



UL/IEC Power + Control Supply





## Contents

### Overview

Typical applications .....	06
Features & Benefits .....	07
Range overview .....	08
General technical characteristics .....	10

### Connector

Customized solution & Overmolded cable assembly.....	14
3 Contacts + ground .....	18
5 Contacts .....	22
6 Contacts .....	26
8 Contacts .....	30

### Contacts

Description .....	36
Contact plating selector guide .....	37
Contact selector guide .....	38
Packaging .....	38
Crimp contacts .....	39
#16 coaxial contacts .....	41
PCB contacts .....	42

### Technical Information

Stripping instructions for crimp contacts .....	46
Tooling for crimp contacts .....	50
Handle & interchangeable heads for crimp contacts .....	52
Crimping control for crimp contacts .....	53
Insertion tool & extraction tool for crimp contacts .....	54
Stripping instructions and tooling for coax contacts .....	55
Assembly instructions .....	60
Mated connector length.....	65
Evaluation kit .....	67
Rated current & working voltage .....	71
UV resistance .....	72
UL94 + UL1977 .....	73
IEC 61984 with IP code explained .....	76
IEC 61140 explained .....	77
What is NEMA Rating? .....	79
Ethernet for the Layman .....	80
RS-485 for the Layman .....	82

### Appendices

Glossary of terms .....	85
Part number index .....	86

# UTL SERIES



# Overview

■ Typical applications .....	06
■ Features & Benefits .....	07
■ Range overview .....	08
■ General technical characteristics .....	10

## Typical applications



Stage & Light




Energy - Power



Building Automation & Control



Telecom - Data infrastructure

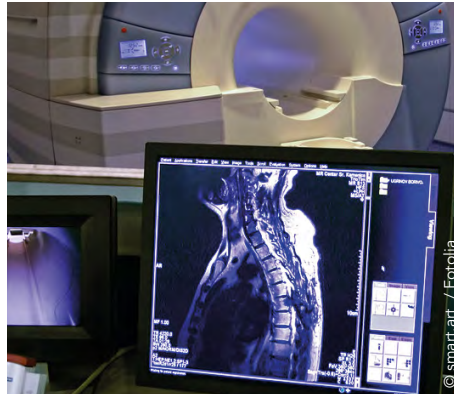

Medical



Instrumentation & Measurement

## Features & Benefits

### EASY TO TRUST

- High level of UL & IEC qualification
- IP68/69K & UV Resistant
- IK07 Impact Resistant
- Moisture proof

### EASY TO USE

- Push-pull coupling
- Blind mateable
- Sensitive tactile and audible click

### EASY TO SUPPLY

- Worldwide distributor network
- Short lead-time

### EASY TO CUSTOMIZE

- Turnkey solution thanks to our overmold capabilities with your cable spec
- Strong R&D team to develop customized solutions

**UTL MAKES YOUR LIFE EASIER**

## PLUGS



## HARNESS

Overmold  
(straight or right angle)



## UTL6




Backshell UTLJC only for 4 pos (103G1) & 5 pos. (145)  
"Clip" backshell only available for UTL size 14:  
connector layout 145



UTL6JC only for 4 pos (103G1) & 5 pos. (145)



## TYPES OF CONTACTS

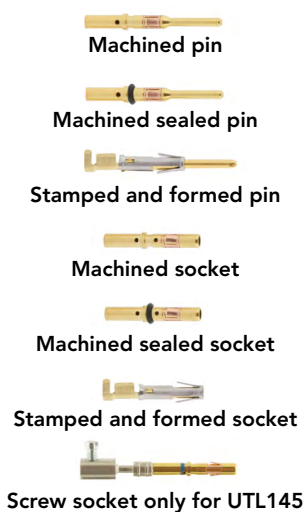

Terminating Resistor  
120Ω impedance

Only for 6 pos. (102G1W3) & 8 pos. (122G1W5)



## EVALUATION KIT



overview

RECEPTACLES

UTL1JC only for 4 pos (103G1)




In line - UTL1



Jam nut - UTL7



Square flange - UTL0 only for 4 pos. (103G1)



Terminating Resistor  
120Ω impedance  
Only for 6 pos. (102G1W3) & 8 pos. (122G1W5)



HARNESS

Overmold  
(straight or right angle)







## Description

- The UTL Series is a plastic connector range that meets industrial safety standards.
- UTL can be used for power supply and power + control supply with DMX or RDM signal.
- The «Key hole» of the coupling system allows blind mating. In dark conditions the mechanical discriminations allow easy mating to avoid connector damage.
- The stainless steel latch coupling system is simple to use. With only 1 finger, connectors are mated with an audible click.
- An optional protective shroud is also available to prevent the disconnection of the connectors without a tool.
- The UTL Series is rated at IP68/69K even in dynamic conditions and remains sealed even when used continuously underwater or cleaned using a high pressure hose while the cable is moving.
- The UTL Series uses an outdoor rated material per Underwriters Laboratories.
- Cable assembly equipped with DMX + Power cables suitable for outdoor use (PUR or Neoprene outer jacket), please consult us for more information.

## Technical features

### Materials

- **Housing:** Thermoplastic
- **Contacts:** Copper alloy
- **Latch:** Stainless steel

### Electrical

- Connector specially designed to be engaged or disengaged in normal use when live or under load
- First Mate Last Break contact mating on ground line
- Signal lines (for UTL102G1W3 & UTL122G1W5): RS485 compliant, 2.5A 10V
- Finger touch proof (connector equipped with socket contacts)
- **In accordance with:**
  - Connector standards:
    - . UL 1977: UL file number ECBT2.E169916
    - . IEC 61984: please consult us
    - . C22.2 N°182.3: file number ECBT8.E169916
  - Equipment standards:
    - . IEC60065, IEC60598, IEC61076-2-103, IEC60320

- Raw material standards:

- . UL94
- . UL746



### Environmental

- **Temperature class (according to IEC61984):**  
From -40°C to +105°C for connector
- **Flammability rating:**  
UL 94: V-0 for connector  
UL94: 5VA for thermoplastic  
UL746C: 5 inch (127mm) end-product flame test
- **Salt spray:**  
≥1,000 hours
- **UV resistant:**  
No mechanical degradation or important color variation due to environmental exposure (F1 material per the UL 746C)
- **Sealing:**
  - IP68/69K mated with standard contacts
  - IP68/69K unmated with specific contacts
  - IP68 1 bar / 1 week
  - IP67 mated for evaluation kits
  - Moisture proof capability

### Fluid resistance:

- Gas and oil
- Mineral oil
- Acid bath
- Basic bath
- For other fluids, please consult us

### Halogen free

### RoHS compliant



### Mechanical

- **Durability:**
  - 250 mating in CBC (Current Breaking Capacity) use (UL1977; IEC61984)
  - 500 mating in COC use (IEC61984)
  - 1,000 matings & unmatings tested
- **Coupling system:**
  - Sensitive and audible click
  - Blind mating
- **Touchproof:**  
IP2X in unmated condition (connector equipped with socket contacts)
- **Shock:**  
IK07 according to IEC62262

## Qualification time saving

In today's fast paced environment we are all buying electronic devices with confidence. To achieve such a high level of trust, the regulator had to put in place a wide variety of safety standards. Some are dedicated to the equipment, some to the connection.

SOURIAU designed and qualified the UTL Series according to the UL 1977 and IEC 61984 but we also took into account additional requirements.


**UL 1977 & IEC 61 984 Qualified**



**Additional Capabilities**



- ☒ Impact resistance
- ☒ Stress relief
- ☒ Flame retardant
- ☒ Finger probe
- ☒ Aging
- ☒ Hot wire
- ☒ Bending
- ☒ Current breaking

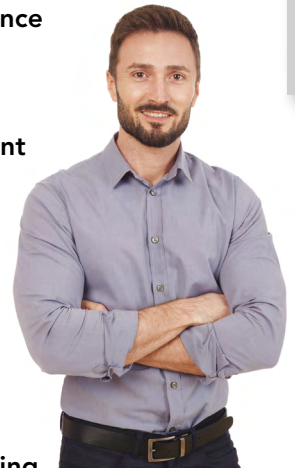

In this way, the UTL Series is also compliant with ALL equipment standards mentioned below.



## Easy Equipment Qualification

Now, the qualification of your equipment is much easier.

UL201	Safety standard of industrial equipment
UL 1995	Heating and cooling equipment
UL 2238	Cable assemblies and fittings for industrial control and signal distribution
IEC 60601	Medical equipment
IEC 61010	Safety requirements for electrical equipment for measurement, control, and laboratory use
IEC 60598	Street lights
UL/IEC 60950	Information technology equipment



# UTL SERIES



# Connector

■ Customized solution & overmolded cable assembly .....	14
■ 3 Contacts + ground	
103G1: 16A 500V.....	18
■ 5 Contacts	
145: 16A 500V.....	22
■ 6 Contacts	
102G1W3: 16A 500V.....	24
■ 8 Contacts	
122G1W5: 16A 500V.....	30


## Customized solution capability

SOURIAU has been designing harsh environment connectors for over one century, year after year developing customized solutions based on dedicated technical specifications from our customers. Thanks to a strong R&T and R&D department and a certified laboratory, we're able to propose customized solutions; the only limit is your imagination!




## Overmolded cable assembly

SOURIAU has provided connectors for various applications for more than 90 years that have been used in the most extreme environments. Conscious about the difficulty in finding a quick and reliable harness manufacturer, we began our own in-house overmolded cable assembly production. It allows customers to reduce the number of suppliers and to take advantage of the "best in class" quality of the SOURIAU group. Overmolding is a process that further enhances the sealing properties and helps to minimize stress on the cable termination to the connector. In addition, the wires are encapsulated inside the molding which creates a barrier preventing liquid/moisture from entering the equipment through the connector or cable jacket if breached.

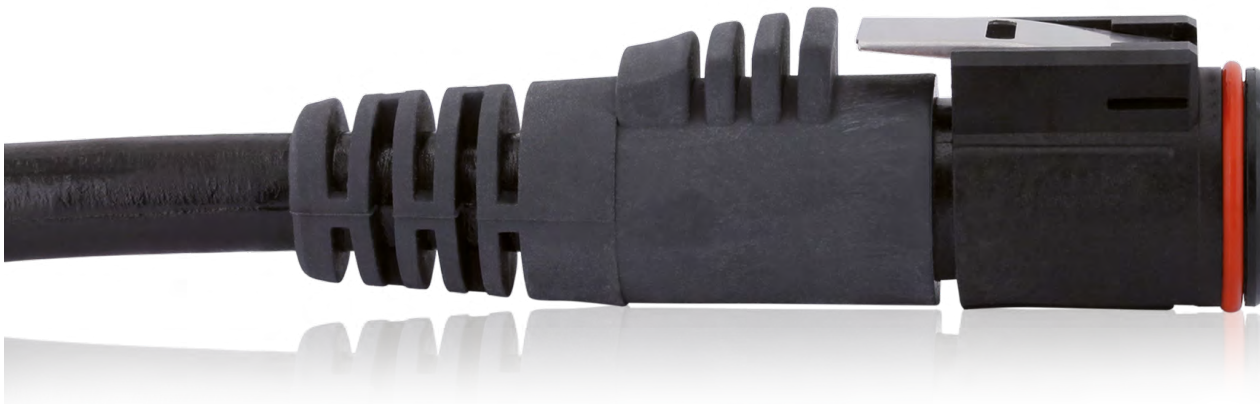

## UTL overmolded cable assembly

### Overmolding description

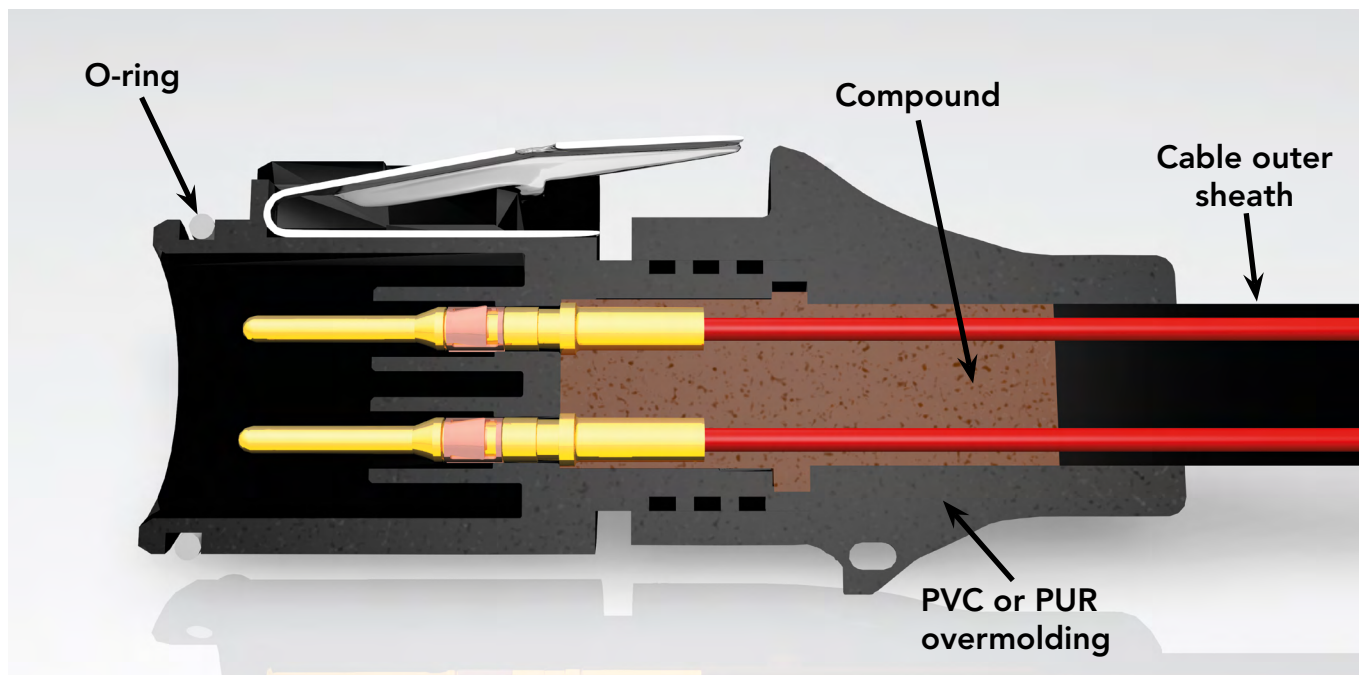


### Connector with cable gland backshell

GOOD



### Overmolded connector

BEST

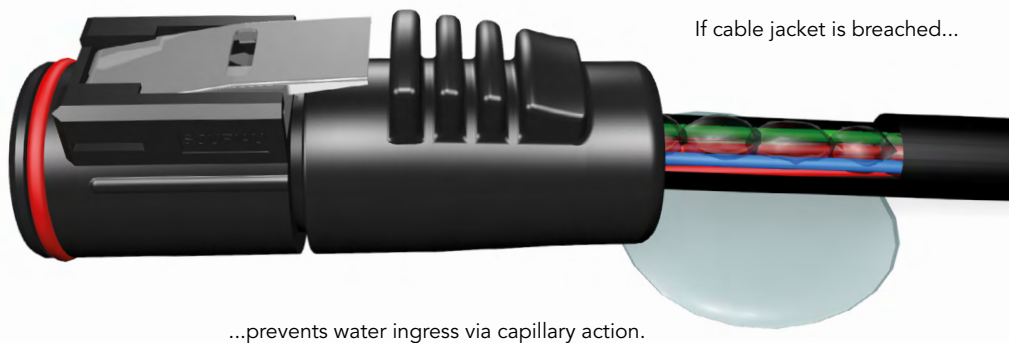

## UTL overmolded cable assembly



### Description

#### Cable - 3 + ground

- Outer sheath: rubber compound EM2 in acc. to HD 22.1 that is VDE 0282 part 1
- Outer sheath color: black
- Flame retardant in acc. to IEC 60332-1-2 resp. VDE 0482 part 332-1-2
- Resistant to Oil, Solvents, Water, Ozone, aging and abrasion

#### Cable - 6 pos.

- Signal: 1 x 2 x 0.22 + shielding  
Power: 3G1.5
- Outer sheath: PUR RAL9005
- Outer sheath color: black
- Core section: 0.22 mm<sup>2</sup> and 1.5 mm<sup>2</sup>

#### Cable - 8 pos.

- Signal: 2 x 2 x 0.22 + shielding  
Power: 3G1.5
- Outer sheath: PUR RAL9005
- Outer sheath color: black
- Core section: 0.22 mm<sup>2</sup> and 1.5 mm<sup>2</sup>

## Specifications

PLATING	SALT SPRAY	TEMPERATURE	WATERPROOF	COUPLING
No plating	≥1000 H	Up to + 90° C <sup>(1)</sup> with 103G1 (4 pos) Up to + 80° C <sup>(1)</sup> with 102G1W3 (6 pos) Up to + 80° C <sup>(1)</sup> with 122G1W5 (8 pos)	IP68/69K dynamic mated & unmated	1,000 matings/unmatings

(1) See page 17 for more information


## UTL overmolded cable assembly

Cable information	
<b>Rated voltage:</b>	U0/U: 450/750 V
<b>Wire section:</b>	3 + ground: 2.5 mm <sup>2</sup> 6 pos. & 8 pos.: 1.5 mm <sup>2</sup> (power), 0.22 mm <sup>2</sup> (signal)
<b>Temperature:</b>	3 + ground: flexible use and fixed installation -25° C up to +60° C 6 pos. & 8 pos.: flexible use -15° C up to +70° C, fixed installation -30° C up to +70° C
<b>Harmonized reference:</b>	3 + ground: H07 RNF 4G x 2.5 6 pos. & 8 pos.: Not Applicable

Standardization of American Cable	
<b>Nomenclature Key</b> <p><b>S:</b> Service Grade (also means extra hard service when not followed by J, V, or P)</p> <p><b>J:</b> Hard Service</p> <p><b>V:</b> Vacuum cleaner cord (also light duty cable)</p> <p><b>P:</b> Parallel cord (also known as zip cord) – Always light duty</p> <p><b>E:</b> Thermoplastic Elastomer (UL/NEC designation ONLY)</p> <p><b>O:</b> Oil Resistant outer jacket</p> <p><b>OO:</b> Oil Resistant outer jacket and insulation</p> <p><b>T:</b> Thermoplastic</p> <p><b>W:</b> Outdoor-includes sunlight resistant jacket and wet location rated conductors (formerly "W-A")</p> <p><b>H:</b> Heater cable</p> <p><b>VW-1:</b> Flame retardant (vertical grade)</p> <p><b>FT2:</b> Flame retardant (horizontal grade)</p>	<b>Definitions of Cable Types</b> <p><b>SVT:</b> Thermoplastic insulated vacuum cleaner cord, with or without 3rd conductor for grounding purposes; 300V (PVC)</p> <p><b>SJT:</b> Junior hard service, thermoplastic insulated conductors and jacket. 300V (PVC)</p> <p><b>SJTW:</b> Same as SJT except outdoor rated. (PVC)</p> <p><b>SJTO:</b> Same as SJT but oil resistant outer jacket. (PVC)</p> <p><b>SJTOW:</b> Same as SJTO except outdoor rated. (PVC)</p> <p><b>ST:</b> Hard service cord with all thermoplastic construction, 600V (PVC)</p> <p><b>STW:</b> Same as ST except outdoor rated. (PVC)</p> <p><b>STO:</b> Same as ST but with oil resistant outer jacket. (PVC)</p> <p><b>STOW:</b> Same as STO except outdoor rated. (PVC)</p>



## 103G1 (shell size 10, 3 + ground, 4x#16)

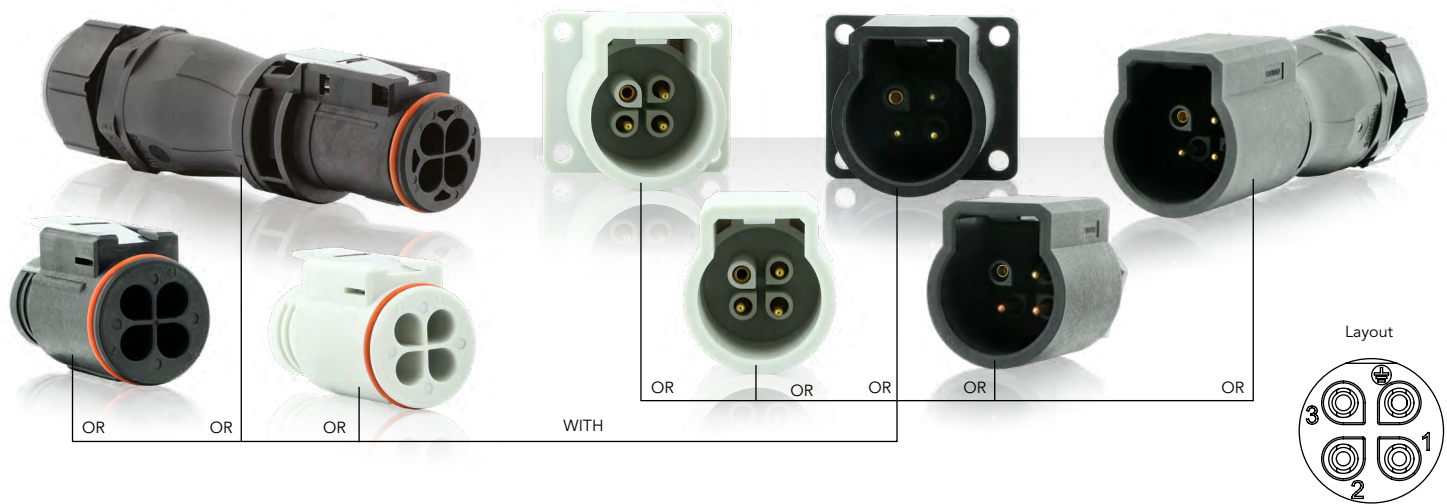

## Connector part number

Plugs and receptacles have to be equipped with both contact genders. Ground lines will never be equipped with the same contacts as the neutral and phase.

Contact type	Connector type	Part number			
		Male insert		Female insert	
		Black color	Grey color	Black color	Grey color
Crimp or PCB contacts supplied separately see page 21	Square flange receptacle	UTL0103G1P	UTL0103G1P03	UTL0103G1S	UTL0103G1S03
	Jam nut receptacle	UTL7103G1P	UTL7103G1P03	UTL7103G1S	UTL7103G1S03
	In line receptacle without backshell	UTL1103G1P	UTL1103G1P03	UTL1103G1S	UTL1103G1S03
	In line receptacle with backshell	UTL11JC103G1P	-	UTL11JC103G1S	-
	Plug for panel mounting	UTL5103G1P	-	UTL5103G1S	-
	Plug for overmolding	UTL6103G1P	UTL6103G1P03	UTL6103G1S	UTL6103G1S03
	Plug threaded without backshell and O-ring	UTL6TH103G1P	-	UTL6TH103G1S	-
	Plug with backshell	UTL6JC103G1P	-	UTL6JC103G1S	-

Standard delivered packaging: individual bag. For bulk delivery of 100 pcs please add a "B" after the P or S (connector gender) and before the potential "03" digits.

## Overmolded cable assembly part number

Nbr contacts	Size	Wire size	Description	Length* (FT)	Part number
4	10	14 AWG	D/E assembly 1 male plug & 1 female plug	3	UTLMKT63G1PS3FT
4	10	16 AWG	D/E assembly 1 male plug & 1 female plug	3	UTLMK63G1PS03FT00
4	10	18 AWG	D/E assembly 1 male plug & 1 female plug	3	UTLMK63G1PS03FT01
4	10	14 AWG	S/E assembly 1 female plug	3	UTLMKT63G1S3FT
4	10	16 AWG	S/E assembly 1 female plug	3	UTLMK63G1S03FT00
4	10	18 AWG	S/E assembly 1 female plug	3	UTLMK63G1S03FT01
4	10	14 AWG	S/E assembly 1 male plug	3	UTLMKT63G1P3FT
4	10	16 AWG	S/E assembly 1 male plug	3	UTLMK63G1P03FT00
4	10	18 AWG	S/E assembly 1 male plug	3	UTLMK63G1P03FT01
4	10	14 AWG	D/E assembly 1 male plug & 1 female in line receptacle	3	UTLMKT613G1SP3FT
4	10	16 AWG	D/E assembly 1 male plug & 1 female in line receptacle	3	UTLMK613G1PS03FT00
4	10	18 AWG	D/E assembly 1 male plug & 1 female in line receptacle	3	UTLMK613G1PS03FT01








\* Other lengths available: 6 and 12 foot only: e.g. UTLTKT63G1PS6FT for a 6 foot version 14 AWG jumper or UTLTK63G1PS06FT01 for a 6 foot version 18 AWG jumper. Contact us for custom length or design needs.

## Evaluation kit

Evaluation kit is composed of 1 connector, contacts and 1 heat shrink boot for a quick and easy assembly production. For more information please see page 67.

## 103G1 (shell size 10, 3 + ground, 4x#16)

### Dimensions (for mated connector lengths see page 65)

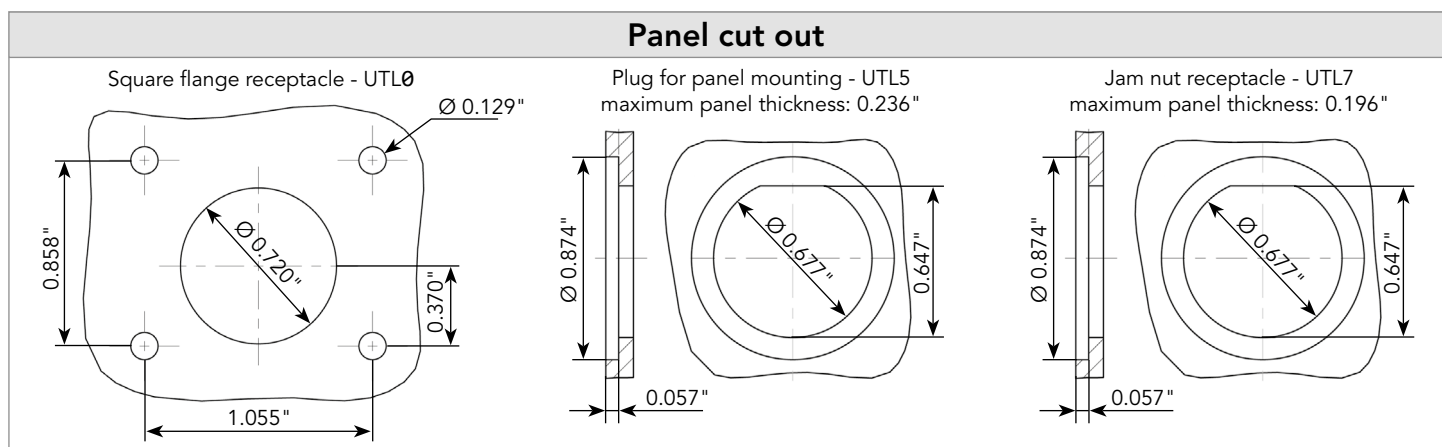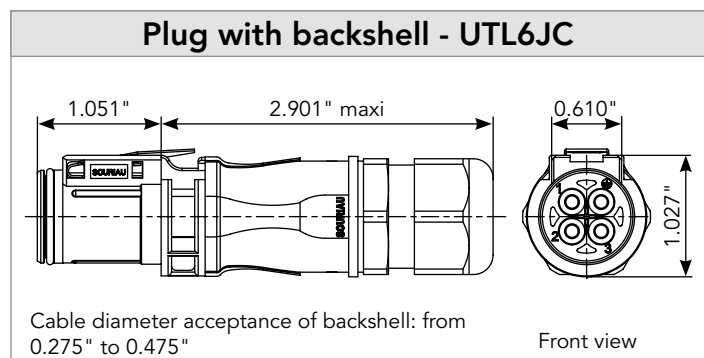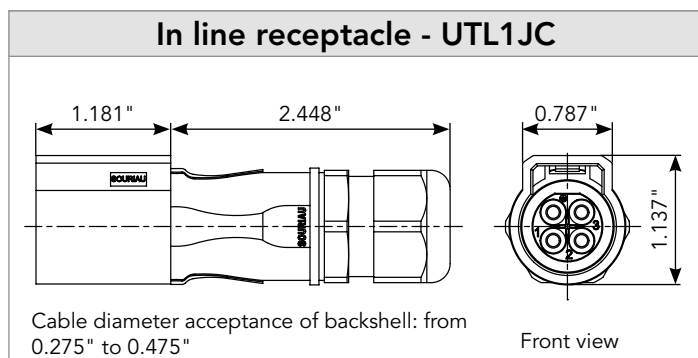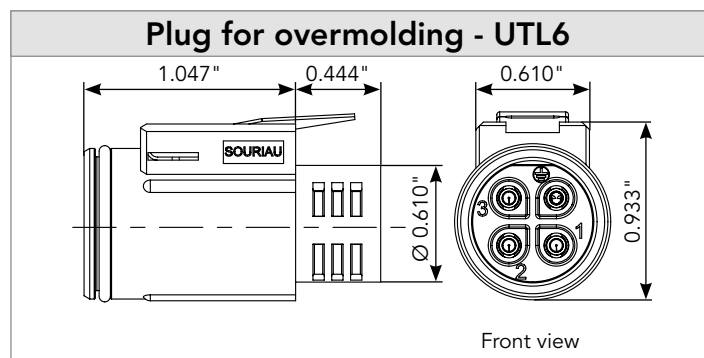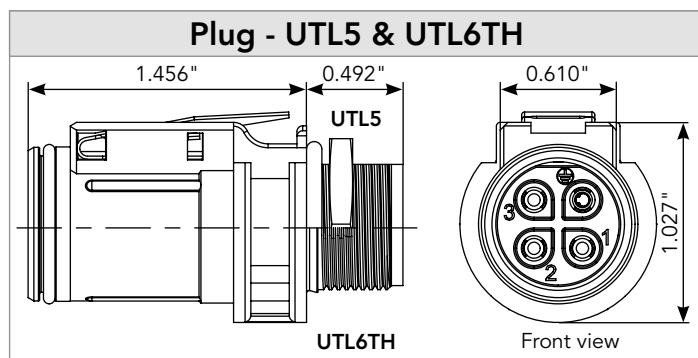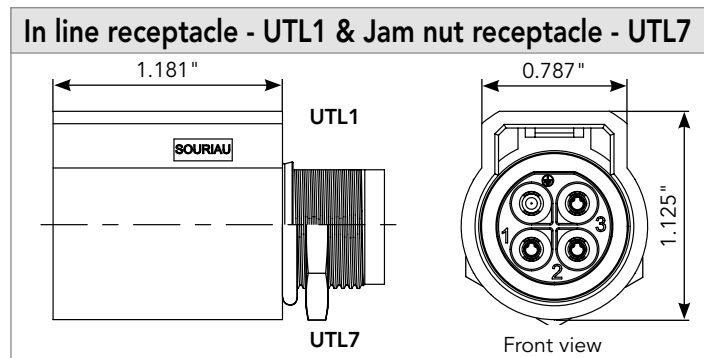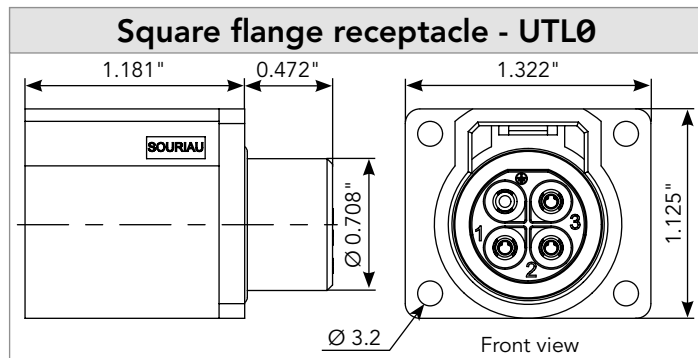

Note: all dimensions are in inch and for information only

## 103G1 (shell size 10, 3 + ground, 4x#16)

### Accessories and tooling

**Dustcap for plug**

IP67



Part number  
UTL610DCG

**Dustcap for receptacle**

IP67



Part number  
UTL10DCG

**Handle (without head)**



Part number  
SHANDLES

**Tool kit**



Part number  
TOOLKIT

**Dustcap for male receptacle**

IP68/69K



Part number  
UTL103G1PDCG68

**Dustcap for female receptacle**

IP68/69K



Part number  
UTL103G1SDCG68

**Extraction tool #16**



Part number  
RX2025GE1

**Insertion tool #16**



Part number  
RTM205

**Cable gland backshell\***



Part number  
UTL10JC

**Backshell housing\***



Part number  
UTL10JCP1

\* Backshells delivered with UTL10SEAL for sealing with plug or receptacle

**O-ring**



Part number  
UTL10SEAL

**Nut**



Part number  
UTL10NUT

**Head crimp tooling (without handle)**

Contacts	Contact size	Part number of head
RM/RC 28M1K <sup>(1)</sup>	Standard contacts #16 Ø 0.062"	S16RCM20*
RM/RC 24M9K <sup>(1)</sup>		S16RCM20*
RM/RC 20M13K <sup>(1)</sup>		S16RCM20*
RM/RC 20M12K <sup>(1)</sup>		S16RCM20*
RM/RC 16M23K <sup>(1)</sup>		S16RCM16*
RM/RC 14M30K <sup>(1)</sup>		S16RCM14*
SM/SC 24ML1TK6 <sup>(1)</sup>		S16SCM20*
SM/SC 20ML1TK6 <sup>(1)</sup>		S16SCM20*
SM/SC 16ML1TK6 <sup>(1)</sup>		S16SCML1*
SM/SC 14ML1TK6 <sup>(1)</sup>		S16SCML1*
SM/SC 16ML11TK6 <sup>(1)</sup>		S16SCML11*
RM/RC 16M25K		S16RCM1625*
RM/RC 14M25K		S16RCM1425*
RMDXK10D28K	Coaxial contacts #16 Ø 0.062"	M20S-1J
RCDXK1D28K		
RM/RC DX60xxD28K		
RM/RC DXK10D28 + YORX090		
RM/RC DX60xxD28		

(1): Example of plating, for other plating options see page 38  
\* Heads to be used with handle PN: SHANDLES




**Protective shroud**



Part number  
UTL610PS

**Sealing plug**



Part number  
SWSFILLERPLUG

Can be used only with UTL5, UTL6JC, UTL6TH

See instruction page 59



**103G1** (shell size 10, 3 + ground, 4x#16)**Contacts**

#16	Contact type	AWG	Part number		Max wire Ø	Max insulator Ø
			Male	Female		
Crimp	Machined	30-28	RM28M1K <sup>(1)</sup>	RC28M1K <sup>(1)</sup>	0.021 "	0.039 "
		26-24	RM24M9K <sup>(1)</sup>	RC24M9K <sup>(1)</sup>	0.031 "	0.062 "
		22-20	RM20M13K <sup>(1)</sup>	RC20M13K <sup>(1)</sup>	0.045 "	0.070 "
		22-20	RM20M12K <sup>(1)</sup>	RC20M12K <sup>(1)</sup>	0.045 "	0.086 "
		20-16	RM16M23K <sup>(1)</sup>	RC16M23K <sup>(1)</sup>	0.070 "	0.125 "
		16-14	RM14M30K <sup>(1)</sup>	RC14M30K <sup>(1)</sup>	0.090 "	0.125 "
	Machined sealed (with O-Ring for IP68/69K unmated)	20-16	RM16M25K	RC16M25K	0.070 "	0.125 "
		16-14	RM14M25K	RC14M25K	0.089 "	0.125 "
		24	RM24M25K <sup>(3)</sup>	RC24M25K <sup>(3)</sup>	0.025 "	0.125 "
	Stamped & Formed reeled contacts See note (2) for loose piece	26-24	SM24M1TK6 <sup>(1)(2)</sup>	SC24M1TK6 <sup>(1)(2)</sup>	-	0.035 " - 0.062 "
		22-20	SM20M1TK6 <sup>(1)(2)</sup>	SC20M1TK6 <sup>(1)(2)</sup>	-	0.047 " - 0.082 "
		18-16	SM16M1TK6 <sup>(1)(2)</sup>	SC16M1TK6 <sup>(1)(2)</sup>	-	0.125 "
		18-16	SM16M11TK6 <sup>(1)(2)</sup>	SC16M11TK6 <sup>(1)(2)</sup>	-	0.118 "
		14	SM14M1TK6 <sup>(1)(2)</sup>	SC14M1TK6 <sup>(1)(2)</sup>	-	0.125 "
Coaxial*	Cable multipiece	see page 41	RMDXK10D28	RCDXK1D28	-	-
	Cable monocrimp		RMDX60xxD28	RCDX60xxD28	-	-
	Twisted pair multipiece		RMDXK10D28 + YORX090	RCDXK1D28 + YORX090	-	-
	Twisted pair monocrimp		RMDX60xxD28	RCDX60xxD28	-	-
PCB	For male insert	-	RM20M12E8K	RC20M12E84K	-	-
	For female insert	-	RM20M12E8K	RC20M12E83K	-	-

(1): Example of plating, for other plating options see page 38 / (2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6

Note: all dimensions are in inch

(3): Includes RM/RC24M25K contacts + a ferrule RR24M1K. The ferrule can also be ordered separately. See page 53


\*: Coax contacts cannot be used in the ground cavity

**REMINDER****Plugs and receptacles have to be equipped with both contact genders.****EX: UTL6103G1P = 3 x SM16M1TK6 (signal) + 1 x SC16M1TK6 (ground)****Electrical characteristics**


**UL**  
16A 600V V0  
13A 277V for CBC use

**CN**  
13A 600V  
10A 277V for CBC use

**IEC**  
16A 500V 6KV 4  
13A 250V 4KV 4 for CBC use

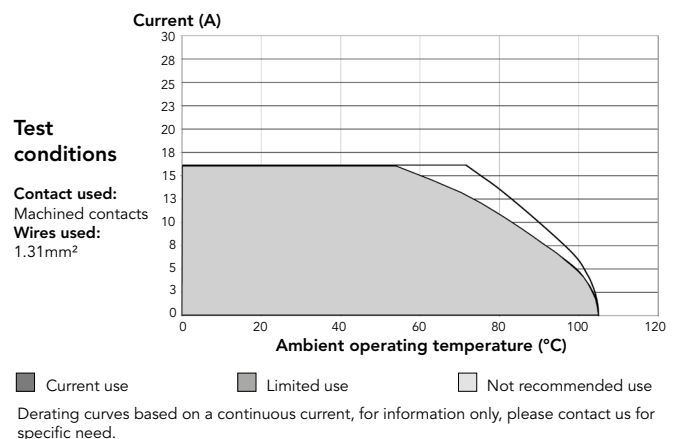**UTS 103 derating curves**

145 (shell size 14, 5x#16)

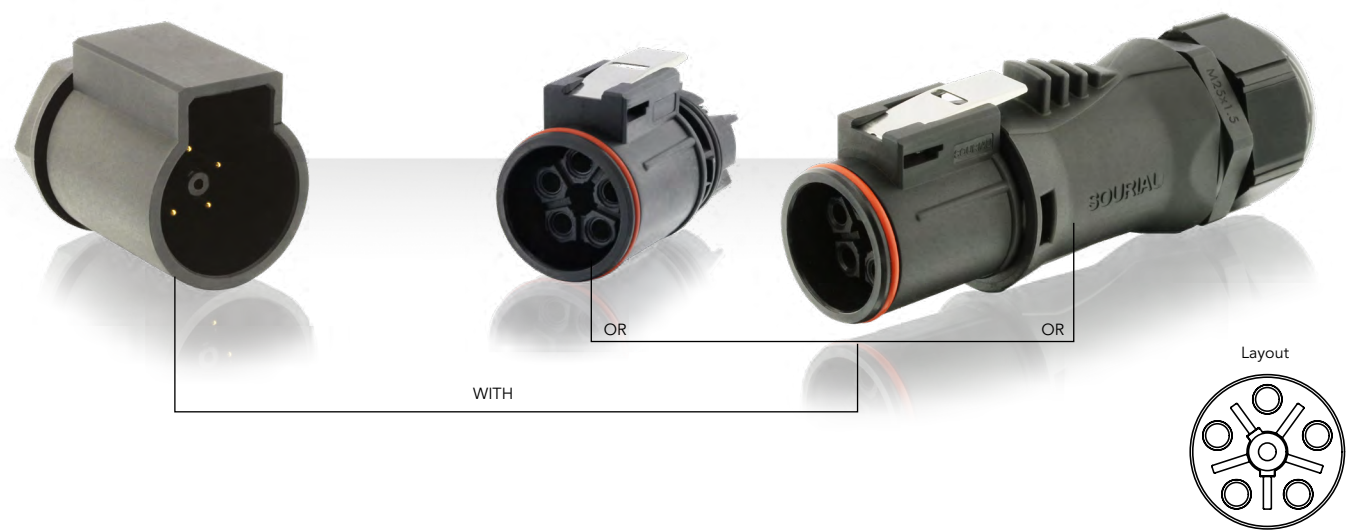

Connector part number

Contact type	Connector type	Part number	
		Male insert	Female insert
Crimp contacts to be ordered separately see page 25	Plug with backshell*	-	UTL6JC145S
	Plug without backshell	-	UTL6145S
	Jam-nut without backshell	UTL7145P	-
Screw termination contacts, delivered with connector (1)	Plug with backshell*	-	UTL6JC145SSCR
	Plug without backshell	-	UTL6145SSCR

\* Non removable backshell when mated. IP68/69K not guaranteed if backshell removed.  
1: Screw termination version (from AWG18 to AWG14) or crimp version.  
Standard delivered packaging: individual bag. For bulk delivery of 100 pcs please add a "B" after the P or S (connector gender) and before the potential "03" digits.


Overmolded cable assembly

Please consult us.

**145** (shell size 14, 5x#16)


## Dimensions (for mated connector lengths see page 66)

### Jam nut receptacle - UTL7

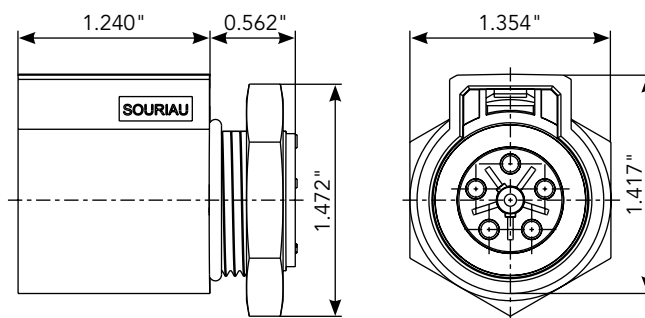


Front view

### Plug with backshell - UTL6

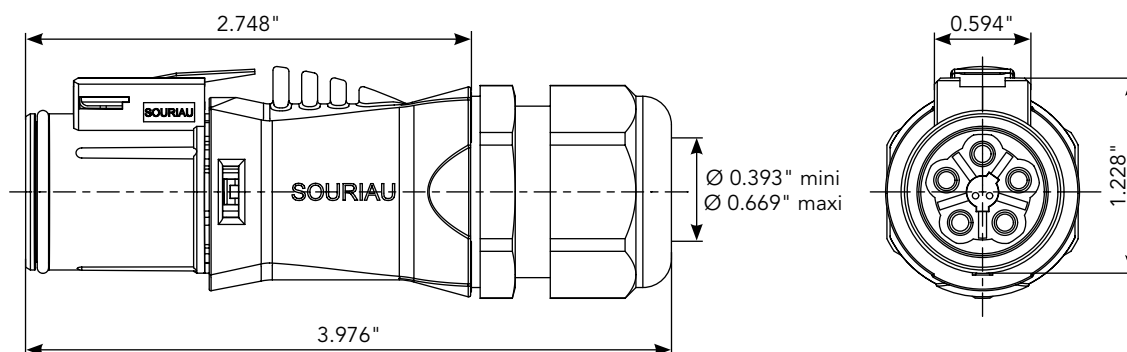


Front view

### Plug without backshell - UTL6

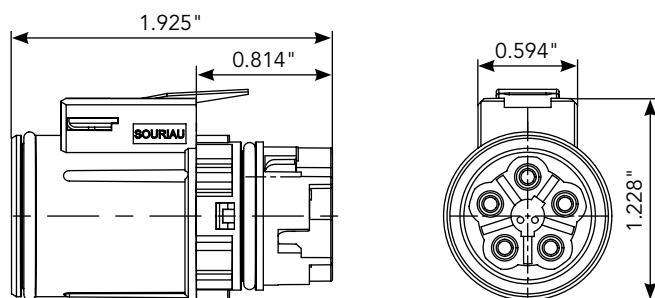

Front view

### Panel cut out

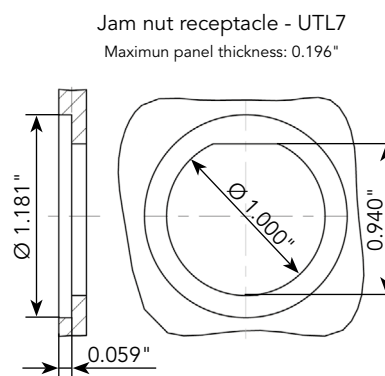


Jam nut receptacle - UTL7  
Maximum panel thickness: 0.196"

Note: all dimensions are in inch and for information only

**145** (shell size 14, 5x#16)

## Tooling

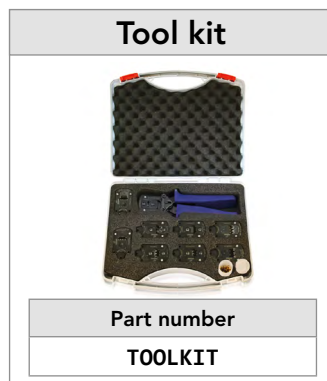

Head crimp tooling (without handle)		
Contacts	Contact size	Part number of head
RM/RC 28M1K <sup>(1)</sup>	Standard contacts #16 Ø 0.062"	S16RCM20*
RM/RC 24M9K <sup>(1)</sup>		S16RCM20*
RM/RC 20M13K <sup>(1)</sup>		S16RCM20*
RM/RC 20M12K <sup>(1)</sup>		S16RCM20*
RM/RC 16M23K <sup>(1)</sup>		S16RCM16*
RM/RC 14M30K <sup>(1)</sup>		S16RCM14*
SM/SC 24ML1TK6 <sup>(1)</sup>		S16SCM20*
SM/SC 20ML1TK6 <sup>(1)</sup>		S16SCM20*
SM/SC 16ML1TK6 <sup>(1)</sup>		S16SCML1*
SM/SC 14ML1TK6 <sup>(1)</sup>		S16SCML1*
SM/SC 16ML11TK6 <sup>(1)</sup>		S16SCML11*

(1): Example of plating, for other plating options see page 38  
\* Heads to be used with handle PN: SHANDLES



## Accessories



**145** (shell size 14, 5x#16)**Contacts**

#16	Contact type	AWG	Part number		Max wire Ø	Max insulator Ø
			Male	Female		
Crimp	Machined	30-28	RM28M1K <sup>(1)</sup>	RC28M1K <sup>(1)</sup>	0.021 "	0.039 "
		26-24	RM24M9K <sup>(1)</sup>	RC24M9K <sup>(1)</sup>	0.031 "	0.062 "
		22-20	RM20M13K <sup>(1)</sup>	RC20M13K <sup>(1)</sup>	0.045 "	0.070 "
		22-20	RM20M12K <sup>(1)</sup>	RC20M12K <sup>(1)</sup>	0.045 "	0.086 "
		20-16	RM16M23K <sup>(1)</sup>	RC16M23K <sup>(1)</sup>	0.070 "	0.125 "
		16-14	RM14M30K <sup>(1)</sup>	RC14M30K <sup>(1)</sup>	0.090 "	0.125 "
	Machined sealed (with O-Ring for IP68/69K unmated)	20-16	RM16M25K	RC16M25K	0.070 "	0.125 "
		16-14	RM14M25K	RC14M25K	0.089 "	0.125 "
		24	RM24M25K <sup>(3)</sup>	RC24M25K <sup>(3)</sup>	0.025 "	0.125 "
	Stamped & Formed reeled contacts See note (2) for loose piece	26-24	SM24M1TK6 <sup>(1)(2)</sup>	SC24M1TK6 <sup>(1)(2)</sup>	-	0.035 " - 0.062 "
		22-20	SM20M1TK6 <sup>(1)(2)</sup>	SC20M1TK6 <sup>(1)(2)</sup>	-	0.047 " - 0.082 "
		18-16	SM16M1TK6 <sup>(1)(2)</sup>	SC16M1TK6 <sup>(1)(2)</sup>	-	0.125 "
		18-16	SM16M11TK6 <sup>(1)(2)</sup>	SC16M11TK6 <sup>(1)(2)</sup>	-	0.118 "
		14	SM14M1TK6 <sup>(1)(2)</sup>	SC14M1TK6 <sup>(1)(2)</sup>	-	0.125 "
Coaxial*	Cable multipiece	see page 41	RMDXK10D28	RCDXK1D28	-	-
	Cable monocrimp		RMDX60xxD28	RCDX60xxD28	-	-
	Twisted pair multipiece		RMDXK10D28 + YORX090	RCDXK1D28 + YORX090	-	-
	Twisted pair monocrimp		RMDX60xxD28	RCDX60xxD28	-	-

(1): Example of plating, for other plating options see page 38

(2): For loose piece contact packaging, place "L" in part number. Example: **SM20ML1TK6**

(3): Includes RM/RC24M25K contacts + a ferrule RR24M1K. The ferrule can also be ordered separately. See page 53

\*: Coax contacts cannot be used in the ground cavity


Note: all dimensions are in inch

**Electrical characteristics**


**UL**  
16A 600V V0  
13A 277V for CBC use

**CN**  
13A 600V  
10A 277V for CBC use

**IEC**  
16A 500V 4KV 4  
13A 250V 2.5KV 4 for CBC use

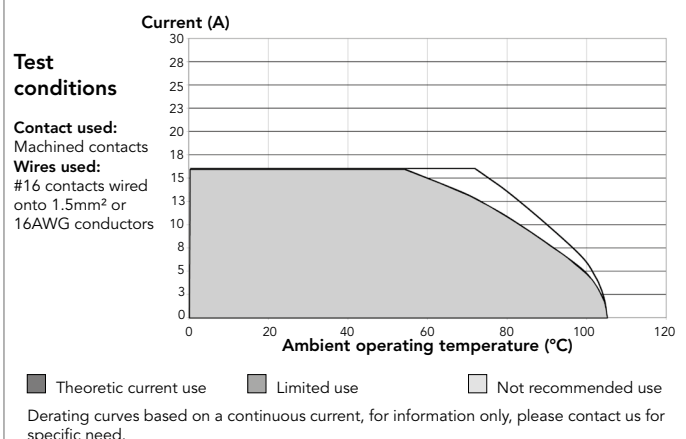**UTL145 derating curves**

## 102G1W3 (shell size 10, 3x#16 + 3x#20)

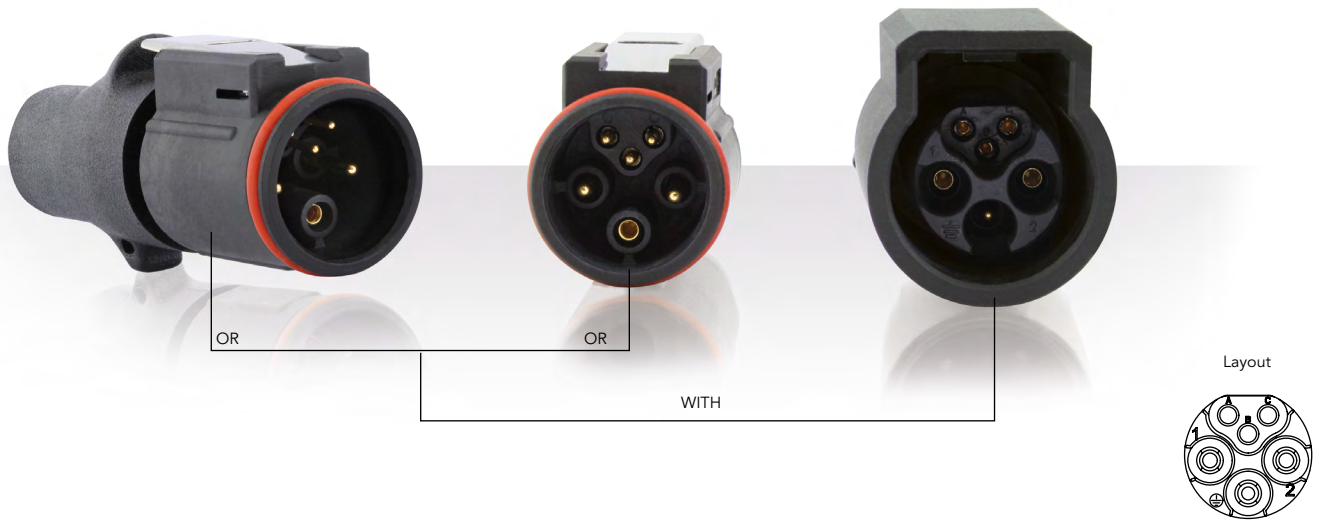

## Connector part number

Plugs and receptacles have to be equipped with both contact genders. Ground lines will never be equipped with the same contacts as the neutral and phase.

Contact type	Connector type	Part number	
		Male insert	Female insert
Crimp contacts supplied separately see page 29	Plug	UTL6102G1W3P	UTL6102G1W3S
	Jam nut receptacle	UTL7102G1W3P	UTL7102G1W3S
	In line receptacle	UTL1102G1W3P	UTL1102G1W3S
	Terminating Resistor plug - 120Ω	UTL6102G1W3PCDMX	UTL6102G1W3SCDMX
Contacts included	Terminating Resistor receptacle - 120Ω	UTL1102G1W3PCDMX	UTL1102G1W3SCDMX

The Terminating Resistor is only designed to ensure the 120 Ohms impedance on the signal lines, no contact loaded in the power positions.

#20 contacts and plastic plate are not removable.

Standard delivered packaging: individual bag. For bulk delivery of 100 pcs please add a "B" after the P or S (connector gender) and before the potential "03" digits.

## Overmolded cable assembly part number

Layout	Wire size	Overmolded harnesses, straight ending Connector	Length* (FT )	Part number
102G1W3	14 AWG	D/E assembly 1 male plug & 1 female plug	3	UTL6V2G1W3PS03FT0
		S/E assembly 1 female plug	3	UTL6V2G1W3S03FT0
		S/E assembly 1 male plug	3	UTL6V2G1W3P03FT0
		D/E assembly 1 male plug & 1 female in line receptacle	3	UTL61V2G1W3PS03FT0
	16 AWG	D/E assembly 1 male plug & 1 female plug	3	UTL6V2G1W3PS03FT1
		S/E assembly 1 female plug	3	UTL6V2G1W3S03FT1
		S/E assembly 1 male plug	3	UTL6V2G1W3P03FT1
		D/E assembly 1 male plug & 1 female in line receptacle	3	UTL61V2G1W3PS03FT1

\* Other stock lengths available: 6 and 12 foot only: e.g. UTL6V2G1W3P06FT0 for a 6 foot version 14 AWG







Contact us for custom length or design needs.

## Evaluation kit

Evaluation kit is composed of 1 connector, contacts and 1 heat shrink boot for a quick and easy assembly production. For more information please see page 68.

# 102G1W3 (shell size 10, 3x#16 + 3x#20)

## Dimensions (for mated connector lengths see page 65)

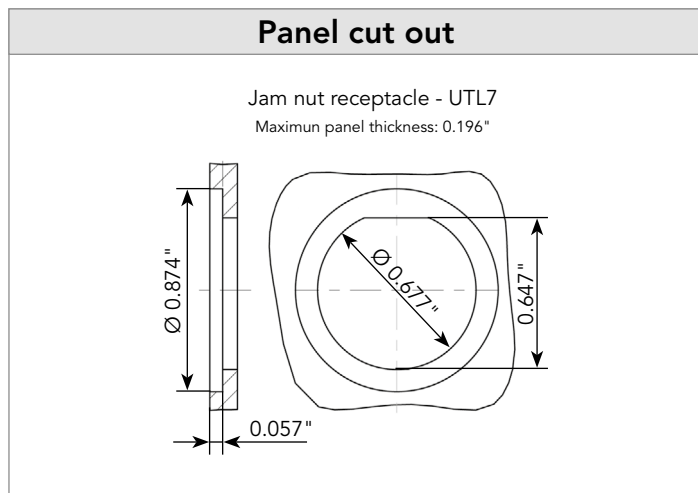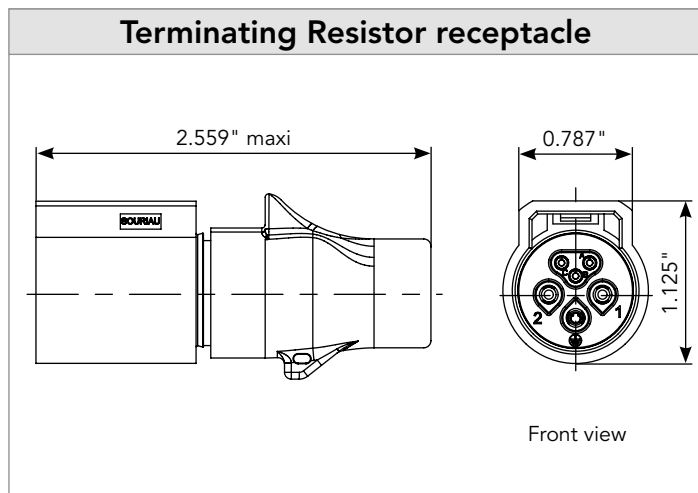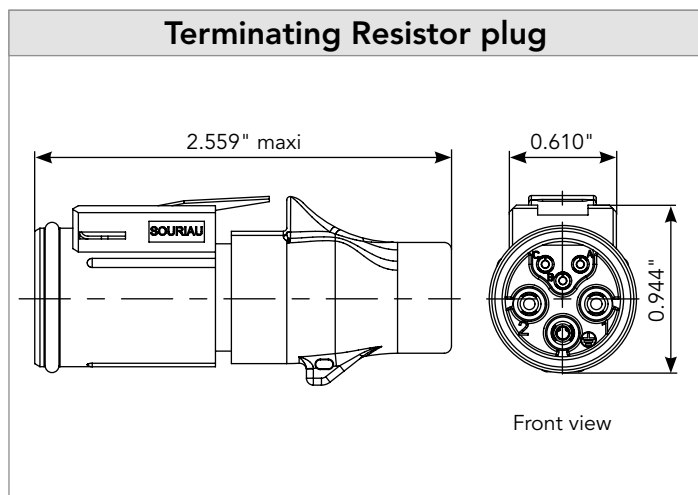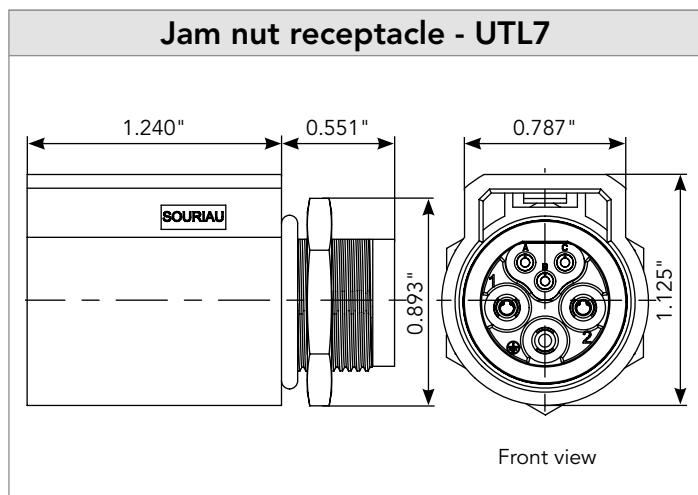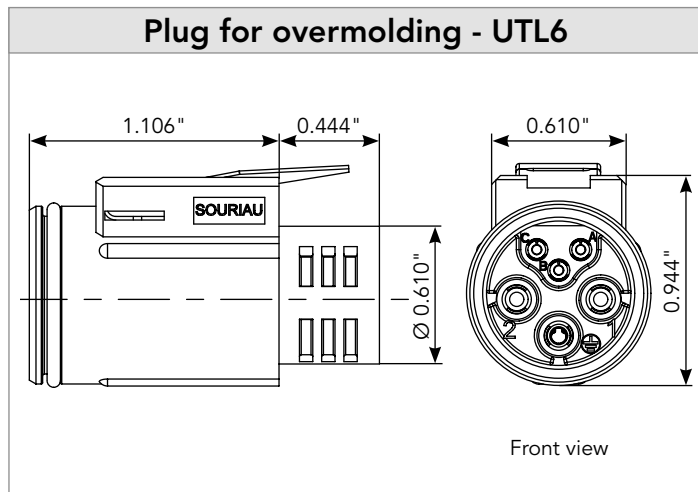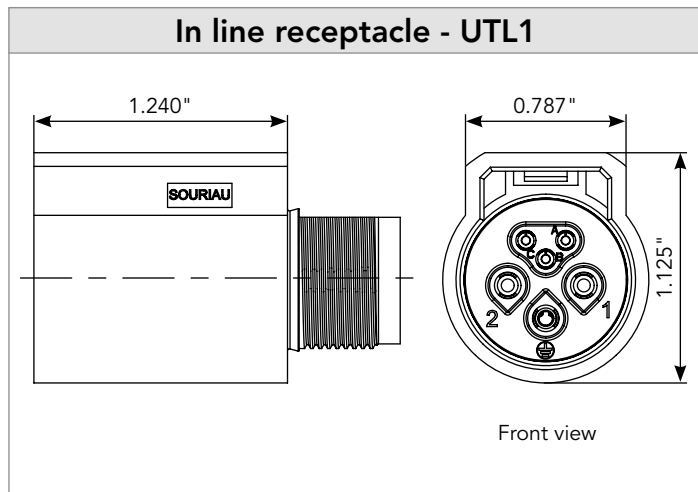

Note: all dimensions are in inch and for information only



# 102G1W3 (shell size 10, 3x#16 + 3x#20)

## Accessories and tooling

**Dustcap for plug**


IP67



Part number  
UTL610DCG

**Dustcap for receptacle**

IP67




Part number  
UTL10DCG

**Handle (without head)**



Part number  
SHANGLES

**Tool kit**



Part number  
TOOLKIT

**Dustcap for male receptacle**


IP68/69K



Part number  
UTL102G1W3PDCG68

**Dustcap for female receptacle**

IP68/69K



Part number  
UTL102G1W3SDCG68

**Extraction tool #16**




Part number  
RX2025GE1

**Insertion tool #16**



Part number  
RTM205

**Extraction tool #20**



Part number  
RX20D44

Head crimp tooling (without handle)		
Contacts	Contact size	Part number of head
RM/RC 24W3K <sup>(1)</sup>	Standard contacts #20 Ø 0.039"	S20RCM*
RM/RC 20W3K <sup>(1)</sup>		S20RCM*
RM/RC 18W3K <sup>(1)</sup>		S20RCM*
SM/SC 24WL3 <sup>(1)(2)</sup>		S20SCM20*
SM/SC 20WL3 <sup>(1)(2)</sup>		S20SCM20*
RM/RC 28M1K <sup>(1)</sup>	Standard contacts #16 Ø 0.062"	S16RCM20*
RM/RC 24M9K <sup>(1)</sup>		S16RCM20*
RM/RC 20M13K <sup>(1)</sup>		S16RCM20*
RM/RC 20M12K <sup>(1)</sup>		S16RCM20*
RM/RC 16M23K <sup>(1)</sup>		S16RCM16*
RM/RC 14M30K <sup>(1)</sup>		S16RCM14*
SM/SC 24ML1TK6 <sup>(1)</sup>		S16SCM20*
SM/SC 20ML1TK6 <sup>(1)</sup>		S16SCM20*
SM/SC 16ML1TK6 <sup>(1)</sup>		S16SCML1*
SM/SC 14ML1TK6 <sup>(1)</sup>		S16SCML1*
SM/SC 16ML11TK6 <sup>(1)</sup>		S16SCML11*
RMDXK10D28K	Coaxial contacts #16 Ø 0.062"	M20S-1J
RCDXK1D28K		
RM/RC DX60xxD28K		
RM/RC DXK10D28 + YORX090		
RM/RC DX60xxD28		

(1): Example of plating, for other plating options see page 38  
\* Heads to be used with handle PN: SHANGLES

(2): loose contact





**102G1W3** (shell size 10, 3x#16 + 3x#20)**Contacts**

#20	Contact type	AWG	Part number		Max wire Ø	Max insulator Ø
			Male	Female		
Crimp	Machined	26-24	RM24W3K <sup>(1)</sup>	RC24W3K <sup>(1)</sup>	0.031"	0.062"
		22-20	RM20W3K <sup>(1)</sup>	RC20W3K <sup>(1)</sup>	0.045"	0.062"
		20-18	RM18W3K <sup>(1)</sup>	RC18W3K <sup>(1)</sup>	0.051"	0.082"
	Stamped & Formed reeled contacts See note (2) for loose piece	26-24	SM24W3TK6 <sup>(1)(2)</sup>	SC24W3TK6 <sup>(1)(2)</sup>	-	0.035" - 0.062"
		26-24	SM24W3S26 <sup>(1)(2)</sup>	SC24W3S25 <sup>(1)(2)</sup>	-	0.035" - 0.062"
		22-20	SM20W3TK6 <sup>(1)(2)</sup>	SC20W3TK6 <sup>(1)(2)</sup>	-	0.047" - 0.082"
		22-20	SM20W3S26 <sup>(1)(2)</sup>	SC20W3S25 <sup>(1)(2)</sup>	-	0.047" - 0.082"
#16						
Crimp	Machined	30-28	RM28M1K <sup>(1)</sup>	RC28M1K <sup>(1)</sup>	0.021"	0.039"
		26-24	RM24M9K <sup>(1)</sup>	RC24M9K <sup>(1)</sup>	0.031"	0.062"
		22-20	RM20M13K <sup>(1)</sup>	RC20M13K <sup>(1)</sup>	0.045"	0.070"
		22-20	RM20M12K <sup>(1)</sup>	RC20M12K <sup>(1)</sup>	0.045"	0.086"
		20-16	RM16M23K <sup>(1)</sup>	RC16M23K <sup>(1)</sup>	0.070"	0.125"
		16-14	RM14M30K <sup>(1)</sup>	RC14M30K <sup>(1)</sup>	0.090"	0.125"
	Stamped & Formed reeled contacts See note (2) for loose piece	26-24	SM24M1TK6 <sup>(1)(2)</sup>	SC24M1TK6 <sup>(1)(2)</sup>	-	0.035" - 0.062"
		22-20	SM20M1TK6 <sup>(1)(2)</sup>	SC20M1TK6 <sup>(1)(2)</sup>	-	0.047" - 0.082"
		18-16	SM16M1TK6 <sup>(1)(2)</sup>	SC16M1TK6 <sup>(1)(2)</sup>	-	0.125"
		18-16	SM16M11TK6 <sup>(1)(2)</sup>	SC16M11TK6 <sup>(1)(2)</sup>	-	0.118"
		14	SM14M1TK6 <sup>(1)(2)</sup>	SC14M1TK6 <sup>(1)(2)</sup>	-	0.125"
Coaxial*	Cable multipiece	see page 41	RMDXK10D28	RCDXK1D28	-	-
	Cable monocrimp		RMDX60xxD28	RCDX60xxD28	-	-
	Twisted pair multipiece		RMDXK10D28 + YORX090	RCDXK1D28 + YORX090	-	-
	Twisted pair monocrimp		RMDX60xxD28	RCDX60xxD28	-	-

(1): Example of plating, for other plating options see page 38

(2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6

\*: Coax contacts cannot be used in the ground cavity


Note: all dimensions are in inch

**REMINDER****Plugs and receptacles have to be equipped with both contact genders.****EX: UTL6102W3G1P = 2 x SM16M1TK6 (power) + 1 x SC16M1TK6 (ground) + 3 x SM20W3TK6 (signal)****Electrical characteristics**


**UL**  
16A 600V V0  
13A 277V for CBC use

**CN**  
13A 600V  
10A 277V for CBC use

**IEC**  
16A 500V 6KV 4  
13A 250V 4KV 4 for CBC use

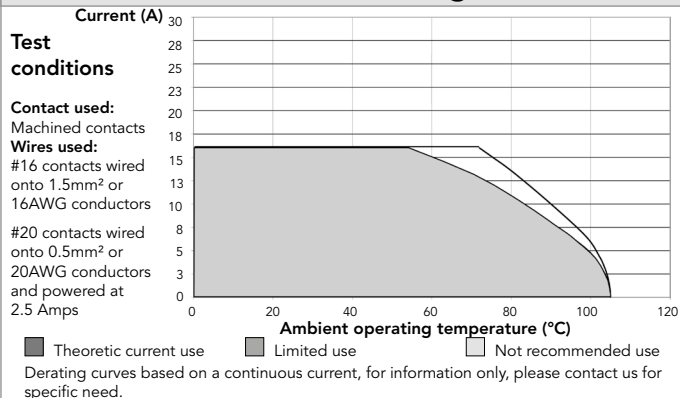**UTL102G1W3 derating curves**

## 122G1W5 (shell size 12, 3x#16 + 5x#20)

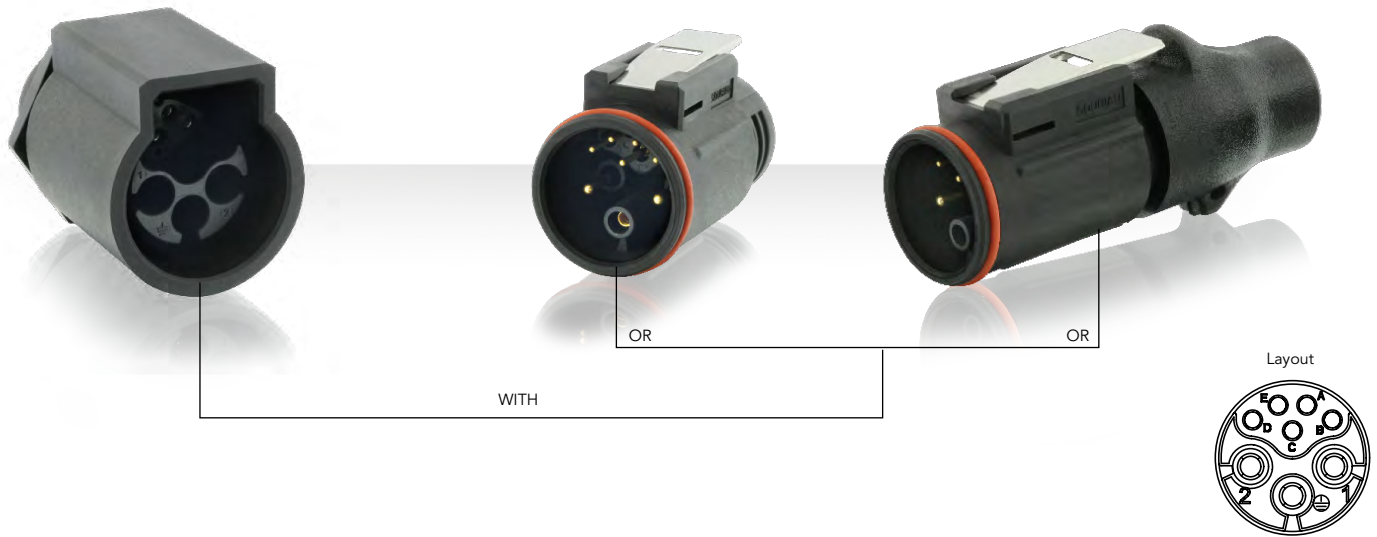

### Connector part number

Plugs and receptacles have to be equipped with both contact genders. Ground lines will never be equipped with the same contacts as the neutral and phase.

Contact type	Connector type	Part number	
		Male insert with female ground	Female insert with male ground
Crimp contacts supplied separately see page 33	Plug	UTL6122G1W5P	UTL6122G1W5S
	Jam nut receptacle	UTL7122G1W5P	UTL7122G1W5S
	In line receptacle	UTL1122G1W5P	UTL1122G1W5S
Contacts included	Terminating Resistor plug - 120Ω	UTL6122G1W5PCDMX	UTL6122G1W5SCDMX
	Terminating Resistor receptacle - 120Ω	UTL1122G1W5PCDMX	UTL1122G1W5SCDMX

The Terminating Resistor is only designed to ensure the 120 Ohms impedance on the signal lines, no contact loaded in the power positions.

#20 contacts and plastic plate are not removable.

Standard delivered packaging: individual bag. For bulk delivery of 100 pcs please add a "B" after the P or S (connector gender) and before the potential "03" digits.

### Overmolded cable assembly part number

Layout	Wire size	Overmolded harnesses, straight ending Connector	Length* (FT )	Part number
122G1W5	14 AWG	D/E assembly 1 male plug & 1 female plug	3	UTL6122G1W5PS03FT0
		S/E assembly 1 female plug	3	UTL6122G1W5S03FT0
		S/E assembly 1 male plug	3	UTL6122G1W5P03FT0
		D/E assembly 1 male plug & 1 female in line receptacle	3	UTL6V122G1W5PS03F0
	16 AWG	D/E assembly 1 male plug & 1 female plug	3	UTL6122G1W5PS03FT1
		S/E assembly 1 female plug	3	UTL6122G1W5S03FT1
		S/E assembly 1 male plug	3	UTL6122G1W5P03FT1
		D/E assembly 1 male plug & 1 female in line receptacle	3	UTL6V122G1W5PS03F1

\* Other stock lengths available: 6 and 12 foot only: e.g. UTL6V122G1W5PS06F0 for a 6 foot version 14 AWG

Contact us for custom length or design needs.


### Evaluation kit

Evaluation kit is composed of 1 connector, contacts and 1 heat shrink boot for a quick and easy assembly production. For more information please see page 69.


# 122G1W5 (shell size 12, 3x#16 + 5x#20)

## Dimensions (for mated connector lengths see page 66)


In line receptacle - UTL1

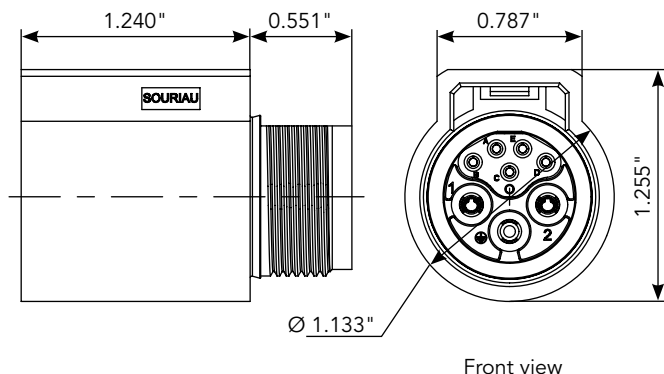


Plug for overmolding - UTL6

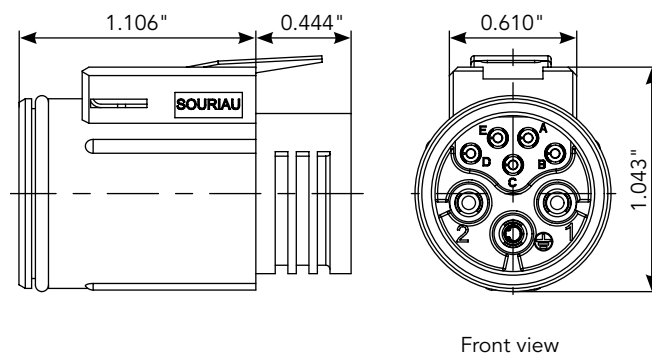


Jam nut receptacle - UTL7

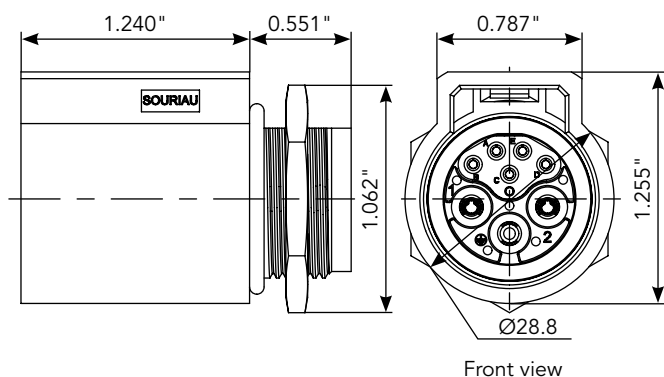

Terminating Resistor plug

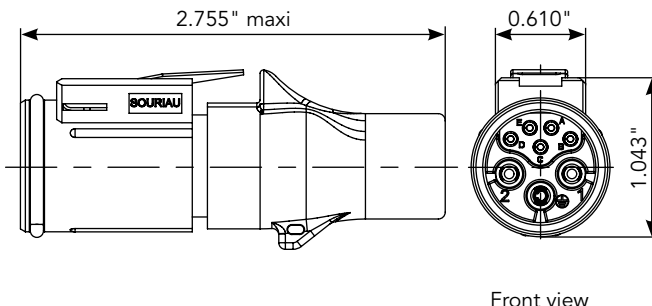


Terminating Resistor receptacle

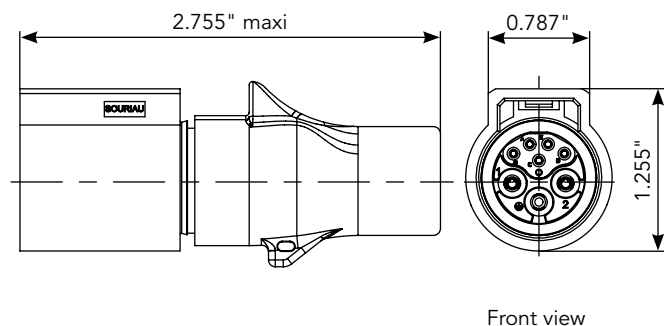

Panel cut out

Jam nut receptacle - UTL7  
Maximum panel thickness: 0.196"

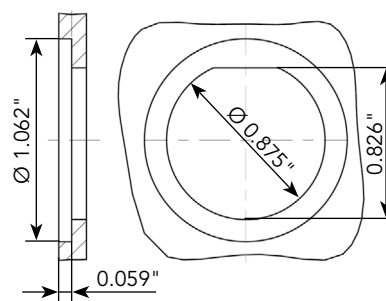

Note: all dimensions are in inch and for information only

# 122G1W5 (shell size 12, 3x#16 + 5x#20)

## Accessories and tooling

**Dustcap for plug**


IP67



Part number  
UTL612DCG

**Dustcap for receptacle**

IP67




Part number  
UTL12DCG

**Handle (without head)**



Part number  
SHANGLES

**Tool kit**



Part number  
TOOLKIT

**Extraction tool #16**



Part number  
RX2025GE1

**Insertion tool #16**



Part number  
RTM205

Head crimp tooling (without handle)		
Contacts	Contact size	Part number of head
RM/RC 24W3K <sup>(1)</sup>	Standard contacts #20 Ø 0.039"	S20RCM*
RM/RC 20W3K <sup>(1)</sup>		S20RCM*
RM/RC 18W3K <sup>(1)</sup>		S20RCM*
SM/SC 24WL3 <sup>(1)(2)</sup>		S20SCM20*
SM/SC 20WL3 <sup>(1)(2)</sup>		S20SCM20*
RM/RC 28M1K <sup>(1)</sup>	Standard contacts #16 Ø 0.062"	S16RCM20*
RM/RC 24M9K <sup>(1)</sup>		S16RCM20*
RM/RC 20M13K <sup>(1)</sup>		S16RCM20*
RM/RC 20M12K <sup>(1)</sup>		S16RCM20*
RM/RC 16M23K <sup>(1)</sup>		S16RCM16*
RM/RC 14M30K <sup>(1)</sup>		S16RCM14*
SM/SC 24ML1TK6 <sup>(1)</sup>		S16SCM20*
SM/SC 20ML1TK6 <sup>(1)</sup>		S16SCM20*
SM/SC 16ML1TK6 <sup>(1)</sup>		S16SCML1*
SM/SC 14ML1TK6 <sup>(1)</sup>		S16SCML1*
SM/SC 16ML11TK6 <sup>(1)</sup>		S16SCML11*
RMDXK10D28K	Coaxial contacts #16 Ø 0.062"	M20S-1J
RCDXK1D28K		
RM/RC DX60xxD28K		
RM/RC DXK10D28 + YORX090		
RM/RC DX60xxD28		

(1): Example of plating, for other plating options see page 38  
 \* Heads to be used with handle PN: SHANGLES

(2): loose contact



Handle

+



Head

=



Complete set

**122G1W5** (shell size 12, 3x#16 + 5x#20)**Contacts**

#20	Contact type	AWG	Part number		Max wire Ø	Max insulator Ø
			Male	Female		
Crimp	Machined	26-24	RM24W3K <sup>(1)</sup>	RC24W3K <sup>(1)</sup>	0.031"	0.062"
		22-20	RM20W3K <sup>(1)</sup>	RC20W3K <sup>(1)</sup>	0.045"	0.062"
		20-18	RM18W3K <sup>(1)</sup>	RC18W3K <sup>(1)</sup>	0.051"	0.082"
	Stamped & Formed reeled contacts See note (2) for loose piece	26-24	SM24W3TK6 <sup>(1)(2)</sup>	SC24W3TK6 <sup>(1)(2)</sup>	-	0.035" - 0.062"
		26-24	SM24W3S26 <sup>(1)(2)</sup>	SC24W3S25 <sup>(1)(2)</sup>	-	0.035" - 0.062"
		22-20	SM20W3TK6 <sup>(1)(2)</sup>	SC20W3TK6 <sup>(1)(2)</sup>	-	0.047" - 0.082"
		22-20	SM20W3S26 <sup>(1)(2)</sup>	SC20W3S25 <sup>(1)(2)</sup>	-	0.047" - 0.082"
#16						
Crimp	Machined	30-28	RM28M1K <sup>(1)</sup>	RC28M1K <sup>(1)</sup>	0.021"	0.039"
		26-24	RM24M9K <sup>(1)</sup>	RC24M9K <sup>(1)</sup>	0.031"	0.062"
		22-20	RM20M13K <sup>(1)</sup>	RC20M13K <sup>(1)</sup>	0.045"	0.070"
		22-20	RM20M12K <sup>(1)</sup>	RC20M12K <sup>(1)</sup>	0.045"	0.086"
		20-16	RM16M23K <sup>(1)</sup>	RC16M23K <sup>(1)</sup>	0.070"	0.125"
		16-14	RM14M30K <sup>(1)</sup>	RC14M30K <sup>(1)</sup>	0.090"	0.125"
	Stamped & Formed reeled contacts See note (2) for loose piece	26-24	SM24M1TK6 <sup>(1)(2)</sup>	SC24M1TK6 <sup>(1)(2)</sup>	-	0.035" - 0.062"
		22-20	SM20M1TK6 <sup>(1)(2)</sup>	SC20M1TK6 <sup>(1)(2)</sup>	-	0.047" - 0.082"
		18-16	SM16M1TK6 <sup>(1)(2)</sup>	SC16M1TK6 <sup>(1)(2)</sup>	-	0.125"
		18-16	SM16M11TK6 <sup>(1)(2)</sup>	SC16M11TK6 <sup>(1)(2)</sup>	-	0.118"
		14	SM14M1TK6 <sup>(1)(2)</sup>	SC14M1TK6 <sup>(1)(2)</sup>	-	0.125"
Coaxial	Cable multipiece	see page 41	RMDXK10D28	RCDXK1D28	-	-
	Cable monocrimp		RMDX60xxD28	RCDX60xxD28	-	-
	Twisted pair multipiece		RMDXK10D28 + YORX090	RCDXK1D28 + YORX090	-	-
	Twisted pair monocrimp		RMDX60xxD28	RCDX60xxD28	-	-

(1): Example of plating, for other plating options see page 38

(2): For loose piece contact packaging, place "L" in part number. Example: SM20ML1TK6

\*: Coax contacts cannot be used in the ground cavity


Note: all dimensions are in inch

**REMINDER****Plugs and receptacles have to be equipped with both contact genders.****EX: UTL6122G1W5P = 2 x SM16M1TK6 (power) + 1 x SC16M1TK6 (ground) + 5 x SM20W3TK6 (signal)****Electrical characteristics**

**UL**  
16A 600V V0  
13A 277V for CBC use

**CN**  
13A 600V  
10A 277V for CBC use

**IEC**  
16A 500V 6KV 4  
13A 250V 4KV 4 for CBC use

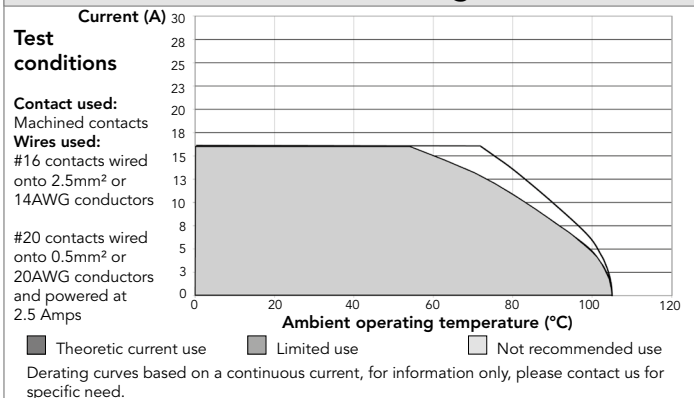**UTL122G1W5 derating curves**

# UTL SERIES

# Contacts

■ Description .....	36
■ Contact plating selector guide .....	37
■ Contact selector guide .....	38
■ Packaging .....	38
■ Crimp contacts .....	39
■ #16 coaxial contacts .....	41
■ PCB contacts .....	42

## Contacts



### Description

The UTL series is delivered without contacts (crimp version). This series offers the unique possibility to use the same contact in any layout as long as it receives the same active part size.

This provides the benefit of standardization and subsequent reduced inventory costs. In addition, it eliminates the need for added tooling and simplifies the assembly process. SOURIAU contacts are designed for simple snap-in installation and further eliminate the need for insertion tooling.

Crimp contacts are available in different versions:



• Machined



• Stamped & Formed



• Coaxial

The UTL series 3 + ground can be equipped with PCB contacts



## Contacts

## Contact plating selector guide

Once the contact size has been selected, the next step is to decide on which type to use. SOURIAU offers two main types of electrical contacts:

- Machined
- Stamped & Formed


Machined contacts are generally chosen as a better solution for power applications or when lower quantities are needed.

Stamped & formed contacts offer the ability to be crimped automatically which makes them more suitable for high volume production applications.

The next decision to make is: What plating should I choose?

The graph below can help guide you to plating recommendations based on application, mating cycles and current/voltage needs.

Note: do not mix different plating (i.e. tin plated pin contacts with gold plated socket contacts).

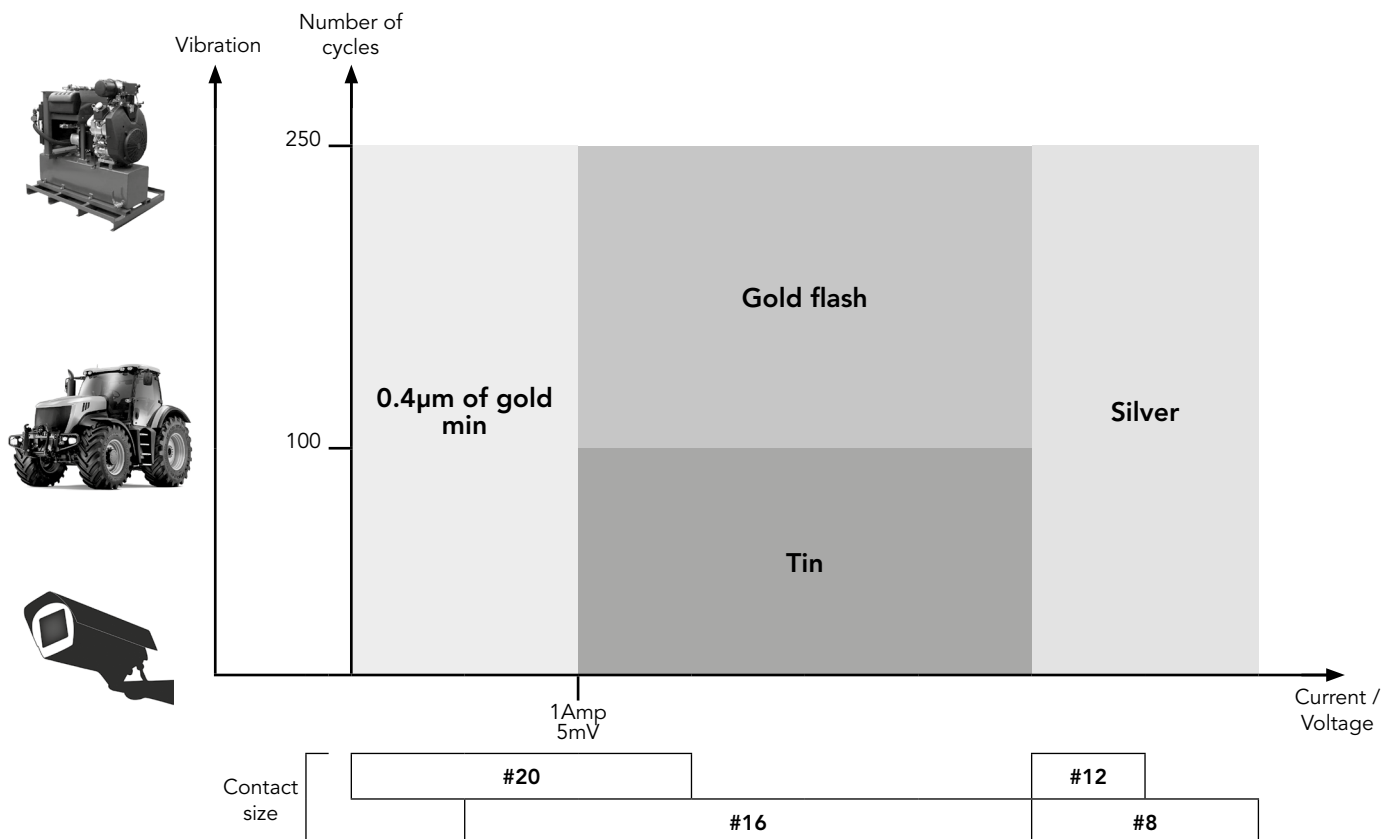

## Contacts

### Plating selector guide

#### Contacts supplied separately

Electrical characteristics: contact resistance		
#20 Ø 0.039"	Machined	< 6mΩ
	Stamped and Formed	< 6mΩ
#16 Ø 0.062"	Machined	< 3mΩ
	Stamped and Formed	< 6mΩ

#### Stamped & Formed contacts

Contact size	Plating code	Plating description	
		Active area	Other areas
#20 Ø 0.039"	S25 (female)	0,75µm Gold mini over Nickel	Gold flash over Nickel
	S26 (male)	0,75µm Gold mini over Nickel	Gold flash over Nickel
	TK6	0,5µm - 2,5µm Sn pre-plated	-
#16 Ø 0.062"	S31	Gold Flash over Nickel	Crimped area: 1.3µ Tin mini over Nickel Other areas: 1.3µ Tin mini
	S18	0,75µm Gold mini over Nickel	
	D70	0,13µm Gold mini over Nickel	Gold flash over Nickel
	TK6	0,5µm - 2,5µm Sn pre-plated	-

#### Machined contacts

Contact size	Plating code	Plating description
		Active area
#20 Ø 0.039"	K	0.4 µm Gold over 2 µm Nickel mini
#16 Ø 0.062"	K	0.4 µm Gold over 2 µm Nickel mini
	J	Gold Flash over Nickel 2 µm mini
	T	Tin 3 µm (-0/+2) over 1.3 µm Nickel mini
	D28*	0.75 µm mini Gold over 2 µm Nickel mini

\* For Coax contacts only


### Packaging - Size contacts #20 & #16

Due to the wide variety of applications, contact packaging is offered for small series (bulk package) and high volume production (reeled contacts):

#### Stamped & Formed



• 25 pieces loose package



• 3,000 pieces reeled

#### Machined contacts\*



• 50 pieces bulk package



• 1,000 pieces bulk package




• 2,000 pieces reeled

\* Note : 1,000 pieces bulk package available by adding 1000 at the end of the part number: e.g. RC16M23K1000  
2,000 pieces reeled package available by adding K at the beginning of the part number: e.g. KRC16M23K

## Crimp contacts

### Standard version

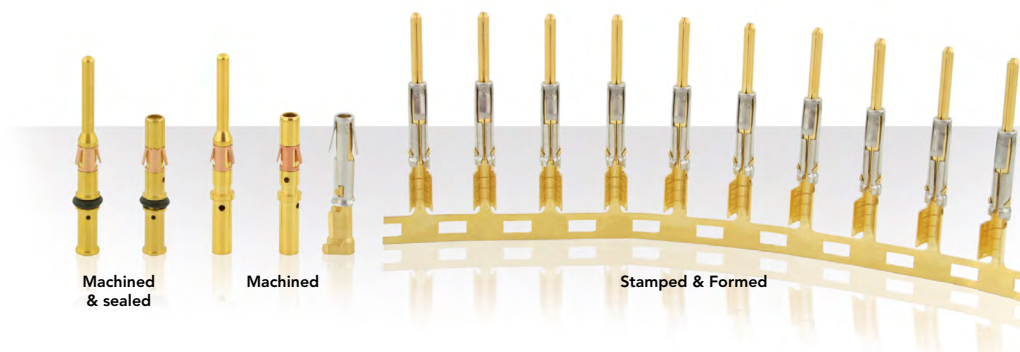

Contact size	Type	Wire size		Part number		Max wire Ø	Max insulator Ø	Available plating see page 38
		AWG	mm²	Male	Female			
#20 Ø 0.039"	Machined	26-24	0.13-0.20	RM24W3K	RC24W3K	0.031"	0.062" max	K
	Stamped & Formed	26-24	0.13-0.25	SM24W3 - (1)	SC24W3 - (1)	-	0.035" - 0.062"	TK6 S25 (female) S26 (male)
				SM24WL3 - (2)	SC24WL3 - (2)	-		
	Machined	22-20	0.32-0.52	RM20W3K	RC20W3K	0.045"	0.062" max	K
	Stamped & Formed	22-20	0.35-0.5	SM20W3 - (1)	SC20W3 - (1)	-	0.046" - 0.081"	TK6 S25 (female) S26 (male)
				SM20WL3 - (2)	SC20WL3 - (2)	-		
#16 Ø 0.062"	Machined	20-18	0.50-0.93	RM18W3K	RC18W3K	0.051"	0.082" max	K
	Machined	30-28	0.05-0.08	RM28M1 -	RC28M1 -	0.021"	0.043"	K, J
	Machined	26-24	0.13-0.2	RM24M9 -	RC24M9 -	0.031"	0.062"	K, J
	Stamped & Formed	26-24	0.13-0.25	SM24M1 - (1) SM24ML1 - (2)	SC24M1 - (1) SC24ML1 - (2)	0.035" - 0.050"	0.035" - 0.062"	TK6, S31, S18
	Machined	22-20	0.32-0.52	RM20M13 - RM20M12 -	RC20M13 - RC20M12 -	0.045"	0.070" 0.086"	K, J
	Stamped & Formed	22-20	0.35-0.5	SM20M1 - (1) SM20ML1 - (2)	SC20M1 - (1) SC20ML1 - (2)	0.046" - 0.081"	0.046" - 0.081"	TK6, S31, S18
	Machined	20-16	0.52-1.5	RM16M23 -	RC16M23 -	0.070"	0.125"	K, J
	Machined Sealed contact	20-16	0.52-1.5	RM16M25K	RC16M25K	0.070"	0.125"	K
	Machined Sealed contact	24	0.25	RM24M25K (3)	RM24M25K (3)	0.025"	0.125"	K
	Stamped & Formed	18-16	0.8-1.5	SM16M1 - (1) SM16ML1 - (2)	SC16M1 - (1) SC16ML1 - (2)	0.118"	No insulation grip	TK6, S31, S18
	Stamped & Formed	18-16	0.8-1.5	SM16M11 - (1) SM16ML11 - (2)	SC16M11 - (1) SC16ML11 - (2)	0.078" - 0.118"	0.081" - 0.118"	TK6, S31, S18
	Machined	16-14	1.5-2.5	RM14M30 -	RC14M30 -	0.090"	0.125"	K, J
	Stamped & Formed	14	2.0-2.5	SM14M1 - (1) SM14ML1 - (2)	SC14M1 - (1) SC14ML1 - (2)	0.125"	No insulation grip	TK6, S31, S18
	Machined Sealed contact	16-14	1.5-2.5	RM14M25K	RC14M25K	0.090"	0.125"	K

(1): Contact reeled (2): Loose contact. Example: RM24W3K - Size #20, Machined, AWG24 wire.

(3): Includes RM/RC24M25K contacts + a ferrule RR24M1K. The ferrule can also be ordered separately. See page 53

### REMINDER

Plugs and receptacles have to be equipped with both contact genders. Examples:  
 UTL6122W3G1P = 2 x SM16M1TK6 (power) + 1 x SC16M1TK6 (ground) + 5 x SM20W3TK6 (signal)

Note: all dimensions are in inch and for information only

## Crimp contacts

### First Mate Last Break contacts

Contact size	Type	Wire size		Part number		Max wire Ø (inch)	Max insulator Ø (inch)	Color band		Available plating see p. 38
		AWG	mm²	Male	Female			Front	Rear	
#16 Ø 0.062" Longer male contact (+0.039") for First Mate Last Break Connection	Machined	30-28	0.05-0.08	RM28M1GE1-	-	0.021"	0.039"	-	Red	K
		26-24	0.13-0.2	RM24M9GE1-		0.031"	0.062"	Red	Red	
		22-20	0.32-0.52	RM20M12GE1-		0.045"	0.086"	Blue	Red	
		20-16	0.52-1.5	RM16M23GE1-		0.070"	0.125"	-	Red	
		16-14	1.5-2.5	RM14M30GE1-		0.089"	-	-	Red	
#16 Ø 0.062" Shorter female contact (-0.027") for Last Mate First Break Connection	Machined	30-28	0.05-0.08	-	RC28M1GE7-	0.021"	0.039"	-	Blue	K
		26-24	0.13-0.2		RC24M9GE7-	0.031"	0.062"	Red	Blue	
		22-20	0.32-0.52		RC20M12GE7-	0.045"	0.086"	Blue	Blue	
		18-16	0.92-1.5		RC16M23GE7-	0.070"	0.125"	-	Blue	
		16-14	1.5-2.5		RC14M30GE7-	0.089"	-	-	Blue	

### How to make FMLB / LMFB\* connection

Contact 1 \ Contact 2	Standard male contact	Standard female contact	Longer male contact
Standard male contact		✓	
Standard female contact	✓		✓ FMLB
Shorter female contact	✓ LMFB		

First Mate Last Break contacts should be chosen only if the cavity is not marked with the ground symbol. For cavities marked with the ground symbol, standard contacts will fulfill the same role as a first mate, last break contact used in a standard cavity.



Ground symbol

\* FMLB: First Mate Last Break / LMFB: Last Mate First Break

## #16 coaxial contacts

### Coaxial contact range

Note: Coax contacts cannot be used in the ground cavity

We provide 2 types of coaxial contacts suitable for 50 or 75Ω, coaxial cable or twisted pair cable.

#### Monocrimp coaxial contact

- The monocrimp one-piece coaxial contacts offer high reliability plus the economic advantage of a 95% reduction in installation time over conventional assembly methods.
- This economy is achieved by simultaneously crimping both the inner conductor and outer braid or drain wire.



#### Multipiece crimp coaxial contact

- The inner conductor and outer braid is crimped individually.
- The thermoplastic insulating bushing in the outer body is designed to accept and permanently retain the inner contact.
- An outer ferrule is used to connect the braid to the outer contact and provide cable support to ensure against bending and vibration.



#### Suitable for coaxial cable or twisted cable

- For jacket diameter from 0.070" to 0.120"  
Inner conductor up to 0.096" diameter



- For jacket diameter from 0.025" to 0.1057"  
Inner conductor from 30 AWG to 24 AWG



#### Contacts for coaxial cable summary

Contact type	Contact range	
	Male contact	Female contact
Multipiece	RMDXK10D28	RCDXK1D28
Monocrimp	RMDX60xxD28	RCDX60xxD28

#### Contacts for twisted pairs cable summary

Contact type	Contact range	
	Male contact	Female contact
Multipiece	RMDXK10D28 + YORX090	RCDXK1D28 + YORX090
Monocrimp	RMDX60xxD28	RCDX60xxD28

## PCB contacts for 3 + ground (103G1)

### PCB contacts for 3 + ground (103G1)

#### PCB soldering

UTL range can be carried out with a wave soldering process, but not reflow soldering process. All high temperature processes are prohibited.




Contact size	Connector type	Part number contact		Plating see page 38
		Male	Female	
#16 Ø 0.062"	Male insert	RM20M12E8K	RC20M12E84K	K
	Female insert	RM20M12E8K	RC20M12E83K	


#### Nominal length

Dimension of dipsolder contacts out of connector (contacts to be ordered separately).

UTL7 female

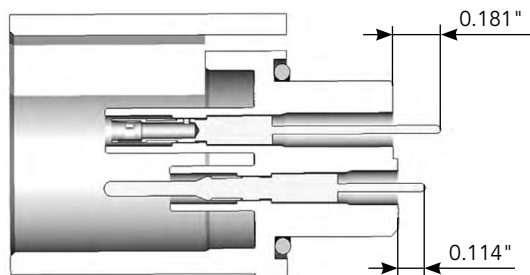

UTL7 male

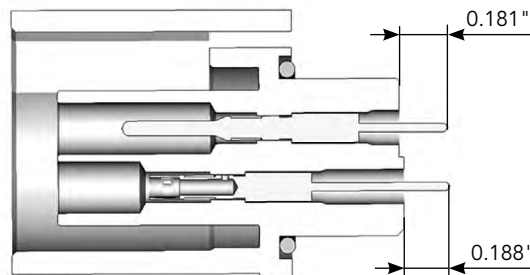

Note: The 6 pos. & 8 pos. layouts do not support PCB contacts

## Notes

# UTL SERIES



# Technical Information

■ Stripping instructions for crimp contacts .....	46
■ Tooling for crimp contacts .....	50
■ Handle & interchangeable heads for crimp contacts .....	52
■ Crimping control for crimp contacts .....	53
■ Insertion tool & extraction tool for crimp contacts .....	54
■ Stripping instructions and tooling for coax contacts.....	55
■ Assembly instructions .....	60
■ Mated connector length .....	65
■ Evaluation kit 3 contacts + ground .....	67
■ Evaluation kit 6 contacts .....	68
■ Evaluation kit 8 contacts .....	69
■ Evaluation kit – Assembly instructions .....	70
■ Rated current & working voltage .....	71
■ UV resistance .....	72
■ UL94 + UL1977 .....	73
■ IEC 61984 & IP codes explained .....	76
■ IEC 61140 explained .....	78
■ What is NEMA rating? .....	79
■ Ethernet for the Layman .....	80
■ RS-485 for the Layman .....	82


# Stripping instructions for crimp contacts

## Stripping & cutting dimensions of outer jacket


- Female insulator: Strip external cable sheath, adjust ground cable length
- Male insulator: Strip external cable sheath, adjust signal cable lengths
- Then, strip individual wire according to the recommended stripping length below
- Crimp contacts (see page 49)

### 3 + ground


UTL0103G1P - UTL1103G1P - UTL5103G1P -  
UTL6103G1P - UTL6TH103G1P - UTL7103G1P

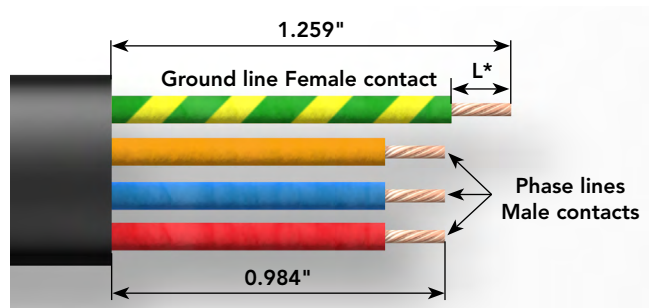


UTL0103G1S - UTL1103G1S - UTL5103G1S -  
UTL6103G1S - UTL6TH103G1S - UTL7103G1S

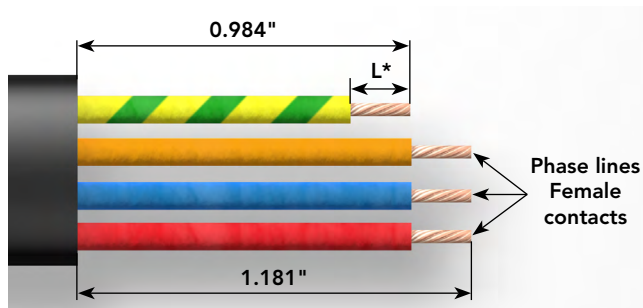


UTL6JC103G1P

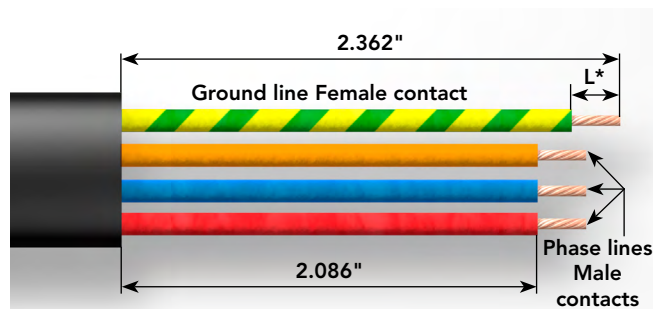


UTL6JC103G1S

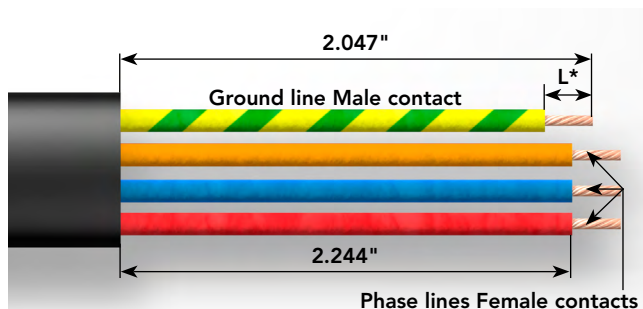

UTL1JC103G1P

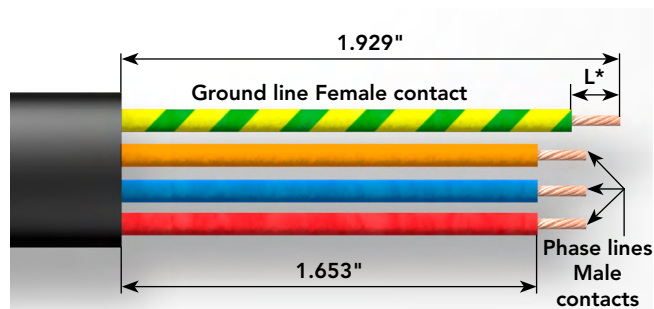

UTL1JC103G1S

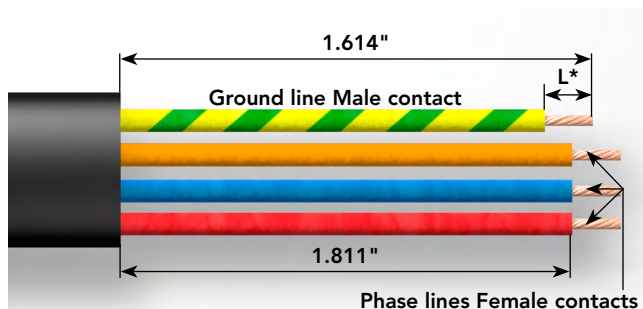

\* see page 49

Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B


## Stripping instructions for crimp contacts

### Stripping & cutting dimensions of outer jacket


- Female insulator: Strip external cable sheath, adjust ground cable length
- Male insulator: Strip external cable sheath, adjust signal cable lengths
- Then, strip individual wire according to the recommended stripping length below
- Crimp contacts (see page 49)

#### 5 pos.


UTL6145P - UTL7145P - UTL1145P

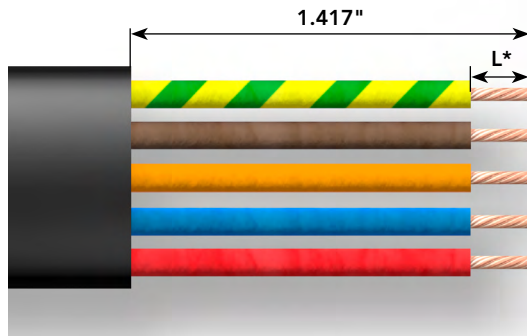

UTL6145S - UTL7145S - UTL1145S

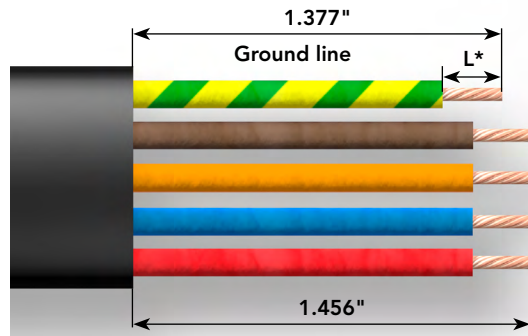


UTL6JC145SSCR

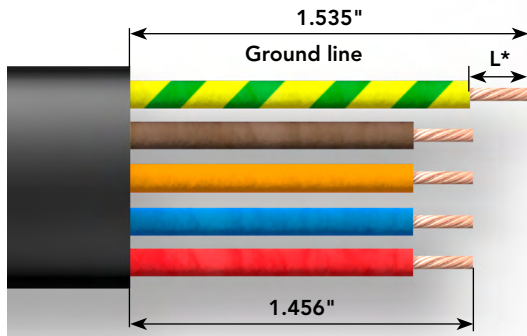


#### 6 pos.

UTL6102G1W3P - UTL7102G1W3P - UTL1102G1W3P

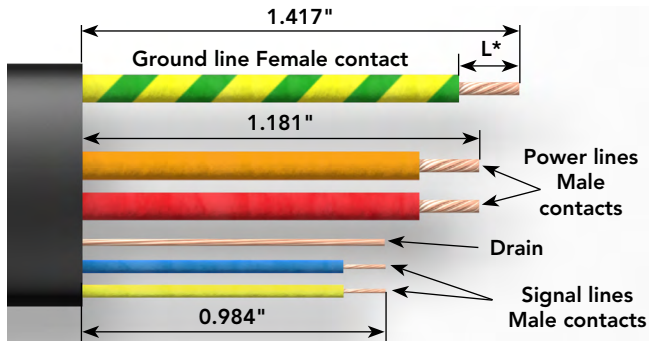

UTL6102G1W3S - UTL7102G1W3S - UTL1102G1W3S

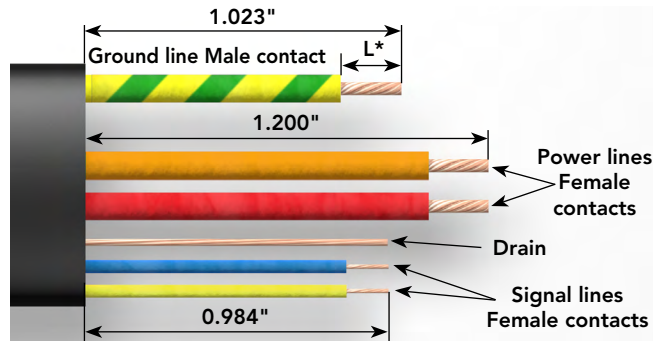

\* see page 49

Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B


## Stripping instructions for crimp contacts

### Stripping & cutting dimensions of outer jacket


- Female insulator: Strip external cable sheath, adjust ground cable length
- Male insulator: Strip external cable sheath, adjust signal cable lengths
- Then, strip individual wire according to the recommended stripping length below
- Crimp contacts (see page 49)

#### 8 pos.

UTL6122G1W5P - UTL7122G1W5P - UTL1122G1W5P

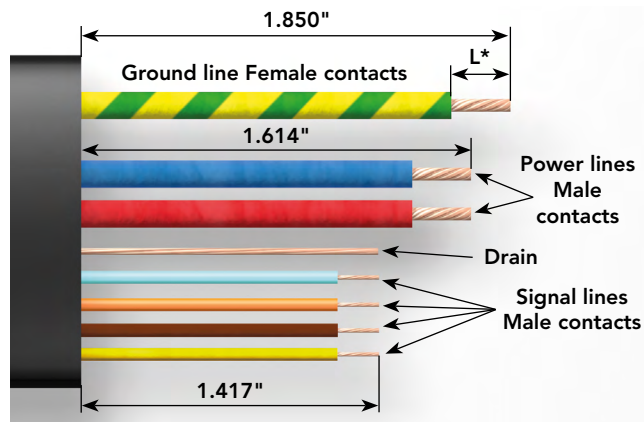

UTL6122G1W5S - UTL7122G1W5S - UTL1122G1W5S

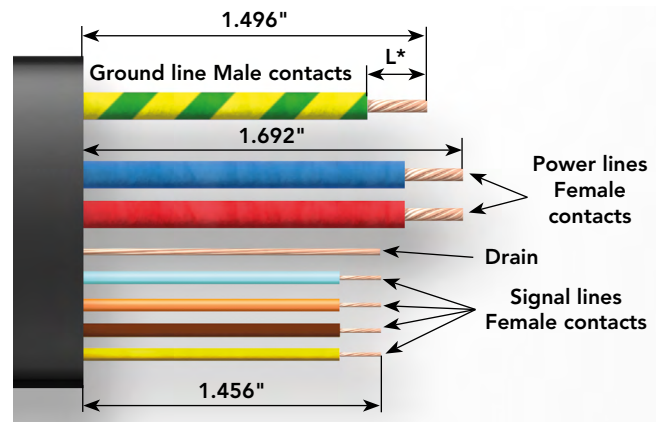




\* see page 49

Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B

# Stripping instructions for crimp contacts


## Wire stripping length

	Part number		Stripping length L (inch)
	Male	Female	
<b>Machined contact</b> 	#20 - Ø 0.039"		
	RM24W3- / RM20W3- / RM18W3-	RC24W3- / RC20W3- / RC18W3-	0.188"
	#16 - Ø 0.062"		
	RM28M1- / RM24M9- / RM20M13- / RM20M12-	RC28M1- / RC24M9- / RC20M13- / RC20M12-	0.188"
	RM16M23- / RM14M30-	RC16M23- / RC14M30-	0.279"
	RM16M25- / RM14M25-	RC16M25- / RC14M25-	0.212" / 0.204"
<b>Stamped &amp; formed</b> <b>With insulation support</b> 	#20 - Ø 0.039"		
	SM24W3- / SM24WL3- / SM20W3- / SM20WL3-	SC24W3- / SC24WL3- / SC20W3- / SC20WL3-	0.157"
	#16 - Ø 0.062"		
	SM24M1- / SM24ML1- / SM20M1- / SM20ML1-	SC24M1- / SC24ML1- / SC20M1- / SC20ML1-	0.157"
	SM16M11- / SM16ML11-	SC16M11- / SC16ML11-	0.183"
	#16 - Ø 0.062"		
<b>Without insulation support</b> 	#16 - Ø 0.062"		
	SM16M1- / SM16ML1-	SC16M1- / SC16ML1-	0.250"
	SM14M1- / SM14ML1-	SC14M1- / SC14ML1-	0.250"

Note: See page 38 for plating options and other contact details

Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B

## Screw termination version

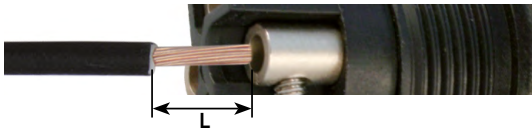	Female	Stripping length L (inch)
<b>Screw contact delivered with connector</b> 	#16 (Ø 0.062")	
		0.228"

Section: 1.5<sup>2</sup>mm or AWG16 max, 0.5<sup>2</sup>mm or AWG20 min. - Insulate diameter: Ø 0.157" maxi. - Cable diameter : Ø 0.354" to Ø 0.669" maxi

## Tooling for crimp contacts

### Automatic crimping tools




# SOURIAU

**Mecal is a leader in manufacturing tooling for crimping terminals over a stripped wire.**


Established in 1976, Mecal has become one of the world's leading companies dedicated to the design and manufacture of semi automatic production tools for strip fed, open barrel crimp terminals, serving the Automotive, Telecom and Datacom industries.

SOURIAU designs, manufactures and markets **high performance - high reliability interconnect solutions** for severe environments dedicated to the Aerospace, Defense/Space, Heavy Industry (Railway & Mass Transit, Nuclear, Oil & Gas) and Industrial Equipment markets. SOURIAU has a worldwide presence with R & D centers and production sites in Europe, USA, Japan and India. The Company is deeply involved in the environmental protection with industrial sites following ISO 14001 and RoHS products.

SOURIAU has been working in partnership with Mecal for many years. With sales offices located in all major industrial regions of the world, the combined strengths of both organizations has resulted in a truly global solution to all your production tooling needs. If you need automatic crimping tool, don't hesitate to contact Mecal.

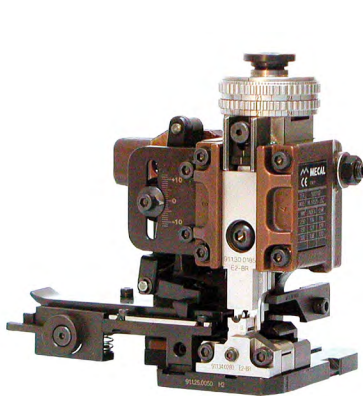

Mini Applicator

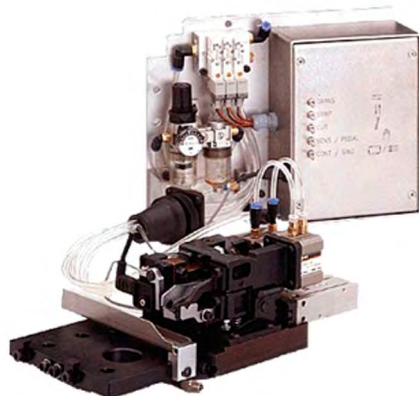

Stripper



Presses

Mecal sales network:

<http://www.mecal.net>

SOURIAU doesn't propose automatic crimp tooling. For tooling development, please contact directly Mecal or your tooling supplier.

## Tooling for crimp contacts

**Crimp tool table**

### Standard contacts

Contact size	Part number	Head*	Handles*	Insertion tool	Extraction tools
#20 Ø 0.039"	RM/RC 24W3K	S20RCM	SHANGLES	-	RX20D44
	RM/RC 20W3K				
	RM/RC 18W3K				
	SM 24WL3S*(1)	S20SCM20			
	SC 24WL3S*(1)				
SM/SC 20WL3S*(1)					
#16 Ø 0.062"	RM/RC 28M1*	S16RCM20		RTM205	RX2025GE1
	RM/RC 24M9*				
	RM/RC 20M13*				
	RM/RC 20M12*				
	RM/RC 16M23*	S16RCM16			
	RM/RC 14M30*	S16RCM14			
	SM/SC 24ML1*	S16SCM20			
	SM/SC 20ML1*				
	SM/SC 16ML1*	S16SCML1			
	SM/SC 14ML1*				
SM/SC 16ML11*	S16SCML11				

(1) loose contact

\* endurance of SHANGLES & Head tools = 50,000 cycles

### Specific contacts

Contact size	Part number <sup>(1)</sup>	Hand tools* (SHANDLES) head	Tool with separate locator			Insertion tool	Extraction tool				
			Hand tool	Positioner + locator setting							
#16 Ø 0.062" Sealed contact	RM/RC 24M25K	S16RCM1625	-	-	-	RTM205	RX2025GE1				
	RM/RC 16M25K	S16RCM1625	-	-	-						
	RM/RC 14M25K	S16RCM1425	-	-	-						
#16 Ø 0.062" Longer RM contact	RM28M1GE1K	S16RCM20	-	-	-			RTM205	RX2025GE1		
	RM24M9GE1K										
	RM16M23GE1K	S16RCM16	MH860	MH86186	6/8						
	RM14M30GE1K	S16RCM14									
#16 Ø 0.062" Shorter RC contact	RC28M1GE7K	S16RCM20	MH860	MH86164G	4/6					RTM205	RX2025GE1
	RC24M9GE7K				5/6						
	RC20M13GE7K RC20M12GE7K				5/7						
	RC16M23GE7K				6/8						
	RC14M30GE7K	S16RCM14		M317	UH25						

(1) see page 38 for plating options and other contact details

\* endurance of SHANGLES & Head tools = 50,000 cycles



# Handle & interchangeable heads for crimp contacts

## Crimping with SOURIAU tooling

- 1) Fully close then release the tool, keep it open.  
Open the 2 pins.




- 2) Choose the adapter head (sold separately), keep vertical and slide it into the handle until the mechanical stop.




- 3) Close the two pins simultaneously to maintain the head.



- 4) Strip the cable properly by checking the recommended size in the catalog on pages 46 to 48.

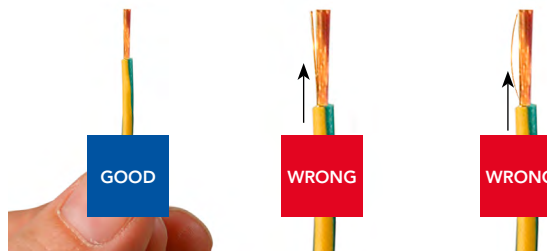

- 5) Place conductors, with no deterioration, in the contact bucket.  
All strands to be located in the crimp bucket.

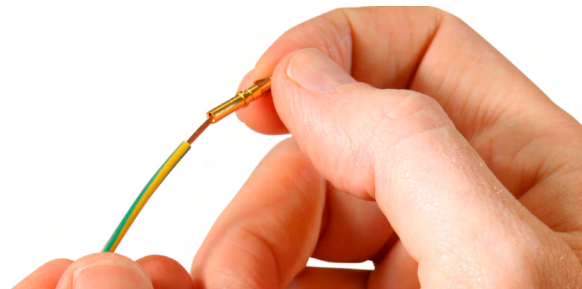


- 6) Position the contact in the bottom of the tool by checking its orientation. Maintain the wire in position.



- 7) Tighten sharply the handles to the end of the mechanism (max 175 N). After handles are opened, extract the contact.



- 8) Control the quality of crimping (see page 53).

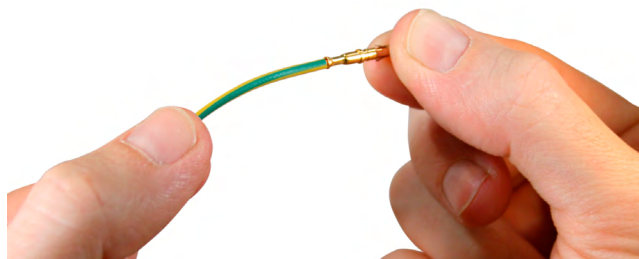

Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B

## Crimping control for crimp contacts

### Crimping

One of the key factors which affects the performance of a connector is the way contacts are terminated. Crimped connections are today seen as the best solution to ensure quality throughout the lifetime of the product. Here are some reasons why we recommend this method of termination for UTL connectors:

#### Advantages (Extract from the IEC 60352-2):



- Efficient processing of connections at each production level
- Processing by fully-automatic or semi-automatic crimping machines, or with hand operated tools
- No cold-soldered joints
- No degradation of the spring characteristic of female contacts by the soldering temperature

- No health risk from heavy metal and flux steam
- Preservation of conductor flexibility behind the crimped connection
- No burned, discolored and overheated wire insulation
- Good connections with reproducible electrical and mechanical performances
- Easy production control.

To ensure that the crimp tooling is performing according to original specifications, it is important to carry out regular checks. A common way to check the performance of tooling is with a simple pull test, ideally using a dedicated electric pull tester. Minimum recommended pull forces are indicated in the tables below:



Machined contact



Stamped & Formed contact



Active contact part	Contact type	Die location on heads	Wire section range	Section (mm²)	Tensile straight test (mini)	Height (inch) H (±0.002")	Width (inch) W (±0.002")	Tooling head part number	
Machined contacts size #20 Ø0.039"	RM24W3K	26/24	26 AWG	0.12 min	15 N	0.037"	0.050"	S20RCM	
	RC24W3K		24 AWG	0.25 max	32 N				
	RM20W3K	22/20	22 AWG	0.32 min	40 N	0.049"	0.070"		
	RC20W3K		20 AWG	0.50 max	60 N				
	RM18W3K	20/18	20 AWG	0.50 max	60 N	0.053"	0.073"		
	RC18W3K		18 AWG	0.82 max	90 N				
S & F contacts size #20 Ø0.039"	SM24WL3TK6*	26/24	26 AWG	0.12 min	15 N	0.031"	0.058"	S20SCM20	
	SC24WL3TK6*		24 AWG	0.25 max	32 N				
	SM20WL3TK6*	22/20	22 AWG	0.32 min	40 N	0.039"	0.060"		
	SC20WL3TK6*		20 AWG	0.50 max	60 N				
Machined contacts size #16 Ø0.062"	RM28M1K*	30/28	30 AWG	0.05 min	11 N	0.044"	0.055"	S16RCM20	
	RC28M1K*		28 AWG	0.08 max	11 N				
	RM24M9K*	26/24	26 AWG	0.12 min	15 N	0.045"	0.055"		
	RC24M9K*		24 AWG	0.25 max	32 N				
	RM20M13K*	22/20	22 AWG	0.32 min	40 N	0.049"	0.069"		
	RC20M13K*		20 AWG	0.50 max	60 N				
	RM20M12K*		22 AWG	0.32 min	40 N				
	RC20M12K*		20 AWG	0.50 max	60 N				
	RM16M23K*	20	20 AWG	0.50 max	60 N	0.065"	0.085"		S16RCM16
	RC16M23K*	18	18 AWG	0.82 max	90 N	0.070"	0.089"		
		16	16 AWG	1.50 max	150 N	0.077"	0.095"		
	RM24M25K	20	24 AWG	0.25max	32 N	0.065"	0.085"		16RCM1625
	RM16M25K	118	18 AWG	0.82 max	90 N	0.070"	0.089"		S16RCM1625
	RC16M25K	16	16 AWG	1.50 max	150 N	0.077"	0.095"		
	RM14M25K	16	16 AWG	1.50 min	150 N	0.082"	0.105"		S16RCM1425
	RC14M25K	14	14 AWG	2.50 min	230 N	0.090"	0.109"		
RM14M30K*	16	16 AWG	1.50 min	150 N	0.082"	0.105"	S16RCM14		
RC14M30K*	14	14 AWG	2.50 min	230 N	0.090"	0.109"			
S & F contacts size #16 Ø0.062"	SM24ML1TK6*	26/24	26 AWG	0.12 min	15 N	0.033"	0.059"	S16SCM20	
	SC24ML1TK6*		24 AWG	0.25 max	32 N				
	SM20ML1TK6*	22/20	22 AWG	0.32 min	40 N	0.040"	0.060"		
	SC20ML1TK6*		20 AWG	0.50 max	60 N				
	SM16ML11TK6*	18	18 AWG	0.82 min	90 N	0.051"	0.082"	S16SCML11	
	SC16ML11TK6*	16	16 AWG	1.50 max	150 N	0.053"	0.082"		
	SM16ML1TK6*	18	18 AWG	0.82 min	90 N	0.058"	0.079"	S16SCML1	
	SC16ML1TK6*	16	16 AWG	1.50 max	150 N	0.066"	0.080"		
	SM14ML1TK6*	14	14 AWG	2.50 max	230 N	0.070"	0.101"		
	SC14ML1TK6*								

\* example of plating, for other plating see page 38

Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B

## Insertion tool for crimp contacts

Contact size	Part number
#16	RTM205



RTM205

## Extraction tool for crimp contacts

Contact size	Part number
#20	RX20D44
#16	RX2025GE1



RX20D44



RX2025GE1

## Contact extraction instructions


Place the tool into the cavity from front face of the connector, push on the handle, then remove the contact.  
#20 female contact are not removable.



## #16 coaxial contacts

### Twisted pair cable monocrimp contact cabling

Cable type	Ø over jacket (inch)		Part number		Crimp tool	Inner + outer tool	Cable strip length (inch)		
	Outer maxi Ø D	Inner conductor Ø G					A	B	C
AWG26 (7x0.16)	0.041"	0.018"	Male	RMDX6031D28	M20S-1J	S-80J + SL-105J	0.185"	0.236"	0.157"
			Female	RCDX6031D28					

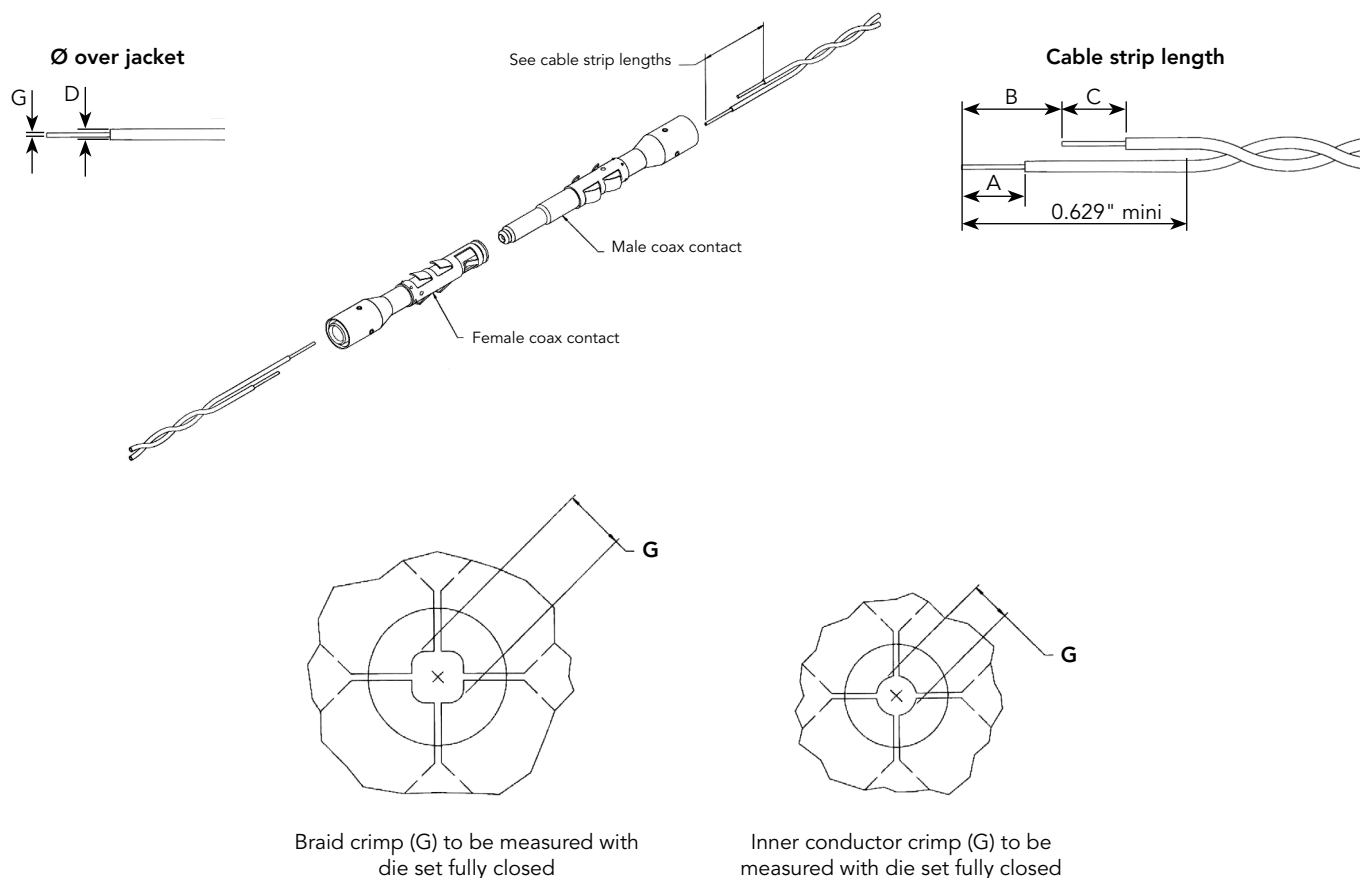

## Tooling for coaxial contacts


M20S-1J


Die and  
Stop Bushing


## #16 coaxial contacts

### Coax cable with monocrimp contact cabling

Cable type	Ø over jacket (inch)					Part number		Crimp tool	Inner + outer tool	Cable strip length (inch)		
	Impedance Ohm	Outer maxi Ø D	Outer braid Ø E	Dielectric Ø F	Inner conductor Ø D					A	B	C
RG174/U	1.968"	0.114"	0.088"	0.059"	0.018"	Male	RMDX6032D28	M20S-1J	S-80J + SL-105J	0.200"	0.236"	0.459"
						Female	RCDX6032D28					
RG188A/U	1.968"	0.109"	0.077"	0.059"	0.020"	Male	RMDX6036D28	M20S-1J	S-80J + SL-105J	0.200"	0.236"	0.459"
						Female	RCDX6036D28					
RG316/U	1.968"	0.098"	0.080"	0.059"	0.020"	Male	RMDX6036D28	M20S-1J	S-80J + SL-105J	0.200"	0.236"	0.459"
						Female	RCDX6036D28					

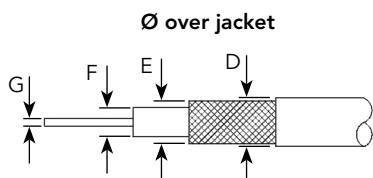


Ø over jacket

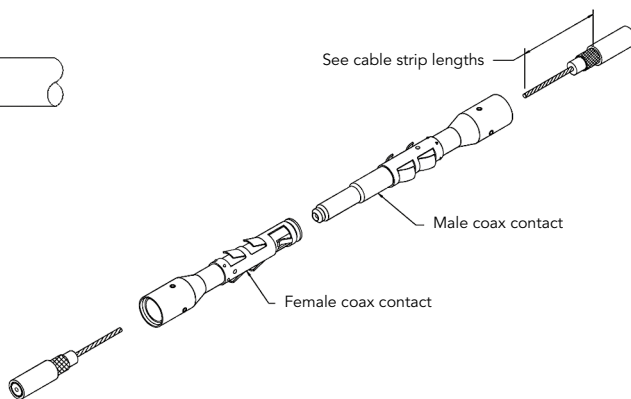

See cable strip lengths

Male coax contact

Female coax contact



Cable strip length

## Tooling for coaxial contacts

M20S-1J



Die and  
Stop Bushing

## #16 coaxial contacts


### Twisted pair cable multipiece contact cabling

Cable type	Ø over jacket (inch)		Part number		Crimp tool	Inner tool	Outer tool	Cable strip length (inch)		
	Outer maxi Ø D	Inner conductor Ø G						A	B	C
AWG26 (7x0.16)	0.041 "	0.018 "	Male	RMDXK10D28 + YORX090	M20S-1J	S26D2J + SL46D2K	S22-1J + SL47-1J	0.312 "	0.312 "	0.312 "
			Female	RCDXK10D28 + YORX090				0.250 "	0.250 "	0.312 "


#### Multipiece kit details

<b>RMDXK10D28 or RCDXK10D28 includes</b>	Outer contact
	Inner contact
	Outer hyring
	Inner supporting sleeve


#### Ø over jacket




#### Male cable strip length

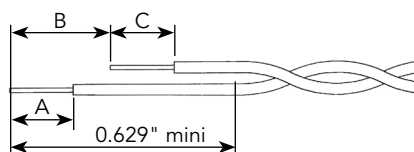


#### Female cable strip length

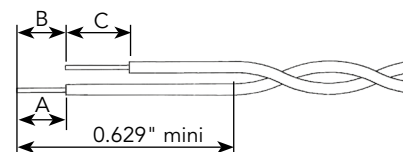

#### Female contact

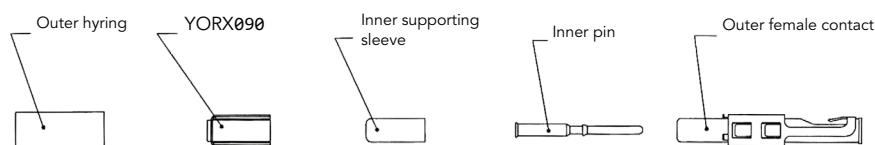

#### Male contact

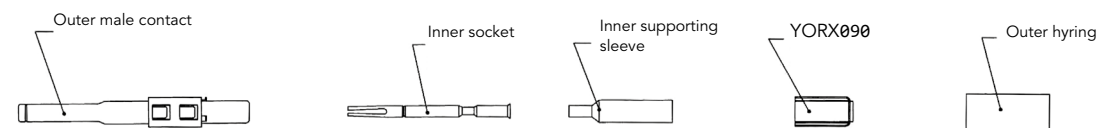

## Tooling for coaxial contacts

M20S-1J


Die and  
Stop Bushing

# #16 coaxial contacts


## Twisted pair cable multipiece male contact cabling

Cable type	Ø over jacket (inch)					Part number	Crimp tool	Inner tool	Outer tool	Cable strip length (inch)		
	Impedance Ohm	Outer maxi Ø D	Outer braid Ø E	Dielectric Ø F	Inner conductor Ø D					A	B	C
RG174/U	50	0.114"	0.088"	0.059"	0.018"	RMDXK10D28	M20S-1J see page 57	S26D2J + SL46D2K	S22-1J + SL47-1J	0.172"	0.312"	0.625"
RG188/U	50	0.109"	0.077"	0.059"	0.020"							
RG161/U	70	0.082"	-	0.057"	0.011"							
RG179A/U	75	0.105"	0.083"	0.062"	0.011"							
RG179B/U	75	0.105"	0.083"	0.062"	0.011"							
RG187/U	75	0.109"	0.077"	0.059"	0.011"							
RG178A/U	50	0.075"	0.053"	0.033"	0.011"					0.296"	0.359"	0.690"
RG196/U	50	0.079"	-	0.033"	0.011"							


### Multipiece kit details

RMDXK10D28 includes	Outer contact
	Inner contact
	Outer hyring
	Inner supporting sleeve


### Cable strip length

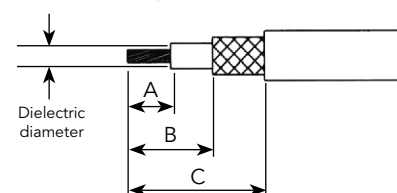

### Contact assembly with dielectric diameter over 0.055" - without inner supporting sleeve

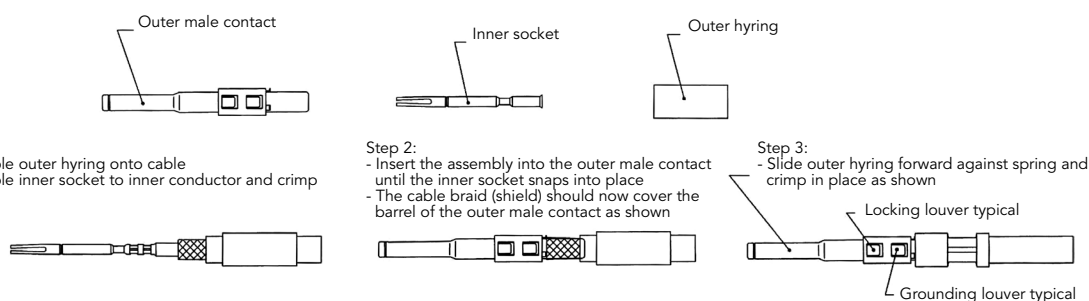

### Contact assembly with dielectric diameter under 0.055" - with inner supporting sleeve

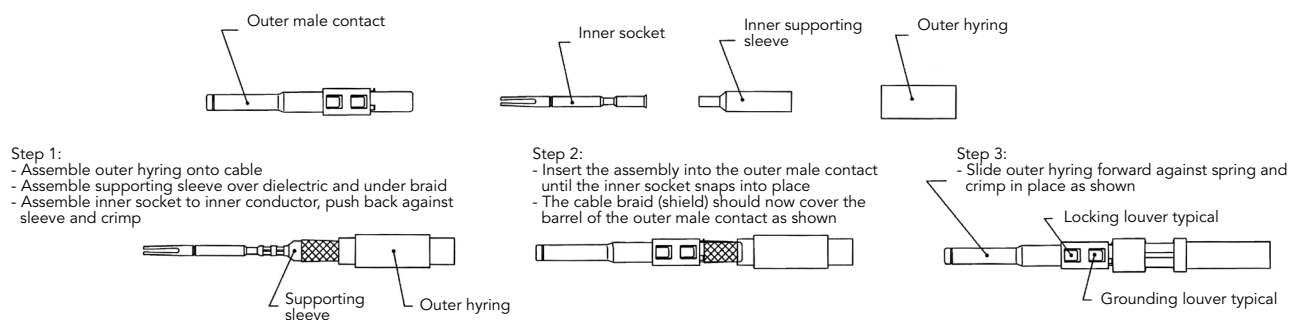



## #16 coaxial contacts


### Twisted pair cable multipiece female contact cabling

Cable type	Ø over jacket (inch)					Part number	Crimp tool	Inner tool	Outer tool	Cable strip length (inch)	
	Impedance Ohm	Outer maxi Ø D	Outer braid Ø E	Dielectric Ø F	Inner conductor Ø D					A	C
RG174/U	50	0.114"	0.088"	0.059"	0.018"	RCDXK1D28	M20S-1J see page 57	S26D2J + SL46D2K	S22-1J + SL47-1J	0.172"	0.438"
RG188/U	50	0.109"	0.077"	0.059"	0.020"						
RG161/U	70	0.082"	-	0.057"	0.011"						
RG179A/U	75	0.105"	0.083"	0.062"	0.011"						
RG179B/U	75	0.105"	0.083"	0.062"	0.011"						
RG187/U	75	0.109"	0.077"	0.059"	0.011"						
RG178A/U	50	0.075"	0.053"	0.033"	0.011"					0.250"	0.438"
RG196/U	50	0.079"	-	0.033"	0.011"						


#### Multipiece kit details

RCDXK1D28 includes	Outer contact
	Inner contact
	Outer hyring
	Inner supporting sleeve


#### Cable strip length

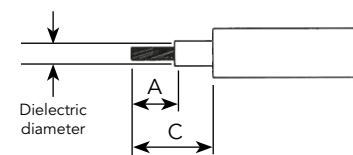

#### Contact assembly with dielectric diameter over 0.055" - without inner supporting sleeve

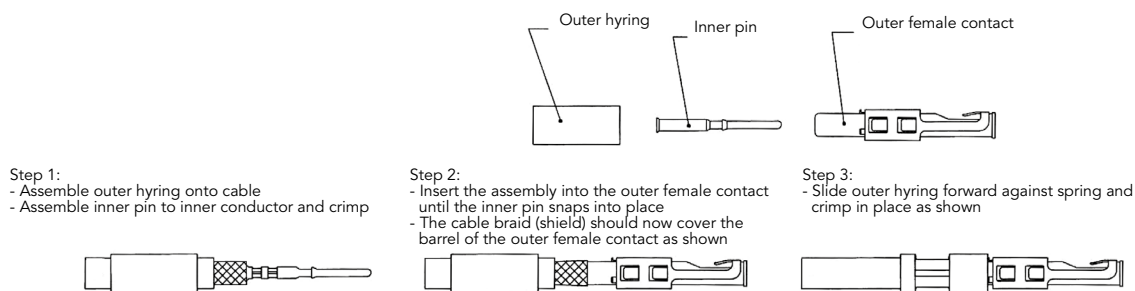



#### Contact assembly with dielectric diameter under 0.055" - with inner supporting sleeve

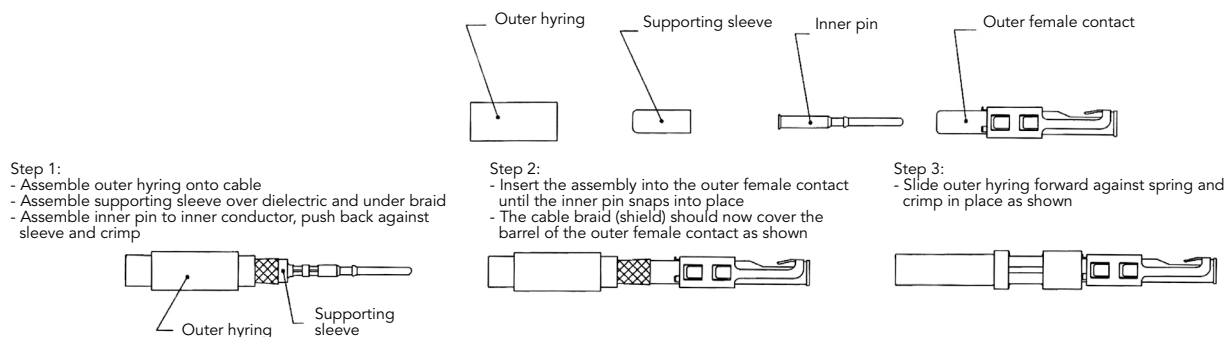

## Assembly instructions

### UTL0 assembly (Mounting suggestion)

- Strip wires
- Crimp contacts
- Place all the contacts inside the corresponding cavities
- Manually push each contact, or use our tool (**RTM205** for #16 contacts), until audible click. Check each contact retention, with two finger retraction
- Place receptacle in the panel cut-out (see dimension page 19 for UTL103G1)
- Secure receptacle with M3 screws (not supplied), torque 0.7 Nm maxi

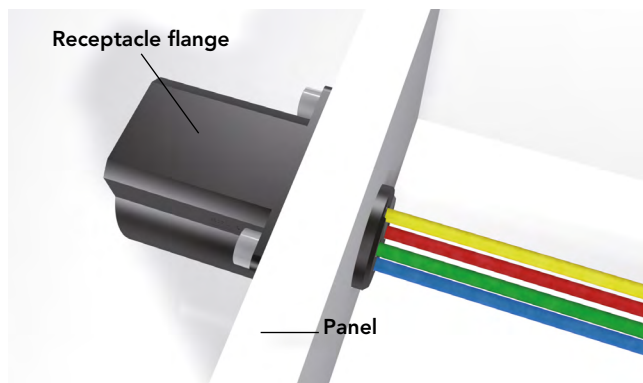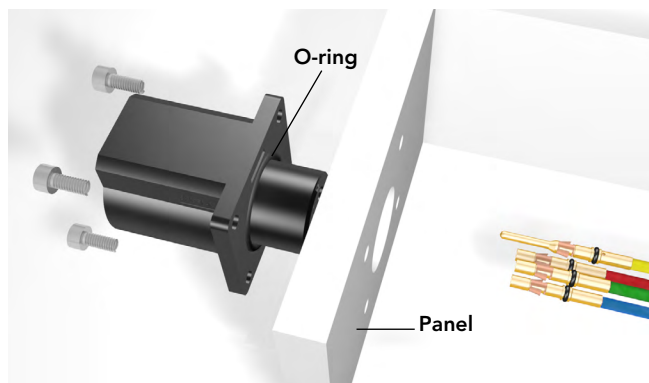

### UTL6 or UTL1 assembly

- Strip wires
- Crimp contacts
- Place all the contacts inside the corresponding cavities
- Manually push each contact, or use our tool (**RTM205** for #16 contacts), until audible click. Check each contact retention, with two finger retraction
- Do an overmolding on the wired set or use heat shrink boot






Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B

## Assembly instructions

### UTL7 assembly (Mounting suggestion)



- Slide nut over the wires
- Strip wires
- Crimp contacts
- Place all the contacts inside the corresponding cavities
- Manually push each contact, or use our tool (**RTM205** for #16 contacts), until audible click. Check each contact retention, with two finger retraction
- Seat o-ring, place receptacle in the panel cut-out (see dimension page 19 for UTL103G1, page 23 for UTL145, page 27 for UTL102G1W3 or page 31 for UTL122G1W5)
- Tighten jam nut torque: 2.5 Nm maxi, tightening tool: 7/8"

Final view

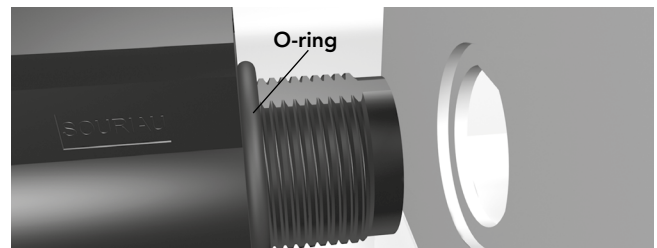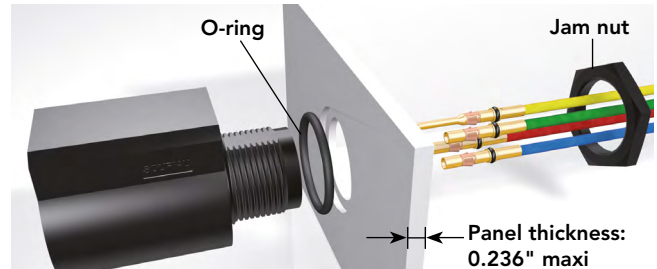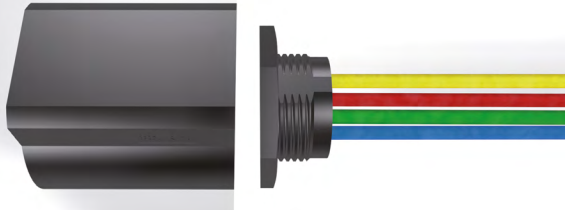

### UTL6145 with backshell assembly

- Slide backshell on the cable
- Strip wires
- For screw termination version: place each stripped wire in the contact and tighten the screw, advised torque 20 Ncm
- For crimp termination version: crimp contacts on wires and insert contacts in the cavities
- Check wire retention by a slight two finger retraction
- Then click the backshell on the plug rear side
- Tighten the cable gland on the backshell, indicative torque: 3 Nm
- Finally tighten the nut on the cable gland, wrench size 30, indicative torque: 8 Nm maxi (coupling torque will depend of the cable type)

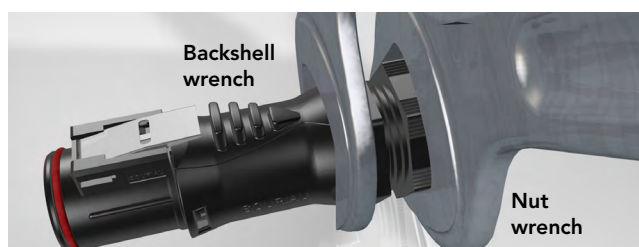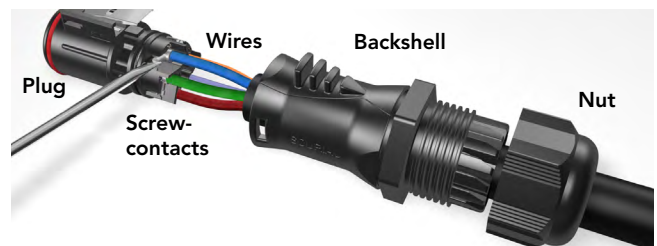


Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B

## Assembly instructions

### Protective shroud assembly UTL6JC & UTL6TH (Mounting suggestion)




- No tool is required to assemble the Protective Shroud UTL10PS on the plug.
- Take care about the orientation of the protective shroud
- Put the protective shroud on the appropriate area until a click is heard
- By a visual control, make sure that the Protective Shroud is well oriented and inserted
- Please note that we don't recommend to dismantling the protective shroud after assembly

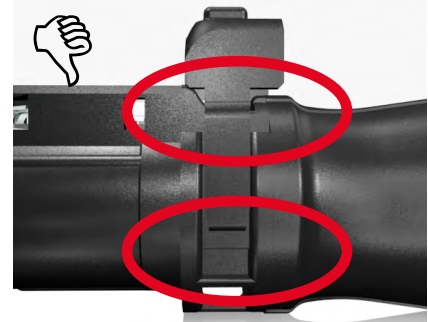

- The aim of the Protective Shroud is to not be able to disconnect the plug without a tool

- To disconnect the plug, when Protective Shroud is used, please use a screw driver and put the screw driver into the hole of the protective shroud


- Then push on the screwdriver and pull slightly on the plug do disconnect it

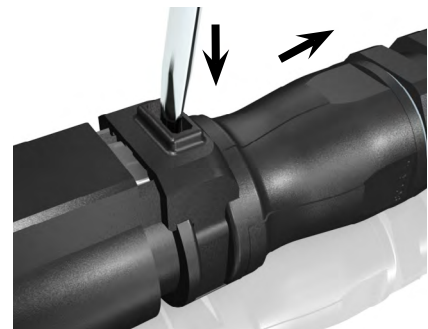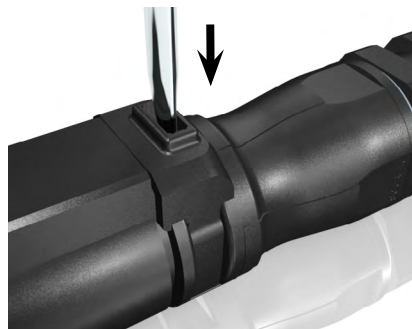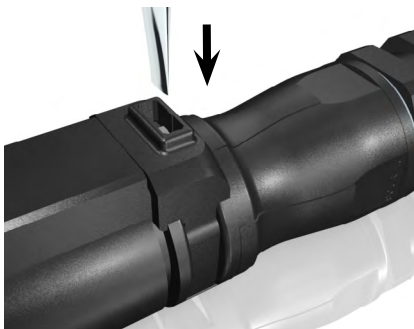

Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B

# Assembly instructions

## UTL1JC103G1 & UTL6JC103G1 assembly (Mounting suggestion)

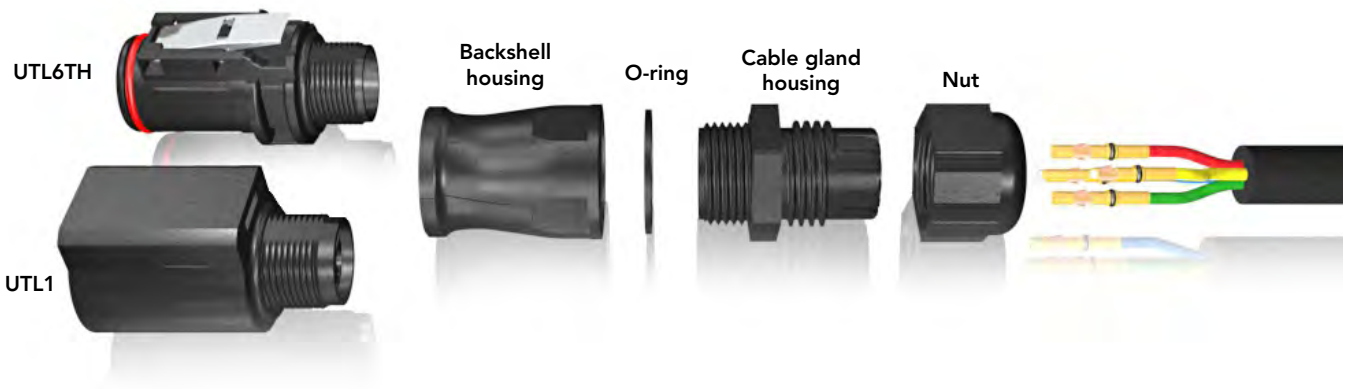

- Slide nut over the wires **1**
- Strip wires
- Crimp contacts
- Place all the contacts inside the corresponding cavities
- Manually push each contact, or use our tool (**RTM205** for #16 contacts), until audible click. Check each contact retention, with two finger retraction **2**
- Check the presence and the appropriate positioning of the connector O-ring
- Screw backshell housing at the rear of the connector until the mechanical stop (recommended coupling torque 2.5 Nm). You can use a dummy receptacle in order to facilitate this assembly operation **3**
- Then check the presence and the appropriate positioning of the cable gland gasket
- Screw the cable gland housing at the rear of the backshell housing by using a wrench (size 25) with the recommended coupling torque 3 Nm **4**

- Screw the nut of the cable gland by using a wrench (size 25). Recommended coupling torque 5 Nm **5**
- Please note that the coupling torque of the nut is for information only and may need to be adjusted according to your cable specification (diameter, flexibility, outer jacket material for example). SOURIAU cannot be responsible in case the coupling torque is not adapted to the cable specification



Note: Assembly operations mentioned above shall not interfere or to be in contradiction with the IPC-WHMA-A-620B





## Assembly instructions



### SWSFILLERPLUG mounting for 3 + ground

Push the sealing plug into each connector cavity to seal until a mechanical stop.



#### UTL0

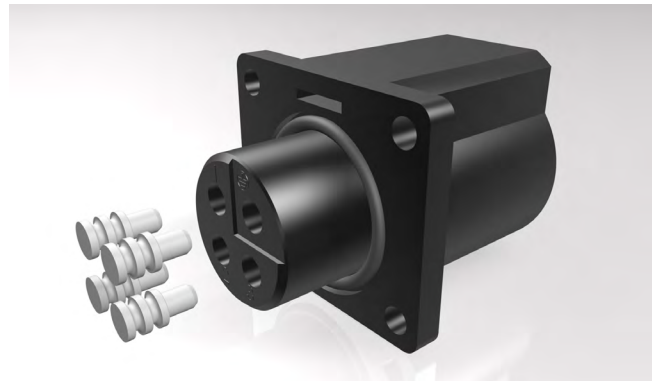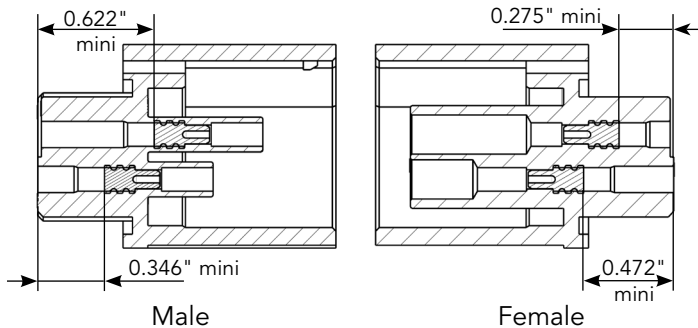

#### UTL7 & UTL1

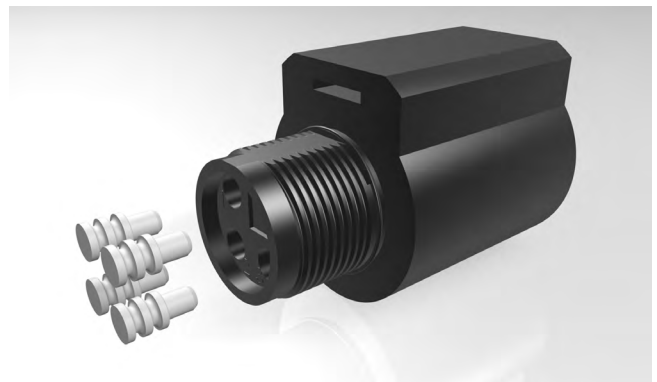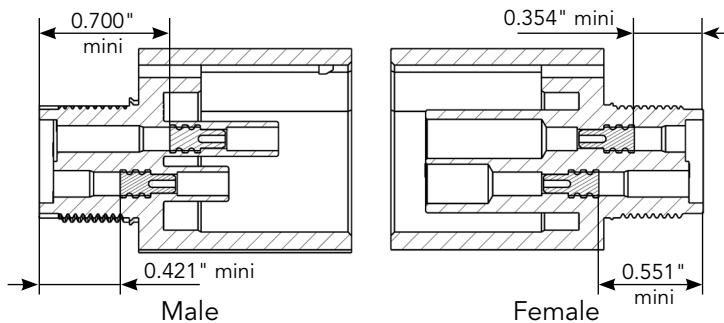

#### UTL6

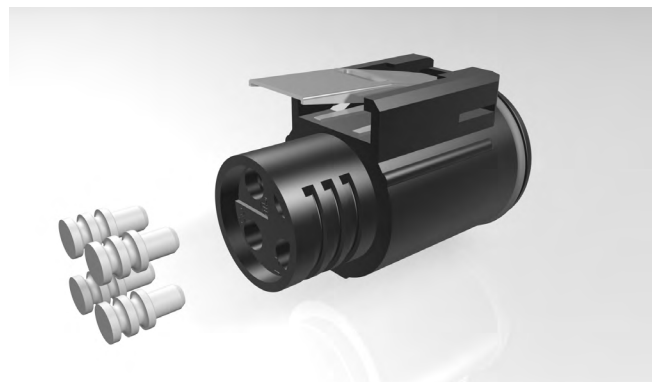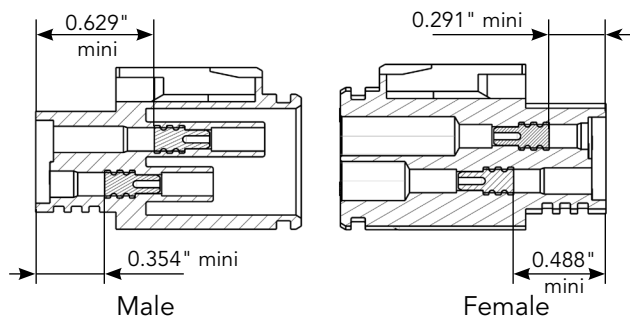

Note: all dimensions are in inch


3.425"

## Mated connector length

**103G1** (shell size 10, 3 + ground, 4x#16) & **102G1W3** (shell size 10, 3x#16 + 3x#20)


**UTL0 + UTL6 overmolded**

3.070" maxi

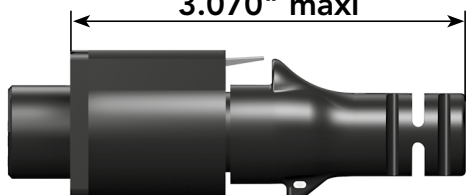


**UTL7 + UTL6 overmolded**

3.110" maxi

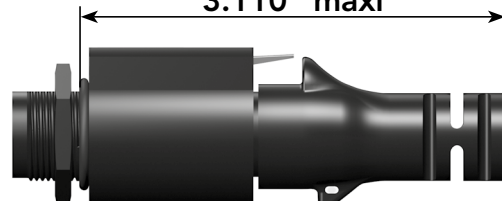

**UTL1 + UTL6 overmolded**

4.881" maxi

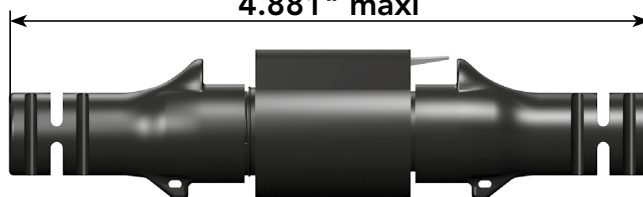

**UTL5 + UTL1JC**

4.015" maxi




**UTL7 + UTL6JC**

4.015" maxi




**Right angle overmolded  
plug**

2.874" maxi

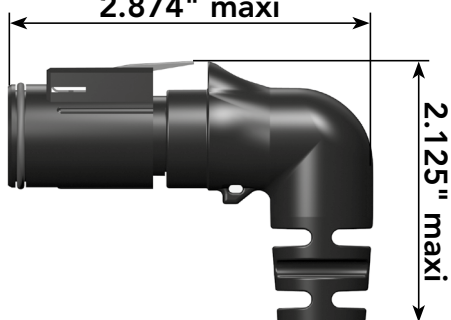

**Right angle overmolded  
receptacle**

2.913" maxi

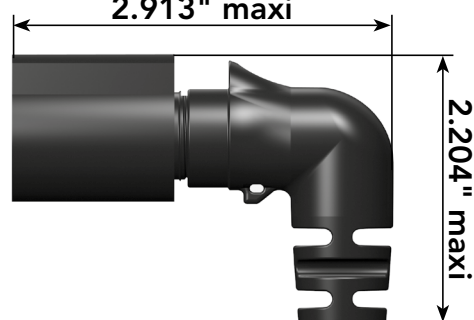

Note: all dimensions are in inch




## Mated connector length

**122G1W5** (shell size 12, 3x#16 + 5x#20)

**UTL7 + UTL6 overmolded**

**3.582" maxi**

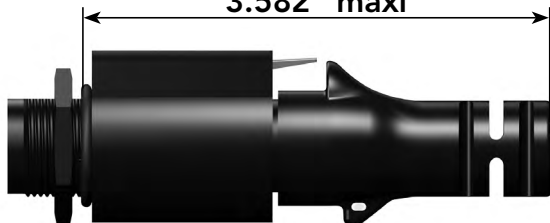

**UTL1 overmolded + UTL6 overmolded**


**5.314" maxi**



**145** (shell size 14, 5x#16)

**UTL1 or UTL7 + UTL6**

**2.047"**

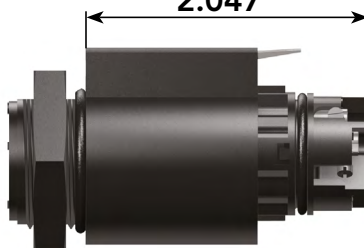

**UTL1 or UTL7 + UTL6JC**

**4.133"**



Note: all dimensions are in inch

## Evaluation kit 3 contacts + ground part number (103G1)

Evaluation kit is composed of 1 connector, contacts and 1 heat shrink boot for a quick and easy assembly production.

Evaluation kit is the solution for a quick prototyping, please note that the IP level of the evaluation kit is IP67.

Part number	Connector type	Gender	Wire section		UTL6103G1P20AWG	UTL6103G1P16AWG	UTL1103G1P20AWG	UTL1103G1P16AWG	UTL7103G1P20AWG	UTL7103G1P16AWG	UTL0103G1P20AWG	UTL0103G1P16AWG	SM20M16S14AWG	SC20M16S14AWG	SM16M16S14AWG	SC16M16S14AWG	SM14M16S14AWG	SC14M16S14AWG
			AWG	mm²														
UTL6103G1P20AWG	Plug	Male power	20	0.5	1	-	-	-	-	-	-	-	4	2	-	-	-	-
UTL6103G1P16AWG	Plug	Male power	16	1.5	1	-	-	-	-	-	-	-	-	-	4	2	-	-
UTL6103G1P14AWG	Plug	Male power	14	2.5	1	-	-	-	-	-	-	-	-	-	-	-	4	2
UTL6103G1S20AWG	Plug	Female power	20	0.5	-	1	-	-	-	-	-	-	2	4	-	-	-	-
UTL6103G1S16AWG	Plug	Female power	16	1.5	-	1	-	-	-	-	-	-	-	-	2	4	-	-
UTL6103G1S14AWG	Plug	Female power	14	2.5	-	1	-	-	-	-	-	-	-	-	-	-	2	4
UTL1103G1P20AWG	Inline receptacle	Male power	20	0.5	-	-	1	-	-	-	-	-	4	2	-	-	-	-
UTL1103G1P16AWG	Inline receptacle	Male power	16	1.5	-	-	1	-	-	-	-	-	-	-	4	2	-	-
UTL1103G1P14AWG	Inline receptacle	Male power	14	2.5	-	-	1	-	-	-	-	-	-	-	-	-	4	2
UTL1103G1S20AWG	Inline receptacle	Female power	20	0.5	-	-	-	1	-	-	-	-	2	4	-	-	-	-
UTL1103G1S16AWG	Inline receptacle	Female power	16	1.5	-	-	-	1	-	-	-	-	-	-	2	4	-	-
UTL1103G1S14AWG	Inline receptacle	Female power	14	2.5	-	-	-	1	-	-	-	-	-	-	-	-	2	4
UTL7103G1P20AWG	Jam nut receptacle	Male power	20	0.5	-	-	-	-	1	-	-	-	4	2	-	-	-	-
UTL7103G1P16AWG	Jam nut receptacle	Male power	16	1.5	-	-	-	-	1	-	-	-	-	-	4	2	-	-
UTL7103G1P14AWG	Jam nut receptacle	Male power	14	2.5	-	-	-	-	1	-	-	-	-	-	-	-	4	2
UTL7103G1S20AWG	Jam nut receptacle	Female power	20	0.5	-	-	-	-	-	1	-	-	2	4	-	-	-	-
UTL7103G1S16AWG	Jam nut receptacle	Female power	16	1.5	-	-	-	-	-	1	-	-	-	-	2	4	-	-
UTL7103G1S14AWG	Jam nut receptacle	Female power	14	2.5	-	-	-	-	-	1	-	-	-	-	-	-	2	4
UTL0103G1P20AWG	Square flange receptacle	Male power	20	0.5	-	-	-	-	-	-	1	-	4	2	-	-	-	-
UTL0103G1P16AWG	Square flange receptacle	Male power	16	1.5	-	-	-	-	-	-	1	-	-	-	4	2	-	-
UTL0103G1P14AWG	Square flange receptacle	Male power	14	2.5	-	-	-	-	-	-	1	-	-	-	-	-	4	2
UTL0103G1S20AWG	Square flange receptacle	Female power	20	0.5	-	-	-	-	-	-	-	1	2	4	-	-	-	-
UTL0103G1S16AWG	Square flange receptacle	Female power	16	1.5	-	-	-	-	-	-	-	1	-	-	2	4	-	-
UTL0103G1S14AWG	Square flange receptacle	Female power	14	2.5	-	-	-	-	-	-	-	1	-	-	-	-	2	4

## Evaluation kit 6 contacts part number (102G1W3)

Evaluation kit is composed of 1 connector, contacts and 1 heat shrink boot for a quick and easy assembly production.

Evaluation kit is the solution for a quick prototyping, please note that the IP level of the evaluation kit is IP67.

Part number	Connector type	Gender	Wire section		UTL6102G1W3P16AWG	UTL6102G1W3S16AWG	UTL1102G1W3P16AWG	UTL1102G1W3S16AWG	UTL7102G1W3P16AWG	UTL7102G1W3S16AWG	Heat shrink boot	SM20WL3S26	SC20WL3S25	SM24WL3S26	SC24WL3S25	SM16ML1S31	SC16ML1S31	SM14ML1S31	SC14ML1S31
			AWG	mm²															
UTL6102G1W3P16AWG	Plug	Male power	16	1.5	1	-	-	-	-	-	1	1	-	3	-	3	2	-	-
UTL6102G1W3P14AWG	Plug	Male power	14	2.5	1	-	-	-	-	-	1	1	-	3	-	-	-	3	2
UTL6102G1W3S16AWG	Plug	Female power	16	1.5	-	1	-	-	-	-	1	-	1	-	3	2	3	-	-
UTL6102G1W3S14AWG	Plug	Female power	14	2.5	-	1	-	-	-	-	1	-	1	-	3	-	-	2	3
UTL1102G1W3P16AWG	Inline receptacle	Male power	16	1.5	-	-	1	-	-	-	1	1	-	3	-	3	2	-	-
UTL1102G1W3P14AWG	Inline receptacle	Male power	14	2.5	-	-	1	-	-	-	1	1	-	3	-	-	-	3	2
UTL1102G1W3S16AWG	Inline receptacle	Female power	16	1.5	-	-	-	1	-	-	1	-	1	-	3	2	3	-	-
UTL1102G1W3S14AWG	Inline receptacle	Female power	14	2.5	-	-	-	1	-	-	1	-	1	-	3	-	-	2	3
UTL7102G1W3P16AWG	Jam nut receptacle	Male power	16	1.5	-	-	-	-	1	-	-	1	-	3	-	3	2	-	-
UTL7102G1W3P14AWG	Jam nut receptacle	Male power	14	2.5	-	-	-	-	1	-	-	1	-	3	-	-	-	3	2
UTL7102G1W3S16AWG	Jam nut receptacle	Female power	16	1.5	-	-	-	-	-	1	-	-	1	-	3	2	3	-	-
UTL7102G1W3S14AWG	Jam nut receptacle	Female power	14	2.5	-	-	-	-	-	1	-	-	1	-	3	-	-	2	3

## Evaluation kit 8 contacts part number (122G1W5)

Evaluation kit is composed of 1 connector, contacts and 1 heat shrink boot for a quick and easy assembly production.

Evaluation kit is the solution for a quick prototyping, please note that the IP level of the evaluation kit is IP67.



Part number	Connector type	Gender	Wire section		UTL6122G1W5P	UTL6122G1W5S	UTL1122G1W5P	UTL1122G1W5S	UTL7122G1W5P	UTL7122G1W5S	Heat shrink boot	SM20WL3S26	SC20WL3S25	SM24WL3S26	SC24WL3S25	SM16ML1S31	SC16ML1S31	SM14ML1S31	SC14ML1S31
			AWG	mm²															
UTL6122G1W5P16AWG	Plug	Male power	16	1.5	1	-	-	-	-	-	1	2	-	5	-	3	2	-	-
UTL6122G1W5P14AWG	Plug	Male power	14	2.5	1	-	-	-	-	-	1	2	-	5	-	-	-	3	2
UTL6122G1W5S16AWG	Plug	Female power	16	1.5	-	1	-	-	-	-	1	-	2	-	5	2	3	-	-
UTL6122G1W5S14AWG	Plug	Female power	14	2.5	-	1	-	-	-	-	1	-	2	-	5	-	-	2	3
UTL1122G1W5P16AWG	Inline receptacle	Male power	16	1.5	-	-	1	-	-	-	1	2	-	5	-	3	2	-	-
UTL1122G1W5P14AWG	Inline receptacle	Male power	14	2.5	-	-	1	-	-	-	1	2	-	5	-	-	-	3	2
UTL1122G1W5S16AWG	Inline receptacle	Female power	16	1.5	-	-	-	1	-	-	1	-	2	-	5	2	3	-	-
UTL1122G1W5S14AWG	Inline receptacle	Female power	14	2.5	-	-	-	1	-	-	1	-	2	-	5	-	-	2	3
UTL7122G1W5P16AWG	Jam nut receptacle	Male power	16	1.5	-	-	-	-	1	-	-	2	-	5	-	3	2	-	-
UTL7122G1W5P14AWG	Jam nut receptacle	Male power	14	2.5	-	-	-	-	1	-	-	2	-	5	-	-	-	3	2
UTL7122G1W5S16AWG	Jam nut receptacle	Female power	16	1.5	-	-	-	-	-	1	-	-	2	-	5	2	3	-	-
UTL7122G1W5S14AWG	Jam nut receptacle	Female power	14	2.5	-	-	-	-	-	1	-	-	2	-	5	-	-	2	3

## Evaluation kit

### Assembly instructions

The boot is semi-flexible and heat-shrinkable with a moldable adhesive inner lining.

- Place the heat shrink boot over the cable
- Strip the cable jacket (see pages 46 to 48)
- Strip the individual wires (see page 49)
- Crimp the contacts (see pages 52 & 53) **1**
- Place the contacts in their cavities, checking the retention by slightly pulling the cable **2**
- Clean the connector surface and the cable jacket with isopropyl alcohol  
(Note: It is advised to rub the jacket with sand paper and clean the jacket before shrinking the boot)
- Position the boot over the rear threads **3**
- Heat the boot with a heat gun: minimum shrink temp: 80°C - minimum full recovery temp: 110°C make sure to apply the heat evenly around the boot. Starting by applying the heat from the rear of the connector. **4**  
Do not apply excessive heat, as it will damage the connector and/or boot.
- Let the boot cool down **5**
- Check for good retention and the boot glue grip **6**.

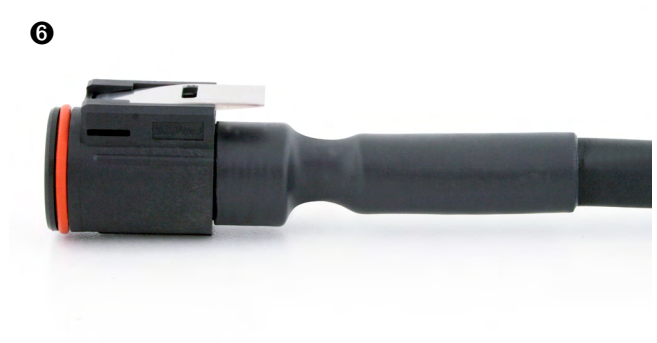
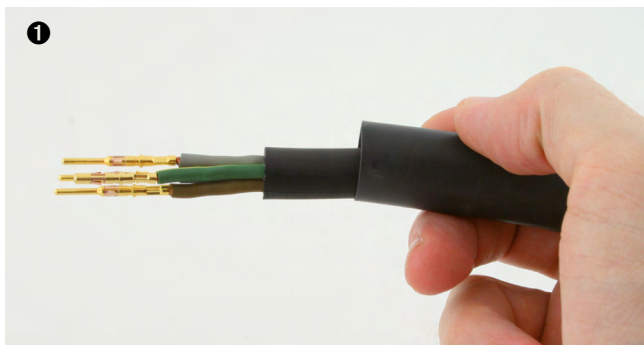


## Rated current & working voltage

### Current carrying capacity

The current carrying capacity of a connector is limited by the thermal properties of materials used in its construction. The amount of current that can be handled depends on the size of cable used, the ambient temperature and the heat that is generated inside the connector. Part 3 of the IEC 60512 standard determines through a derating curve, the maximum current permissible, which varies from one layout to another (Fig.1 & Fig.2). Wire size plays an important role as well, since they help to dissipate heat and avoid overheating (Fig.1 & Fig.2).

Please note that the curve should be adjusted when dealing with potential hot spots, which can occur as a result of unequal loading of current across a number of contacts. As a general rule, it is best to avoid locating power handling contacts in the middle of the connector; try to locate them towards the edge where heat can be dissipated more effectively. Eventually you should find a level which represents the permissible operating range:

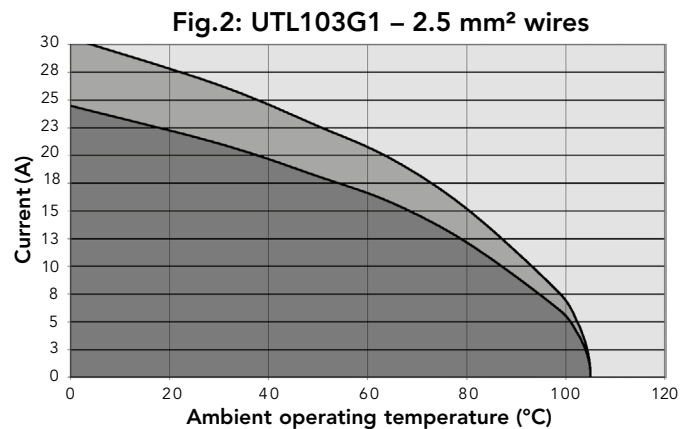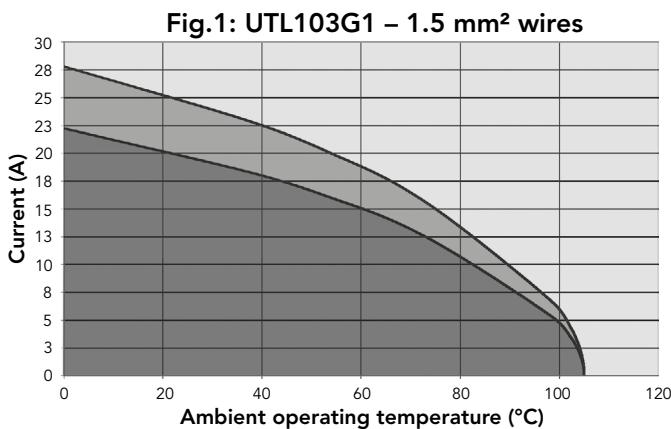

Theoretic current use
  Limited use
  Not recommended use

The **rated current** is defined as uninterrupted continuous current that a connector can take when all contacts are energized simultaneously without exceeding the maximum limit of temperature. The ground contact is never loaded.

## UV resistance

### UV resistance


Solar radiation affects all materials, but plastics can be susceptible to extreme degradation over time. The choice of materials for the UTL series was therefore a critical consideration.

All over the world we are not exposed to the same amount of energy given by the sun. The chart shown here clearly illustrates this.

So we performed test according to the ISO 4892-2 and simulated 5 years exposure to outdoor environments (temperature, humidity, etc...).

After this period there was no significant colour variation, no crazing, no cracking and no major variation of mechanical properties.

In addition, to that we asked UL to perform UV test per the UL746C. Our material has been rated F1 which is the highest level in this standard.

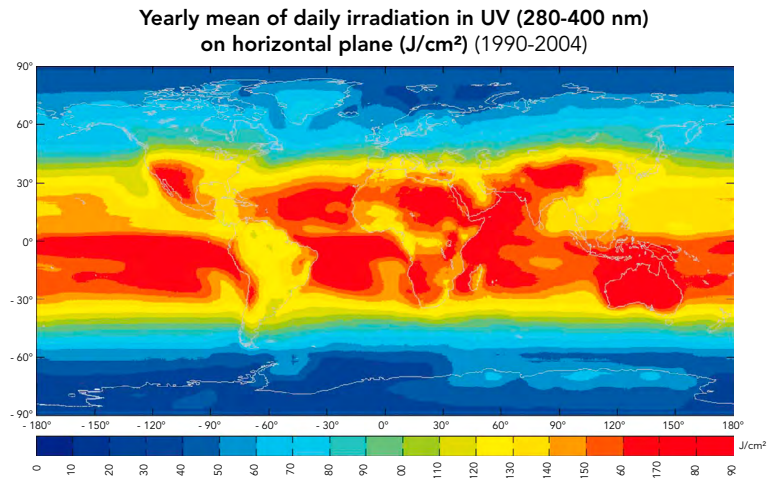



## UL94 + UL1977

Underwriter laboratories



There are two main standards for industrial connectors: UL94 & UL1977

### UL 94: Tests for Flammability of Plastic Materials for Parts in Devices and Appliances

This standard is dedicated to plastics flammability. It characterizes how the material burns in various orientation and thicknesses. Whereas most of our competitors are using a 50W test to classify the ability of their solution to withstand fire, SOURIAU decided to increase this to a 500W test. New regulations tend to emphasize the importance of burning behavior making the 50W test less and less relevant.

The UTL series has been rated at 5VA.

Procedure: Bar specimens are to be 4.921" long by 0.511" wide, and provided in the minimum thickness.

Plaque specimens are to be 5.905" by 5.905" and provided in the minimum thickness.

Thicker specimens may also be provided and shall be tested if the results obtained on the minimum thickness indicate inconsistent test results. The maximum thickness is not to exceed 0.511".



Conditions	5VA
Afterflame time plus afterglow time after fifth flame application for each individual bar specimen	≤60s
Cotton indicator ignited by flaming particles or drops from any bar specimen	No
Burn-through (hole) of any plaque specimen	No

#### 5VA Vertical burning:

- The specimen is clamped from the upper 0.236" of the specimen, with the longitudinal axis vertical, so that the lower end of the specimen is 11.810" above a horizontal layer of not more than 0.08 g of absorbent cotton thinned to approximately 1.968" x 1.968" and a maximum thickness of 0.236".
- The 500W flame is then to be applied to one of the lower corners of the specimen so that the tip of the blue cone is within 0 to 0.118" of the specimen edge.
- Apply the flame for 5<sup>±0.5</sup> seconds and then remove for 5<sup>±0.5</sup> seconds. Repeat the operation until the specimen has been subjected to five applications of the test flame.

#### 5VA Horizontal burning:

- Support the plaque specimen by a clamp in the horizontal plane.
- The flame is then to be applied to the centre of the bottom surface of the plaque so that the tip of the blue cone is within 0 to 0.118" of the plaque surface.
- Apply the flame for 5<sup>±0.5</sup> seconds and then remove for 5<sup>±0.5</sup> seconds. Repeat the operation until the plaque specimen has been subjected to five applications of the test flame.
- After the fifth application of the test flame, and after all flaming or glowing combustion has ceased, it is to be observed whether or not the flame penetrated (burned through) the plaque material. In addition, no opening greater than 0.118" shall appear after the test.

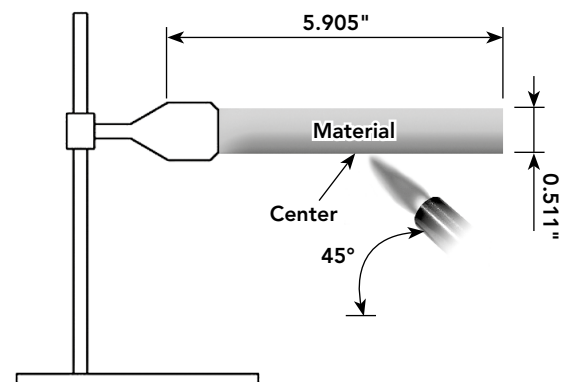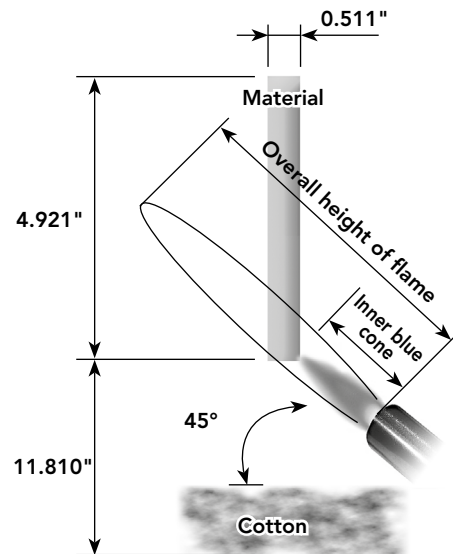

## UL94 + UL1977

Underwriter laboratories 

### UL1977

There are several standards which deal with plug and receptacle. Each of them is only for a small area of applications. It could be telecommunication, etc. The UL 1977 covers single and multipole connectors intended for factory assembly.

Requirements apply to devices taking into account intensity and voltage. The categories are as follows:

	0	30 V (42 V peak)	600 V
0	Type 0	Type 1A	
8.3 A		Type 2	
31 A	Type 1B	Type 3	
200 A		Type 4	
1000 A			

According to above table, the level of performance that has to be reached could be different. Most of them are explained in the following page.

### Insulating materials:

Material uses for electrical insulation, as a minimum, have to comply with the characteristics shown below:

#### • Minimum ratings for polymeric materials

Type	Flame rating	Relative thermal index (RTI) Electrical/mechanical w/o impact **
0	-	50/50
1A	HB	50/50
1B	HB	50/50
2	HB	50/50
3	HB	50/50
4	HB	50/50

\* The RTI of the material shall not be lower than the temperature measured during the Temperature Test.

\*\* For a thickness less than that for which a value has been established, the RTI of the minimum thickness with an established value shall be used.

### Assembly:

Connector has to be keyed to prevent any mismatching that can damage the machine or hurt the user. In the same way, plugs and sockets have to be equipped to protect persons against contact with live parts.

Finally the identified grounding contact shall be located so that the corresponding electrical continuity has to be completed before any other contact.

## UL94 + UL1977

Underwriter laboratories 

## UL1977

## Spacing:

For a 250V max connector, distance through air or over material shall be 1.2mm whereas from 250V to 600V connector the spacing is 0.125" minimum. These distances have to be taken between uninsulated live parts as shown in the matrix below:

## • Applicability of spacing requirements

Type	Uninsulated live part - uninsulated live part of opposite polarity	Uninsulated live part - uninsulated grounded metal part	Uninsulated live part - exposed dead metal part
0	No	No	No
1A	Yes	Yes	Yes
1B	Yes	Yes	No
2	Yes	Yes	Yes
3	Yes	Yes	Yes
4	Yes	Yes	Yes

An alternative way to determine voltage rating is with the Dielectric-Withstand test. If during one minute there is no arc-over or breakdown the rated voltage is given as shown below:

- a) 500 volts for a type 1B device
- b) 1000 volts plus twice rated voltage for types 1A, 2, 3 and 4 devices.

## Marking:

A device shall be legibly marked with the manufacturer's trade name, trade mark, or other descriptive marking by which the organization responsible for the product may be identified. (Exception: If the device is too small, or where the legibility would be difficult to attain, the manufacturer's name, trademark, or other descriptive marking may appear on the smallest unit container or carton)

The following shall be marked on the device or on the smallest unit container or carton or on a stuffer sheet in the smallest unit container or carton:

- a) The catalog number or an equivalent designation
- b) The electrical rating in both volts and amperes, if assigned
- c) Whether ac or dc, if restricted
- d) Flammability class, if identified

Example : **10A 500V UL94 V-0**

# IEC 61984 & IP codes explained

## IEC 61984

The norm is dedicated to connectors with rated voltage above 50V and up to 1000V and rated currents up to 125A per contact. Depending on your application connectors could be compliant with another standard. This has to be double checked with the customer.


There are a lot of constructional requirements and performances specified in that standard. Most of them are illustrated in greater details hereafter.

### Provisions for grounding:


The UTL connector is intended to be used on Class I,II and III systems (See IEC 61140) . Not like a typical connector, the UTL can be used to interrupt current. The "First mate Last break" contact feature is built in so any regular contact will ensure the functionality. Critically, among all of the normal assumptions we make in designing a connector, this contact has to be considered as a live part and must be protected against electric shock by double or reinforced insulation.

### IP code:

IP is a coding system defined by the IEC 60529 to indicate the degrees of protection provided by an enclosure. The aim of this is to give information regarding the accessibility of live parts against ingress of water and other foreign bodies.

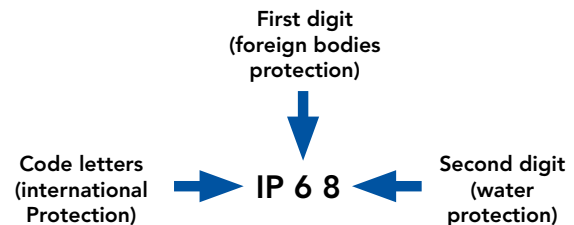

1 <sup>st</sup> digit	Degree of protection	2 <sup>nd</sup> digit	Degree of protection
0	No protection against accidental contact. No protection against solid foreign bodies.	0	No protection against water.
1	Protection against contact with any large area by hand and against large solid foreign bodies with a diameter bigger than 50 mm.	1	Drip-proof. Protection against vertical water drips.
2	Protection against contact with the fingers. Protection against solid foreign bodies with a diameter bigger than 12 mm.	2	Drip-proof. Protection against water drips up to a 15° angle.
3	Protection against tools, wires or similar objects with a diameter bigger than 2.5 mm. Protection against small solid bodies with a diameter bigger than 2.5 mm.	3	Spray-proof. Protection against diagonal water drips up to a 60° angle.
4	Same as 3 however diameter is bigger than 1 mm.	4	Splash-proof. Protection against splashed water from all directions.
5	Full protection against contact. Protection against interior injurious dust deposits.	5	Hose-proof. Protection against water (out of a nozzle) from all directions.
6	Total protection against contact. Protection against penetration of dust.	6	Protection against temporary flooding.
		7	Protection against temporary immersions.
		8	Protection against water pressure. Pressure to be specified by supplier.

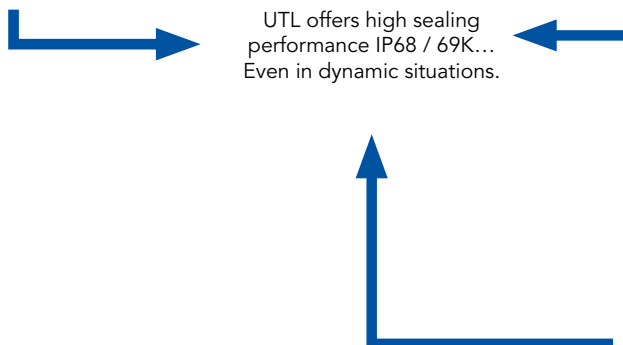

In addition to the IEC 60529 we conjointly use the DIN 40050 part 9 which is dedicated to road vehicles. The main differences are:

- **First digit:** 5 replaced by 5K, 6 by 6K. In the DIN the tested equipment is not depressurized as it is in the IEC.
- **Second digit:** 5K and 6K has been added and are equivalent respectively to 5 and 6 but with higher pressure. 9K which represents the High pressure cleaning.

9K	High pressure hose-proof. Protection against high pressure water (out of a nozzle) from all directions.
----	--

## IEC 61984 & IP codes explained

### IEC 61984

#### Overvoltage

UTL connectors are qualified to be used on systems rated at Overvoltage category III

Per the IEC 60664-1 (formerly VDE 0110) each category is linked to the end application and where the device will be implemented:

- **Category IV** (primary overcurrent protection equipment):  
Origin of the installation
- **Category III** (Any fixed installation with a permanent connection)  
Fixed installation and equipment and for cases where the reliability and the availability is subject to special requirements
- **Category II** (Domestic appliances):  
Energy consuming equipment to be supplied from the fixed installation
- **Category I** (Protected electronic circuit):  
For connection to circuit in which measurements are taken to limit transient overvoltage.

#### Pollution degree

Per the IEC 60664-1 (formerly VDE 0110) the environment affects the performance of the insulation. Particles can build a bridge between two metal parts. As a rule dust mixed with water can be conductive and more generally speaking metal dust is conductive. Finally, the standard defines 4 levels of pollution:

- **Degree 1** (Air conditioned dry room):  
No pollution or only dry, non conductive pollution occurs. The pollution has no influence.
- **Degree 2** (Personal computer in a residential area):  
Only non conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.
- **Degree 3** (Machine tools):  
Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.
- **Degree 4** (Equipment on roofs, locomotives):  
Continuous conductivity occurs due to conductive dust, rain or other wet conditions.

Finally, the harsher the environment is, the longer clearance and creepage distances should be. Nonetheless, according the IEC 61984, enclosure rated at IP54 or higher can be dimensioned for a lower pollution degree. This applies to mated connectors disengaged for test and maintenance.

#### Marking

The marking should give enough details to the user to know what the main characteristics are and without going deep in technical documentation. Below examples identify the suitability of the connector:

- **Example 1:**  
Marking of a connector with rated current 16A, rated voltage 400V, rated impulse voltage 6kV and pollution degree 3, 2 and 1 for use in any system, preferably unearthened or delta-earthed systems:

16A 400V 6kV 3

- **Example 2:**  
Marking of a connector with rated current 16A, rated insulation voltages line-to-earth 250V, line-to-line 400V, rated impulse voltage 4kV and pollution degree 3, 2 and 1 for use in earthed systems:

16A 250V 400V 4kV 3

## IEC 61140 explained

### IEC 61140

On a daily basis, we are using many electrical appliances, some are grounded, and some are not. The levels of grounding protection are clearly defined by the International Electrotechnical Commission standard IEC 61140, a standard that has an influence on our connectors and how they should be used; our customers therefore need to pay particular attention to the three categories defined within this standard to ensure compatibility with their system. Everything explained hereafter is valid for connectors not intended to interrupt current.




Devices which belong to this category have their chassis grounded via the ground wire (green/yellow in Europe, green in the US, Canada and Japan). A fault in the appliance might cause a live conductor to energize the casing. In this case, the current flows to the ground conductor and the circuit interrupter will cut off the power supply. In case of the UTL series, the envelope cannot become live since it is made in plastic. There is no special care to be taken to attach the connector shell to the ground.



Products in this category have reinforced insulation, meaning that the casing does not need to be connected to ground. In this case, the possibility of electric shock has been removed. Most of the time, reinforced insulation means double insulation, i.e. the second layer will take over the first one in case the first one fails. The UTL series could be used in that condition. We recommend to contact SOURIAU for further explanation.

Note: UL 1310 also defines a class II device, but in that case this is just to set the upper limit of use, like a wall charger for our cell phone.



In this category, electrical appliances are fed by a low voltage source (<48VAC or <120VDC). In normal conditions live conductors can be accessible without any risk for the end user. No particular attention needs to be taken in regards to UTL series when it comes to a class III device.

### Conclusion :

UTL series can be used in Class I, II or III environments but each category affects the product performance. Throughout the catalog, current and voltage ratings have been given for class I devices keeping in mind the ground conductor needs to be attached according to recommended wiring instructions.

Note: Special applications like recreational vehicles are not under the scope of the IEC 61140.

## What is NEMA rating?

- NEMA ratings vs IP ratings

Whereas IP ratings only consider protection against ingress of foreign bodies (first digit) and ingress of water (second digit), NEMA ratings consider these but also verify protection from external ice, corrosive materials, oil immersion, etc.

The correlation between NEMA & IP being limited only to dust and water, we can state that a NEMA type is equivalent to an IP rating but it is not possible to say the contrary.

Below a list of some NEMA standards:

Enclosure rating	IP20	IP22	IP55	IP64	IP65	IP66	IP67
Type 1	•						
Type 3				•			
Type 3R		•					
Type 3S				•			
Type 4						•	
Type 4X						•	
Type 6							•
Type 12			•				
Type 13					•		

- indicates compliance




Type 6 rating can be either Type 6 or Type 6P - please see below:

6	IP67	Enclosures constructed for either indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment, falling dirt, hose-directed water, the entry of water during <b>occasional temporary</b> submersion at a limited depth and damage from external ice formation.
6P	IP67	Enclosures constructed for either indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment, falling dirt, hose-directed water, the entry of water <b>during prolonged</b> submersion at a limited depth and damage from external ice formation.



## Ethernet for the Layman

In order to explain basic Ethernet theory, we can use a functional comparison to a busy city with highways, buildings and cars. To illustrate this, the table below provides correlation between the different components/pieces/links that encompass Ethernet network connectivity, and the larger scale infrastructure of a metropolitan city.

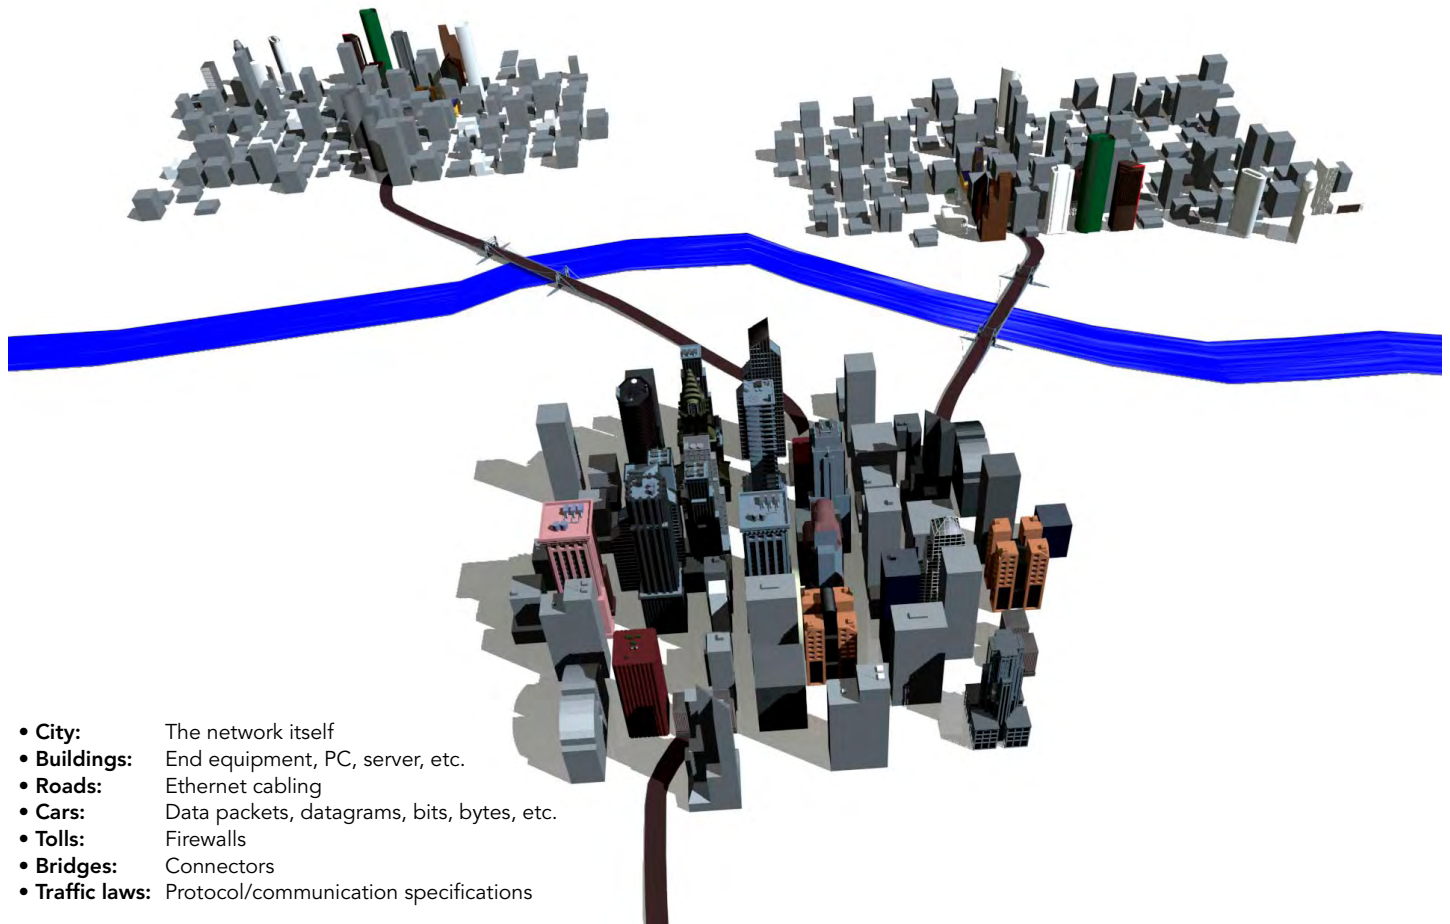

## Ethernet basics

Ethernet is a widely used communications protocol that is used to transmit data packets (datagrams) between network devices. Imagine a highway in a large metropolitan area six lanes wide at rush hour. The vehicles on the highway need rules to follow so that they get to their destination without crashing into each other. In an Ethernet network link, there could be 100 million bits of information transmitted in one second. In the Ethernet standard, there exist rules to govern packet structure, transmission requirements, error correction, communication with end equipment, etc.

## Examining the differences between 100Mhz, 100 Base TX, Cat5e/Cat6. What does it all mean?

When discussing connectors and Ethernet, there are a few key details to be aware of:


- 100Mhz is a measurement of Frequency for the signal
  - Comparable to the Speed Limit of a highway
- 100BaseTX (or Fast Ethernet) is an Ethernet link standard and identifies available link bandwidth. The bandwidth is measured in units of Mbits/S (megabits per second)
  - Comparable to the number of cars that pass a point in one second
- Cat5e/Cat6 are an EIA/TIA standard for performance and physical characteristics for cables and connectors
  - Comparable to performance specifications of the car and highway.

In connectors and cables, Fast Ethernet uses 2 pairs. One for transmit and one for receive. This way data traffic can flow in both directions simultaneously.

## Ethernet for the Layman

### SOURIAU offering:

Standard solutions.

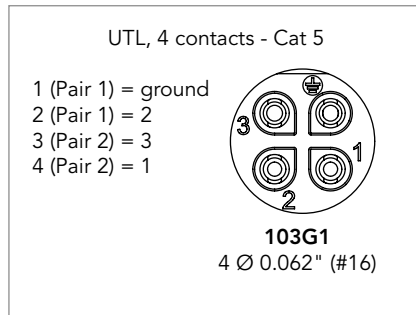

### What about using coax contacts?

Ethernet twisted pairs carry a symmetrical (balanced) signal. Once terminated into a coax contact, the inner core will be protected by a shield - but not the outer contact. Because of EMI issues, the signal will no longer be balanced. Conclusion - it does not work and is not recommended.

### What about using Quadrax contacts?

The Quadrax contact is used in railway applications because of the use of quad cable. In this specific market, the standard Ethernet twisted pairs wires cannot be offered, they are too thin and often solid (not stranded).

In the rest of industry, UTP (Unshielded Twisted Pairs) cables are widely used. The Quadrax contact is not designed to terminate them. And thus, are not advised for industrial applications.

### Conclusion

To carry 100Mb/s data signal, 100BaseTX or Fast Ethernet recommends the use of Cat5e connectors as well as Cat5e cable with the support of a 100MHz signal. Nevertheless, a 100Mb/s signal can be transmitted in certain conditions (short distance, only one connector, lower frequency but a different code) thru many other connection materials - not necessarily Cat5e rated.

## RS-485 for the Layman

RS-485 signals are used in a wide range of applications (from computers and networks to building automation and stage lighting). In addition, it may be used to control video surveillance systems or to interconnect security control panels and devices such as access control card readers.

### RS-485 basics

RS-485 only specifies electrical characteristics of the generator and the receiver. It does not specify or recommend any communications protocol, only the physical layer. An RS-485 network consists of a single controller (the master) and 1 up to 32 slave devices (the receivers). For example, a lighting console is frequently employed as the controller for a network of slave devices like dimmers, fog machines and intelligent lights.

### Physical layer

The standard transmission medium is twisted-pair cable of either #22 or #24 AWG solid wire. Typically, a minimum of two lines are used but a third reference wire may be accommodated. Four-wire cables can also be used if full-duplex operation is desired. The cables may be shielded or unshielded, with unshielded the most common.

The nominal characteristic impedance is 100 or 120  $\Omega$ . It also defines three generator interface points (signal lines); "A", "B" and "C". The data is transmitted on "A" and "B" with "C" being used as a ground reference.

Terminating load resistors are required to ensure a matched line condition. Without terminating load resistors, reflections of fast driver edges can cause multiple data edges and subsequent data/signal corruption.

### What is DMX?

The DMX, or Digital Multiplex, is the protocol for stage lighting applications using the RS-485 standard.

### Example of a DMX simple network

Controller (the master)




Light (1st slave)



Light (2nd slave)



Light (3th slave)



Terminating Resistor

### SOURIAU offering:

Duplex	
UTL, 6 contacts - Power + RS 485 1 Twisted pair	
1 (Pair 1) = A	
2 (Pair 1) = B	
Ground = C	
Phase = 1	<b>102G1W3</b> 3 $\varnothing$ 0.039" (#20) 3 $\varnothing$ 0.062" (#16)
Neutral = 2	
Ground = Ground	

Full Duplex	
UTL, 8 contacts - Power + RS 485 2 Twisted pairs	
1 (Pair 1) = A	
2 (Pair 1) = B	
3 (Pair 2) = E	
4 (Pair 2) = D	<b>122G1W5</b> 5 $\varnothing$ 0.039" (#20) 3 $\varnothing$ 0.062" (#16)
Ground = C	
Phase = 1	
Neutral = 2	Ground = Ground
Ground = Ground	

## Notes

# UTL SERIES

# Appendices

■ Glossary of terms .....	85
■ Part number index .....	86


## Glossary of terms

### • Clearance

Per the IEC 60664-1 it is the shortest distance between two conductive parts even over the air.

### • Creepage distance

Per the IEC 60664-1 it represents the shortest distance along the surface of the insulating material between two conductive parts.



### • Working voltage

Per the IEC 60664-1 it is the highest r.m.s. value of A.C. or D.C. voltage across any particular insulation which can occur when the equipment is supplied at rated voltage.

### • Rated impulse voltage

Impulse withstands voltage value assigned by the manufacturer to the equipment or to a part of it characterizing the specified withstand capability of its insulation against transient overvoltage.

### • Working current

It is the maximum continuous and not interrupted current able to be carried by all contacts without exceeding the maximum temperature of the insulating material.

### • Transient voltage

Extract from the IEC 60664-1: Short duration overvoltage of a few millisecond or less, oscillatory or non-oscillatory, usually highly damped.

### • CTI (Comparative Tracking Index)

The CTI value is commonly used to characterize the electrical breakdown properties of an insulating material. It allows users to know the tendency to create creepage paths. This value represents the maximum voltage after 50 drops of ammonium chloride solution without any breakdown.

### • RTI (Relative Temperature Index):

Extract from ULs website:

Maximum service temperature for a material, where a class of critical property will not be unacceptably compromised through chemical thermal degradation, over the reasonable life of an electrical product, relative to a reference material having a confirmed, acceptable corresponding performance defined RTI.

- **RTI Elec:** Electrical RTI, associated with critical electrical insulating properties.
- **RTI Mech Imp:** Mechanical Impact RTI, associated with critical impact resistance, resilience and flexibility properties.
- **RTI Mech Str:** Mechanical Strength (Mechanical without Impact) RTI, associated with critical mechanical strength where impact resistance, resilience and flexibility are not essential.



### Part number index

#### Connector

UTL0103G1P.....	P. 18
UTL0103G1P03.....	P. 18
UTL0103G1S.....	P. 18
UTL0103G1S03.....	P. 18
UTL1102G1W3P.....	P. 26
UTL1102G1W3PCDMX.....	P. 26
UTL1102G1W3S.....	P. 26
UTL1102G1W3SCDMX.....	P. 26
UTL1103G1P.....	P. 18
UTL1103G1P03.....	P. 18
UTL1103G1S.....	P. 18
UTL1103G1S03.....	P. 18
UTL1122G1W5P.....	P. 30
UTL1122G1W5PCDMX.....	P. 30
UTL1122G1W5S.....	P. 30
UTL1122G1W5SCDMX.....	P. 30
UTL11JC103G1P.....	P. 18
UTL11JC103G1S.....	P. 18
UTL5103G1P.....	P. 18
UTL5103G1S.....	P. 18
UTL6102G1W3P.....	P. 26
UTL6102G1W3PCDMX.....	P. 26
UTL6102G1W3S.....	P. 26
UTL6102G1W3SCDMX.....	P. 26
UTL6103G1P.....	P. 18
UTL6103G1P03.....	P. 18
UTL6103G1S.....	P. 18
UTL6103G1S03.....	P. 18
UTL6122G1W5P.....	P. 30
UTL6122G1W5PCDMX.....	P. 30
UTL6122G1W5S.....	P. 30
UTL6122G1W5SCDMX.....	P. 30
UTL6145S.....	P. 22
UTL6145SSCR.....	P. 22
UTL6JC103G1P.....	P. 18
UTL6JC103G1S.....	P. 18
UTL6JC145S.....	P. 22
UTL6JC145SSCR.....	P. 22
UTL6TH103G1P.....	P. 18
UTL6TH103G1S.....	P. 18
UTL7102G1W3P.....	P. 26
UTL7102G1W3S.....	P. 26
UTL7103G1P.....	P. 18
UTL7103G1P03.....	P. 18
UTL7103G1S.....	P. 18
UTL7103G1S03.....	P. 18
UTL7122G1W5P.....	P. 30
UTL7122G1W5S.....	P. 30
UTL7145P.....	P. 22

#### Overmolded cable assembly

HAUTL12G1W3PR1M.....	P. 26
HAUTL12G1W3PR2M.....	P. 26
HAUTL12G1W3PS1M.....	P. 26
HAUTL12G1W3PS2M.....	P. 26
HAUTL12G1W3SR1M.....	P. 26
HAUTL12G1W3SR2M.....	P. 26
HAUTL12G1W3SS1M.....	P. 26
HAUTL12G1W3SS2M.....	P. 26
HAUTL12G1W5PS1M.....	P. 30

HAUTL12G1W5PS2M.....	P. 30
HAUTL12G1W5SS1M.....	P. 30
HAUTL12G1W5SS2M.....	P. 30
HAUTL13G1PR1M.....	P. 18
HAUTL13G1PR2M.....	P. 18
HAUTL13G1PS1M.....	P. 18
HAUTL13G1PS2M.....	P. 18
HAUTL13G1SR1M.....	P. 18
HAUTL13G1SR2M.....	P. 18
HAUTL13G1SS1M.....	P. 18
HAUTL13G1SS2M.....	P. 18
HAUTL62G1W3PR1M.....	P. 26
HAUTL62G1W3PR2M.....	P. 26
HAUTL62G1W3PS1M.....	P. 26
HAUTL62G1W3PS2M.....	P. 26
HAUTL62G1W3SR1M.....	P. 26
HAUTL62G1W3SR2M.....	P. 26
HAUTL62G1W3SS1M.....	P. 26
HAUTL62G1W3SS2M.....	P. 26
HAUTL62G1W5PS1M.....	P. 30
HAUTL62G1W5PS2M.....	P. 30
HAUTL62G1W5SS1M.....	P. 30
HAUTL62G1W5SS2M.....	P. 30
HAUTL63G1PR1M.....	P. 18
HAUTL63G1PR2M.....	P. 18
HAUTL63G1PS1M.....	P. 18
HAUTL63G1PS2M.....	P. 18
HAUTL63G1SR1M.....	P. 18
HAUTL63G1SR2M.....	P. 18
HAUTL63G1SS1M.....	P. 18
HAUTL63G1SS2M.....	P. 18

#### Evaluation kit

UTL0103G1P14AWG.....	P. 62
UTL0103G1P16AWG.....	P. 62
UTL0103G1P20AWG.....	P. 62
UTL0103G1S14AWG.....	P. 62
UTL0103G1S16AWG.....	P. 62
UTL0103G1S20AWG.....	P. 62
UTL1102G1W3P14AWG.....	P. 63
UTL1102G1W3P16AWG.....	P. 63
UTL1102G1W3S14AWG.....	P. 63
UTL1102G1W3S16AWG.....	P. 63
UTL1103G1P14AWG.....	P. 62
UTL1103G1P16AWG.....	P. 62
UTL1103G1P20AWG.....	P. 62
UTL1103G1S14AWG.....	P. 62
UTL1103G1S16AWG.....	P. 62
UTL1103G1S20AWG.....	P. 62
UTL1122G1W5P14AWG.....	P. 64
UTL1122G1W5P16AWG.....	P. 64
UTL1122G1W5S14AWG.....	P. 64
UTL1122G1W5S16AWG.....	P. 64
UTL6102G1W3P14AWG.....	P. 63
UTL6102G1W3P16AWG.....	P. 63
UTL6102G1W3S14AWG.....	P. 63
UTL6102G1W3S16AWG.....	P. 63
UTL6103G1P14AWG.....	P. 62
UTL6103G1P16AWG.....	P. 62
UTL6103G1P20AWG.....	P. 62
UTL6103G1S14AWG.....	P. 62

UTL6103G1S16AWG.....	P. 62
UTL6103G1S20AWG.....	P. 62
UTL6122G1W5P14AWG.....	P. 64
UTL6122G1W5P16AWG.....	P. 64
UTL6122G1W5S14AWG.....	P. 64
UTL6122G1W5S16AWG.....	P. 64
UTL7102G1W3P14AWG.....	P. 63
UTL7102G1W3P16AWG.....	P. 63
UTL7102G1W3S14AWG.....	P. 63
UTL7102G1W3S16AWG.....	P. 63
UTL7103G1P14AWG.....	P. 62
UTL7103G1P16AWG.....	P. 62
UTL7103G1P20AWG.....	P. 62
UTL7103G1S14AWG.....	P. 62
UTL7103G1S16AWG.....	P. 62
UTL7103G1S20AWG.....	P. 62
UTL7122G1W5P14AWG.....	P. 64
UTL7122G1W5P16AWG.....	P. 64
UTL7122G1W5S14AWG.....	P. 64
UTL7122G1W5S16AWG.....	P. 64

#### Accessories

SWSFILLERPLUG.....	P. 59
UTL102G1W3PDCG68.....	P. 28
UTL102G1W3SDCG68.....	P. 28
UTL103G1PDCG68.....	P. 20
UTL103G1SDCG68.....	P. 20
UTL10DCG.....	P. 20
UTL10JC.....	P. 20
UTL10JCP1.....	P. 20
UTL10SEAL.....	P. 20
UTL10NUT.....	P. 20
UTL14JC.....	P. 24
UTL14JCP1.....	P. 24
UTL610DCG.....	P. 20
UTL610PS.....	P. 20

#### Contacts

RC14M25K.....	P. 39
RC14M30GE7J.....	P. 40
RC14M30GE7K.....	P. 40
RC14M30J.....	P. 39
RC14M30K.....	P. 39
RC16M23GE7J.....	P. 40
RC16M23GE7K.....	P. 40
RC16M23J.....	P. 39
RC16M23K.....	P. 39
RC16M25K.....	P. 39
RC18W3K.....	P. 39
RC20M12E83K.....	P. 42
RC20M12E84K.....	P. 42
RC20M12GE7J.....	P. 40
RC20M12GE7K.....	P. 40
RC20M12J.....	P. 39
RC20M12K.....	P. 39
RC20M13GE7J.....	P. 40
RC20M13GE7K.....	P. 40
RC20M13J.....	P. 39
RC20M13K.....	P. 39
RC20W3K.....	P. 39
RC24M9GE7J.....	P. 40

## Part number index

RC24M9GE7K.....	P. 40	SC20M1S18.....	P. 40	MH86164G.....	P. 51
RC24M9J.....	P. 39	SC20ML1S18.....	P. 39	MH86186.....	P. 51
RC24M9K.....	P. 39	SC20M1S31.....	P. 39	RTM205.....	P. 51
RC24W3K.....	P. 39	SC20ML1S31.....	P. 39	RX2025GE1.....	P. 51
RC28M1GE7J.....	P. 40	SC20M1TK6.....	P. 39	RX20D44.....	P. 51
RC28M1GE7K.....	P. 40	SC20ML1TK6.....	P. 39	S16RCM14.....	P. 51
RC28M1J.....	P. 39	SC20W3TK6.....	P. 39	S16RCM1425.....	P. 51
RC28M1K.....	P. 39	SC20W3S25.....	P. 39	S16RCM16.....	P. 51
RM14M25K.....	P. 39	SC20WL3TK6.....	P. 39	S16RCM1625.....	P. 51
RM14M30GE1J.....	P. 40	SC20WL3S25.....	P. 39	S16RCM20.....	P. 51
RM14M30GE1K.....	P. 40	SC24M1S18.....	P. 39	S16SCM20.....	P. 51
RM14M30J.....	P. 39	SC24ML1S18.....	P. 39	S16SCML1.....	P. 51
RM14M30K.....	P. 39	SC24M1S31.....	P. 39	S16SCML11.....	P. 51
RM16M23GE1J.....	P. 40	SC24ML1S31.....	P. 39	S20RCM.....	P. 51
RM16M23GE1K.....	P. 40	SC24M1TK6.....	P. 39	S20SCM20.....	P. 51
RM16M23J.....	P. 39	SC24ML1TK6.....	P. 39	S22-1J.....	P. 57
RM16M23K.....	P. 39	SC24W3TK6.....	P. 39	S26D2J.....	P. 57
RM16M25K.....	P. 39	SC24W3S25.....	P. 39	SL46D2K.....	P. 57
RM18W3K.....	P. 39	SC24WL3TK6.....	P. 39	SL47-1J.....	P. 57
RM20M12E8K.....	P. 42	SC24WL3S25.....	P. 39	S-80J.....	P. 55
RM20M12GE1J.....	P. 40	SM14M1S18.....	P. 39	SL-105J.....	P. 55
RM20M12GE1K.....	P. 40	SM14ML1S18.....	P. 39	SHANDLES.....	P. 51
RM20M12K.....	P. 39	SM14M1S31.....	P. 39	UH25.....	P. 51
RM20M13GE1J.....	P. 40	SM14ML1S31.....	P. 39		
RM20M13J.....	P. 39	SM14M1TK6.....	P. 39		
RM20M13K.....	P. 39	SM14ML1TK6.....	P. 39		
RM20W3K.....	P. 39	SM16M1S18.....	P. 39		
RM24M9GE1J.....	P. 40	SM16M11S18.....	P. 39		
RM24M9GE1K.....	P. 40	SM16ML1S18.....	P. 39		
RM24M9J.....	P. 39	SM16ML11S18.....	P. 39		
RM24M9K.....	P. 39	SM16M1S31.....	P. 39		
RM24W3K.....	P. 39	SM16M11S31.....	P. 39		
RM28M1GE1J.....	P. 40	SM16ML1S31.....	P. 39		
RM28M1GE1K.....	P. 40	SM16ML11S31.....	P. 39		
RM28M1J.....	P. 39	SM16M1TK6.....	P. 39		
RM28M1K.....	P. 39	SM16M11TK6.....	P. 39		
7RCDX6031D28.....	P. 55	SM16ML1TK6.....	P. 39		
RCDX6032D28.....	P. 56	SM16ML11TK6.....	P. 39		
RCDX6036D28.....	P. 56	SM20M1S18.....	P. 39		
RCDXX1D28.....	P. 59	SM20ML1S18.....	P. 39		
RCDXX1D28 + YORX090.....	P. 57	SM20M1S31.....	P. 39		
RMDX6031D28.....	P. 55	SM20ML1S31.....	P. 39		
RMDX6032D28.....	P. 56	SM20M1TK6.....	P. 39		
RMDX6036D28.....	P. 56	SM20ML1TK6.....	P. 39		
RMDXK10D28.....	P. 58	SM20W3TK6.....	P. 39		
RMDXK10D28 + YORX090.....	P. 57	SM20W3S26.....	P. 39		
SC14M1S18.....	P. 39	SM20WL3TK6.....	P. 39		
SC14ML1S18.....	P. 39	SM20WL3S26.....	P. 39		
SC14M1S31.....	P. 39	SM24M1S18.....	P. 39		
SC14ML1S31.....	P. 39	SM24ML1S18.....	P. 39		
SC14M1TK6.....	P. 39	SM24M1S31.....	P. 39		
SC14ML1TK6.....	P. 39	SM24ML1S31.....	P. 39		
SC16M1S18.....	P. 39	SM24M1TK6.....	P. 39		
SC16M11S18.....	P. 39	SM24ML1TK6.....	P. 39		
SC16ML11S18.....	P. 39	SM24W3TK6.....	P. 39		
SC16M1S31.....	P. 39	SM24W3S26.....	P. 39		
SC16M11S31.....	P. 39	SM24WL3TK6.....	P. 39		
SC16ML1S31.....	P. 39	SM24WL3S26.....	P. 39		
SC16ML11S31.....	P. 39				
SC16M1TK6.....	P. 39				
SC16M11TK6.....	P. 39				
SC16ML1TK6.....	P. 39				
SC16ML11TK6.....	P. 39				
Tooling					
M20S-1J.....	P. 55				
M317.....	P. 51				
MH860.....	P. 51				

## Notes

## Notes



# Reliable People, Reliable Solutions



Your local contact



Our contribution to environmental protection:  
This catalog is printed on PEFC certified paper.  
Advancement of sustainable wood cultivation. [www.pefc.org](http://www.pefc.org)

[www.souriau.com](http://www.souriau.com)  
[technical-americas-ect@esterline.com](mailto:technical-americas-ect@esterline.com)

