

General

Approvals	195
Informations	196
Cam Switches	198
Basic designs	200

**Cam Switches**

On-Off switches, Changeover switches	203
Star-Delta switches	207
Multi speed switches	211
Control switches	215
Voltmeter selector switches	218
Ammeter switches	219
Gang switches	221
Multi step switches	224

Mini-Cam Switches

Technical data	236
On-Off switches, Changeover switches	237
Star-Delta switches	237
Control switches	237
Voltmeter selector switches, Ammeter switches	238
Gang switches, Multi step switches	238

**Load switches**

On-Off switches	240
Changeover switches	241

**Handles and plates**

Operating knobs and handles	242
Escutcheon plates	243
Angles of rotation	247

**Optional Extras**

Drive units	249
Door couplings	250
Key operated switches	251
Padlock devices	252
Switch interlocks	253
Couplings	254
Accessories	256

**Special switches**

257

Technical data

Cam switches	259
Load switches	260

**Dimensions**

Cam switches	262
Load switches	266
Accessories	267



General

Test Authorities, Registration Mark, Approvals

Low voltage switchgear from Benedict GmbH is built and tested to national and international specifications. All devices suit all important specifications without any test obligation, like VDE, BS and also relative to IEC Recommendations and to European Standards like IEC 947 and EN 60947. It is for this reason of our Low voltage switchgear is used all over the world. In order to provide special versions, limitations to the max. voltages, currents and power ratings or special markings are sometimes necessary.

Quality Control System

Since November 1991 Benedict GmbH has been certified according to the quality control system **ÖNORM EN ISO 29001**. The target of the ISO-certification is, to grant the customer the quality of the performance of his supplier, who is audited in accordance with this standard.

CE-Marking



The manufacturer has to sign his products with the CE-Marking. With the CE-Marking the manufacturer confirms the accordance with the different EEC Directives. The CE-Marking is absolutely necessary to sell the products in the EEC.

Below you find the EEC Directives concerning our products.

Low Voltage Directive 2006/95/EC

EMC Directive 2004/108/EC

RoHS + WEEE 2002/95/EC + "002/96/EC

Country	North America	Russia
State deputy or private examination (state admitted)	UL Canada, USA	EAC
Label marking of examination boards	Listed Component	
Duty of approvals	all switchgear	all switchgear

Explanations for choice and supply of low voltage switchgear in Canada and USA

Marking of auxiliary contacts

At several devices in UL-data are two voltages for auxiliary contacts mentioned (e. g.: 600 volts at same potential, 150 volts at different potentials). That means, if the voltage is higher than 150 volts, the control voltage applied to input terminals must be at the same potential.

Low voltage switchgear for auxiliary circuits (e. g. contactor relays, control units, auxiliary contacts in general) usually approved for "Heavy Duty" or "Standard Duty" UL and besides these marked with the admissible max. voltage or with short codes (see table).

Marking of auxiliary contacts according to CSA and UL	Max. rated values per pole	Current Make A	Break A	Cont. Current A	Contact Rating Code Designation
Heavy Duty (HD or HVY DTY)	AC 120	60	6	10	A150
	AC 240	30	3	10	A300
	AC 480	15	1,5	10	A600
	AC 600	12	1,2	10	A600
	DC 125	2,2	2,2	10	N150
	DC 250	1,1	1,1	10	N300
	DC 600	0,4	0,4	10	N600
Standard Duty (SD or STD DTY)	AC 120	30	3	5	B150
	AC 240	15	1,5	5	B300
	AC 480	7,5	0,75	5	B600
	AC 600	6	0,6	5	B600
	DC 125	1,1	1,1	5	P150
	DC 250	0,55	0,55	5	P300
	DC 600	0,2	0,2	5	P600
-	AC 120	15	1,5	2,5	C150
	AC 240	7,5	0,75	2,5	C300
	AC 480	3,75	0,375	2,5	C600
	AC 600	3	0,3	2,5	C600
	DC 125	0,55	0,55	2,5	Q150
	DC 250	0,27	0,27	2,5	Q300
	DC 600	0,1	0,1	2,5	Q600
-	AC 120	3,6	0,6	1	D150
	AC 240	1,8	0,3	1	D300
	DC 125	0,22	0,22	1	R150
	DC 250	0,11	0,11	1	R300
-	AC 120	1,8	0,3	0,5	E150

Discernment at UL-Standards

Recognized Component Industrial Control Equipment

UL issues yellow "Guide cards" with Guide- and File-No.

Devices have permission to be marked with the label

Devices as components approved for "factory wiring": devices for employment in control panels, when they are selected, mounted and wired according to the charging conditions by skilled worker.

Valid UL-Standards:
UL 508 "Standard for Industrial Control Equipment" (partly limited)

Listed Industrial Control Equipment

UL issues white "Guide cards" with Guide- and File-No.

Devices have to be marked with the "UL-Listing Mark"

Devices approved for "field wiring",
a) devices for employment in control panels, when they are mounted and wired by skilled worker.
b) devices for retail in USA

Valid UL-Standards:
UL 508 "Standard for Industrial Control Equipment" (unlimited)

Are devices approved as "Listed Equipment" the approval is also valid for using as "Recognized Component" .

Approvals

Country	USA, Canada UL	Europe	Russia EAC	CB/CCA- Certificates
Type				

Cam Switches (UL-Listed as MANUAL MOTOR CONTROLLER and suitable as MOTOR DISCONNECT)

M10	o	o	o	o
M10H	o	o	o	o
M20	o	o	o	o
N20	o	o	o	o
N33F	o	o	o	o
N40	-	o	o	o
N61	-	o	o	o
N80	o	o	o	o
N100	o	o	o	o
N200	o	o	o	o
L400	o	o	-	-

o In standard version approved
- Not provided for test till now

/ No testing required CE

x In test

Technical Information

Degree of protection acc. to IEC 60947-1

Protection ratings are prefixed by the internationally agreed letters IP followed by two digits.

1st digit: Pertains to solid objects
2nd digit: Pertains to water.

1 st digit	Short description	Definition
1	Protected against solid objects greater than 50 mm	Excludes solid objects exceeding 50 mm in diameter and protects against contact with live and moving parts by a large surface such as a hand (but not against deliberate access).
body		
2L	Protected against solid objects greater than 12,5 mm and against contact by standard test finger	Excludes solid objects exceeding 12,5 mm in diameter and protects against contact with live and moving parts by a standard test finger or similar objects not exceeding 80 mm in length.
3	Protected against solid objects	Excludes solid objects exceeding 2,5 mm in diameter or thickness. greater than 2,5mm
4	Protected against solid objects greater than 1 mm	Excludes solid objects exceeding 1 mm in diameter or thickness.
5	Dust protected	Prevents ingress of dust in quantities and locations that would interfere with the intended operation of the equipment.
6	Dust tight	Prevents ingress of dust.

Resistance to climatic conditions acc. to IEC60068

Open-type devices are climate-resistant in the constant climate according to IEC60068-2-3 (this is a climate with an ambient temperature of 40°C and an atmospheric humidity of 90 to 95%).

Enclosed devices are climate-resistant in an alternating climate according to IEC 68-2-30 (this is a moist alternating climate with a 24-hour cycle between climates with an ambient temperature of 25°C, and an atmospheric humidity of 95 to 100% and an ambient temperature of 40°C, and an atmospheric humidity of 90 to 96% in the presence of condensation during rises in temperature).

Data are valid up to an altitude of 2000m above sea level.

Short circuit protection

Backup fuses should be used to protect contactors and starters against short circuits. For starters the device with the smaller admissible fuse at the main and at the control circuit (contactor or thermal overload) determines the fuse size.

After a short circuit devices have to be checked for correct operation. Disconnect power before proceeding with any work on the equipment!

Mounting positions

No limitations, all kind of positions allowed.


2 nd digit	Short description	Definition
1	Protected against dripping water	Dripping water (vertically falling drops) shall have no harmful effect.
2	Protected against dripping water when tilted up to 15°	Vertically dripping water shall have no harmful effect when the enclosure is tilted at any angle up to 15° from its normal position.
3	Protected against spraying water	Water falling as a spray at an angle up to 60° from the vertical shall have no harmful effect.
4	Protected against splashing water	Water splashed against the enclosure from any direction shall have no harmful effect.
5	Protected against water jets	Water protected by a nozzle against the enclosure from any direction shall have no harmful effect.
6	Protected against heavy seas	Water from heavy seas or water projected in powerful jets shall not enter the enclosure in harmful quantities.
7	Protected against the effects of immersion	Ingress of water in a harmful quantity shall not be possible when the enclosure is immersed in water under standard conditions of pressure and time.
8	Protected against submersion	No ingress of water.

Suitable ambient temperatures:

Operation	open °C	-40 up to +60
	enclosed °C	-40 up to +40
Storage	°C	-50 up to +90

Technical Information

Terminal screws

Devices Type	Kind of connection				Screw driver	Tightening torque	
	Screw with washer	Screw with clamp box	2 Screws	Screw with w. nut		Nm	lb. inch
							
Cam Switches							
M4H..	M2,5	-	-	-	 Pz1	0,6	5
M10	M3	-	-	-	 Pz2	0,6 - 1,2	5 - 11
M10H	M3,5	-	-	-	 Pz2	0,8 - 1,4	7 - 12
M20, N20, N33F	M4	-	-	-	 Pz2	1,2 - 1,8	11 - 16
N40	M5	-	-	-	 Pz2	2,5 - 3	22 - 26
N61, N80	-	-	2 x M5	-	 Pz2	2,5 - 3	22 - 26
N100	-	-	2 x M6	-	 Pz3	3,5 - 4,5	31 - 40
N200	-	-	-	M10		10	88
L100	-	-	2 x M5	-	 Pz2	2,5 - 3	22 - 26
L160	-	-	-	M8		4 - 6,5	35 - 57
L400	-	-	-	M12		16	140
L600	-	-	-	M16		24	210
L800	-	-	-	M16		24	210
L1200	-	-	-	M16		24	210

Telux - Cam Switches

Ratings								Designs			
Typ	Rated current			Motor			Plate	Panel moun. M10H, M20 IP65 IP40	Single hole mount. Ø22,5mm with Plate IP65	without Plate IP65	Flush mount. IP40
	Therm. I_{th} open A	AC21 A	atU _e V	AC3 3~400V kW	AC23 3~400V A	3~400V kW					
M4H	10	10	440	2,2	6	3	30□	M4H E	M4H Z	M4H ZO	-
M10H	20	20	690	5,5	16	7,5	48□	M10H E	M10H Z	M10H ZO	-
M10	20	20	440	5,5	16	7,5	48□	-	-	-	M10 UP
M20	32	32	690	11	30	15	48□	M20 E	M20 Z	M20 ZO	-
N20	32	32	690	11	30	15	64□	N20 E	-	-	-
N33F	50	50	690	15	45	22	64□	N33F E	N33F Z	-	-
N40	63	63	690	15	45	22	88□	N40 E	-	-	-
N61	90	85	690	25	60	30	88□	N61 E	-	-	-
N80	115	115	690	30	85	45	88□	N80 E	-	-	-
L100	125	125	690	15	45	22	88□	L100 E	-	-	-
L160	180	180	690	25	60	30	88□	L160 E	-	-	-
N100	150	150	690	40	110	55	132□	N100 E	-	-	-
N200	250	250	690	70	140	70	132□	N200 E	-	-	-
L400	400	400	690	70	140	70	132□	L400 E	-	-	-
L600	600	400	690	70	140	70	132□	L600 E	-	-	-
L800	800	400	690	70	140	70	132□	L800 E	-	-	-
L1200	1200	400	690	70	140	70	132□	L1200 E	-	-	-

Cam Switches 10 - 250A


Cam switches can be used for virtually all purposes, e.g. as motor, main, control or instrument switches. Over and above the switching programs mentioned in the list, an effectively limitless number of special programs can be implemented.

Load switch L.. 125 - 1200A

Load switches are primarily employed where resistive or slightly inductive current loads are to be switched on and off, or switching takes place without loading.


Load switches are assembled by parallel switching of two or more of cam switch contacts.

With customer built main terminal protection, load switch L.. can also be used as main switch.

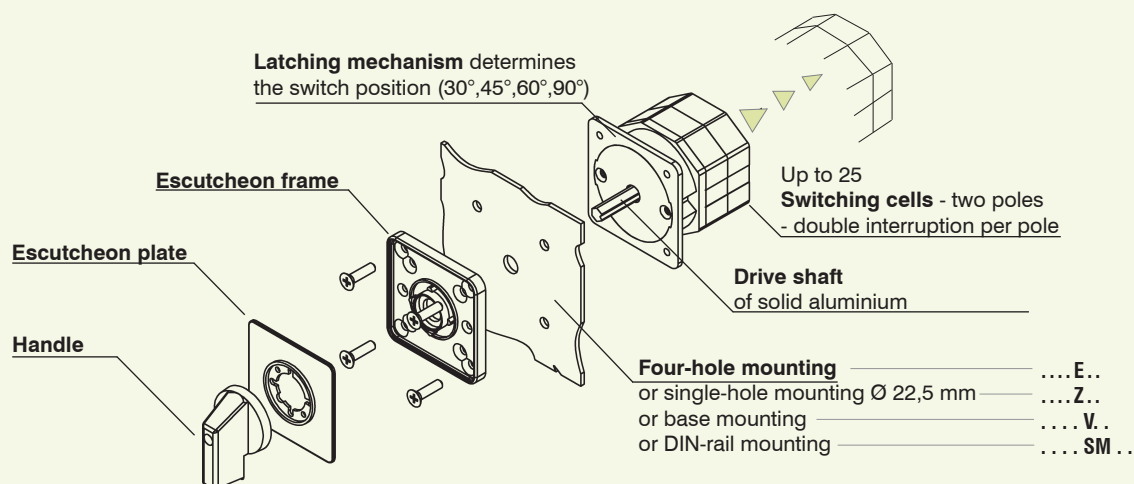

Designs Base mounting IP40	DIN-rail mounting IP40	Modular IP40	Plastic enclosed ..P.. IP40 ..PF.. IP65	horizontal, IP65	Motor switch enclosed IP65	Terminal box mounting IP65	Cast enclosed ..G.. IP40 ..GF.. IP65
							
-	-	-	-	-	-	-	-
M10H V	M10H SM	M10H SMA	-	-	M10H PM	-	-
-	-	-	M10 P(F)	-	-	M10 KE	-
M20 V	M20 SM	M20 SMA	-	-	-	-	-
N20 V	N20 SM	-	N20 P(F)	-	N20 PM	N20 KE	N20 G(F)
N33F V	N33F SM	-	N33F P(F)	-	N33F PM	N33F KE	-
N40 V	-	-	N40 P(F)	N40 PLF	-	-	-
N61 V	-	-	N61 P(F)	N61 PLF	-	-	-
N80 V	-	-	N80 P(F)	N80 PLF	-	-	-
L100 V	-	-	-	-	-	-	-
L160 V	-	-	-	-	-	-	-
N100 V	-	-	N100 PF	-	-	-	-
N200 V	-	-	N200 PF	-	-	-	-
L400 V	-	-	-	-	-	-	-
L600 V	-	-	-	-	-	-	-
L800 V	-	-	-	-	-	-	-
L1200 V	-	-	-	-	-	-	-

Ordering

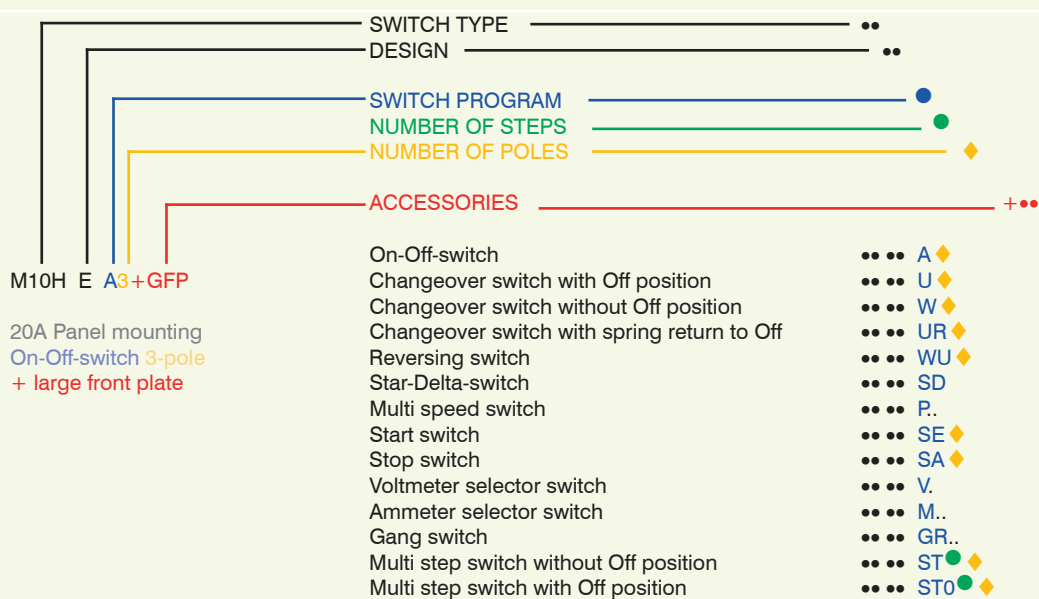

Panel mounting designs

Switches of the panel mounting designs listed below have protection from front IP40. Where a shaft seal (appendix +WD) is used, the protection is increased to IP54. Use of a moisture proofing cap (appendix +FR) results in an increase in rear protection to IP54. In the standard version, the switches are delivered with a square escutcheon plate and black instrument knob. Forward mounting is possible for some of the design

E switches. The position of the terminals of the standard switches is left and right, at switch M10H the terminals are above and below. Where a knob insert is turned by 90° (can easily be performed after delivery), the position of the terminals can be changed.

Dimensions see page 262.



Design

Design		Possible switch sizes					
Description	Type appendix	M10H	M20	N20 N33F	N40 N61 N80	N100 N200	L...
Panel mounting For installation in control panels, machines and equipment. For panel thickness of over 5mm, an extended switch shaft is required (appendix +VW). Protection from front: M10H, M20 IP65 all others IP40	E	X	X	X	X	X	X
Central fixing 22,5mm Switch for mounting with standard 22,5mm mounting holes and 1-4mm panel thickness. Protection from front: IP65 Wrench J7049 necessary	Z	X	X	X ²⁾	-	-	-
Central fixing 22,5mm Switch without escutcheon plate , for installation with standard 22,5mm mounting holes and 1-4mm panel thickness. Protection from front: IP65 Wrench J7049 necessary	ZO	X	X	-	-	-	-
Flush mounting version Switch with white instrument knob, cream escutcheon plate with black markings, for installation in 65mm flush mounting boxes and use of Unitas plate. Supplied with flush mounting box: appendix +UP. Maximum number of cells with: M10 FM box 45mm deep 2 FM box 65mm deep 4	UP	X ¹⁾	-	-	-	-	-

1) Switches are delivered with switch type M10




2) For switch types N33F only, max. 3 poles and 3 cells

Base mounting designs

Switches of the designs listed below have protection from front IP40. When a shaft seal (appendix +WD) is used, the front protection type is increased to IP54. In the standard version, the switches are delivered with a square escutcheon plate and black instrument knob (design SMA with grey cover and grey toggle knob). Door couplings are advisable for switchgear cabinets with hinged doors.

The position of the terminals of the standard switches is left and right, at switch M10H the terminals are above and below. Where a knob insert is turned by 90° (can easily be performed after delivery), the position of the terminals can be changed.

Dimensions see page 263.

Design	Type appendix	Possible switch sizes						
		M10H	M20	N20 N33F	N40 N61 N80	N100 N200	L...	
	Base mounting For screw mounting to the back wall or floor of distributor boxes, or of appliances with removable lids. Additional it is necessary to state the installation depth - that is the distance between mounting level of the switch and the inside edge of the door (dimension T).  Door couplings see page 250	V ... +T/...	X	X	X	X	X	X
	Snap-on mounting on DIN-rail Switch with square escutcheon plate, for snap-on mounting on standard DIN EN 50022 rail. Additional it is necessary to state the installation depth - that is the distance between mounting level of the switch and the inside edge of the door (dimension T).  Door couplings see page 250	SM ... +T/...	X	X	X	-	-	-
	Snap-on mounting on DIN-rail with installation cover for standard opening and toggle knob. The lay-out of the terminals of the standard switches is above and below. Dimensions for Switch types M10H SMA .. with 1-3 cells M20 SMA .. with 1 or 2 cells  further dimensions see page 263	SMA	X	X	-	-	-	-

Plastic enclosed switches

The switches, which have durable plastic enclosures, are intended for wall mounting or attachment to machines. In the standard version, they are supplied with a light-grey enclosure, square escutcheon plate, black markings on a silver background, and a black instrument knob. Other colours and colour combinations are available for most enclosure types. It is not possible to mount an additional rectangular plate. The enclosure base is equipped with 4 entry glands with heavy-gauge conduit threads (see drawings). In all types of plastic enclosures, two terminals that are connected and insulated from switch column can be provided for a PE conductor (appendix +PE). In addition, 1 or 2 pilot lamps (appendix +SL..) with neon lights can be installed.

Dimensions see page 264.

Cast aluminium enclosed switches

The switches with cast aluminium enclosures are intended for wall mounting or attachment to machines, under heavy-duty operating conditions. The switches are delivered with a square escutcheon plate, black markings on a silver background, and a black instrument knob. It is not possible to mount an additional rectangular plate. The enclosure base makes provision for 2 (4) entry glands with heavy-gauge conduit threads. If a switch with an aluminium enclosure is to be mounted directly on the terminal box of a motor, a 35mm or 50mm hole can be made in the floor of the switch enclosure. Design PLF is the replacement for designs G and GF at types N40 to N80.

Dimensions see page 265.



Design

Description	Type appendix	Possible switch sizes							
		M10H	N20	N33F	N40	N61	N80	N100	N200
Plastic enclosure light grey Protection class IP40 Maximum number of cells	P	X 6	X 6	X 6	X 6	X 2	-	-	-
Plastic enclosure light grey Moisture protection Protection class IP65 Maximum number of cells	PF	X 6	X 6	X 6	X 6	X 5	X 5	X 4	X 3
Plastic enclosure horizontal light grey Moisture protection Protection class IP65 Maximum number of cells	PLF	- -	- -	- -	X 10	X 6	X 6	-	-
Cast enclosure Protection class IP40 Maximum number of cells	G	- -	X 6	-	-	-	-	-	-
Cast enclosure Moisture protection Protection class IP65 Maximum number of cells	GF	- -	X 6	-	-	-	-	-	-
Terminal box mounting Protection class IP65 These switches are front mounted on a terminal box. The switch cells protrude through a hole into the terminal compartment. Maximum number of cells	KE	X 12	X 12	X 12	-	-	-	-	-
Plastic motor switch enclosure Moisture protection Protection class IP65 Maximum number of cells	PM	-	X 6	-	-	-	-	-	-

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
On-Off-switches A							
1-pole		60°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. A1 . A1	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. A1 . A1	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. A1 . A1 . A1	+003
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. A1 . A1	
2-pole		60°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. A2 . A2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. A2 . A2	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. A2 . A2 . A2	+003
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. A2 . A2	
3-pole		60°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. A3 . A3	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. A3 . A3	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. A3 . A3 . A3	+003
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. A3 . A3	
4-pole 4. pole early make		60°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. A4 . A4	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. A4 . A4	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. A4 . A4 . A4	+003
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. A4 . A4	
6-pole		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. A6 . A6	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. A6 . A6	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. A6 . A6 . A6	+003
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. A6 . A6	

Ordering example: AC21 250A panel mounting, On-Off-switch 6-pole, Escutcheon plate OFF - ON **N200 E A6+003**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Changeover switches U							
1-pole		60°	1	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x¹⁾ . U1 x x x x - - . U1 x - x - x x . U1 x x x - x - . U1 x - x - x - . U1 x - x - x - . U1 x - x - - - . U1 x - x - - - . U1	 +007
2-pole		60°	2	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x¹⁾ - . U2 x x x x - - . U2 x - x - x x . U2 x x x - x - . U2 x - x - x - . U2 x - x - x - . U2 x - x - - - . U2 x - x - - - . U2	 +007
3-pole		60°	3	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x¹⁾ - . U3 x x x x - - . U3 x - x - x x . U3 x x x - x - . U3 x - x - x - . U3 x - x - x - . U3 x - x - - - . U3 x - x - - - . U3	 +007
4-pole 4. pole early make		60°	4	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x x x¹⁾ - . U4 x x x x - - . U4 x - x - x x . U4 x - x - x - . U4 x - x - x - . U4 x - x - x - . U4 x - x - - - . U4 x - x - - - . U4	 +007
6-pole		60°	6	48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . M20 . N20 . N33F . N40 . N61 . N80 . N100 . N200 .	x x x - x¹⁾ - . U6 x x x - - - . U6 x - x - x x . U6 x - x - x - . U6 x - x - x - . U6 x - x - x - . U6 x - x - - - . U6 x - x - - - . U6	 +007

Ordering example: AC21 250A panel mounting, changeover switch 6-pole, Escutcheon plate 1 - OFF - 2 **N200 E U6+007**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Changeover switches without off W							
1-pole		60°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. W1 . W1	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. W1 . W1	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. W1 . W1 . W1	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. W1 . W1	
2-pole		60°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. W2 . W2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. W2 . W2	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. W2 . W2 . W2	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. W2 . W2	
3-pole		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. W3 . W3	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. W3 . W3	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. W3 . W3 . W3	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. W3 . W3	
4-pole 4. pole early make		60°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. W4 . W4	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. W4 . W4	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. W4 . W4 . W4	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. W4 . W4	
6-pole		60°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	. W6 . W6	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. W6 . W6	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. W6 . W6 . W6	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. W6 . W6	

Ordering example: AC21 250A panel mounting, changeover switch without off 6-pole, **N200 E W6**

1) Plastic enclosed switches are delivered with switch type M10.















Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Reversing switches WU							
2-pole		60°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. WU2 . WU2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. WU2 . WU2	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. WU2 . WU2 . WU2	+007
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. WU2 . WU2	
2-pole without off cross switch		60°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. WK2 . WK2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. WK2 . WK2	
				88 □ 63A 90A 115A	N40 . x x x - x - N61 . x - x - x - N80 . x - x - - -	. WK2 . WK2 . WK2	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. WK2 . WK2	
2-pole with spring return from both sides to off		30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. WU2R2 . WU2R2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. WU2R2 . WU2R2	
				88 □ 63A	N40 . x - x - x -	. WU2R2	
2-pole position 1 latched position 2 with spring return to off		60°+30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. WU2R1 . WU2R1	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. WU2R1 . WU2R1	
				88 □ 63A	N40 . x - x - x -	. WU2R1	
3-pole		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. WU3 . WU3	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. WU3 . WU3	
				88 □ 63A 90A 115A	N40 . x - x - x - N60 . x - x - x - N80 . x - x - - -	. WU3 . WU3 . WU3	+007
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. WU3 . WU3	
3-pole with spring return from both sides to off		30°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. WU3R2 . WU3R2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x x x - x -	. WU3R2 . WU3R2	
				88 □ 63A	N40 . x - x x -	. WU3R2	
3-pole position 1 latched position 2 with spring return to off		60°+30°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. WU3R1 . WU3R1	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. WU3R1 . WU3R1	
				88 □ 63A	N40 . x - x - x -	. WU3R1	

Ordering example: AC21 63A base mounting, reversing switch 3-pole, position 2 with spring to off **N40 V WU3R1**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Star-Delta switches SD							
1 rotary direction 		60°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. SD . SD	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SD . SD	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. SD . SD . SD	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SD . SD	
both rotary directions 		45°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. SDR . SDR	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SDR . SDR	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. SDR . SDR . SDR	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SDR . SDR	
1 rotary direction spring return from 0 to off 			4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. SRD . SRD	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SRD . SRD	
				88 □ 63A 90A 115A	N40 . x - x - x - N60 . x - x - x - N80 . x - x - - -	. SRD . SRD . SRD	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SRD . SRD	
1 rotary direction with clockwise operation and backswitch interlock 		60°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. SDRU . SDRU	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SDRU . SDRU	
				88 □ 63A 90A 115A	N40 . x - x - x - N60 . x - x - x - N80 . x - x - - -	. SDRU . SDRU . SDRU	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SDRU . SDRU	
Star-Delta selector switch 		60°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. SDU . SDU	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SDU . SDU	
				88 □ 63A 90A 115A	N40 . x - x - x - N60 . x - x - x - N80 . x - x - - -	. SDU . SDU . SDU	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SDU . SDU	

Ordering example: AC21 32A cast enclosed, star-delta selector switch

N20 G SDU

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Star-Delta switches SD							
with double outfeed phases for use with manual motor starter		60°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x x - -	. SDMO . SDMO	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SDMO . SDMO	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. SDMO . SDMO . SDMO	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SDMO . SDMO	
with auxiliary contacts for contactor control, without main contacts, automatic zero setting in event of mains break- down		90°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x x - -	. SDJ1 . SDJ1	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SDJ1 . SDJ1	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. SDJ1 . SDJ1 . SDJ1	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SDJ1 . SDJ1	
with auxiliary contacts for contactor control, without main contacts, automatic zero setting in event of mains break- down, spring return to		90°+30°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x x - -	. SDJ2 . SDJ2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SDJ2 . SDJ2	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. SDJ2 . SDJ2 . SDJ2	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SDJ2 . SDJ2	
as type SDJ1 but for both rotary directions		60°	7	48 □ 20A 32A	M10H . x x x x - - - M20 . x x x x - - -	. SDRJ1 . SDRJ1	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - - -	. SDRJ1 . SDRJ1	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - - - N80 . x - x - - -	. SDRJ1 . SDRJ1 . SDRJ1	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SDRJ1 . SDRJ1	
with brake position (counter current braking) brake position is a momentary operation		45°+30°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x x - -	. SDB . SDB	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SDB . SDB	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. SDB . SDB . SDB	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. SDB . SDB	

Ordering example: AC21 250A panel mounting star-delta switch with brake position

N200 E SDB

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Split phase switches HP							
for starting up single-phase motors with split-phase, spring return from START to Off		30° + 60°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. HP1 . HP1	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. HP1 . HP1	
				88 □ 63A	N40 . x - x - x -	. HP1	
for starting up single-phase motors with split-phase, spring return from START to 1		90° + 30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. HP2 . HP2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. HP2 . HP2	
				88 □ 63A	N40 . x - x - x -	. HP2	
for starting up single-phase motors with split-phase, both rotary directions		60° + 30°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. HPR1 . HPR1	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. HPR1 . HPR1	
				88 □ 63A	N40 . x - x - x -	. HPR1	
as type HPR1 with starting and phase-shifting capacitor		60° + 30°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. HPR2 . HPR2	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. HPR2 . HPR2	
				88 □ 63A	N40 . x - x - x -	. HPR2	

Ordering example: AC21 63A panel mounting, split phase switch, both rotary directions **N40 E HPR1**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi speed switches P							
1 Dahlander winding 1 rotary direction		60°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x x - -	. P61 . P61	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P61 . P61	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P61 . P61 . P61	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P61 . P61	
1 Dahlander winding 1 rotary direction		60°	4	48 □ 20A 32A	M10H . x x x x x x ¹⁾ - M20 . x x x x x - -	. P62 . P62	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P62 . P62	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P62 . P62 . P62	+007
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P62 . P62	
1 Dahlander winding both rotary directions		60°	7	48 □ 20A 32A	M10H . x x x x - - - M20 . x x x x - - -	. P61R . P61R	
				64 □ 32A 50A	N20 . x - x - x - N33F . x - x - - -	. P61R . P61R	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - - - N80 . x - x - - -	. P61R . P61R . P61R	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P61R . P61R	
1 Dahlander winding 1 rotary direction, clockwise operation		60°	5	48 □ 20A 32A	M10H . x x x x x x ¹⁾ - M20 . x x x x x - -	. P61RU . P61RU	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P61RU . P61RU	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P61RU . P61RU . P61RU	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P61RU . P61RU	
1 Dahlander winding 1 rotary direction, with auxiliary contacts for contactor control		60°	5	48 □ 20A 32A	M10H . x x x x x x ¹⁾ - M20 . x x x x x - -	. P61J . P61J	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P61J . P61J	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P61J . P61J . P61J	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P61J . P61J	

Ordering example: AC21 32A cast enclosed, multi speed switch, 1 Dahlander winding, 1 rotary direction

N20 G P61

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi speed switches P							
open Dahlander winding 1 rotary direction low speed with star-delta-start		45°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	. P91 . P91	
			64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P91 . P91		
			88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P91 . P91 . P91		
			132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P91 . P91		
open Dahlander winding both rotary directions low speed with star-delta-start		30°	8	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	. P91R . P91R	
			64 □ 32A 50A	N20 . x - x - x - N33F . x - x - - -	. P91R . P91R		
			88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - - - N80 . x - x - - -	. P91R . P91R . P91R		
			132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P91R . P91R		
open Dahlander winding 1 rotary direction, low speed with star-delta-start, with additional start position (starting resistor)		30°	7	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	. P91W . P91W	
			64 □ 32A 50A	N20 . x - x - x - N33F . x - x - - -	. P91W . P91W		
			88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - - - N80 . x - x - - -	. P91W . P91W . P91W		
			132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P91W . P91W		

Ordering example: AC21 250A panel mounting, multi speed switch, 1 rotary direction, low speed with star-delta-start

N200 E P91

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi speed switches P							
2 separate windings 1 rotary direction		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. P63 . P63	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P63 . P63	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P63 . P63 . P63	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P63 . P63	
2 separate windings 1 rotary direction		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. P64 . P64	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P64 . P64	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P64 . P64 . P64	+007
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P64 . P64	
2 separate windings both rotary directions		60°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. P66 . P66	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P66 . P66	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P66 . P66 . P66	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P66 . P66	
2 separate windings 1 opened 1 rotary direction		60°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. P71 . P71	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P71 . P71	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P71 . P71 . P71	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P71 . P71	
2 separate windings 1 rotary direction low speed with star-delta-start		45°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	. P96 . P96	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. P96 . P96	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. P96 . P96 . P96	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. P96 . P96	

Ordering example: AC21 250A panel mounting, multi speed switch, 2 separate windings, low speed with star-delta-start **N200 E P96**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi speed switches P							
2 separate windings 1 rotary direction both speeds with star-delta-start		45°	8	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	P122 P122	
				64 □ 32A 50A	N20 . x - x - x - N33F . x - x - - -	P122 P122	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - - - N80 . x - x - - -	P122 P122 P122	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	P122 P122	
1 Dahlander winding A 1 normal winding B 3 speeds 1 rotary direction 0-A Δ-B Δoder Δ-A Δ		45°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	P93 P93	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	P93 P93	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	P93 P93 P93	+127
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	P93 P93	
1 Dahlander winding A 1 normal winding B 3 speeds 1 rotary direction 0-B Δoder Δ-A Δ-A Δ		45°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	P94 P94	
				64 □ 32A 50A	N20 . x - x - x - N33F . x - x - x -	P94 P94	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	P94 P94 P94	+127
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	P94 P94	
1 Dahlander winding A 1 normal winding B 3 speeds 1 rotary direction 0-A Δ-A Δ-B Δoder Δ		45°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	P95 P95	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	P95 P95	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	P95 P95 P95	+127
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	P95 P95	
1 Dahlander winding A 1 normal winding B 3 speeds both rotary directions		45°	9	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	P93R P93R	
				64 □ 32A 50A	N20 . x - x - - - N33F . x - x - - -	P93R P93R	
				88 □ 63A 90A 115A	N40 . x - x - - - N61 . x - x - - - N80 . x - x - - -	P93R P93R P93R	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	P93R P93R	

Ordering example: AC21 250A panel mounting, multi speed switch, 1 Dahlander winding A,
1 normal winding B, 3 speeds, both rotary directions **N200 E P93R**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
-------------	----------------	-----------------	--	------	--	------------------------	---------------------

Multi speed switches P

1 Dahlander winding A 1 normal winding B 3 speeds both rotary directions		45°	9 48 □ 20A 32A	M10H . x x x - - - . P94R M20 . x x x - - - . P94R	
			64 □ 32A 50A	N20 . x - x - - - . P94R N33F . x - x - - - . P94R	
			88 □ 63A 90A 115A	N40 . x - x - - - . P94R N61 . x - x - - - . P94R N80 . x - x - - - . P94R	
			132 □ 150A 250A	N100 . x - x - - - . P94R N200 . x - x - - - . P94R	
1 Dahlander winding A 1 normal winding B 3 speeds both rotary directions		45°	8 48 □ 20A 32A	M10H . x x x - - - . P95R M20 . x x x - - - . P95R	
			64 □ 32A 50A	N20 . x - x - x - . P95R N33F . x - x - - - . P95R	
			88 □ 63A 90A 115A	N40 . x - x - x - . P95R N61 . x - x - - - . P95R N80 . x - x - - - . P95R	
			132 □ 150A 250A	N100 . x - x - - - . P95R N200 . x - x - - - . P95R	
2 Dahlander windings 4 speeds 1 rotary direction 0 - A Δ - B Δ - A ∞ - B ∞		30°	8 48 □ 20A 32A	M10H . x x x - - - . P124 M20 . x x x - - - . P124	
			64 □ 32A 50A	N20 . x - x - x - . P124 N33F . x - x - - - . P124	
			88 □ 63A 90A 115A	N40 . x - x - x - . P124 N61 . x - x - - - . P124 N80 . x - x - - - . P124	
			132 □ 150A 250A	N100 . x - x - - - . P124 N200 . x - x - - - . P124	
2 Dahlander windings 4 speeds both rotary directions		30°	12 48 □ 20A 32A	M10H . x x x - - - . P124R M20 . x x x - - - . P124R	
			64 □ 32A 50A	N20 . x - x - - - . P124R N33F . x - x - - - . P124R	
			88 □ 63A 90A 115A	N40 . x - x - - - . P124R N61 . x - x - - - . P124R N80 . x - x - - - . P124R	
			132 □ 150A 250A	N100 . x - x - - - . P124R N200 . x - x - - - . P124R	

Ordering example: AC21 250A Base mounting, multi speed switch, 2 Dahlander windings, 4 speeds, 1 rotary direction

N200 V P124

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
-------------	----------------	-----------------	---	------	---	------------------------	---------------------

Changeover switches with spring return to off UR

1-pole		30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . UR1 M20 . x x x x - - . UR1	
				64 □ 32A 50A	N20 . x - x - x x . UR1 N33F . x - x - x - . UR1	
				88 □ 63A	N40 . x - x - x - . UR1	
2-pole		30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . UR2 M20 . x x x x - - . UR2	
				64 □ 32A 50A	N20 . x - x - x x . UR2 N33F . x - x - x - . UR2	
				88 □ 63A	N40 . x - x - x - . UR2	
3-pole		30°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . UR3 M20 . x x x x - - . UR3	
				64 □ 32A 50A	N20 . x - x - x x . UR3 N33F . x - x - x - . UR3	
				88 □ 63A	N40 . x - x - x - . UR3	






Changeover switches with 1 latched and 1 momentary position UK

1-pole position 1 latched position 2 with spring return		60°+30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . UK1 M20 . x x x x - - . UK1	
				64 □ 32A 50A	N20 . x - x - x x . UK1 N33F . x - x - x - . UK1	
				88 □ 63A	N40 . x - x - x - . UK1	
2-pole position 1 latched position 2 with spring return		60°+30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . UK2 M20 . x x x x - - . UK2	
				64 □ 32A 50A	N20 . x - x - x x . UK2 N33F . x - x - x - . UK2	
				88 □ 63A	N40 . x - x - x - . UK2	
3-pole position 1 latched position 2 with spring return		60°+30°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . UK3 M20 . x x x x - - . UK3	
				64 □ 32A 50A	N20 . x - x - x x . UK3 N33F . x - x - x - . UK3	
				88 □ 63A	N40 . x - x - x - . UK3	






Ordering example: AC21 63A panel mounting, changeover switch, position 1 latched, position 2 with spring return, 3-pole: **N40 E UK3**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Double throw switches with spring return to off WR							
1-pole		30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . W1R M20 . x x x x - - . W1R		
			64 □ 32A 50A	N20 . x - x - x x . W1R N33F . x - x - x - . W1R			
			88 □ 63A	N40 . x - x - x - . W1R			
2-pole		30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . W2R M20 . x x x x - - . W2R		
			64 □ 32A 50A	N20 . x - x - x x . W2R N33F . x - x - x - . W2R			
			88 □ 63A	N40 . x - x - x - . W2R			
3-pole		30°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . W3R M20 . x x x x - - . W3R		
			64 □ 32A 50A	N20 . x - x - x x . W3R N33F . x - x - x - . W3R			
			88 □ 63A	N40 . x - x - x - . W3R			

Start-Stop switches S

Start-switch, 1-pole		30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . SE M20 . x x x x - - . SE	
				64 □ 32A 50A	N20 . x - x - x x . SE N33F . x - x - x - . SE	
Start-switch, 2-pole		30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . S2E M20 . x x x x - - . S2E	
				64 □ 32A 50A	N20 . x - x - x x . S2E N33F . x - x - x - . S2E	
Start-switch, 3-pole		30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . S3E M20 . x x x x - - . S3E	
				64 □ 32A 50A	N20 . x - x - x x . S3E N33F . x - x - x - . S3E	

Bestellbeispiel: AC21 50A base mounting, Start-switch, 3-pole

N33F V S3E

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs















Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Start-Stop switches S							
Stop-switch, 1-pole		30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. SA . SA	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SA . SA	
				88 □ 63A	N40 . x - x - x -	. SA	
Stop-switch, 2-pole		30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. S2A . S2A	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. S2A . S2A	
				88 □ 63A	N40 . x - x - x -	. S2A	
Stop-switch, 3-pole		30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. S3A . S3A	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. S3A . S3A	
				88 □ 63A	N40 . x - x - x -	. S3A	
Start-Stop-switch, 1-pole		30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. SEA . SEA	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. SEA . SEA	
Start-Stop-switch, 1-pole position START with spring return to 1		90° + 30°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. S392 . S392	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. S392 . S392	
Start-Stop-switch, 1-pole for reversing contactors		60° + 30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. S2EA . S2EA	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. S2EA . S2EA	
Start-Stop-switch, 1-pole for reversing contactors with limit switches		30°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. S22 . S22	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. S22 . S22	

Ordering example: AC21 50A panel mounting, Start-Stop-switch, 1-pole for reversing contactors

N33F E S2EA

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs











Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Voltmeter selector switches V							
3 line voltages 		45°	2 48 □ 20A 32A 64 □ 32A 50A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x x x - x -	. V3 . V3 . V3 . V3		
3 phase voltages 		45°	2 48 □ 20A 32A 64 □ 32A 50A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x x x - x -	. V0 . V0 . V0 . V0		
3 line voltages and 3 phase voltages 		30°	3 48 □ 20A 32A 64 □ 32A 50A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x x x - x -	. V1 . V1 . V1 . V1		
2 3-phase systems 2 x 3 line voltages 		45°	4 48 □ 20A 32A 64 □ 32A 50A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x - x - x -	. V32 . V32 . V32 . V32		
3 line voltages and 1 phase voltage 		45°	3 48 □ 20A 32A 64 □ 32A 50A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x x x - x -	. V13 . V13 . V13 . V13		

Ordering example: AC21 50A panel mounting, Voltmeter selector switch, 3 line voltages and 1 phase voltage

N33F E V13

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs













Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Ammeter selector switches M							
1-pole, for current transformer		90°	1	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . M11 M20 . x x x x - - . M11		
				64 □ 32A 50A	N20 . x - x - x x . M11 N33F . x x x - x - . M11		
				88 □ 63A	N40 . x - x - x - . M11		
2-pole, for 1 current transformer or direct current measurement		90°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . M12 M20 . x x x x - - . M12		
				64 □ 32A 50A	N20 . x - x - x x . M12 N33F . x x x - x - . M12		
				88 □ 63A 90A 115A	N40 . x - x - x - . M12 N60 . x - x - x - . M12 N80 . x - x - - - . M12		
				132 □ 150A 250A	N100 . x - x - - - . M12 N200 . x - x - - - . M12		
1-pole, for 2 current transformers		90°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . M21 M20 . x x x x - - . M21		
				64 □ 32A 50A	N20 . x - x - x x . M21 N33F . x x x - x - . M21		
				88 □ 63A	N40 . x - x - x - . M21		
2-pole, for 2 current transformers or direct current measurement in 2 phases		90°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . M22 M20 . x x x x - - . M22		
				64 □ 32A 50A	N20 . x - x - x x . M22 N33F . x x x - x - . M22		
				88 □ 63A 90A 115A	N40 . x - x - x - . M22 N60 . x - x - x - . M22 N80 . x - x - - - . M22		
				132 □ 150A 250A	N100 . x - x - - - . M22 N200 . x - x - - - . M22		
1-pole, for 3 current transformers		90°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . M31 M20 . x x x x - - . M31		
			4	64 □ 32A 50A	N20 . x - x - x x . M31 N33F . x - x - x - . M31		
				88 □ 63A	N40 . x - x - x - . M31		

Ordering example: AC21 63A panel mounting, ammeter selector switch, for 3 current transformers 1-pole

N40 V M31

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Ammeter selector switches M							
2-pole, for 3 current transformers or direct current measurement in 3 phases 		90°	6 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - M20 . x x x - - - N20 . x - x - x x N33F . x - x - x - N40 . x - x - x - N61 . x - x - x - N80 . x - x - - - N100 . x - x - - - N200 . x - x - - -	. M32 . M32 . M32 . M32 . M32 . M32 . M32 . M32 . M32		
1-pole, for 4 current transformers 		90°	4 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A	M10H . x x x x x ¹⁾ - M20 . x x x x x - - N20 . x - x - x x N33F . x - x - x - N40 . x - x - x -	. M41 . M41 . M41 . M41		
2-pole, for 4 current transformers or direct current measurement in 4 phases 		90°	6 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - M20 . x x x - - - N20 . x - x - x x N33F . x - x - x - N40 . x - x - x - N61 . x - x - x - N80 . x - x - - - N100 . x - x - - - N200 . x - x - - -	. M42 . M42 . M42 . M42 . M42 . M42 . M42 . M42 . M42		
f. output measurement in 3-phase systems by 2-wattmeter method 		90°	5 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x - x - x - N40 . x - x - x - N61 . x - x - x - N80 . x - x - - - N100 . x - x - - - N200 . x - x - - -	. M2W . M2W . M2W . M2W . M2W . M2W . M2W . M2W . M2W		

Ordering example: AC21 63A panel mounting, ammeter selector switch, for 4 current transformers 1-pole

N40 V M41

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Gang switches GR							
2 circuits A and B 1-pole 0 - A - A+B	 	45°	1 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - . GR11 M20 . x x x x - - . GR11 N20 . x - x - x x . GR11 N33F . x x x - x - . GR11 N40 . x - x - x - . GR11 N61 . x - x - x - . GR11 N80 . x - x - - - . GR11 N100 . x - x - - - . GR11 N200 . x - x - - - . GR11			
2 circuits A and B 1-pole 0 - A - B - A+B	 	45°	1 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - . GR12 M20 . x x x x - - . GR12 N20 . x - x - x x . GR12 N33F . x x x - x - . GR12 N40 . x - x - x - . GR12 N61 . x - x - x - . GR12 N80 . x - x - - - . GR12 N100 . x - x - - - . GR12 N200 . x - x - - - . GR12			
2 circuits A and B 2-pole 0 - A - A+B	 	45°	2 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - . GR21 M20 . x x x x - - . GR21 N20 . x - x - x x . GR21 N33F . x x x - x - . GR21 N40 . x - x - x - . GR21 N61 . x - x - x - . GR21 N80 . x - x - - - . GR21 N100 . x - x - - - . GR21 N200 . x - x - - - . GR21			
2 circuits A and B 2-pole 0 - A - B - A+B	 	45°	2 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - . GR22 M20 . x x x x - - . GR22 N20 . x - x - x x . GR22 N33F . x x x - x - . GR22 N40 . x - x - x - . GR22 N61 . x - x - x - . GR22 N80 . x - x - - - . GR22 N100 . x - x - - - . GR22 N200 . x - x - - - . GR22			
2 circuits A and B 3-pole 0 - A - A+B	 	45°	3 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - . GR31 M20 . x x x x - - . GR31 N20 . x - x - x x . GR31 N33F . x - x - x - . GR31 N40 . x - x - x x . GR31 N61 . x - x - x - . GR31 N80 . x - x - - - . GR31 N100 . x - x - - - . GR31 N200 . x - x - - - . GR31			

Ordering example: AC21 250A panel mounting, gang switch, 2 circuits A and B, 3-pole **N200 E GR31**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Gang switches GR							
2 circuits A and B 3-pole 0 - A - B - A+B 		45°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. GR32 . GR32	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. GR32 . GR32	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. GR32 . GR32 . GR32	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. GR32 . GR32	
3 circuits A, B and C 1-pole 0 - A - A+B - A+B+C 		45°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. GR14 . GR14	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. GR14 . GR14	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. GR14 . GR14 . GR14	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. GR14 . GR14	
3 circuits A, B and C 2-pole 0 - A - A+B - A+B+C 		45°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. GR23 . GR23	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. GR23 . GR23	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. GR23 . GR23 . GR23	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. GR23 . GR23	
3 circuits A, B and C 3-pole 0 - A - A+B - A+B+C 		45°	5	48 □ 20A 32A	M10H . x x x x x x ¹⁾ - M20 . x x x x x - -	. GR33 . GR33	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. GR33 . GR33	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. GR33 . GR33 . GR33	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. GR33 . GR33	

Ordering example: AC21 250A panel mounting, gang switch, 3 circuits A, B and C, 3-pole

N200 E GR33

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Series-Parallel switches SP							
2 circuits A and B 2-pole 0 - A + B - A,B (parallel) 		45°	2 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x x x - x - N40 . x - x - x - N61 . x - x - x - N80 . x - x - - - N100 . x - x - - - N200 . x - x - - -	SP1 SP1 SP1 SP1 SP1 SP1 SP1 SP1 SP1		
2 circuits A and B 2-pole 0 - A,B (parall.) - A - A+B 		90°	3 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x x x - x - N40 . x - x - x - N61 . x - x - x - N80 . x - x - - - N100 . x - x - - - N200 . x - x - - -	SP4 SP4 SP4 SP4 SP4 SP4 SP4 SP4 SP4	 +126 	
2 circuits A and B for 3-phase systems 0 - A+B - A - B - A,B 		30°	2 48 □ 20A 32A 64 □ 32A 50A 88 □ 63A 90A 115A 132 □ 150A 250A	M10H . x x x x x ¹⁾ - M20 . x x x x - - N20 . x - x - x x N33F . x x x - x - N40 . x - x - x - N61 . x - x - x - N80 . x - x - - - N100 . x - x - - - N200 . x - x - - -	SP3 SP3 SP3 SP3 SP3 SP3 SP3 SP3 SP3	 +112 	

Ordering example: AC21 250A panel mounting, series-parallel switch, 2 circuits for 3-phase systems

N200 E SP3

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 1-pole without Off ST.1							
3 steps		60°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST31 M20 . x x x x - - . ST31		
			64 □ 32A 50A	N20 . x - x - x x . ST31 N33F . x x x - x - . ST31			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST31 N61 . x - x - x - . ST31 N80 . x - x - - - . ST31			
			132 □ 150A 250A	N100 . x - x - - - . ST31 N200 . x - x - - - . ST31			
4 steps		60°	2	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST41 M20 . x x x x - - . ST41		
			64 □ 32A 50A	N20 . x - x - x x . ST41 N33F . x x x - x - . ST41			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST41 N61 . x - x - x - . ST41 N80 . x - x - - - . ST41			
			132 □ 150A 250A	N100 . x - x - - - . ST41 N200 . x - x - - - . ST41			
5 steps		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST51 M20 . x x x x - - . ST51		
			64 □ 32A 50A	N20 . x - x - x x . ST51 N33F . x x x - x - . ST51			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST51 N61 . x - x - x - . ST51 N80 . x - x - - - . ST51			
			132 □ 150A 250A	N100 . x - x - - - . ST51 N200 . x - x - - - . ST51			
6 steps		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST61 M20 . x x x x - - . ST61		
			64 □ 32A 50A	N20 . x - x - x x . ST61 N33F . x x x - x - . ST61			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST61 N61 . x - x - x - . ST61 N80 . x - x - - - . ST61			
			132 □ 150A 250A	N100 . x - x - - - . ST61 N200 . x - x - - - . ST61			
7 steps		45°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST71 M20 . x x x x - - . ST71		
			64 □ 32A 50A	N20 . x - x - x x . ST71 N33F . x - x - x - . ST71			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST71 N61 . x - x - x - . ST71 N80 . x - x - - - . ST71			
			132 □ 150A 250A	N100 . x - x - - - . ST71 N200 . x - x - - - . ST71			

Ordering example: AC21 250A panel mounting, multi step switch 1-pole without off, 7 steps

N200 E ST71

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 1-pole without Off ST.1							
8 steps		45°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. ST81 . ST81	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST81 . ST81	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST81 . ST81 . ST81	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST81 . ST81	
9 steps		30°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. ST91 . ST91	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST91 . ST91	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST91 . ST91 . ST91	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST91 . ST91	
10 steps		30°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. ST101 . ST101	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST101 . ST101	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST101 . ST101 . ST101	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST101 . ST101	
11 steps		30°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	. ST111 . ST111	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST111 . ST111	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST111 . ST111 . ST111	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST111 . ST111	
12 steps		30°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	. ST121 . ST121	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST121 . ST121	
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST121 . ST121 . ST121	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST121 . ST121	

Ordering example: AC21 250A panel mounting, multi step switch 1-pole without off, 12 steps

N200 E ST121

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 1-pole with Off ST0.1							
2 steps		60°	1 48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST021 M20 . x x x x - - . ST021			
			64 □ 32A 50A	N20 . x - x - x x . ST021 N33F . x x x - x - . ST021			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST021 N61 . x - x - x - . ST021 N80 . x - x - - - . ST021			+ 422
			132 □ 150A 250A	N100 . x - x - - - . ST021 N200 . x - x - - - . ST021			
3 steps		45°	2 48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST031 M20 . x x x x - - . ST031			
			64 □ 32A 50A	N20 . x - x - x x . ST031 N33F . x x x - x - . ST031			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST031 N61 . x - x - x - . ST031 N80 . x - x - - - . ST031			+ 127
			132 □ 150A 250A	N100 . x - x - - - . ST031 N200 . x - x - - - . ST031			
4 steps		30°	2 48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST041 M20 . x x x x - - . ST041			
			64 □ 32A 50A	N20 . x - x - x x . ST041 N33F . x x x - x - . ST041			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST041 N61 . x - x - x - . ST041 N80 . x - x - - - . ST041			+ 112
			132 □ 150A 250A	N100 . x - x - - - . ST041 N200 . x - x - - - . ST041			
5 steps		45°	3 48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST051 M20 . x x x x - - . ST051			
			64 □ 32A 50A	N20 . x - x - x x . ST051 N33F . x x x - x - . ST051			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST051 N61 . x - x - x - . ST051 N80 . x - x - - - . ST051			+ 423
			132 □ 150A 250A	N100 . x - x - - - . ST051 N200 . x - x - - - . ST051			
6 steps		45°	4 48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST061 M20 . x x x x - - . ST061			
			64 □ 32A 50A	N20 . x - x - x x . ST061 N33F . x - x - x - . ST061			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST061 N61 . x - x - x - . ST061 N80 . x - x - - - . ST061			+ 128
			132 □ 150A 250A	N100 . x - x - - - . ST061 N200 . x - x - - - . ST061			

Ordering example: AC21 250A panel mounting, multi step switch 1-pole with off, 6 steps

N200 E ST061

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 1-pole with Off ST0.1							
7 steps		45°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. ST071 . ST071	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST071 . ST071	+129
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST071 . ST071 . ST071	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST071 . ST071	
8 steps		30°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. ST081 . ST081	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST081 . ST081	+114
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST081 . ST081 . ST081	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST081 . ST081	
9 steps		30°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - M20 . x x x x - -	. ST091 . ST091	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST091 . ST091	+115
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST091 . ST091 . ST091	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST091 . ST091	
10 steps		30°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	. ST0101 . ST0101	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST0101 . ST0101	+116
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST0101 . ST0101 . ST0101	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST0101 . ST0101	
11 steps		30°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - M20 . x x x - - -	. ST0111 . ST0111	
				64 □ 32A 50A	N20 . x - x - x x N33F . x - x - x -	. ST0111 . ST0111	+117
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - x - N80 . x - x - - -	. ST0111 . ST0111 . ST0111	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST0111 . ST0111	

Ordering example: AC21 250A panel mounting, multi step switch 1-pole with off, 11 steps

N200 E ST0111

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 2-pole without Off ST.2							
3 steps		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST32 M20 . x x x x - - . ST32		
			64 □ 32A 50A	N20 . x - x - x x . ST32 N33F . x x x - x - . ST32			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST32 N61 . x - x - x - . ST32 N80 . x - x - - - . ST32			
			132 □ 150A 250A	N100 . x - x - - - . ST32 N200 . x - x - - - . ST32			
4 steps		60°	4	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST42 M20 . x x x x - - . ST42		
			64 □ 32A 50A	N20 . x - x - x x . ST42 N33F . x - x - x - . ST42			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST42 N61 . x - x - x - . ST42 N80 . x - x - - - . ST42			
			132 □ 150A 250A	N100 . x - x - - - . ST42 N200 . x - x - - - . ST42			
5 steps		60°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST52 M20 . x x x x - - . ST52		
			64 □ 32A 50A	N20 . x - x - x x . ST52 N33F . x - x - x - . ST52			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST52 N61 . x - x - x - . ST52 N80 . x - x - - - . ST52			
			132 □ 150A 250A	N100 . x - x - - - . ST52 N200 . x - x - - - . ST52			
6 steps		60°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - . ST62 M20 . x x x - - - . ST62		
			64 □ 32A 50A	N20 . x - x - x x . ST62 N33F . x - x - x - . ST62			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST62 N61 . x - x - x - . ST62 N80 . x - x - - - . ST62			
			132 □ 150A 250A	N100 . x - x - - - . ST62 N200 . x - x - - - . ST62			
7 steps		45°	7	48 □ 20A 32A	M10H . x x x - - - . ST72 M20 . x x x - - - . ST72		
			64 □ 32A 50A	N20 . x - x - x - . ST72 N33F . x - x - - - . ST72			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST72 N61 . x - x - - - . ST72 N80 . x - x - - - . ST72			
			132 □ 150A 250A	N100 . x - x - - - . ST72 N200 . x - x - - - . ST72			

Ordering example: AC21 250A panel mounting, multi step switch 2-pole without off, 7 steps

N200 E ST72

1) Plastic enclosed switches are delivered with switch type M10.








Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 2-pole without Off ST.2							
8 steps		45°	8	48 □ 20A 32A	M10H . x x x - - - . M20 . x x x - - - .	ST82 ST82	
				64 □ 32A 50A	N20 . x - x - x - . N33F . x - x - - - .	ST82 ST82	
				88 □ 63A 90A 115A	N40 . x - x - x - . N61 . x - x - - - . N80 . x - x - - - .	ST82 ST82 ST82	
				132 □ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST82 ST82	
9 steps		30°	9	48 □ 20A 32A	M10H . x x x - - - . M20 . x x x - - - .	ST92 ST92	
				64 □ 32A 50A	N20 . x - x - - - . N33F . x - x - - - .	ST92 ST92	
				88 □ 63A 90A 115A	N40 . x - x - - - . N61 . x - x - - - . N80 . x - x - - - .	ST92 ST92 ST92	
				132 □ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST92 ST92	
10 steps		30°	10	48 □ 20A 32A	M10H . x x x - - - . M20 . x x x - - - .	ST102 ST102	
				64 □ 32A 50A	N20 . x - x - - - . N33F . x - x - - - .	ST102 ST102	
				88 □ 63A 90A 115A	N40 . x - x - - - . N61 . x - x - - - . N80 . x - x - - - .	ST102 ST102 ST102	
				132 □ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST102 ST102	
11 steps		30°	11	48 □ 20A 32A	M10H . x x x - - - . M20 . x x x - - - .	ST112 ST112	
				64 □ 32A 50A	N20 . x - x - - - . N33F . x - x - - - .	ST112 ST112	
				88 □ 63A 90A 115A	N40 . x - x - - - . N61 . x - x - - - . N80 . x - x - - - .	ST112 ST112 ST112	
				132 □ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST112 ST112	
12 steps		30°	12	48 □ 20A 32A	M10H . x x x - - - . M20 . x x x - - - .	ST122 ST122	
				64 □ 32A 50A	N20 . x - x - - - . N33F . x - x - - - .	ST122 ST122	
				88 □ 63A 90A 115A	N40 . x - x - - - . N61 . x - x - - - . N80 . x - x - - - .	ST122 ST122 ST122	
				132 □ 150A 250A	N100 . x - x - - - . N200 . x - x - - - .	ST122 ST122	

Ordering example: AC21 250A panel mounting, multi step switch 2-pole without off, 12 steps

N200 E ST122

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 2-pole with Off ST0.2							
2 steps		60°	2 48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST022 M20 . x x x x - - . ST022		+ 422 	
			64 □ 32A 50A	N20 . x - x - x x . ST022 N33F . x x x - x - . ST022			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST022 N61 . x - x - x - . ST022 N80 . x - x - - - . ST022			
			132 □ 150A 250A	N100 . x - x - - - . ST022 N200 . x - x - - - . ST022			
			3 steps				45°
64 □ 32A 50A	N20 . x - x - x x . ST032 N33F . x x x - x - . ST032						
88 □ 63A 90A 115A	N40 . x - x - x - . ST032 N61 . x - x - x - . ST032 N80 . x - x - - - . ST032						
132 □ 150A 250A	N100 . x - x - - - . ST032 N200 . x - x - - - . ST032						
4 steps		30°			4 48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST042 M20 . x x x x - - . ST042	
			64 □ 32A 50A	N20 . x - x - x x . ST042 N33F . x - x - x - . ST042			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST042 N61 . x - x - x - . ST042 N80 . x - x - - - . ST042			
			132 □ 150A 250A	N100 . x - x - - - . ST042 N200 . x - x - - - . ST042			
			5 steps		45°	6 48 □ 20A 32A	M10H . x x x x - x ¹⁾ - . ST052 M20 . x x x x - - - . ST052
64 □ 32A 50A	N20 . x - x - x x . ST052 N33F . x - x - x - . ST052						
88 □ 63A 90A 115A	N40 . x - x - x - . ST052 N61 . x - x - x - . ST052 N80 . x - x - - - . ST052						
132 □ 150A 250A	N100 . x - x - - - . ST052 N200 . x - x - - - . ST052						
6 steps		45°				7 48 □ 20A 32A	M10H . x x x x - x ¹⁾ - . ST062 M20 . x x x x - - - . ST062
			64 □ 32A 50A	N20 . x - x - x - . ST062 N33F . x - x - - - . ST062			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST062 N61 . x - x - - - . ST062 N80 . x - x - - - . ST062			
			132 □ 150A 250A	N100 . x - x - - - . ST062 N200 . x - x - - - . ST062			

Ordering example: AC21 250A panel mounting, multi step switch 2-pole with off, 6 steps

N200 E ST062

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 2-pole with Off ST0.2							
7 steps		45°	8	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	. ST072 . ST072	
				64 □ 32A 50A	N20 . x - x - x - N33F . x - x - - -	. ST072 . ST072	+ 129
				88 □ 63A 90A 115A	N40 . x - x - x - N61 . x - x - - - N80 . x - x - - -	. ST072 . ST072 . ST072	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST072 . ST072	
8 steps		30°	9	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	. ST082 . ST082	
				64 □ 32A 50A	N20 . x - x - - - N33F . x - x - - -	. ST082 . ST082	+ 114
				88 □ 63A 90A 115A	N40 . x - x - - - N61 . x - x - - - N80 . x - x - - -	. ST082 . ST082 . ST082	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST082 . ST082	
9 steps		30°	10	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	. ST092 . ST092	
				64 □ 32A 50A	N20 . x - x - - - N33F . x - x - - -	. ST092 . ST092	+ 115
				88 □ 63A 90A 115A	N40 . x - x - - - N61 . x - x - - - N80 . x - x - - -	. ST092 . ST092 . ST092	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST092 . ST092	
10 steps		30°	11	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	. ST0102 . ST0102	
				64 □ 32A 50A	N20 . x - x - - - N33F . x - x - - -	. ST0102 . ST0102	+ 116
				88 □ 63A 90A 115A	N40 . x - x - - - N61 . x - x - - - N80 . x - x - - -	. ST0102 . ST0102 . ST0102	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST0102 . ST0102	
11 steps		30°	12	48 □ 20A 32A	M10H . x x x - - - M20 . x x x - - -	. ST0112 . ST0112	
				64 □ 32A 50A	N20 . x - x - - - N33F . x - x - - -	. ST0112 . ST0112	+ 117
				88 □ 63A 90A 115A	N40 . x - x - - - N61 . x - x - - - N80 . x - x - - -	. ST0112 . ST0112 . ST0112	
				132 □ 150A 250A	N100 . x - x - - - N200 . x - x - - -	. ST0112 . ST0112	

Ordering example: AC21 250A panel mounting, multi step switch 2-pole with off, 11 steps **N200 E ST0112**

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 3-pole without Off ST.3							
3 steps		60°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST33 M20 . x x x x - - . ST33		
			64 □ 32A 50A	N20 . x - x - x x . ST33 N33F . x - x - x - . ST33			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST33 N61 . x - x - x - . ST33 N80 . x - x - - - . ST33			
			132 □ 150A 250A	N100 . x - x - - - . ST33 N200 . x - x - - - . ST33			
4 steps		60°	6	48 □ 20A 32A	M10H . x x x - x ¹⁾ - . ST43 M20 . x x x - - - . ST43		
			64 □ 32A 50A	N20 . x - x - x x . ST43 N33F . x - x - x - . ST43			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST43 N61 . x - x - x - . ST43 N80 . x - x - - - . ST43			
			132 □ 150A 250A	N100 . x - x - - - . ST43 N200 . x - x - - - . ST43			
5 steps		60°	8	48 □ 20A 32A	M10H . x x x x - - - . ST53 M20 . x x x - - - . ST53		
			64 □ 32A 50A	N20 . x - x - x - . ST53 N33F . x - x - - - . ST53			
			88 □ 63A 90A 115A	N40 . x - x - x - . ST53 N61 . x - x - - - . ST53 N80 . x - x - - - . ST53			
			132 □ 150A 250A	N100 . x - x - - - . ST53 N200 . x - x - - - . ST53			
6 steps		60°	9	48 □ 20A 32A	M10H . x x x x - - - . ST63 M20 . x x x - - - . ST63		
			64 □ 32A 50A	N20 . x - x - - - . ST63 N33F . x - x - - - . ST63			
			88 □ 63A 90A 115A	N40 . x - x x - - - . ST63 N61 . x - x - - - . ST63 N80 . x - x - - - . ST63			
			132 □ 150A 250A	N100 . x - x - - - . ST63 N200 . x - x - - - . ST63			
7 steps		45°	11	48 □ 20A 32A	M10H . x x x x - - - . ST73 M20 . x x x - - - . ST73		
			64 □ 32A 50A	N20 . x - x - - - . ST73 N33F . x - x - - - . ST73			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST73 N61 . x - x - - - . ST73 N80 . x - x - - - . ST73			
			132 □ 150A 250A	N100 . x - x - - - . ST73 N200 . x - x - - - . ST73			

Ordering example: AC21 250A panel mounting, multi step switch 3-pole without off, 7 steps

N200 E ST73

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 3-pole without Off ST.3							
8 steps		45°	12	48 □ 20A 32A	M10H . x x x - - - . ST83 M20 . x x x - - - . ST83		
			64 □ 32A 50A	N20 . x - x - - - . ST83 N33F . x - x - - - . ST83			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST83 N61 . x - x - - - . ST83 N80 . x - x - - - . ST83			
			132 □ 150A 250A	N100 . x - x - - - . ST83 N200 . x - x - - - . ST83			
9 steps		30°	14	48 □ 20A 32A	M10H . x - x - - - . ST93 M20 . x - x - - - . ST93		
			64 □ 32A 50A	N20 . x - x - - - . ST93 N33F . x - x - - - . ST93			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST93 N61 . x - x - - - . ST93 N80 . x - x - - - . ST93			
			132 □ 150A 250A	N100 . x - x - - - . ST93 N200 . x - x - - - . ST93			
10 steps		30°	15	48 □ 20A 32A	M10H . x - x - - - . ST103 M20 . x - x - - - . ST103		
			64 □ 32A 50A	N20 . x - x - - - . ST103 N33F . x - x - - - . ST103			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST103 N61 . x - x - - - . ST103 N80 . x - x - - - . ST103			
			132 □ 150A 250A	N100 . x - x - - - . ST103 N200 . x - x - - - . ST103			
11 steps		30°	17	48 □ 20A 32A	M10H . x - x - - - . ST113 M20 . x - x - - - . ST113		
			64 □ 32A 50A	N20 . x - x - - - . ST113 N33F . x - x - - - . ST113			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST113 N61 . x - x - - - . ST113 N80 . x - x - - - . ST113			
			132 □ 150A 250A	N100 . x - x - - - . ST113 N200 . x - x - - - . ST113			
12 steps		30°	18	48 □ 20A 32A	M10H . x - x - - - . ST123 M20 . x - x - - - . ST123		
			64 □ 32A 50A	N20 . x - x - - - . ST123 N33F . x - x - - - . ST123			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST123 N61 . x - x - - - . ST123 N80 . x - x - - - . ST123			
			132 □ 150A 250A	N100 . x - x - - - . ST123 N200 . x - x - - - . ST123			

Ordering example: AC21 250A panel mounting, multi step switch 3-pole without off, 12 steps

N200 E ST123

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 3-pole with Off ST0.3							
2 steps		60°	3	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST023 M20 . x x x x - - . ST023		
				64 □ 32A 50A	N20 . x - x - x x . ST023 N33F . x x x - x - . ST023		
				88 □ 63A 90A 115A	N40 . x - x - x - . ST023 N61 . x - x - x - . ST023 N80 . x - x - - - . ST023	+422	
				132 □ 150A 250A	N100 . x - x - - - . ST023 N200 . x - x - - - . ST023		
3 steps		45°	5	48 □ 20A 32A	M10H . x x x x x ¹⁾ - . ST033 M20 . x x x x - - . ST033		
				64 □ 32A 50A	N20 . x - x - x x . ST033 N33F . x - x - x - . ST033		
				88 □ 63A 90A 115A	N40 . x - x - x - . ST033 N61 . x - x - x - . ST033 N80 . x - x - - - . ST033	+127	
				132 □ 150A 250A	N100 . x - x - - - . ST033 N200 . x - x - - - . ST033		
4 steps		30°	6	48 □ 20A 32A	M10H . x x x x - x ¹⁾ - . ST043 M20 . x x x x - - . ST043		
				64 □ 32A 50A	N20 . x - x - x x . ST043 N33F . x - x - x - . ST043		
				88 □ 63A 90A 115A	N40 . x - x - x - . ST043 N61 . x - x - x - . ST043 N80 . x - x - - - . ST043	+112	
				132 □ 150A 250A	N100 . x - x - - - . ST043 N200 . x - x - - - . ST043		
5 steps		45°	9	48 □ 20A 32A	M10H . x x x x - - - . ST053 M20 . x x x x - - - . ST053		
				64 □ 32A 50A	N20 . x - x - - - . ST053 N33F . x - x - - - . ST053		
				88 □ 63A 90A 115A	N40 . x - x - - - . ST053 N61 . x - x - - - . ST053 N80 . x - x - - - . ST053	+423	
				132 □ 150A 250A	N100 . x - x - - - . ST053 N200 . x - x - - - . ST053		
6 steps		45°	11	48 □ 20A 32A	M10H . x x x x - - - . ST063 M20 . x x x x - - - . ST063		
				64 □ 32A 50A	N20 . x - x - - - . ST063 N33F . x - x - - - . ST063		
				88 □ 63A 90A 115A	N40 . x - x - - - . ST063 N61 . x - x - - - . ST063 N80 . x - x - - - . ST063	+128	
				132 □ 150A 250A	N100 . x - x - - - . ST063 N200 . x - x - - - . ST063		

Ordering example: AC21 250A panel mounting, multi step switch 3-pole with off, 6 steps **N200 E ST063**

1) Plastic enclosed switches are delivered with switch type M10.

Switching programs

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design see page 6-8 E. Z. V. SMA. P. G.	Switch pro- gram	Escutcheon plate
Multi step switches 3-pole with Off ST0.3							
7 steps		45°	12	48 □ 20A 32A	M10H . x x x - - - . ST073 M20 . x x x - - - . ST073		
			64 □ 32A 50A	N20 . x - x - - - . ST073 N33F . x - x - - - . ST073			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST073 N61 . x - x - - - . ST073 N80 . x - x - - - . ST073			
			132 □ 150A 250A	N100 . x - x - - - . ST073 N200 . x - x - - - . ST073			
8 steps		30°	14	48 □ 20A 32A	M10H . x - x - - - . ST083 M20 . x - x - - - . ST083		
			64 □ 32A 50A	N20 . x - x - - - . ST083 N33F . x - x - - - . ST083			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST083 N61 . x - x - - - . ST083 N80 . x - x - - - . ST083			
			132 □ 150A 250A	N100 . x - x - - - . ST083 N200 . x - x - - - . ST083			
9 steps		30°	15	48 □ 20A 32A	M10H . x - x - - - . ST093 M20 . x - x - - - . ST093		
			64 □ 32A 50A	N20 . x - x - - - . ST093 N33F . x - x - - - . ST093			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST093 N61 . x - x - - - . ST093 N80 . x - x - - - . ST093			
			132 □ 150A 250A	N100 . x - x - - - . ST093 N200 . x - x - - - . ST093			
10 steps		30°	17	48 □ 20A 32A	M10H . x - x - - - . ST0103 M20 . x - x - - - . ST0103		
			64 □ 32A 50A	N20 . x - x - - - . ST0103 N33F . x - x - - - . ST0103			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST0103 N61 . x - x - - - . ST0103 N80 . x - x - - - . ST0103			
			132 □ 150A 250A	N100 . x - x - - - . ST0103 N200 . x - x - - - . ST0103			
11 steps		30°	18	48 □ 20A 32A	M10H . x - x - - - . ST0113 M20 . x - x - - - . ST0113		
			64 □ 32A 50A	N20 . x - x - - - . ST0113 N33F . x - x - - - . ST0113			
			88 □ 63A 90A 115A	N40 . x - x - - - . ST0113 N61 . x - x - - - . ST0113 N80 . x - x - - - . ST0113			
			132 □ 150A 250A	N100 . x - x - - - . ST0113 N200 . x - x - - - . ST0113			


Ordering example: AC21 250A panel mounting, multi step switch 3-pole with off, 11 steps **N200 E ST0113**

Mini-Cam Switches M4H

Panel mounting E, IP40



Central fixing Z

Central fixing without escutcheon plate ZO

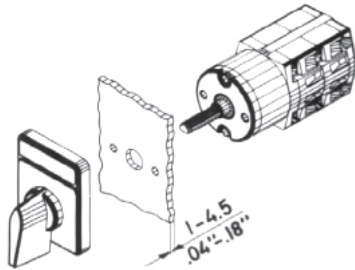


Mounting holes


D366-f

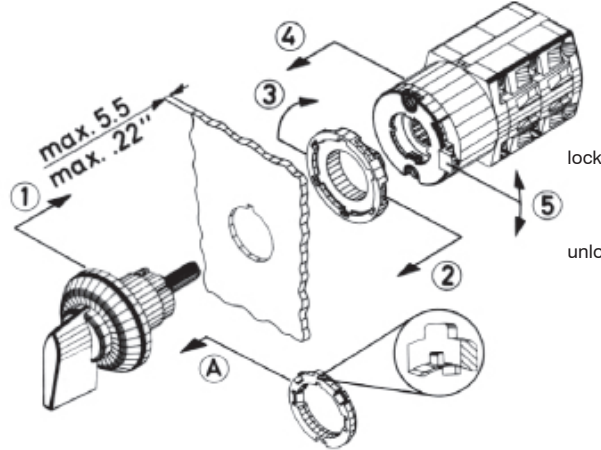

Central fixing 16mm



unlock Central fixing 22mm



Single hole mountings are generally delivered for a 16mm (.64") mounting.

Using the forwarded adapter ring, it is possible to alter the single hole mountings from 22mm (.88"). For that purpose the adapter ring has to be attached onto the threaded part of the body in such a manner, that

1. the flat side of the adapter ring shows towards the front seal and

2. the inner nose fits into the notch of the body.


The adapter ring has to be pushed towards the front seal.

Optional extras	ordering code	for design	M4H Z ... +SRE	M4H Z ... +SA.	M4H ZO ... +SA.	M4H Z ... +SRE+SA.
Additional escutcheon plate	+SRE	E, Z, ZO				
Additional escutcheon plate	+SRE2	E, Z, ZO				
Key operated switch with lock KABA	+SA1	Z, ZO				
with lock Ronis	+SA2	Z, ZO				


Wrench J7400

for switches M4H with central fixing is necessary


Panel mounting E




Central fixing Z, ZO

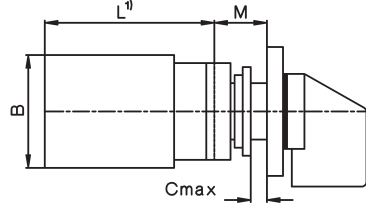

ZO



Z



Type		A	B	D	M	Dimension L for ... cells							
						1	2	3	4	5	6	7	8
M4H	mm	30	28	29,5	12,5	38,5	50,5	62,5	74,5	86,5	98,5	110,5	122,5

Technical data

Type	according to specifications	AC21A	Motor rating AC3								
			AC15		Volt	3 phase 3-pole			1 phase 2-pole		
			110V 240V	380V 440V		110	220	380	110	220	380
		General use	Pilot Duty		120	240	440	120	240	277	440
M4H	IEC, VDE, BS, SEV UL, CSA	10A/500V 10A/300V	2,5A 1,5A A300	kW HP	0,65 0,75	1,5 1	2,2 -	0,3 0,33	0,55 0,75	- 0,75	0,75 -

Type	according to specifications	Volt	Motor rating AC23		2-pole	
			3-pole			
			110 220 380 120 240 440		110 220 380 120 240 440	
M4H	IEC, VDE, BS, SEV UL, CSA	kW HP	0,75 1,8 3 - - -		0,37 0,75 1,1 - - -	

additional data for wiring according to UL and CSA

Type	type of wire	temp. rating of wire	torque value for field wiring terminals
M4H	copper wire only	60/75°C	0,6Nm / 5lb · inch

Mini-Cam Switches M4H

Switch programs

Description	Wiring diagram	AC21 500V 10A AC15 230V 2,5A AC3 4x400V 2,2kW	escutch. 30 x 30	numb. of cells	Type	Design .E. ↓	.Z. ↓	.ZO. ↓	Switch pro- gram
On-Off-switch A 1-pole 2-pole 3-pole 4-pole 6-pole				1 1 2 2 3	M4H . M4H . M4H . M4H . M4H .	x x x x x	x x x x x	x x x x x	. A1 . A2 . A3 . A4 . A6
Changeover switch U 1-pole 2-pole 3-pole 4-pole				1 2 3 4	M4H . M4H . M4H . M4H .	x x x x	x x x x	x x x x	. U1 . U2 . U3 . U4
Changeover switch without off W 1-pole 2-pole 3-pole 4-pole 6-pole				1 2 3 4 6	M4H . M4H . M4H . M4H . M4H .	x x x x x	x x x x x	x x x x x	. W1 . W2 . W3 . W4 . W6
Reversing switch WU 2-pole 3-pole 3-pole with spring return to 0				2 3 3	M4H . M4H . M4H .	x x x	x x x	x x x	. WU2 . WU3 . WU3R2
Star-delta switch SD 1 rotary direction both rotary directions				4 5	M4H . M4H .	x x	x x	x x	. SD . SDR
Changeover with spring return UR 1-pole 2-pole 3-pole				1 2 3	M4H . M4H . M4H .	x x x	x x x	x x x	. UR1 . UR2 . UR3
Start switch 1-pole				1	M4H .	x	x	x	. SE
Stop switch 1-pole				1	M4H .	x	x	x	. SA

Ordering example: Stop switch, 1-pole, Central fixing: **M4H Z SA**

Mini-Cam Switches M4H

Switch programs

Description	Wiring diagram	AC21 500V 10A AC15 230V 2,5A AC3 4x400V 2,2kW	escutch. 30 x 30	numb. of cells	Type	Design .E. ↓ .Z. ↓ .ZO. ↓	Switch pro- gram	
Start-Stop switch			1	M4H .	x	x	x	. SEA
Start-Stop switch position START with spring return to 1			1	M4H .	x	x	x	. S392
Start-Stop switch for reversing contactors			2	M4H .	x	x	x	. S2EA
Voltmeter selector switch V 3 line voltages			2	M4H .	x	x	x	. V3
3 phase voltages			2	M4H .	x	x	x	. V0
3 line voltages 3 phase voltages			3	M4H .	x	x	x	. V1
Ammeter selector switch A 1-pole, 3 current transformer			4	M4H .	x	x	x	. M31
Gang switch GR 2 circuits A and B 1-pole 0 - A - A+B			1	M4H .	x	x	x	. GR11
2 circuits A and B 1-pole 0 - A - B - A+B			1	M4H .	x	x	x	. GR12
3 circuits A, B and C 1-pole			2	M4H .	x	x	x	. GR14
Multi step switch without 0 ST 3 steps, 1-pole			2	M4H .	x	x	x	. ST31
3 steps, 2-pole			3	M4H .	x	x	x	. ST32
3 steps, 3-pole			5	M4H .	x	x	x	. ST33

Ordering example: Multi step switch without 0, 3 steps, 3-pole, panel mounting: **M4H E ST33**

Mini-Cam Switches M4H

Switch programs


Description	Wiring diagram	AC21 500V 10A AC15 230V 2,5A AC3 4x400V 2,2kW	escutch. 30 x 30	numb. of cells	Type	Design .E. ↓	.Z. ↓	.ZO. ↓	Switch pro- gram
Multi step switch without 0 ST									
4 steps, 1-pole				2	M4H .	x	x	x	. ST41
4 steps, 2-pole				4	M4H .	x	x	x	. ST42
4 steps, 3-pole				6	M4H .	x	x	x	. ST43
5 steps, 1-pole				3	M4H .	x	x	x	. ST51
5 steps, 2-pole				5	M4H .	x	x	x	. ST52
6 steps, 1-pole				3	M4H .	x	x	x	. ST61
6 steps, 2-pole				6	M4H .	x	x	x	. ST62
Multi step switch with 0 ST0.									
2 steps, 1-pole				1	M4H .	x	x	x	. ST021
2 steps, 2-pole				2	M4H .	x	x	x	. ST022
2 steps, 3-pole				3	M4H .	x	x	x	. ST023
3 steps, 1-pole				2	M4H .	x	x	x	. ST031
3 steps, 2-pole				3	M4H .	x	x	x	. ST032
3 steps, 3-pole				5	M4H .	x	x	x	. ST033
4 steps, 1-pole				2	M4H .	x	x	x	. ST041
4 steps, 2-pole				4	M4H .	x	x	x	. ST042
4 steps, 3-pole				6	M4H .	x	x	x	. ST043
5 steps, 1-pole				3	M4H .	x	x	x	. ST051
5 steps, 2-pole				5	M4H .	x	x	x	. ST052
6 steps, 1-pole				4	M4H .	x	x	x	. ST061
7 steps, 1-pole				4	M4H .	x	x	x	. ST071
8 steps, 1-pole				5	M4H .	x	x	x	. ST081
9 steps, 1-pole				5	M4H .	x	x	x	. ST091
10 steps, 1-pole				6	M4H .	x	x	x	. ST0101

Ordering example: Multi step switch with 0, 10 steps, 1-pole, Central fixing without escutcheon plate: **M4H ZO ST0101**

Load Switches for resistive or slightly inductive loads or switching without load

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design .E. .V. ↓ ↓	Switch pro- gram	Escutcheon plate
On-Off-switches A							
1-pole		60°	2 88 □ 125A 1 180A 1 132 □ 400A 3 600A 2 800A 3 1200A	L100 . L160 . L400 . L600 . L800 . L1200 .	x x x x x x x x x x x x	. A1 . A1 . A1 . A1 . A1 . A1	
2-pole		60°	2 88 □ 125A 2 180A 2 132 □ 400A 3 600A 4 800A 6 1200A	L100 . L160 . L400 . L600 . L800 . L1200 .	x x x x x x x x x x x x	. A2 . A2 . A2 . A2 . A2 . A2	
3-pole		60°	4 88 □ 125A 3 180A 3 132 □ 400A 6 600A 6 800A 9 1200A	L100 . L160 . L400 . L600 . L800 . L1200 .	x x x x x x x x x x x x	. A3 . A3 . A3 . A3 . A3 . A3	
4-pole 4. pole early make		60°	4 88 □ 125A 4 180A 4 132 □ 400A 6 600A 8 800A 12 1200A	L100 . L160 . L400 . L600 . L800 . L1200 .	x x x x x x x x x x x x	. A4 . A4 . A4 . A4 . A4 . A4	
6-pole		60°	6 88 □ 125A 6 180A 6 132 □ 400A 9 600A 12 800A 18 1200A	L100 . L160 . L400 . L600 . L800 . L1200 .	x x x x x x x x x x x x	. A6 . A6 . A6 . A6 . A6 . A6	

For switches with the design **V.**, it is necessary to state the installation depth - that is, the distance between mounting level of the switch and the inside edge of the door (dimension T).



Further informations	page
Technical Data	261
Dimensions	266

Load Switches for resistive or slightly inductive loads or switching without load

Description	Wiring diagram	Switching angle	Number of cells ↓ Size ↓ AC21	Type	Design .E. .V. ↓ ↓	Switch pro- gram	Escutcheon plate
Changeover switches U							
1-pole		60°	2 88 □ 125A	L100 .	x x	. U1	
			2 180A	L160 .	x x	. U1	
			2 132□ 400A	L400 .	x x	. U1	
			3 600A	L600 .	x x	. U1	
			4 800A	L800 .	x x	. U1	
6 1200A	L1200 .	x x	. U1				
2-pole		60°	4 88 □ 125A	L100 .	x x	. U2	
			4 180A	L160 .	x x	. U2	
			4 132□ 400A	L400 .	x x	. U2	
			6 600A	L600 .	x x	. U2	
			8 800A	L800 .	x x	. U2	
12 1200A	L1200 .	x x	. U2				
3-pole		60°	6 88 □ 125A	L100 .	x x	. U3	
			6 180A	L160 .	x x	. U3	
			6 132□ 400A	L400 .	x x	. U3	
			9 600A	L600 .	x x	. U3	
			12 800A	L800 .	x x	. U3	
18 1200A	L1200 .	x x	. U3				
4-pole 4. pole early make		60°	8 88 □ 125A	L100 .	x x	. U4	
			8 180A	L160 .	x x	. U4	
			8 132□ 400A	L400 .	x x	. U4	
			12 600A	L600 .	x x	. U4	
			16 800A	L800 .	x x	. U4	
24 1200A	L1200 .	x x	. U4				
Changeover switches without off W							
1-pole		60°	2 88 □ 125A	L100 .	x x	. W1	
			2 180A	L160 .	x x	. W1	
			2 132□ 400A	L400 .	x x	. W1	
			3 600A	L600 .	x x	. W1	
			4 800A	L800 .	x x	. W1	
6 1200A	L1200 .	x x	. W1				
2-pole		60°	4 88 □ 125A	L100 .	x x	. W2	
			4 180A	L160 .	x x	. W2	
			4 132□ 400A	L400 .	x x	. W2	
			6 600A	L600 .	x x	. W2	
			8 800A	L800 .	x x	. W2	
12 1200A	L1200 .	x x	. W2				
3-pole		60°	6 88 □ 125A	L100 .	x x	. W3	
			6 180A	L160 .	x x	. W3	
			6 132□ 400A	L400 .	x x	. W3	
			9 600A	L600 .	x x	. W3	
			12 800A	L800 .	x x	. W3	
18 1200A	L1200 .	x x	. W3				
4-pole 4. pole early make		60°	8 88 □ 125A	L100 .	x x	. W4	
			8 180A	L160 .	x x	. W4	
			8 132□ 400A	L400 .	x x	. W4	
			12 600A	L600 .	x x	. W4	
			16 800A	L800 .	x x	. W4	
24 1200A	L1200 .	x x	. W4				


Ordering example: AC1 1200A panel mounting, changeover switch without off 4-pole L1200 E W4

Operating Knobs and Handles

Types of handles

In the standard version, the switches are supplied with a black twist knob or instrument knob (M10H - N33F), except for design SMA, which has a grey toggle knob. Switches of size L, which consist of 2 or 3 switch columns, come with a black hand wheel. If required, the switch can be supplied with other knobs, which can later easily be exchanged. All operating knobs have an insert, which sets the position of the knob in relation to the switch shaft. This insert can be mounted in 8 different positions (at intervals of 45°), causing the angle of each individual switch setting to be rotated by 45°.

In the standard version, the switch terminals are positioned left and right (except M10H). When the knob insert is turned by 90°, the lay-out of the terminals changes to top and bottom.

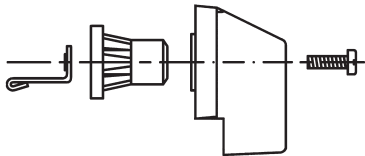

All operating knobs can be moved on the hexagonal shaft, to permit adaptation to different sheet thicknesses, etc.

Type	M10 M10H M20	N20 N33F	N40 N61 N80 L100 L160	N100 N200 L400 L600 L800 L1200
Knob movement mm	5	5	7	9
Hexagonal shaft dimension mm	5	7	9	12


Ordering example: Cam switch N61 V U3 with Instrument knob red
Order type: **N61 V U3 +G3**
Dimensions see page 267

Knobs and handles Description	Colour	Ordering Code	M10 M10H M20	N20 N33F	N40 N61 N80 L100 L160	N100 N200 L400 L600 L800 L1200
 Instrument knob Standard for M10 to N200	grey black red white	+G1 +G2 +G3 +G5	X X X X	X X X X	X	X
 Toggle knob	grey black red white blue	+K1 +K2 +K3 +K5 +K6	X X X X X	X X X X		
 Hand wheel	black	+HR				X


Escutcheon Plates

TELUX-Cam Switches in designs E, V, P, PF, SM, UP, Z and KE are supplied with a square escutcheon plate consisting of a black frame and plexi insert plate. The markings are printed in black on the back of the insert plate. To protect the markings so that they remain easy to read, the back of the insert plate is lined with silver foil. In addition, rectangular plates can be provided for all switch sizes, which can be fitted on all switches after mounting.

Square plate



Rectangular plate
(with square plate)



TELUX-Cam Switches in design SMA, for distribution boards with 45mm inside edge of installation cover, is supplied with a grey cover and black markings.



Special engraved markings on escutcheon plates are limited by the available space. In the case of relatively large production runs or frequent use of the text, we recommend ordering of a printing block. This will be invoiced at cost price, and the engraving will not be charged for. This investment generally pays with batches from 50 pieces upwards.

The "escutcheon plate" column of the selection and ordering tables for switch programs indicates the standard plate and, in some cases, an additional plate that is often used for the programs in question. If such a plate, listed in the selection table, is desired, the appropriate code number should be stated when ordering a switch and switch program.


Should only **plates** or **parts** of the latter be ordered, the order type is assembled as shown by the following example.

Code letter of switch sizes

M10, M10H, M20	A
N20, N33F	E
N40, N61, N80, L100, L160	H
N100, N200, L400, L600, L800, L1200	L

Ordering example: Escutcheon plate silver, complete, for cam switch M10, marked with MAN OFF AUTO, angle of rotation 60°

Order type:

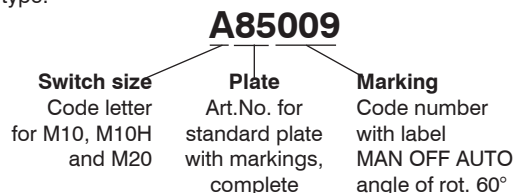

However, if a **switch** with non-standard lettering is required, only three-digit code number for the marking need be added to the order type (see next page).

Dimensions see page 267

Description	Order type Switch size Code letter	Plate Art.No.	Marking Code number
Escutcheon plate for designs E, V, P, Z, SM, KE and UP Escutcheon frame black, plexi insert plate silver, markings black			
Plexi insert plate silver	A E H L	.85...	... (see pp. 244-248)
Plexi insert plate yellow	A E H L	.80...	... (see pp. 244-248)
Escutcheon frame black	A E H L	.8203	-
Rectangular escutcheon plate for designs E, V, Z and SM Escutcheon frame black, plexi insert plate silver, markings black			
Plexi insert plate silver	A E H L	.885..	... (see pp. 244-248)
Plexi insert plate yellow	A E H L	.895..	... (see pp. 244-248)
Escutcheon frame black	A E H L	.8503	-
Installation cover for design SMA grey cover, markings black	A - - -	.68...	... (see page 246)

Escutcheon Plates

Selected standard markings

The markings that are most commonly required are shown below, together with code letters for the switch size and the code number.

Ordering example: Switch type M10H E A3 with escutcheon plate "OFF ON" and additional rectangular escutcheon plate "PUMP"


Order type: **M10H E A3 +003 +516**

Code letter of switch sizes


M10, M10H, M20
N20, N33F
N40, N61, N80, L100, L160
N100, N200, L400, L600, L800, L1200

A
E
H
L


Blank escutcheon plates



Switching angle 30°

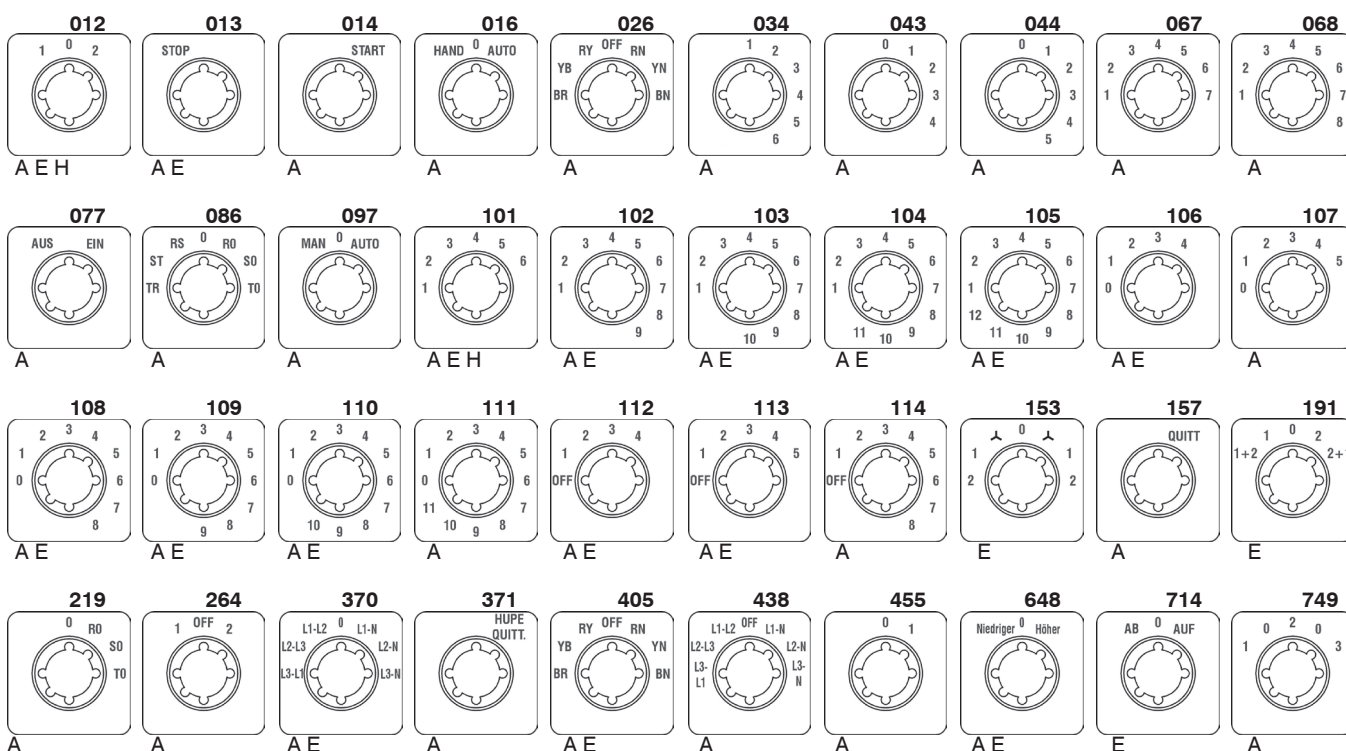


Switching angle 45°

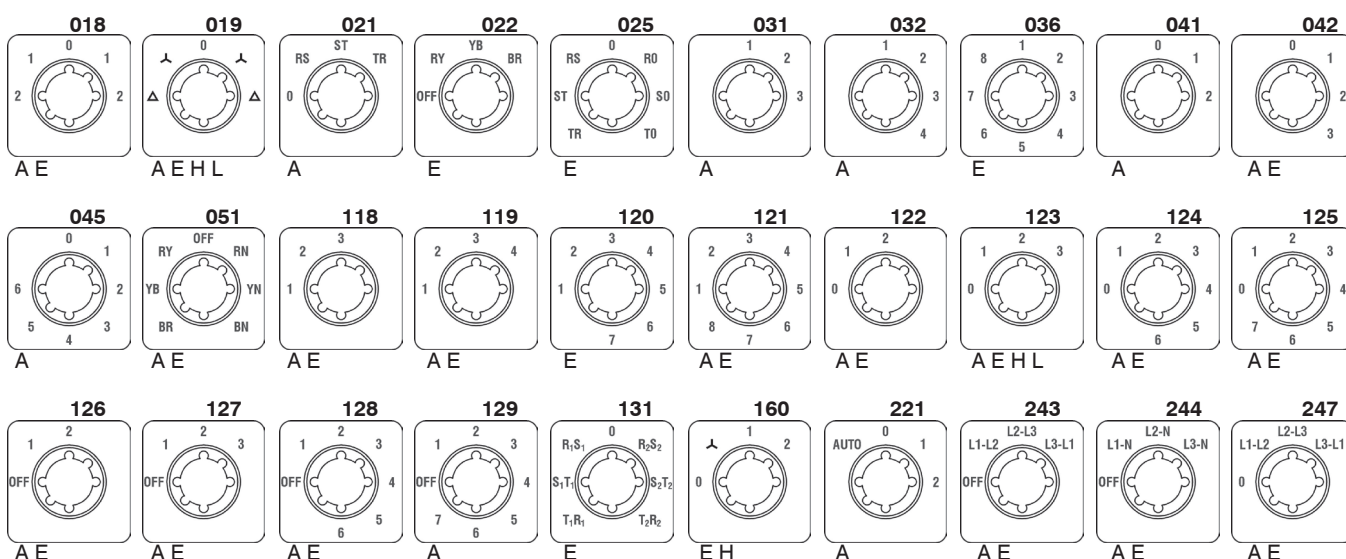


Escutcheon Plates

Switching angle 45°

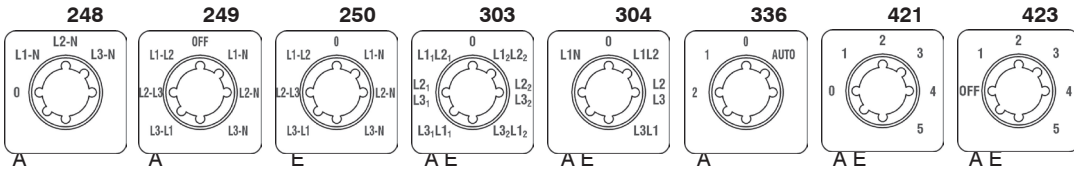


Switching angle 60°

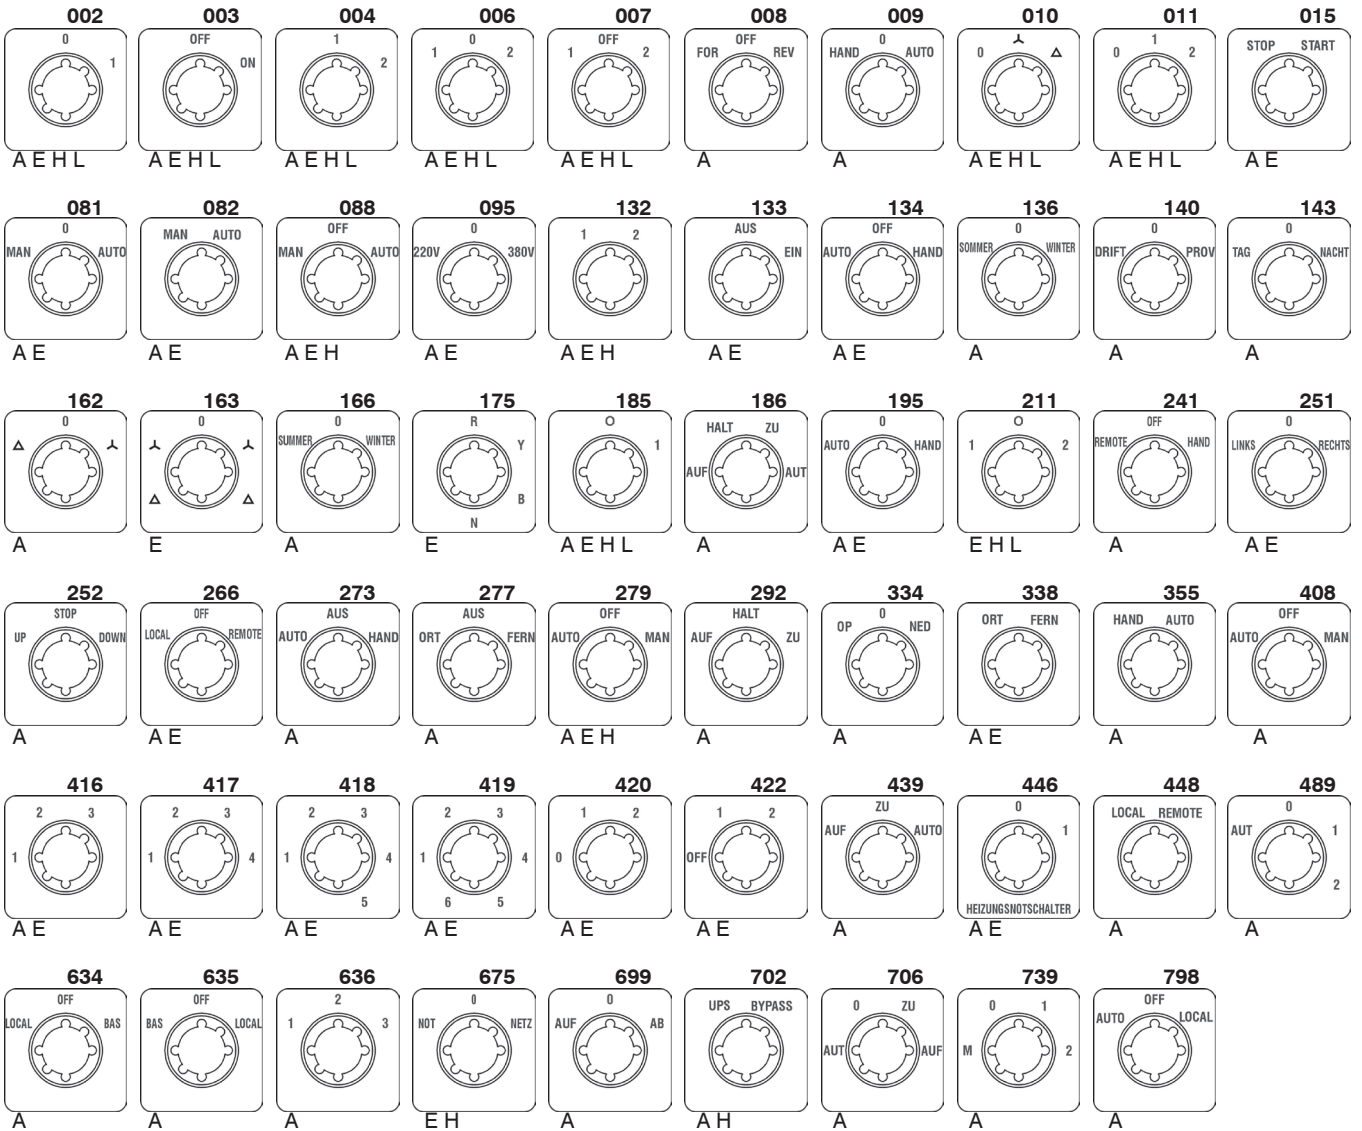


Escutcheon Plates


Switching angle 90°

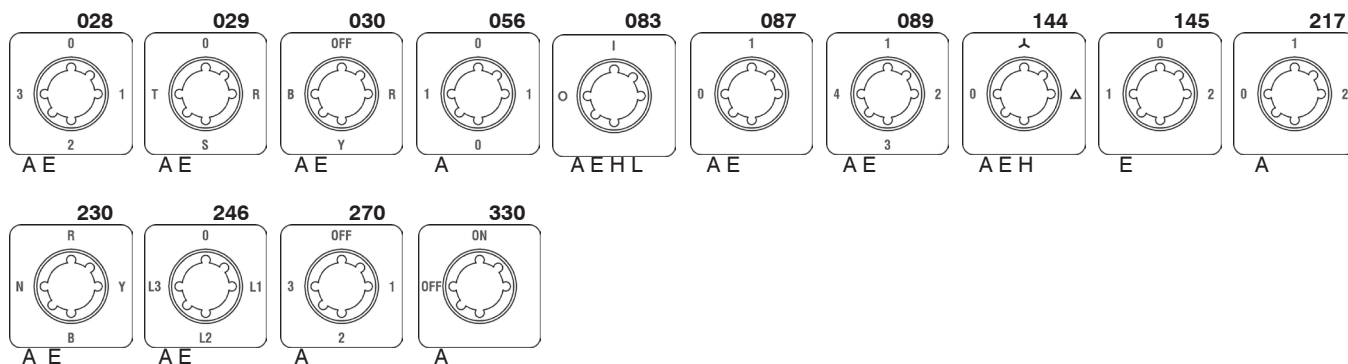


Miscellaneous

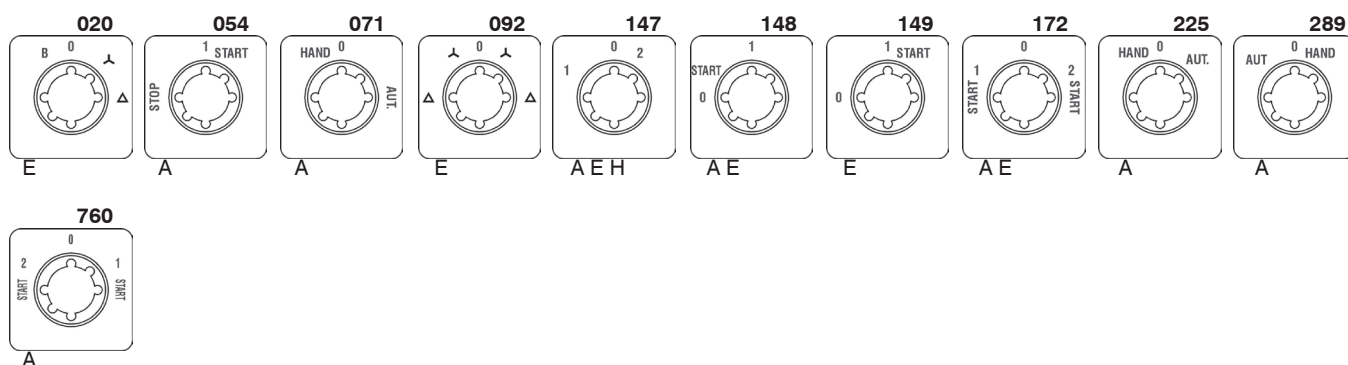

Rectangular additional escutcheon plates

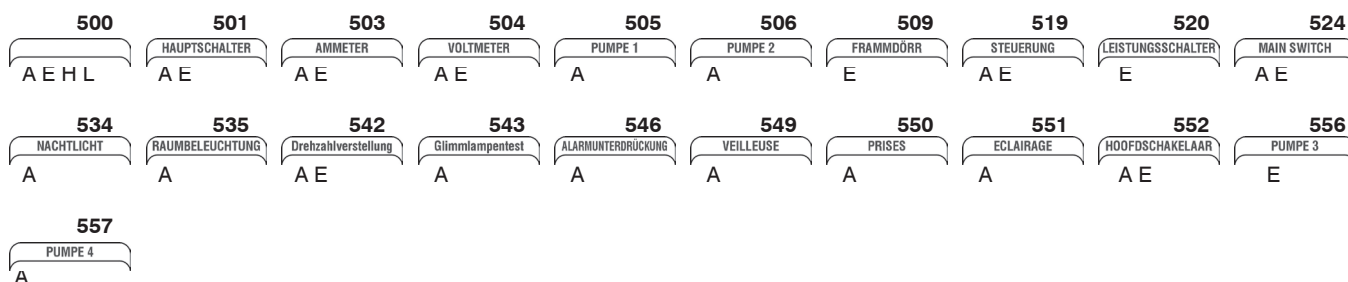

Covers for design SMA

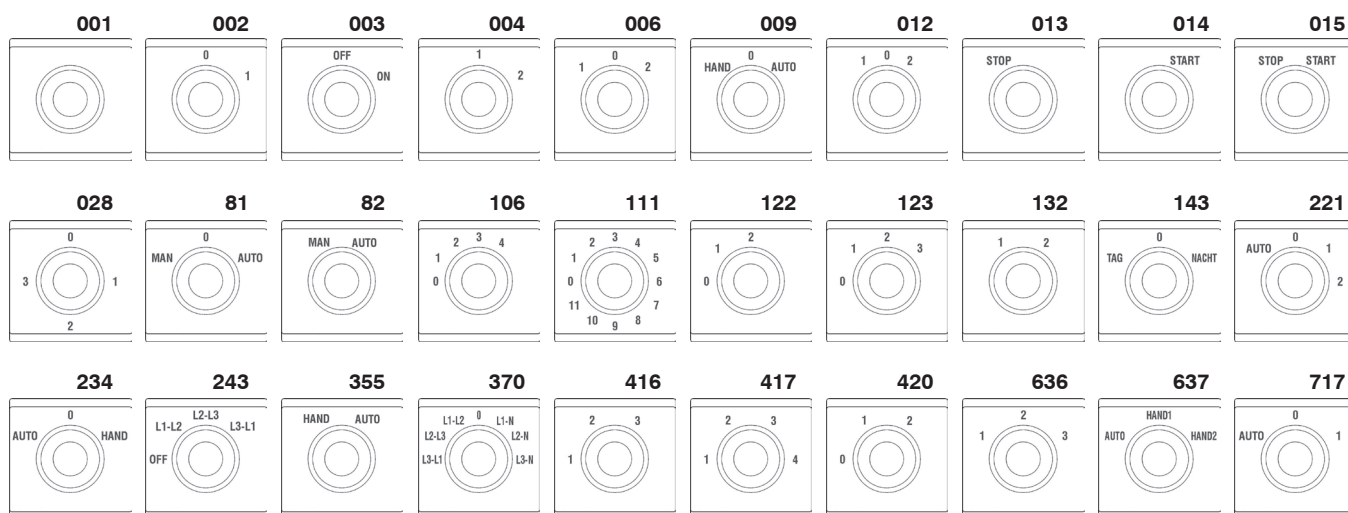

Switching angles

Arrangement of switch settings

All feasible arrangements of switch settings are shown, and defined by position numbers, in the following tables. Not only the switching angles, but also switches with latched or momentary settings, or combinations of the two, are distinguished from one another.

Knowledge of the following variations is particularly important when planning special switches. It is necessary to state the position number when ordering special switches, as the cheapest version will otherwise be selected.

All the switches types listed can be supplied with switching angles other than those indicated, provided that they are permitted by the switch program (additional charge).

Switching angle 30°

PN01	PN02	PN03	PN04	PN05	PN06	PN07	PN08	PN09	PN10
PN11	PN12	PN13	PN14	PN15	PN16	PN17	PN18	PN19	PN20
PN21	PN22	PN23	PN24	PN25	PN26	PN27	PN28		

Switching angle 45°

PN30	PN31	PN32	PN33	PN34	PN35	PN36	PN37	PN38	PN39
PN40	PN41	PN42	PN43	PN44	PN45	PN46	PN47	PN48	PN49

Switching angle 60°

PN50	PN51	PN52	PN53	PN54	PN55	PN56	PN57	PN58	PN59
PN76	PN77	PN78	PN79	PN150	PN151				

Switching angle 45/90°

PN70	PN71	PN72	PN73

+) Not available for switch types M10, M10H and M20

Switching angles

Switching angle 90°

PN60	PN61	PN62	PN63	PN64	PN65	PN66	PN67	PN68	PN69


Momentary settings and special combinations

PN80	PN82	PN83	PN84	PN85	PN86	PN87	PN88	PN89	PN90
PN91	PN92	PN93	PN94	PN95	PN96	PN97	PN98	PN99	PN100
PN101	PN102	PN103	PN104	PN105	PN106	PN107	PN108	PN109	PN124
PN125	PN126	PN127	PN128	PN129	PN130	PN131			

Spring return over several settings


PN110	PN111	PN112	PN113	PN114	PN115	PN116	PN117	PN118	PN119
PN120	PN121	PN122	PN123						

+) Not available for switch types M10, M10H and M20

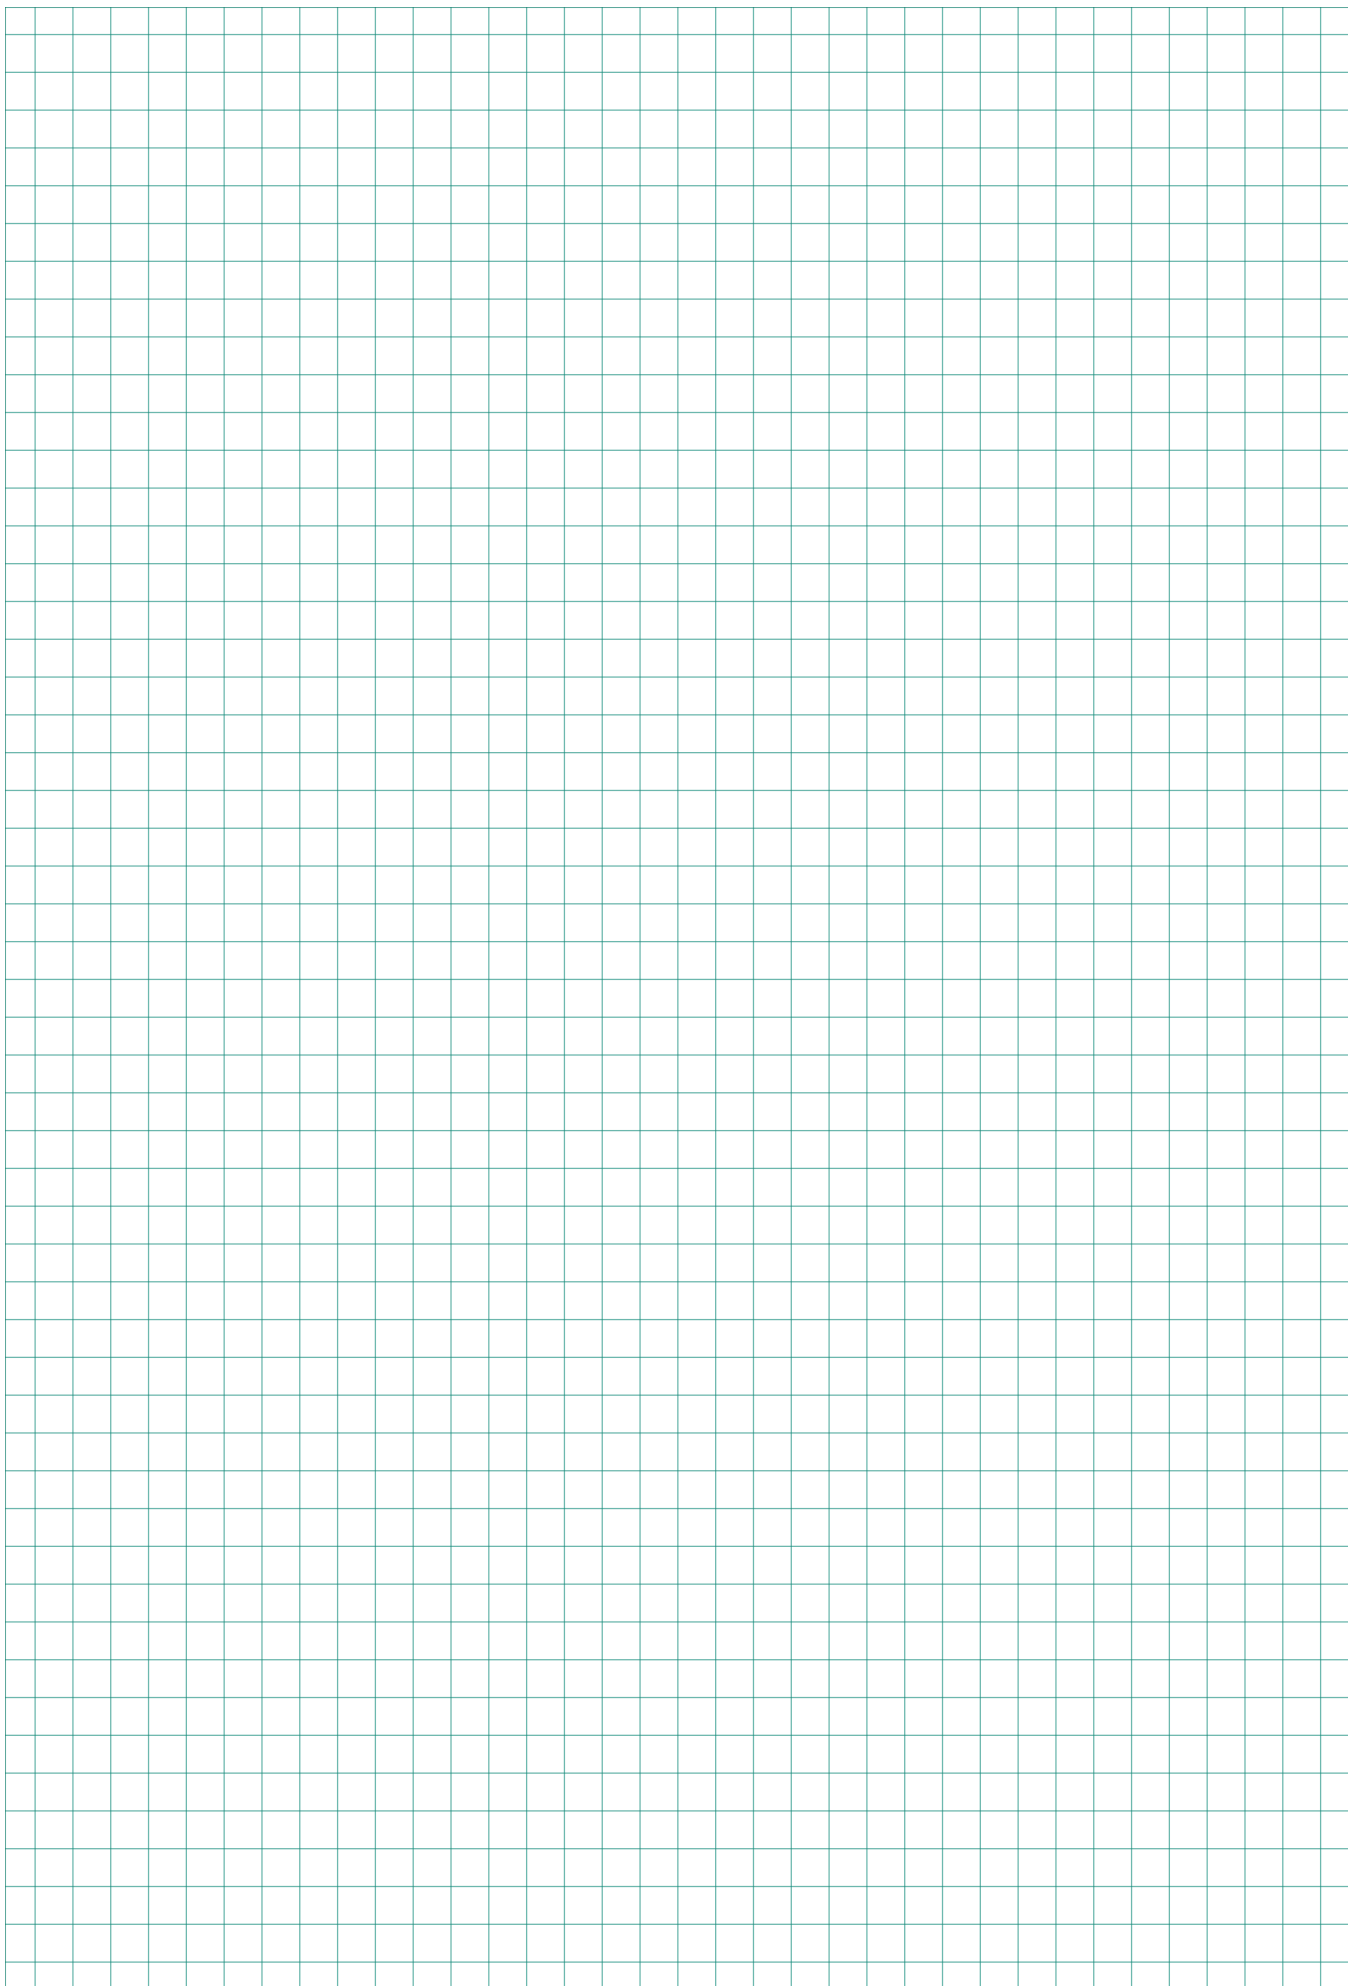

Door couplings

For switches with door couplings it is necessary to state the installation depth - that is, the distance between mounting level of the switch and the inside edge of the door (dimension T).



Door couplings are available for switches to be installed in switchgear cabinets or distribution boards with hinged doors. These permit the doors to be opened without removal of the operating knobs.

Ordering example: Cam switch N100 V A3 with lockable door coupling, moisture protected IP65, dimension T=580mm
Order type: **N100 V A3 + TK2FR/580**

Dimensions see page 269



	Ordering Code	Suitable for designs	Suitable for switch type
Door coupling Protection class from front: IP65 5-hole mounting	+TKE/...	V, SM	M10H, M20, N20, N33F
Door coupling locked Protection class from front: IP65 5-hole mounting Doors only open at a given switch setting: unless otherwise stated, the "OFF" setting.	+TK2E/...	V, SM	M10H, M20, N20, N33F
Door coupling locked Protection class from front: IP65 Central fixing Ø22mm Doors only open at a given switch setting: unless otherwise stated, the "OFF" setting.	+TK2Z/...	V, SM	M10H, M20, N20, N33F
Door coupling Protection class from front: IP40 5-hole mounting	+TK/...	V	N40, N61, N80, N100, N200 L100, L160, L400, L600 L800
Door coupling Protection class from front: IP54 5-hole mounting	+TKFR/...	V	N40, N60, N80, N100, N200 L100, L160, L400, L600 L800
Door coupling locked Protection class from front: IP40 5-hole mounting Doors only open at a given switch setting: unless otherwise stated, the "OFF" setting.	+TK2/...	V	N40, N61, N80, N100, N200 L100, L160, L400, L600 L800
Door coupling locked Protection class from front: IP54 5-hole mounting Doors only open at a given switch setting: unless otherwise stated, the "OFF" setting.	+TK2FR/...	V	N40, N61, N80, N100, N200 L100, L160, L400, L600 L800

Lockable switches

Key-operated and lockable switches are supplied with two keys. Additional keys or other types of lock on request.

Ordering example: Cam switch N20 E A3 key operated
Order type: **N20 E A3 +SA**

Dimensions see page 270 and 271



Key operated switch


Lock Willenhal FT101, key removable in all lockable settings.

Other types of lock on request.

Maximum number of cells

M10 - N33F: 6 N40, N61: 2

Key operated switch, key removable only in some settings. Add letter of setting where key is removable to ordering code according to the scetch below.



Ordering Code

+SA

+SA/.

Suitable for designs

E, V, SM
E, V
P
SMA
UP

Suitable for switch type

M10H, M20, N20, N33F
N40, N61
M10, N20, N33F, N40, N60
M10H, M20
M10



Key operated switch IP65

Lock Ronis R455, key removable in all lockable settings.

Key operated switch, key removable only in some settings. Add letter of setting where key is removable to ordering code according to the scetch above.

+SA

+SA/.


Z, ZO

M10H, M20

Key operated switch

Lock KABA8, key removable in all lockable settings.

Key operated switch, key removable only in some settings. Add letter of setting where key is removable to ordering code according to the scetch below.



+SAK

+SAK/.

E

M10H, M20



Key operated switch with barrel for special security functions

Lock EVVA EHZ50/5 Nickel matt
Special version which prevents not only switching but also access to the cable ends and removal of the switch when locked.

Maximum number of cells

Design E, P: 4

Design UP: 3

+SASI

E
P
UP

M10H, M20
M10, M20
M10, M20

Key operated switch for special security functions without lock

for use of lock EVVA EHZ50/5 or with same dimensions

Maximum number of cells

Design E, P: 4

Design UP: 3

+SASO

E
P
UP

M10H, M20
M10, M20
M10, M20

Padlock devices

A range of padlock devices designed to prevent from being turned on by unauthorized personnel, or during maintenance and repair work, can be supplied.

Dimensions see page 272

Ordering example: Cam switch N33F E A3 with interlocking device SV3 suitable for 3 padlocks

Order type: **N33F E A3 +SV3**




	Padlock device Description	Ordering Code	Suitable for designs	Suitable for switch type
	Padlock device Standard version black , otherwise red , for 1 or 2 padlocks. Shackles up to Ø6mm Standard version black 64 x 64mm, otherwise red 64 x 64mm	+SV1 +SV1R	E, V, SM P, PF	M10H, M20 M10
		+SV164 +SV164R	E, V P, PF	M10H, N20, N33F N20, N33F
	Padlock device Standard version black , otherwise yellow insert plate and red twist knob for 1-3 padlocks. Shackles up to Ø8,5mm Prior to insertion of the first padlock, a red locking ledge must be depressed. This indicates that the switch is locked.	+SV3 +SV3R E, V	E, V E, V L800, L1200 PF	N40, N61, N80, L100, L160 N100, N200, L400, L600, N40, N61, N80, N100, N200
	Padlock device Standard base grey , locking ring black , or with yellow base and red locking ring. Locking ring for 1-3 padlocks. Shackles up to Ø6mm Standard base grey , locking ring black 88 x 88mm, or with yellow base and red locking ring 88 x 88mm	+SV4 +SV4R	E, V SM P, PF	M10H, N20, N33F M10H, N20, N33F N20, N33F
		+SV488 +SV488R	E, V E, V P, PF	N20, N33F N40, N61, N80 N40, N61, N80
	Key lock device With a cylinder lock in the lock attach- ment, one or more switch settings are lockable (state when ordering). The operating knob can only be turned when unlocked. The key can be withdrawn wheter locked or unlocked. Special versions, in which the key cannot be withdrawn when in some (unlockable) settings can be supplied.	+SZ	E, V SM	alle M10H, M20, N20, N33F
	Key lock device Special version for on-off switches, in which it is possible to switch off without a key.	+SZ2	E, V SM	alle M10H, M20, N20, N33F

Switch interlocks

A wide range of locks and interlocking devices, designed to prevent accidental or hazardous switching, can be supplied.

Ordering example: Cam switch N20 E A3 with push button switch lock
Order type: **N20 E A3 + DV**

Dimensions see page 273



Description	Ordering Code	Suitable for designs	Suitable for switch type
Push button interlock The switch can only be actuated when the pushbutton is simultaneously depressed (two-handed operation).	+DV	E, V	all
Interlock with electrical contact The switch can only be actuated when the pushbutton, which also operates a make and break contact, is actuated (for external interlocking devices or safety measures).	+ET	E, V	all
Magnetic interlock The switch can only be actuated when an electromagnet is simultaneously excited. When ordering, voltage and percentage duty cycle of the magnet coil should be stated.	+MV	E	N20, N33F, N40, N61, N80 N100, N200
Circular switch Switches that have the maximum number of settings for a given switching angle can be made without a stop position, permitting direct switching from the last to the first setting.	+RU	all	all
Backswitch 1 Special version of the circular switch, in which the switch can only be turned in one direction.	+RS1	all	all
Backswitch 2 Special version of the circular switch, in which, in given positions, the switch can only be operated in one direction.	+RS2	all	all

Couplings and stop mechanism

A range of couplings and stop mechanisms for trouble-free operation of switches with a very large number of contacts can be supplied.

Dimension see page 274

Ordering example: Cam switch N200 V ST0113 spread over three columns interconnected by gears

Order type: **N200 V ST0113 +ZK3**




Description	Ordering Code	Suitable for designs	Suitable for switch type
Coupling of two columns For simultaneous drive of two switch columns (with very large number of switch cells or limited installation depth).	+ZK2	E, V	all
Coupling of three columns For simultaneous drive of three switch columns.	+ZK3	E, V	all
Coupling of different switch sizes For attachment of control switches (auxiliary contacts) to larger switches. M10H, M20 in sizes E and H. N20 to N80 in size L.	+ZWK	E L800, L1200	N40, N61, N80, L100, L160 N100, N200, L400, L600,
Delayed action switch Using a delayed action coupling, two switch shafts - a main shaft and delayed shaft - can be coupled, such that the delayed shaft is rotated together with the main shaft once a given angle of rotation is reached (e.g. for off-load return of switches used with pole-changing motors).	+SK	E, V G, GF	N20, N33F, N40, N61, N80 N20
Second stop mechanism With switches in which a large number of contacts is simultaneously operated, use of a second stop mechanism is sometimes necessary, in order to ensure precise switching to the next setting.	+RW2	all	all
Metal stop mechanism for extreme mechanical stress on the stop mechanism, e.g. where many contacts are switched at the same time. Not for PN110 to PN123	+MRW E, V	E, V E, V L800, L1200 G, GF	N40, N61, N80, L100, L160 N100, N200, L400, L600, N20

Special versions

A number of special versions can be supplied for adaptation of switches to various conditions of use.

Ordering example: Cam switch M10H E U3 with large front plate
Order type: **M10H E U3 +GFP**



Description	Ordering Code	Suitable for designs	Suitable for switch type
Switch shaft sealing For increased front protection class on IP54.	+WD	E, V SM	N20 to L1200 N20, N33F
Front plate/switch shaft sealing For increased front protection class on IP65. In this version, a wider hole is required for the shaft. Dimensions see page 272	+FPWD	E, V, SM	N20, N33F
Extended switch shaft For adaptation of switch designs V and SM to the enclosure depth. State additional shaft length when ordering.	+VW/...	E, V SM	all M10H, M20, N20, N33F
Large front plate Switch with front plate and operating knob of the next size (for replacement of older, larger switches or aesthetic reasons).	+GFP	E, V, SM	M10H, N20, N33F
Switch with pilot lamp lamp red, 230V lamp red, 400V lamp green, 230V lamp green, 400V	+SLR/230 +SLR/400 +SLG/230 +SLG/400	E P UP	all M10, N20, N33F, N40, N61 M10, N20
Gold plated contacts For electronic circuits with low voltages and currents.	+GK	all	M10H, M20, N20, N33F
Tropical proof type	+TR	all	all
Neon safety switch For all-pole switching off of neon advertisement circuits by the Fire Brigade. Dimensions see page 274	+FEU	E	N20, N33F

Accessories



A number of special versions can be supplied for adaptation of switches to various conditions of use.

Dimensions see page 273

Ordering example: Cam switch N20 E A3 with terminal cover plate

Order type: **N20 E A3 + KLAD**

Description	Ordering Code	Suitable for designs	Suitable for switch type
Terminal cover plate Prevents accidental touching of live terminals (requirement for main switches according to VDE 0113) only for 2 cells for all cells	+KLAD +KLAD	E, V E, V	N20, N40, N61, N80 N100, N200 N33F
Moisture proofing caps Protection class from rear: IP54. For protection of the switch from dust and moisture (e.g. when installed in machine pedestals). For switch mounting from the front and rear. Conical cable entry glands. Maximum number of cells: M10H 7 N20 5 N40 4 N61 2	+FR	E	M10H, N20, N40, N61
Angled terminals For easy connection of inaccessible switches. Unless otherwise stated, all terminals specified with markings are equipped in this manner. A distinction is drawn between left and right angled terminals. Seen from the switch end, the left terminals are located above left and below right; conversely, right terminals are above right and below left.	+WK	E, V N100	M20, N20, N40, N61, N80,
Fast-on connectors For 6,3 x 0,8mm plugs.	+AMPZ	E, V	M20, N20
Earth terminals 2 terminals, connected with one another, insulated from switch column: for earth conductors.	+PE	E, V, P, PF PF G, GF	all M10, N20, N33F, N40, N61 N80, N100, N200 N20
Additional rectangular escutcheon plate 1 line Dimensions see page 267	SRE	E, Z, V, SM	all
Big additional rectangular escutcheon plate for 2 lines Dimensions see page 267	SRE2	E, V	M10H, M20, N20, N33F
Spare key for key operated switches with Lock Willenhal FT101	J7101	E, V, P SMA	M10H, M20, N20, N33F, N40 M10H, M20
Spare key for key operated switches with Lock Ronis R455	B4-R455	Z, ZO	M10H, M20
Wrench for switches with central fixing	J7049	Z, ZO	M10H, M20



Switching Programs according to Customer Requirements

As a result of their modular construction, TELUX cam switches are particularly suitable for manufacturing of special variants. According to its function, each pair of contacts in the switch is adapted to the desired program by appropriate design of the cam plate. In the case of switches with an overall switching angle of more than 180°, provision must be made for a cam plate in each switching cell, controlling two opposite, independent contact pairs with matching programs (does not apply to M10, M10H, M20 and N20).

Depending on the desired contact program for the special switch, it may often be impossible to make full use of all switching cells, that is, to include the maximum possible number of contacts. In determining the number of cells or switch length, one-contact cells will sometimes be resorted to.

Switch sizes M10, M10H, M20 and N20 are exceptions to this rule. Here, two cam plates can be built into each cell, so that both contacts are independently controlled (full use of the cells with special programs).

In all special switches with overall switching angles of less than 180°, the number of cells required is calculated by having the total number of contacts in the switching program.

When planning for switches with special programs, choice of the optimum switching angle thus plays an important part. The listing of all the options for lay-out of switch settings, on pages 247 and 248, should be an aid to planning (position numbers PN).

If special markings are to be engraved on the escutcheon plates, it is vital to take account of the available space. It is advisable to use abbreviations.

We provide forms (see page 275) on request, free of charge, to give a clear overview when special programs are being defined. Switch size, design, type of operating knob and desired switching angle, as well as the function of the contacts, are entered on these forms. Provision has also been made in them for entry of details as to escutcheon plate engravings or other special requirements.

Ordering Example

Order sheet D399E		Cam switches with special switching program		Customer:																																																																												
Switch Type M4H M10 M10H ☒ M20 N20 N33F L100 N40 L160 N61 L400 N80 L600 N100 L800 N200 L1200		Benedict GmbH A-1220 Vienna, Lieblgasse 7 Phone: 251 51-0 Fax: 251 51-88																																																																														
Design Panel mounting E Central fixing Z ☒ ZO Base mounting V Snap-on mount SM SMA Plastic enclosure P IP65 PF Cast enclosure G IP65 GF		Explanations: Contact closed over several positions ☒ Spring return from pos. ☒		Handles Twist knob R (standard) Instrument knob G (standard M4H) ☒ Toggle knob K (standard SMA) Pointer knob Z Ball type handle B Lever handle H Hand wheel HR																																																																												
		Handle colour black (standard) ☒ red grey (standard SMA) white cream-coloured yellow blue																																																																														
Optional extras Circular switch Key removeable				<table border="1"> <tr> <td>Connect.</td> <td>1</td><td>3</td><td>5</td><td>7</td><td>9</td><td>11</td><td>13</td><td>15</td><td>17</td><td>19</td><td>21</td><td>23</td><td>25</td><td>27</td><td>29</td><td>31</td><td>33</td><td>35</td><td>37</td><td>39</td><td>41</td><td>43</td><td>45</td><td>47</td> </tr> <tr> <td>Terminals</td> <td>2</td><td>4</td><td>6</td><td>8</td><td>10</td><td>12</td><td>14</td><td>16</td><td>18</td><td>20</td><td>22</td><td>24</td><td>26</td><td>28</td><td>30</td><td>32</td><td>34</td><td>36</td><td>38</td><td>40</td><td>42</td><td>44</td><td>46</td><td>48</td> </tr> <tr> <td>Connect.</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table>		Connect.	1	3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39	41	43	45	47	Terminals	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	Connect.																								
Connect.	1	3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39	41	43	45	47																																																								
Terminals	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48																																																								
Connect.																																																																																
		<table border="1"> <thead> <tr> <th>Marking for switch position</th> <th>Degree</th> </tr> </thead> <tbody> <tr> <td>OFF</td> <td>270</td> </tr> <tr> <td>1</td> <td>0</td> </tr> <tr> <td></td> <td>45</td> </tr> <tr> <td>2</td> <td>90</td> </tr> <tr> <td>START</td> <td>120</td> </tr> </tbody> </table>		Marking for switch position	Degree	OFF	270	1	0		45	2	90	START	120																																																																	
Marking for switch position	Degree																																																																															
OFF	270																																																																															
1	0																																																																															
	45																																																																															
2	90																																																																															
START	120																																																																															

Order sheet A4 see page 275

Utilization Categories

For easier choice of devices and in order to make the comparison of different products simpler are utilization categories for cam switches according to IEC 947-3, VDE 0660 Part 107 and

auxiliary contacts according to IEC 947-5-1 and VDE 0660 Part 200 determined. The Table below offers diverse utilization categories and assorted test conditions.

Kind of current	Category		Typical applications	Rated operational current	Test conditions for the number of on-load operating cycles (normal service)									Test conditions for making and breaking capacities (operation in fault case)								
	fre-quent operation	infre-quent operation			Make			Break			Make			Break								
					I/I _e	U/U _e	cosφ	I _c /I _e	U _r /U _e	cosφ	I/I _e	U/U _e	cosφ	I _c /I _e	U _r /U _e	cosφ						
Alternating Current	AC20A	AC20B	No-load conditions	all values	-	-	-	-	-	-	-	-	-	-	-	-						
	AC21A	AC21B	Switching of resistive loads including moderate overloads	all values	1	1	0,95	1	1	0,95	1,5	1,05	0,95	1,5	1,05	0,95						
	AC22A	AC22B	Switching of mixed resistive and inductive loads including moderate overloads	all values	1	1	0,8	1	1	0,8	3	1,05	0,65	3	1,05	0,65						
	AC23A	AC23B	Switching of motor loads or other highly inductive loads	0<I _e ≤100A all values 100A<I _e	1	1	0,65	1	1	0,65	10	1,05	0,45 10	8	1,05	0,45 0,35						
	AC2		Slip-ring motors: Starting, plugging	all values	2,5	1	0,65	2,5	1	0,65	4	1,05	0,65	4	1,05	0,65						
	AC3		Squirrel-cage motors: Starting, switching off motors during running	0<I _e ≤100A all values 100A<I _e	I _e ≤17A 6 I _e >17A	0,65 1 0,35	I _e ≤17A 1 I _e >17A	0,65 0,17 0,35	10	1,05	0,45 0,35	8	1,05	0,45 0,35								
	AC4		Squirrel-cage motors: Starting, plugging, inching	0<I _e ≤100A all values 100A<I _e	I _e ≤17A 6 I _e >17A	0,65 1 0,35	I _e ≤17A 6 I _e >17A	0,65 0,35	12	1,05	0,45 0,35	10	1,05	0,45 0,35								
	AC15		Control of electromagnetic loads (> 72VA)	-	10	1	0,7	1	1	0,4	10	1,1	0,3	10	1,1	0,3						
					I/I _e	U/U _e	L/R ¹⁾	I _c /I _e	U _r /U _e	L/R ¹⁾	I/I _e	U/U _e	L/R ¹⁾	I _c /I _e	U _r /U _e	L/R ¹⁾						
Direct current	DC20A	DC20B	No-load conditions	all values	-	-	-	-	-	-	-	-	-	-	-	-						
	DC21A	DC21B	Switching of resistive loads including moderate overloads	all values	1	1	1	1	1	1	1,5	1,05	1	1,5	1,05	1						
	DC22A	DC22B	Switching of mixed resistive a. induct. loads incl. moderate overloads (shunt motors)	all values	1	1	2	1	1	2	4	1,05	2,5	4	1,05	2,5						
	DC23A	DC23B	Switching of highly inductive loads (e.g. series motors)	all values	1	1	7,5	1	1	7,5	4	1,05	15	4	1,05	15						
	DC3		Shunt-motors: Starting, plugging, inching	all values	2,5	1	2	2,5	1	2	4	1,05	2,5	4	1,05	2,5						
	DC5		Series-motors: Starting, plugging, inching	all values	2,5	1	7,5	2,5	1	7,5	4	1,05	15	4	1,05	15						

U_e Rated operational voltage, U Voltage before make, U_r Recovery voltage, I_e Rated operational current, I Current made, I_c Current broken

1) Time in milliseconds (ms)

Note:
By plugging, is understood stopping or reversing the motor rapidly by reversing motor primary connections while the motor is running.
By inching (jogging), is understood energizing a motor once or repeatedly for short periods to obtain small movements of the driven mechanism.

Technical Data

Data according to IEC 947-3, IEC 947-5-1, VDE 0660, EN 60947-3, EN 60947-5-1

Type		M10 P	M10H	M10HD	M20	N20	N33F	N40	N61	N80	N100	N200
Rated therm. current I_{th} open	A	20	20	10	32	32	50	63	90	115	150	250
Rated therm. current I_{th} encl.	A	20	20	10	32	32	50	63	90	115	150	250
Rated operational voltage U_e	V	440	690 ¹⁾	690 ¹⁾	690 ¹⁾	690 ¹⁾	690 ¹⁾	690 ¹⁾	690 ¹⁾	690 ¹⁾	690 ¹⁾	690 ¹⁾
Disconnection property ²⁾ acc. to VDE, IEC up to	V	440	440	440	440	440	440	690	440	440	690	690
Breaking capacity I_{eff}												
3 x 220-440V	A	160	160	-	220	220	260	380	520	740	900	1100
3 x 500V	A	-	100	-	160	160	200	290	380	560	680	850
3 x 660-690V	A	-	80	-	120	120	150	200	290	520	450	-
Utilization categ. AC21A, AC21B Switching of resistive loads including moderate overloads Rated operational current I_e												
	A	20	20	10	32	32	50	63	90	115	150	250
Utilization categ. AC23A, AC23B Switching of motor loads or other highly inductive loads Rated current I_e 400V												
	A	16	16	-	30	30	45	45	60	85	105	135
Power rating 220-240V	kW	4	4	-	7,5	7,5	11	15	22	30	40	40
3-phase 3-pole 380-440V	kW	7,5	7,5	-	15	15	22	22	30	45	55	70
500V	kW	-	7,5	-	15	15	22	22	30	45	55	70
660-690V	kW	-	7,5	-	15	15	22	18,5	30	45	45	-
Star-Delta-Switches for squirrel cage motors Power rating												
3-phase 3-pole 220-240V	kW	3,7	3,7	-	7,5	7,5	8	11	15	18,5	37	40
380-415V	kW	7,5	7,5	-	15	15	18,5	18,5	25	30	40	70
Utilization category AC3 Switching of three-phase motors Rated current I_e 400V												
	A	12	12	-	22	22	30	30	50	60	80	135
Power rating 220-240V	kW	3	3	-	5,5	5,5	7,5	7,5	15	18,5	37	40
3-phase 3-pole 380-440V	kW	5,5	5,5	-	11	11	15	15	25	30	40	70
500V	kW	-	5,5	-	11	11	15	15	25	30	40	70
660-690V	kW	-	5,5	-	11	11	15	15	25	30	40	-
Utilization category AC4 squirrel cage motors, inching Power rating 220-240V												
	kW	0,55	0,55	-	2,2	2,2	3,7	4	5,5	6	11	18,5
3-phase 3-pole 380-440V	kW	1,5	1,5	-	4	4	5,5	7,5	11	15	18,5	35
500V	kW	-	1,5	-	4	4	5,5	7,5	11	15	22	35
660-690V	kW	-	1,5	-	4	4	5,5	7,5	11	15	22	-
Utilization category AC15 Control of electromagnetic loads, contactors, Rated current I_e												
up to 240V	A	6	6	2,5	12	12	16	-	-	-	-	-
380 - 440V	A	4	4	1,5	6	6	7	-	-	-	-	-
2-pole in series 500V	A	-	5	-	8	8	10	-	-	-	-	-
Utilization categ. DC21A, DC21B Switching of resistive loads Time constant $L/R \leq 1ms$ Rated current I_e												
1-pole 30V	A	20	20	10	32	32	40	63	80	100	150	250
60V	A	4	4	-	6	6	20	30	30	30	-	-
110V	A	0,6	0,6	-	3	3	4	6	6	6	-	-
220V	A	0,5	0,5	-	0,8	0,8	0,8	1,3	1,3	1,3	2,5	2,5
440V	A	-	-	-	0,4	0,4	0,4	0,6	0,6	0,6	0,7	0,7
Utilization category DC3 - DC5 Switching of shunt motors and series motors Time constant $L/R \leq 15ms$ Rated current I_e												
1-pole 30V	A	8	8	-	13	13	16	25	32	40	60	100
60V	A	1	1	-	2,4	2,4	4	12	12	12	-	-
110V	A	0,3	0,3	-	0,5	0,5	1,6	2,4	2,4	2,4	-	-
Protection class of terminals ³⁾		IP00	IP20	IP20	IP00	IP00	IP20	IP00	IP00	IP00	IP00	IP00

1) suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry): $U_{imp} = 6kV$. Data for other conditions on request

2) valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3.

3) Protection degree of the terminals with connected insulated conductor. Additional protection with terminal cover (KLAD).

Technical Data

Data according to IEC 947-3, IEC 947-5-1, VDE 0660, EN 60947-3, EN 60947-5-1

Type		M10 P	M10H	M10HD	M20	N20	N33F	N40	N61	N80	N100	N200
Cable cross-sections												
solid	mm ²	1-2,5	1-2,5 ¹⁾	1,5-6	1,5-6	1,5-6	2,5-10	2,5-16 ¹⁾	6-25 ¹⁾	6-35	10-50 ¹⁾	50-150
flexible	mm ²	0,75-2,5	0,75-2,5 ¹⁾	1-4	1-4	1-4	1,5- 6	2,5-10 ¹⁾	6-25 ¹⁾	6-35	10-35 ¹⁾	35-120
flexible w. multicore cable end	mm ²	0,75-2,5	0,75-1,5	1-4	1-4	1-4	1,5- 6	2,5-6	6-16	6-35	10-25	-
Conductors to clamp per pole		2	2	2	2	2	2	2	1	1	1	1
Size of terminal screw		M3	M3,5	M4	M4	M4	M4	M5	2xM5	2xM5	2xM6	M10
Tightening torque	Nm	0,6-1,2	0,8-1,4	1,2-1,8	1,2-1,8	1,2-1,8	1,2-1,8	2,5-3	2,5-3	2,5-3	3,5-4,5	10
	lb.inch	5-11	7-12	11-16	11-16	11-16	11-16	22-26	22-26	22-26	31-40	88
Short circuit protection												
Max. fuse size	gL (gG) A	20	20	20	35	35	50	63	100	125	160	250
Rated short-time withstand current (1sec. current)	A	250	250	-	400	400	500	800	1000	1400	1800	3000
Rated conditional short-circuit current	kA _{eff}	10	10	1	10	10	10	10	10	10	10	10
Short-time capacity												
Load duration	3s A	100	100	-	200	200	350	400	600	720	1000	2000
	10s A	60	60	-	130	130	230	250	400	480	600	1200
Note: Ratings applies to contacts already closed	30s A	35	35	-	85	85	110	160	250	300	500	600
	60s A	25	25	-	65	65	80	110	200	250	370	480
Power loss at AC21A												
per pole	A	20	20	10	32	32	50	63	85	115	150	250
	W	0,6	0,5	0,5	0,9	1,1	1,9	2	2,8	4,4	5,7	21
Switching of capacitive loads												
maximum making capacity up to 500V	A	140	140	-	300	300	350	400	600	700	900	1800

Data according to UL and cUL

Type		M10 P	M10H	M10HD	M20	N20	N33F	N61	N80	N100	N200	L400
Rated voltage	V~	300	600	600	600	600	600	600	600	600	600	600
Rated operational current "General Use" with jumper	A	20	20	10	35	35	60	90	115	130	250	350
	A	15	-	-	25	25	40	60	80	-	-	-
DOL-Rating 3-phase	110-120V	hp	1½	1½	-	5	5	7½	-	10	15	15
	200-208V	hp	2	2	-	5	5	10	-	15	25	25
	220-240V	hp	3	3	-	5	5	15	-	20	30	30
	440-480V	hp	-	5	-	10	10	25	-	40	40	60
	550-600V	hp	-	7½	-	15	15	30	40	50	50	75
DOL-Rating 1-phase	110-120V	hp	½	½	-	1½	1½	3	-	5	7½	7½
	200-208V	hp	1	1	-	3	3	5	-	7½	15	15
	220-240V	hp	1½	1½	-	5	5	7½	-	10	15	20
Fuse size (RK5) Manual Motor Controller 5kA / 600V and Motor Disconnect	A	40 ²⁾	40	-	80	80	150	-	200	300	350	350
Heavy pilot duty	AC	A300	A600	A600	A600	A600	A600	-	-	-	-	-
Cable cross sections												
solid	AWG	12 - 20	12 - 20	10 - 18	10 - 18	10 - 18	10 - 12	10 - 12	10 - 12	10 - 14	-	-
flexible	AWG	14 - 20	14 - 20	8 - 18	8 - 18	8 - 18	6 - 12	2 - 12	2 - 12	1 - 14	250kcmil	500kcmil
Tightening torque	Nm	1.7	1-1.7	1.7-2.8	1.7-2.8	1.7-2.8	2.3-2.8	2.8	2.8	4.5	-	-
	lb.inch	15	9-15	15-25	15-25	15-25	20-25	25	25	40	-	-

1) Maximum cable cross-section with prepared conductor

2) 5kA / 300V

Technical Data

Data according to IEC 947-3, IEC 947-5-1, VDE 0660, EN 60947-3, EN 60947-5-1


Type		L100	L160	L400	L600	L800	L1200
Rated insulation voltage U_i	V	690 ²⁾	690 ²⁾	690 ²⁾	690 ²⁾	690 ²⁾	690 ²⁾
Rated thermal current I_{th} openA	125	180	400	600	800	1200	
Rated thermal current I_{the} encl. A	125	180	400	600	800	1200	
with conductor	mm ²	50	70	40x5	40x10	busbar 2x40x10	busbar 2x50x10
Utilization category AC21A, AC21B							
Switching of resistive loads, including moderate overloads							
Rated operational current I_e	A	125	180	400	400	400	400
Shot-time current-carrying capacity							
Load duration	1s	-	-	4800	6500	8500	10000
	3s	800	1200	3600	5000	6500	8000
	10s	500	800	2000	3200	4000	5800
Note: Ratings applies to	30s	320	480	1200	1700	2200	3200
contacts already closed	60s	180	380	960	1300	1700	2300
Cable cross-sections							
solid or stranded	mm ²	25-50 ¹⁾	cable lug	busbar	busbar	busbar	busbar
flexible	mm ²	25-50 ¹⁾	70	40x5	40x10	2x40x10	2x50x10
flexible with multicore cable end	mm ²	25-35	-	-	-	-	-
Size of terminal screw		2xM5	M8	M12	M16	M16	M16
Number of conductors to clamp per pole		1	1	1	2	1	1
Short circuit protection							
Max. fuse size	slow, gL (gG) A	125	200	400	630	800	1250

1) Maximum cable cross-section with prepared conductor



2) suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry): $U_{imp} = 6kV$. Data for other conditions on request

Dimensions (mm)

Panel mounting E M10 - N100

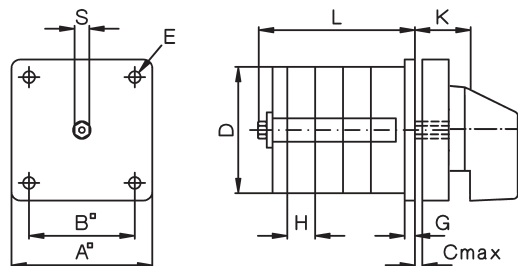

N200

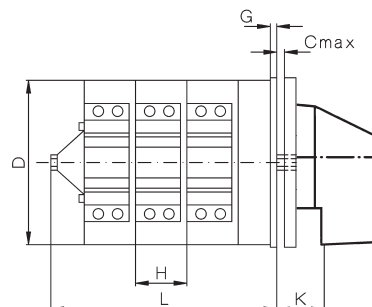


Type	A	B	C	D	D1	D2	D3	E	G	H	KS	
M10H	48	36	5	44 ¹⁾	5	8	-	4	3,5	9,5	19	SW5
M20	48	36	5	56	5	8	57	4	3,5	12,5	19	SW5
N20	64	48	5	56	5	12	57	4,2	3	12,5	20	SW7
N33F	64	48	5	58 ²⁾	5	12	-	4,2	3	15,5	20	SW7
N40	86	68	7	80	6	12	82	5,2	3,5	18	24,5	SW9
N61	86	68	7	80	6	12	82	5,2	3,5	29,5	24,5	SW9
N80	86	68	7	80	6	12	82	5,2	3,5	29,5	24,5	SW9
N100	132	110	9	128	7	16	129	6,2	5	30	37	SW12
N200	132	110	9	128	7	16	-	6,2	5	40	37	SW12


1) 44,5 x 42

2) 58 x 58

Mounting holes: built in from ear
Mounting screw: J3631N M=1,2-1,4 Nm




Mounting holes: built in from front




Type	Dimension L with .. cells														
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
M10H	36,5	46	55,5	65	74,5	84	93,5	103	112,5	122	131,5	141	-	-	-
M20	38,5	51	63,5	76	88,5	101	113,5	126	138,5	151	163,5	176	-	-	-
N20	40,5	53	65,5	78	90,5	103	115,5	128	140,5	153	165,5	178	190,5	203	215,5
N33F	44	59,5	75	90,5	106	121,5	137	152,5	168	183,5	199	214,5	230	245,5	261
N40	52,5	70,5	88,5	106,5	124,5	142,5	160,5	178,5	196,5	214,5	232,5	250,5	268,5	286,5	304,5
N61	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5	-	-	-
N80	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5	-	-	-
N100	88	118	148	178	208	238	268	298	328	358	388	418	-	-	-
N200	96	136	176	216	256	296	336	376	416	456	496	536	-	-	-


Central fixing Z M10H, M20, N33F

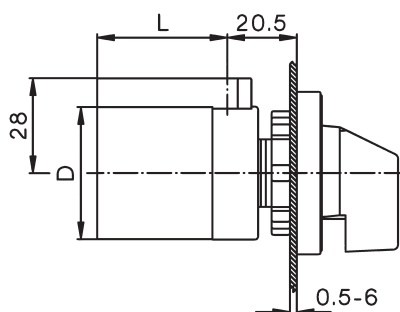

Central fixing without escutcheon plate ZO M10H, M20

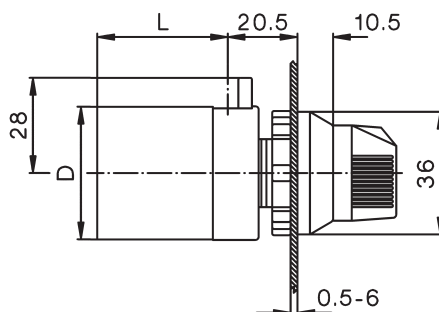


Mounting hole:




Further dimensions see tables above

Mini-Cam Switches M4H


Panel mounting E

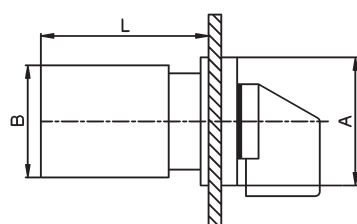


Central fixing Z, ZO

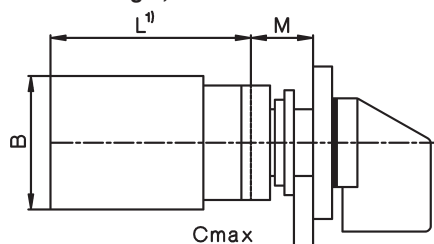

ZO




Z




Typ						Dimension L with .. cells							
		A	B	D	M	1	2	3	4	5	6	7	8
M4H	mm	30	28	29,5	12,5	38,5	50,5	62,5	74,5	86,5	98,5	110,5	122,5

Mounting holes see page 236


Flush mounting UP M10

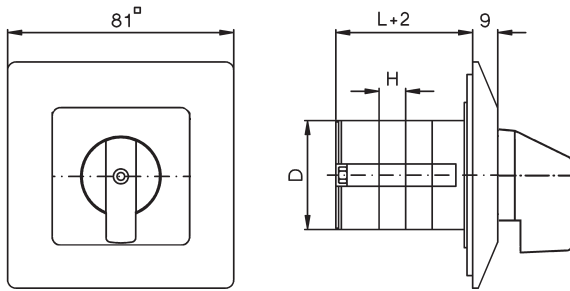

Base mounting V M10H - N100

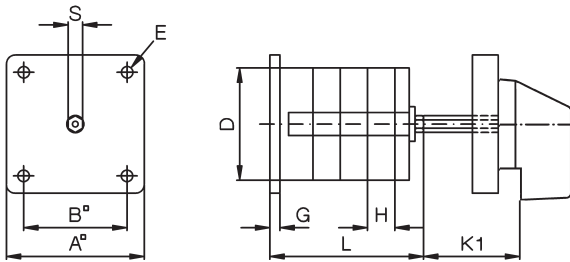

N200

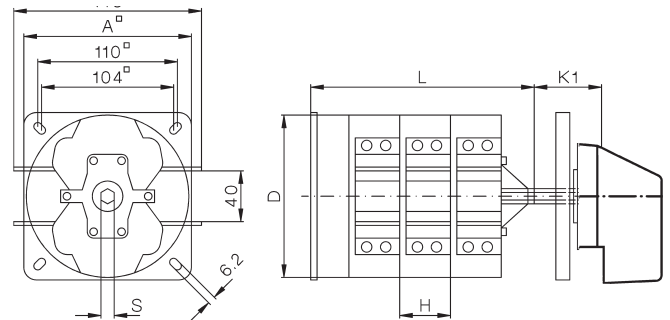


Type	A	B	D	D1	D2	E	G	H	I	K	K1	
M10	48	36	39	5	8	4	3,5	9,5	6	19	41	SW5
M10H	48	36	44 ¹⁾	5	8	4,2	3	9,5	19	41	41	SW5
M20	48	36	56	5	8	4,2	3	12,5	6	19	47	SW5
N20	64	48	56	5	12	4,2	3	12,5	0	20	29	SW7
N33F	64	48	58 ²⁾	5	12	4,2	3	15,5	0	20	31,5	SW7
N40	86	68	80	6	12	5,2	3,5	18	-	-	38,5	SW9
N61	86	68	80	6	12	5,2	3,5	29,5	-	-	49,5	SW9
N80	86	68	80	6	12	5,2	3,5	29,5	-	-	49,5	SW9
N100	132	110	128	7	16	6,2	5	30	-	-	79,5	SW12
N200	132	110	128	7	16	6,2	5	40	-	-	104	SW12

1) 42 x 44,5

2) 58 x 58


Mounting holes: for escutcheon plate



Type	Dimensions L with .. cells														
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
M10	34,5	44	53,5	63	72,5	82	91,5	101	110,5	120	129,5	139	-	-	-
M10H	36,5	46	55,5	65	74,5	84	93,5	103	112,5	122	131,5	141	-	-	-
M20	38,5	51	63,5	76	88,5	101	113,5	126	138,5	151	163,5	176	-	-	-
N20	40,5	53	65,5	78	90,5	103	115,5	128	140,5	153	165,5	178	190,5	203	215,5
N33F	44	59,5	75	90,5	106	121,5	137	152,5	168	183,5	199	214,5	230	245,5	261
N40	52,5	70,5	88,5	106,5	124,5	142,5	160,5	178,5	196,5	214,5	232,5	250,5	268,5	286,5	304,5
N61	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5	-	-	-
N80	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5	-	-	-
N100	88	118	148	178	208	238	268	298	328	358	388	418	-	-	-
N200	96	136	176	216	256	296	336	376	416	456	496	536	-	-	-


Snap-on mounting SM M10H - N33F for 35mm DIN-rail mounting according to DIN EN 50022

Dimensions see tables above

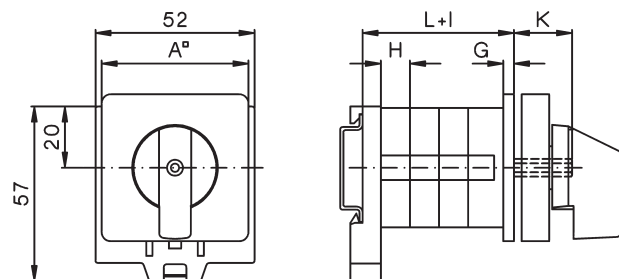


Switch with installation cover SMA M10H, M20 for 35mm DIN-rail mounting according to DIN EN 50022


Type	Dimension X with .. cells					Dimension Y with .. cells				
	1, 2	3	4	5		1, 2	3	4	5	
M10H	44	44	61	76		60	60	75	90	
M20	44	61	76	76		60	75	90	90	

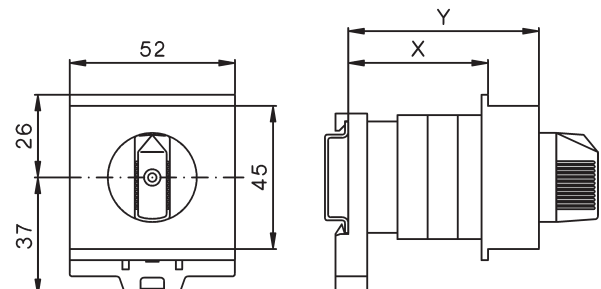


Plastic enclosed switches P, PF
M10 - N61

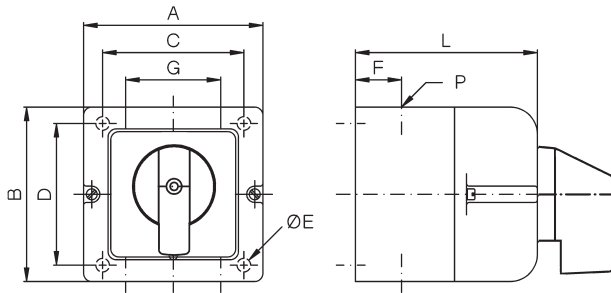

N61, N80

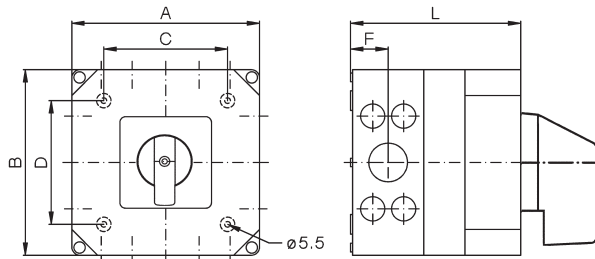

N100, N200

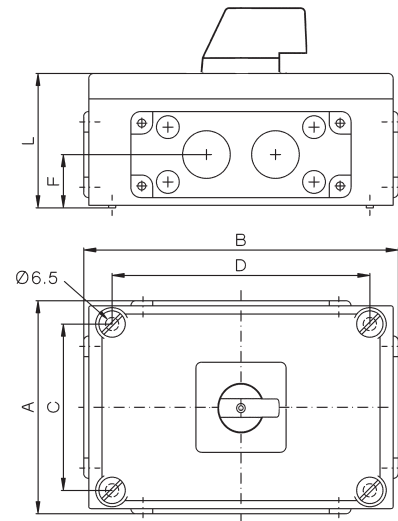

1) knock outs for M40/M32 + 4x M20 at top and bottom
M32/M25 + 4x M20 at the right and left hand side,


2) 2 flange plates with hole 50,5 at top and bottom

3) 2 flange plates with hole 50,5 at top and bottom, can also be mounted at the right and left hand side


Type	A	B	C	D	E	F	G	P	Dimension L with .. cells					
									1	2	3	4	5	6
M10	66	64	50	36	5	15,5	26	M20	43	52	62	71	81	90
N20	82	78	57	53	4,5	17	29	M20	66	66	80	94	108	122
N33F	112	108	85	50	5	20	50	M25	92	92	92	110	128	146
N40	112	108	85	50	5	20	50	M25	92	92	110	128	146	164
N61	182	180	120	120	5,5	36,5	-	1)	-	-	165	215	215	-
N80	182	180	120	120	5,5	36,5	-	1)	110	110	165	215	215	-
N100	210	310	165	255	6,5	52,5	-	2)	130	130	180	-	-	-
N200	310	310	255	255	6,5	52,5	-	3)	130	180	230	-	-	-

Motor terminal box mounting KE

M10 - N33F

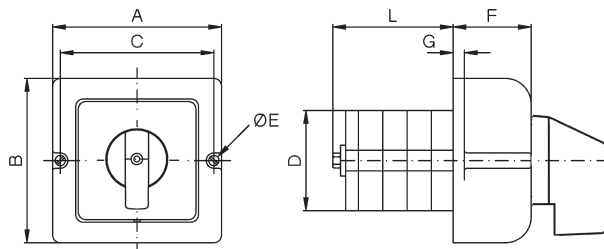

Mounting holes




Type										Dimension L with .. cells				
	A	B	C	D	D1	D2	E	F	G	2	3	4	5	6
M10	66	64	58	39	4	48	3,2	24	6	22	31,5	41	50,5	60
N20	82	78	71	48	5	57	4,2	34	5	24,5	37	49,5	62	74,5
N33F	112	108	100	56	5	70	4,2	49	11	32,5	48	63,5	79	94,5


Plastic enclosed motor starter PM

N20


Typ	P	Dimension L with .. cells					
		1	2	3	4	5	6
N20	M25	80	80	80	92,5	105	117,5

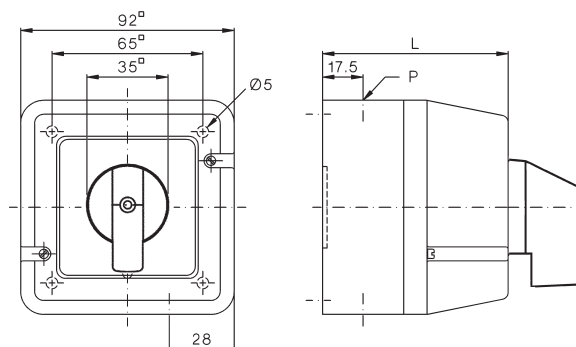

**Cast aluminium enclosed switches G, GF
N20**

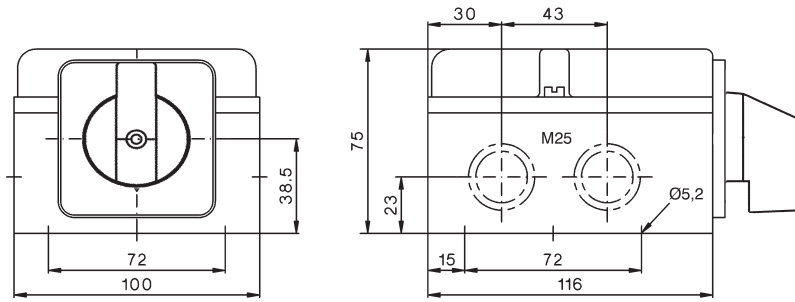


**Plastic enclosure horizontal PLF (Replacement for cast aluminium enclosure G, GF)
N40, N61, N80**

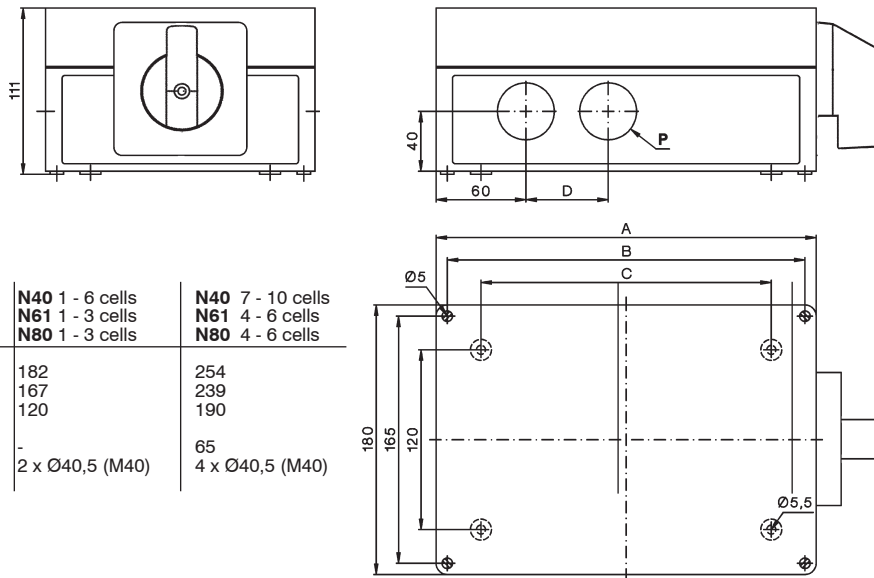


Type	N40 1 - 6 cells N61 1 - 3 cells N80 1 - 3 cells	N40 7 - 10 cells N61 4 - 6 cells N80 4 - 6 cells
A	182	254
B	167	239
C	120	190
D	-	65
P	2 x Ø40,5 (M40)	4 x Ø40,5 (M40)

Load Switches


Panel mounting E L100 - 400, L800, L1200

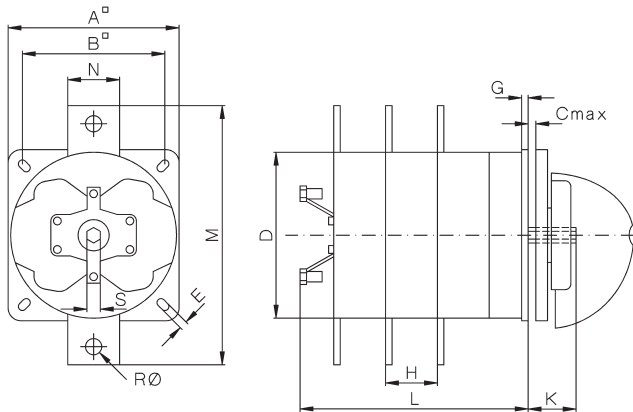


L600

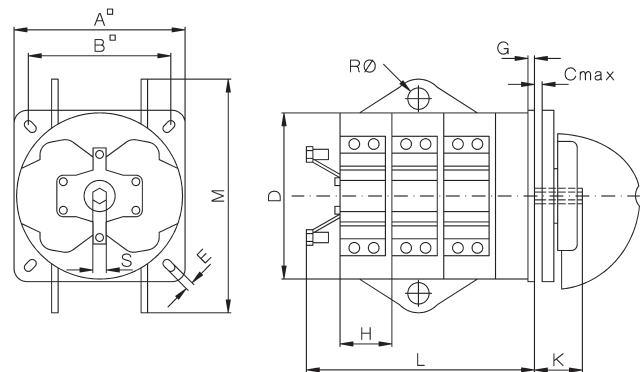

Base mounting V L100 - 400, L800, L1200

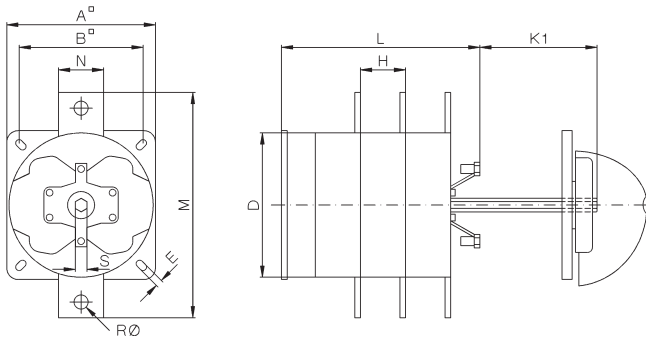


L600

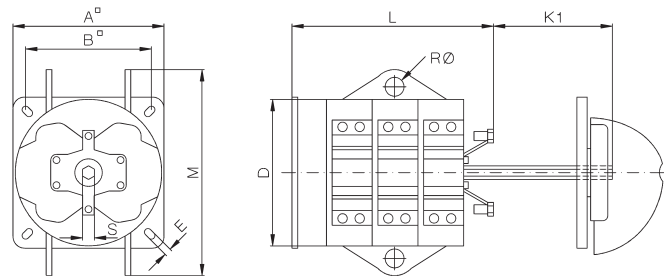

Type	A	B	C	D	D1	D2	E	G	H	K	K1	M	N	R	S
L100	86	68	7	80	6	12	5,2	3,5	18	24,5	38,5	103	27	-	SW9
L160	86	68	7	80	6	12	5,2	3,5	29,5	24,5	38,5	115	-	8,5	SW9
L400	132	110	9	128	7	16	6,2	5	40	37	104	200	40	12,5	SW12
L600	132	110	9	128	7	16	6,2	5	40	37	104	180	-	16,5	SW12
L800	132	110	9	128	7	16	6,2	5	40	37	104	240	40	16,5	SW12
L1200	132	110	9	128	7	16	6,2	5	40	37	104	240	40	16,5	SW12


Type	Dimension L with .. cells											
	1	2	3	4	5	6	7	8	9	10	11	12
L100	52,5	70,5	88,5	106,5	124,5	142,5	160,5	178,5	196,5	214,5	232,5	250,5
L160	64	93,5	123	152,5	182	211,5	241	270,5	300	329,5	359	388,5
L400	96	136	176	216	256	296	336	376	416	456	496	536
L600	96	136	176	216	256	296	336	376	416	456	496	536
L800	96	136	176	216	256	296	336	376	416	456	496	536
L1200	96	136	176	216	256	296	336	376	416	456	496	536

Mounting holes:




Operating Knobs and Handles

Instrument knob G.

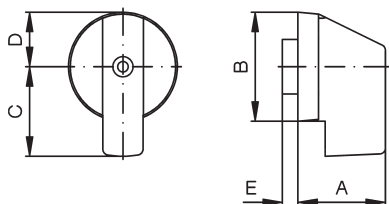


Type	A	B	C	D	E
M10, M10H, M20	23	28	24	14	4
N20, N33F	27	36	32	18	3
N40, N61, N80, L100, L160	36	47	42	24	3,5
N100, N200	48,10	75	63	37,5	-

Twist knob R.

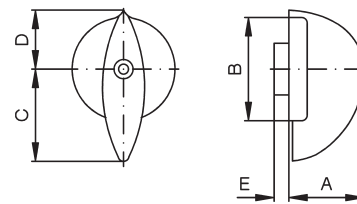

Type	A	B	C	D	E
M10, M10H, M20	20,5	28	25	15	4
N20, N33F	24	36	29,5	19	3
N40, N61, N80, L100, L160	31	49	41	28	3,5
N100, N200, L400, L600, L800, L1200	50	75	62	41	2,5


Toggle knob K.

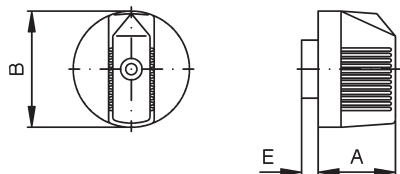


Type	A	B	E
M10, M10H, M20	18,5	28	4
N20, N33F	24	36	3

Hand wheel HR

N100, N200,
L400, L600, L800, L1200

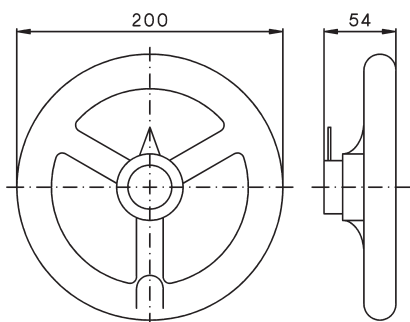

Ball type handle B.

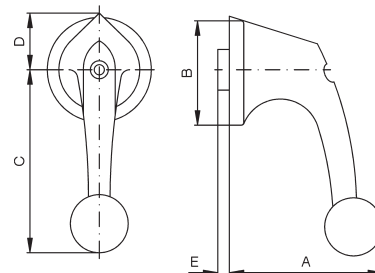


Type	A	B	C	D	E
N20, N33F	53	36,5	64	21	3
N40, N61, N80, L100, L160	62	49	82	31	3,5
N100, N200, L400, L600, L800, L1200	63	75	110	45	2,5

Code number for colour

grey	.1	white	.5
black	.2	blue	.6
red	.3	yellow	.7
cream-coloured	.4	euro-white	.8


Escutcheon plates

Escutcheon plate



Type	A	B
M10, M10H, M20	48	7,5
N20, N33F	64	7,5
N40, N61, N80, L100, L160	88	8
N100, N200, L400, L600, L800, L1200	132	9

Rectangular additional plate SRE




Type	A	B	C
M10, M10H, M20	48	12	7,5
N20, N33F	64	14	7,5
N40, N61, N80, L100, L160	88	22	8
N100, N200, L400, L600, L800, L1200	132	31	9

Special drives

Removable knob drive STGR, STGR2
M10H - N33F

Type	B	C	D1	D2	D3
M10H, M20	36	5	5	12	18
N20, N33F	48	5	5	12	18


Replace dimension D2 with dimension D3 for STGR2
Dimension L see page 262

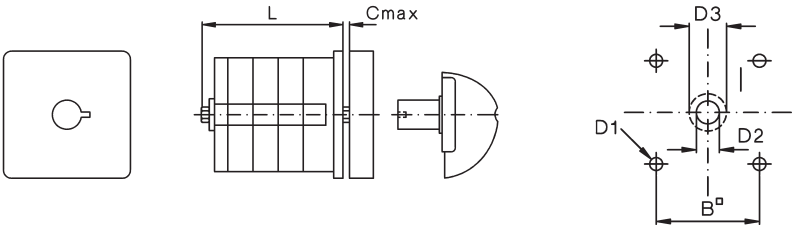


Door couplings

Dimension T is a minimum value. In case of order the dimension T is necessary.


Door coupling TK, TKFR N40 - L1200

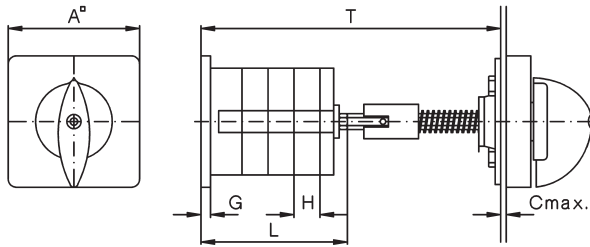


Door coupling, lockable TK2, TK2FR N40 - L1200

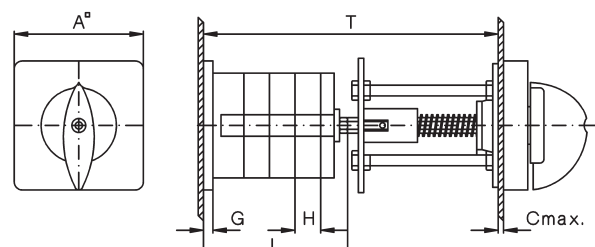


Door coupling TKE, TK2E M10H, M20, N20, N33F

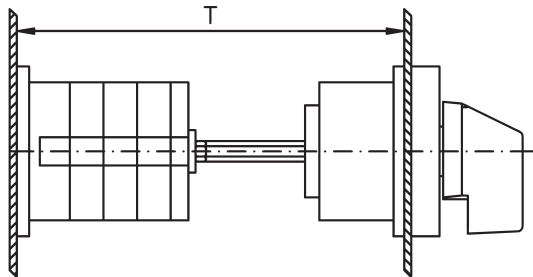


Mounting holes: TK, TKFR, TK2, TK2FR TKE, TK2E



Door coupling, lockable TK2Z M10H, M20, N20, N33F

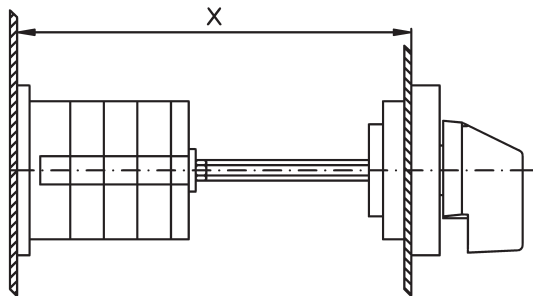

Mounting holes: TKZ




Further dimensions see pages 262 and 263.

Dimension T is a minimum value dependent on switch Type and number of cells. For ordering dimension T is necessary

Type	A	B	C	D1	D2	Minimum dimension T with .. cells							
						1	2	3	4	5	6	7	8
M10H	48	36	5	5	8	108	117,5	127	136,5	146	155,5	165	174,5
M20	48	36	5	5	8	100	112,5	125	137,5	150	162,5	175	187,5
N20	64	48	5	5	10	100	112,5	125	137,5	150	162,5	175	187,5
N33F	64	48	5	5	10	103	118,5	134	149,5	165	180,5	196	211,5
N40	88	48	7	6	12	134	152	170	188	206	224	242	260
N61	88	48	7	6	12	145,5	175	245,5	234	263,5	293	322,5	352
N80	88	48	7	6	12	145,5	175	245,5	234	263,5	293	322,5	352
N100	132	110	9	7	15	202	232	262	292	322	352	382	412
N200	132	110	9	7	15	212	252	292	332	372	412	452	492
L100	88	48	7	6	12	-	152	-	188	-	224	-	260
L160	88	48	7	6	12	145,5	175	245,5	234	263,5	293	322,5	352
L400	132	110	9	7	15	212	252	292	332	372	412	452	492
L600	132	110	9	7	15	-	-	292	-	-	412	-	-
L800	132	110	9	7	15	-	252	-	332	-	412	452	492
L1200	132	110	9	7	15	-	-	292	-	-	412	-	-


Key operated switches SA

Panel mounting E M10 - N61

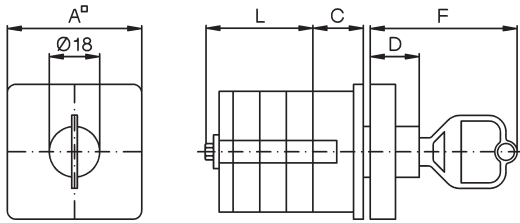


Type	A	B	C	D	D1	D2	F
M10H, M20	48	36	18	17,5	5	18,5	52,5
N20, N33F	64	48	10	17,5	5	18,5	52,5
N40, N61	88	68	23,5	15	6	18,5	50

Mounting holes



Dimension L see page 262


Base mounting V M10 - N61

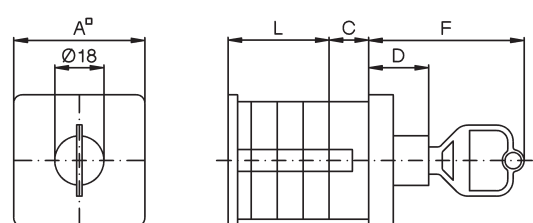


Type	A	C	D	F
M10H, M20	48	18	22	57
N20, N33F	64	8	22	57
N40, N61	88	15	15	50

Dimension L see page 263


Central fixing Z M10H Z ... + SA M20 Z ... + SA

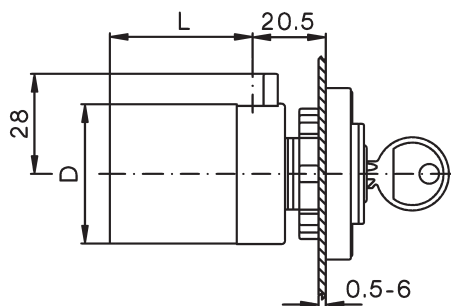

Central fixing without escutcheon plate ZO M10H ZO ... + SA M20 ZO ... + SA

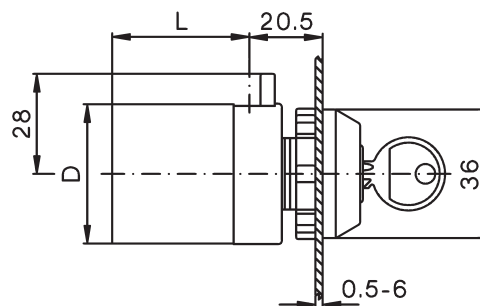


Mounting holes:




Further dimensions see page 262

DIN rail mounting SMA M10H, M20

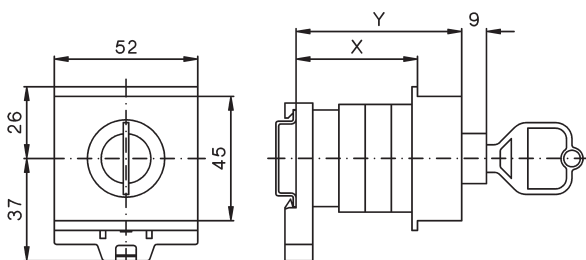

Type	Dimension X with .. cells				Dimension Y with .. cells			
	1	2	3	4	1	2	3	4
M10H	44	75	75	91	60	90	90	107
M20	59	75	75	91	75	90	90	107

Flush mounting UP M10

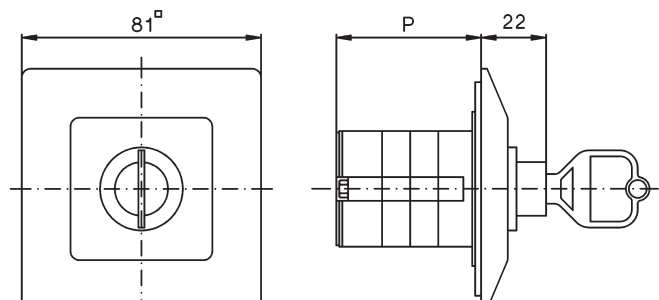


Type	Dimension P with .. cells
M10	47,5 57

Plastic enclosed switches P, PF M10, N20, N33F, N40, N61


Type	Dimension P with .. cells			
	1	2	3	4
M10	62	71	81	90
N20	66	80	94	108
N33F	92	110	110	128
N40	92	110	-	-
N61	110	-	-	-

Further dimensions see page 264

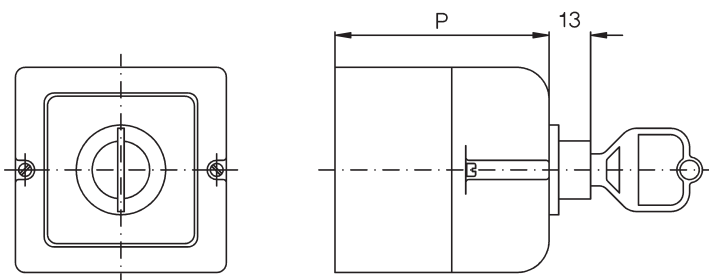


Key operated switches


Key operated switch SAK Panel mounting E M10H, M20

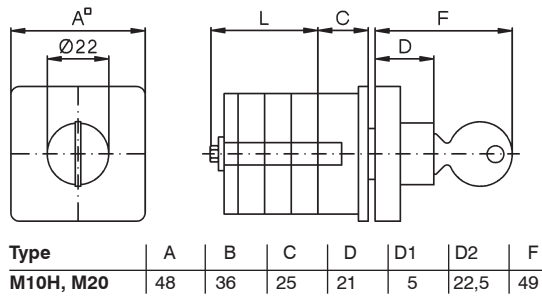


Mounting holes




Key operated switch SAK Base mounting V M10H, M20

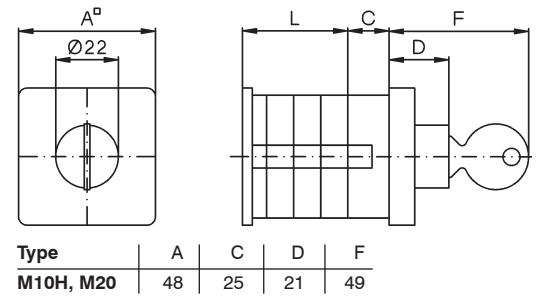

Key operated switch SASI Panel mounting E M10, M20

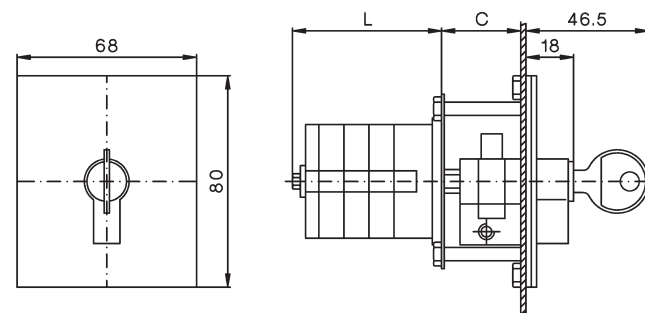


Mounting holes M10, M20



Type	M10	M20
C	20	20


Dimension L see page 262

Key operated switch SASI Plastic enclosed P M10, M20

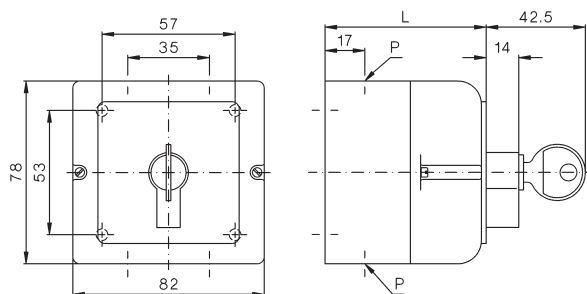

Typ	Dimension P with .. cells				P
	1	2	3	4	
M10	67	79,5	92	104,5	2xM20
M20	79,5	92	104,5	117	2xM20

Key operated switch SASI Flush mounting UP M10, M20

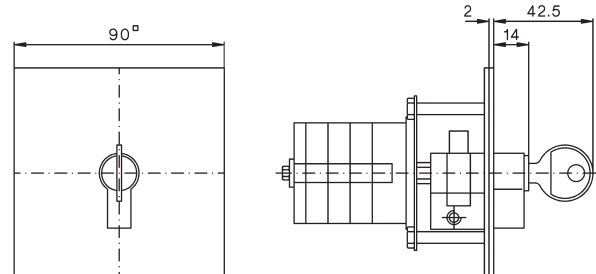


Padlock devices

Padlock device SV1 (max. 2 padlocks with stirrup Ø6mm)

M10H, M20


**Mounting holes
design E, V**

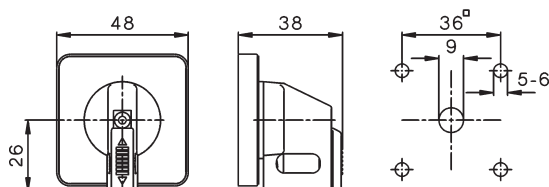

Padlock device SV164

M10H - N33F

**Mounting holes
design E, V**

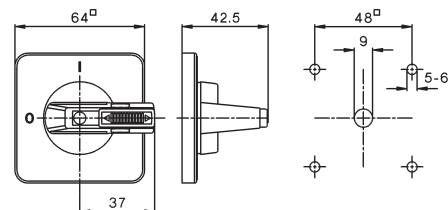



Padlock device SV3 (max. 3 padlocks with stirrup Ø8,5mm)

Panel mounting E

N20 - N200, L100 - L1200

Base mounting V

N20 - N200, L100 - L1200

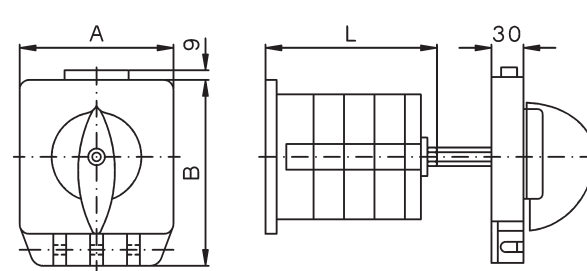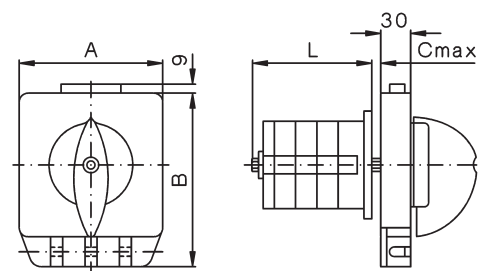


Further dimensions see page 263

Type	A	B	C
N20, N33F	102	128	5
N40, N61, N80, L100, L160	102	128	7
N100, N200, L400, L600, L800, L1200	132	159	9

Padlock device SV4 (max. 3 padlocks with stirrup Ø6mm)

M10H - N33F

**Mounting holes
design E, V**

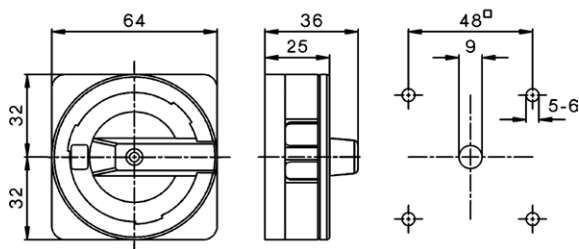


Padlock device SV4 (max. 3 padlocks with stirrup Ø6mm)

N40 - N80, L100 - L160

Padlock device SV488

N20, N33F



**Mounting holes
design E, V**

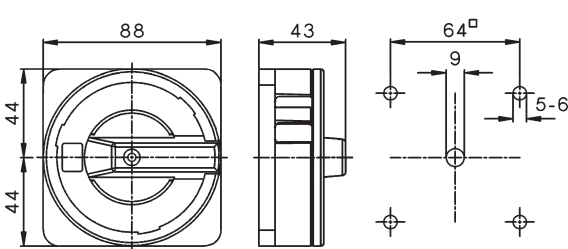

Front plate/switch shaft sealing FPWD

N20, N33F


Mounting holes

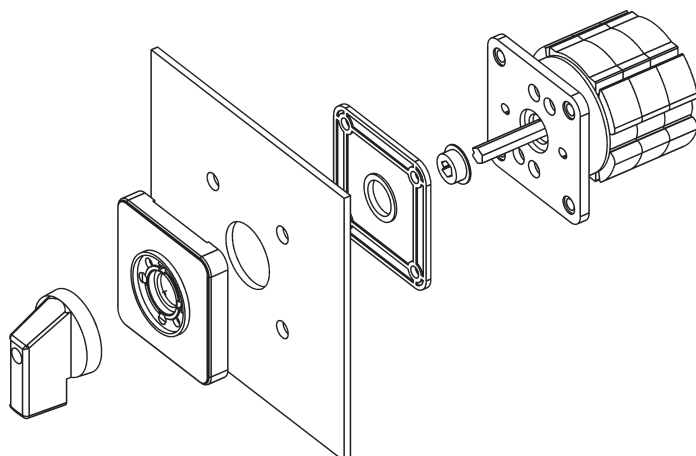

Typ	B	D1	D2
N20, N33F	48	5	17


Interlocks

Lock switch SZ, SZ2 Panel mounting E

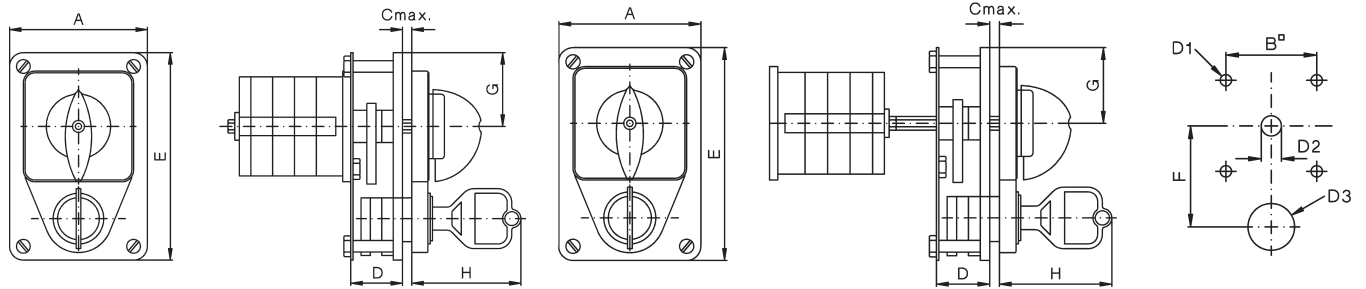

Type	A	B	C	D	D1	D2	D3	E	F	G	H
M10H, M20	60	36	3	22,5	5	8	18,5	90	40	32	47,5
N20, N33F	60	36	3	22,5	5	12	18,5	90	45	32	47,5
N40, N61, N80, L100, L160	90	68	4	24	6	12	18,5	142	61	61,5	48
N100, N200, L400, L600, L800, L1200	140	110	4	27	7	15	18,5	180	83	90,5	49


Push-button switch lock DV Switch interlock with electrical contact ET Panel mounting E

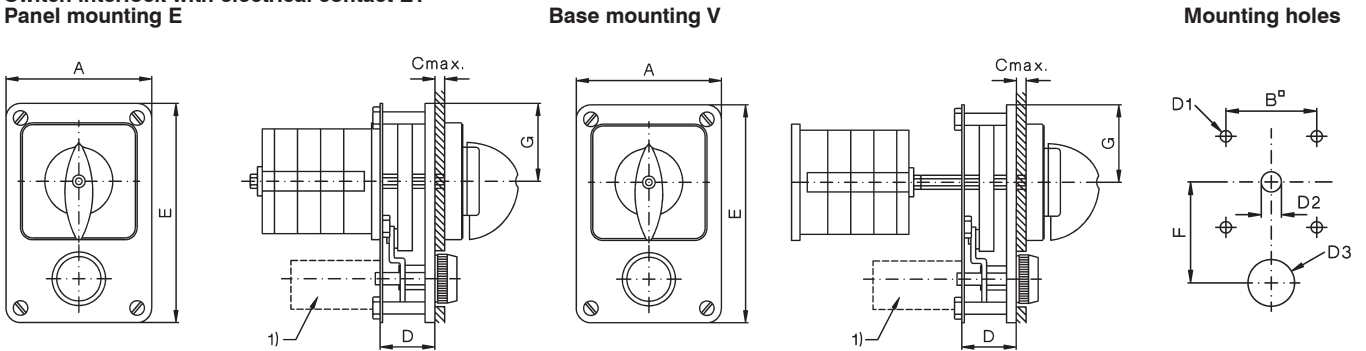

Type	A	B	C	D	D1	D2	D3	E	F	G
M10H, M20	60	36	3	22,5	5	8	26	90	45	32
N20, N33F	60	36	3	22,5	5	10	26	90	45	32
N40, N601 N80, L100, L160	90	68	4	25	6	12	29	142	61	61,5
N100, N200, L400, L600, L800, L1200	140	110	4	41	7	15	29	180	83	90,5


1) only at +ET

Moisture proofing caps for panel switches FR M10H

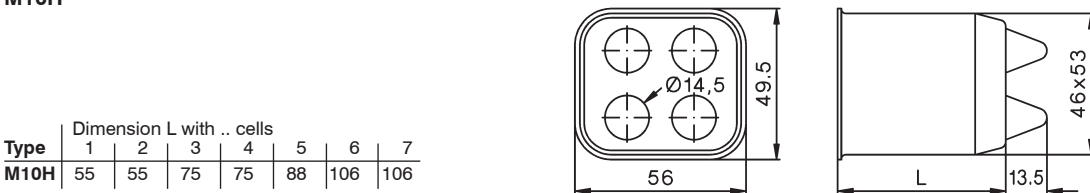

Type	Dimension L with .. cells						
	1	2	3	4	5	6	7
M10H	55	55	75	75	88	106	106


Moisture proofing caps for panel switches FR N20, N40, N61

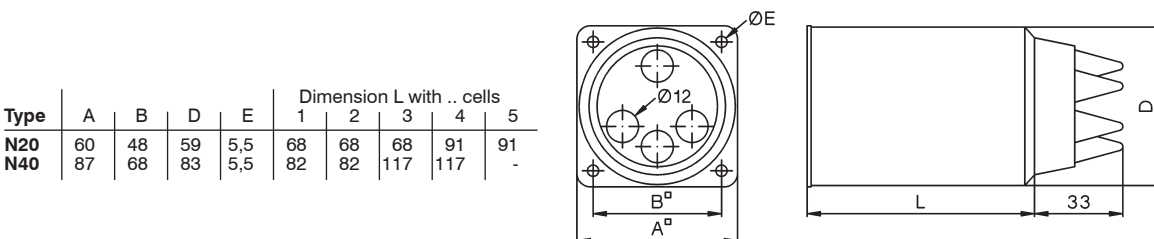


Type	A	B	D	E	Dimension L with .. cells				
					1	2	3	4	5
N20	60	48	59	5,5	68	68	68	91	91
N40	87	68	83	5,5	82	82	117	117	-

Interlocks

Geared switch with two columns ZK2 Panel mounting E

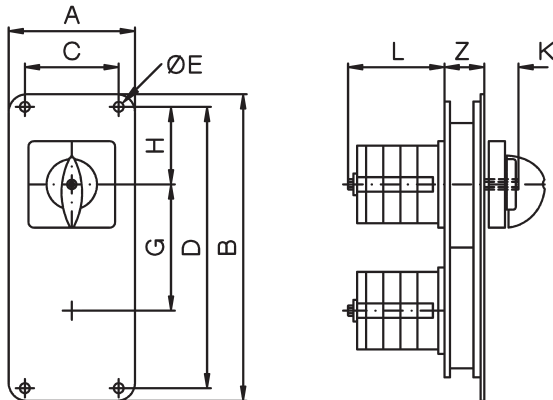


Base mounting V

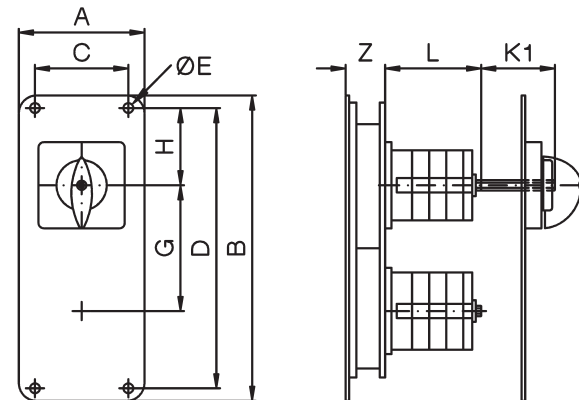


Type	A	B	C	D	E	G	H	Z
M10H, M20	70	170	52	156	5,5	70	43	22
N20, N33F	70	170	52	156	5,5	70	43	22
N40, N61, N80, L100, L160	170	190	150	168	6,5	100	43	23
N100, N200, L400, L600, L800, L1200	180	340	150	310	6,5	140	80	25

Further dimensions see pages 262 and 263

Geared switch with tree columns ZK3 Panel mounting E

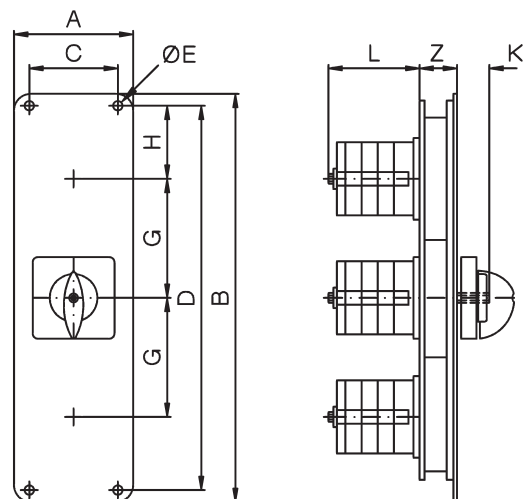


Base mounting V

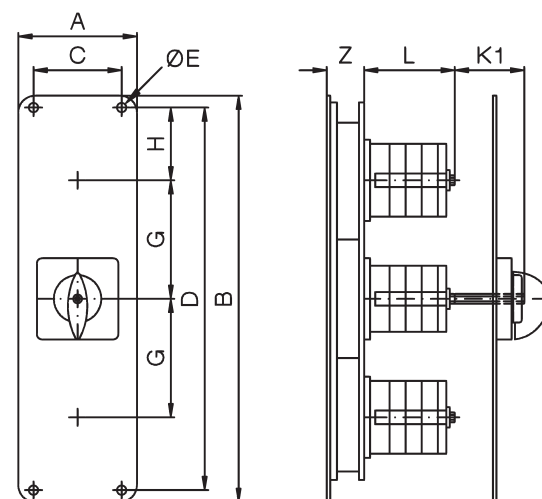

Type	A	B	C	D	E	G	H	Z
M10H, M20	70	240	52	226	5,5	70	43	22
N20, N33F	70	240	52	226	5,5	70	43	22
N40, N61, N80, L100, L160	170	290	150	269	6,5	100	43	23
N100, N200, L400, L600, L800, L1200	180	490	150	460	6,5	140	80	25

Further dimensions see pages 262 and 263

Neon safety switch N20 E .. +FEU, N33F E .. +FEU

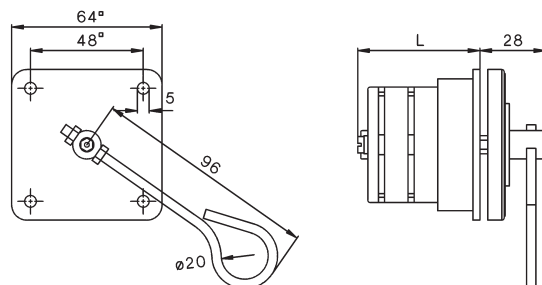

Further dimensions see pages 262

