


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

846-5-9

REVISIONS

ISSUE	CHANGES
0	ER 37394 KH 06/16/97
1	CN 39307 B JLA 07/27/05

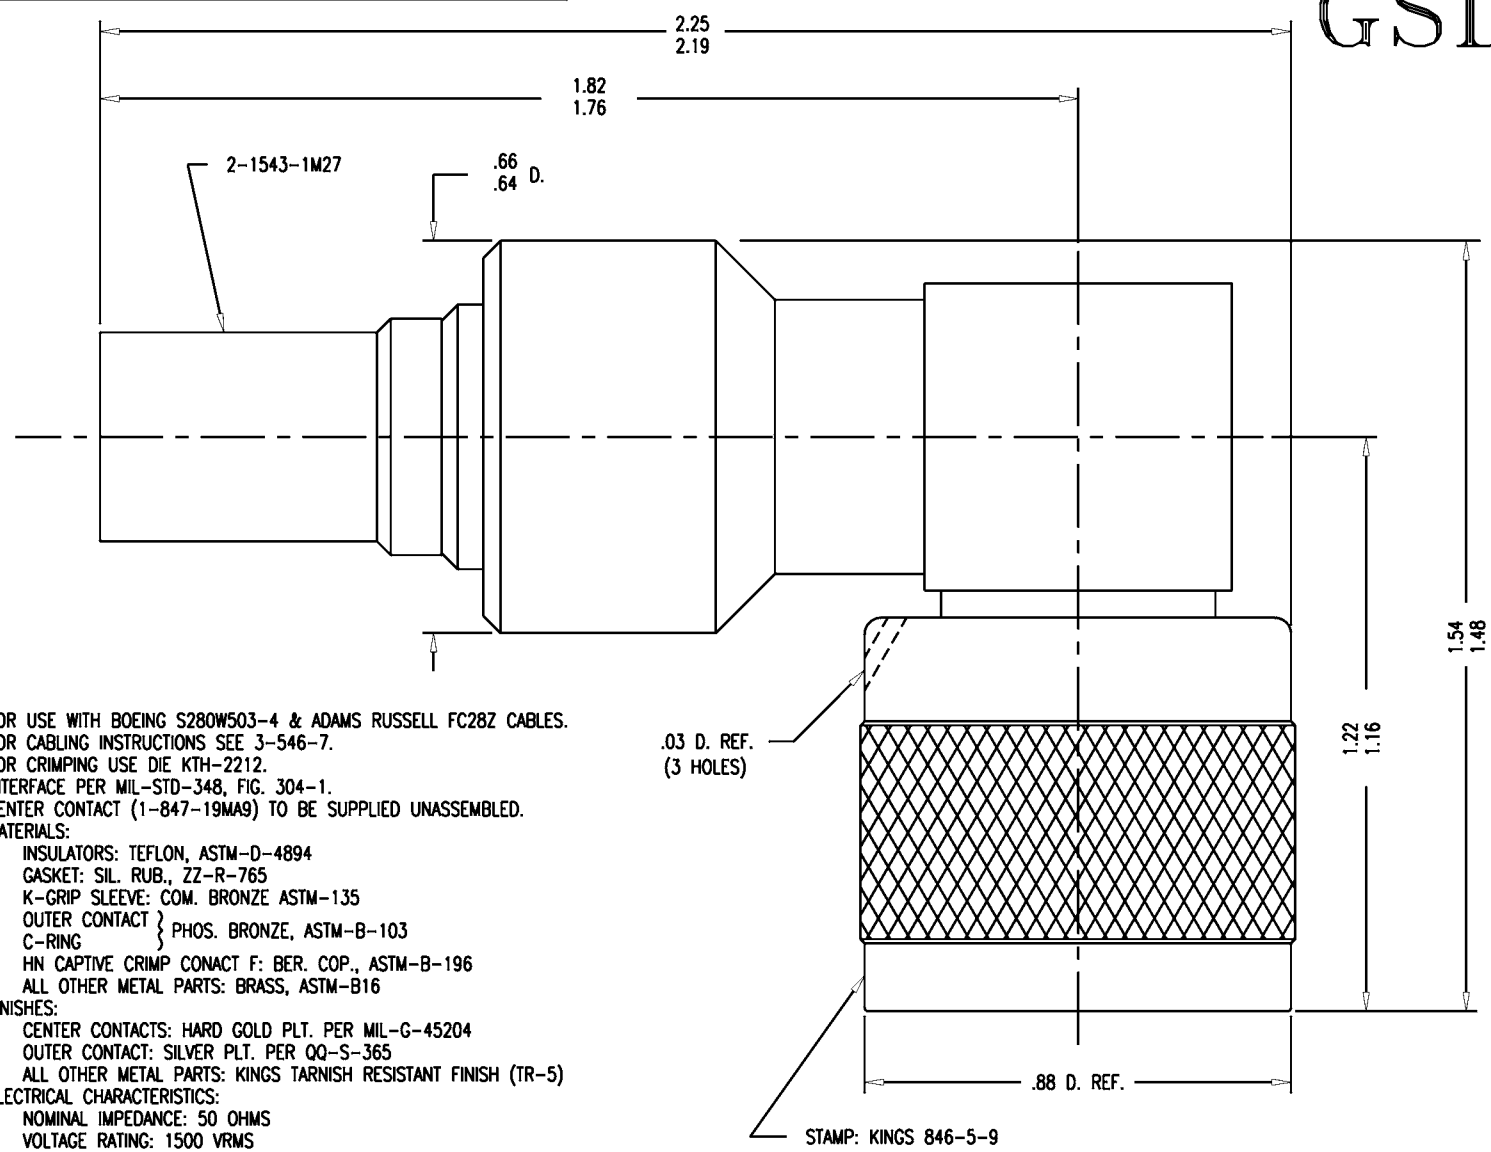

- NOTES:
- FOR USE WITH BOEING S280W503-4 & ADAMS RUSSELL FC28Z CABLES.
 - FOR CABLING INSTRUCTIONS SEE 3-546-7.
 - FOR CRIMPING USE DIE KTH-2212.
 - INTERFACE PER MIL-STD-348, FIG. 304-1.
 - CENTER CONTACT (1-847-19MA9) TO BE SUPPLIED UNASSEMBLED.
 - MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-4894
 - GASKET: SIL. RUB., ZZ-R-765
 - K-GRIP SLEEVE: COM. BRONZE ASTM-135
 - OUTER CONTACT } PHOS. BRONZE, ASTM-B-103
 - C-RING }
 - HN CAPTIVE CRIMP CONTACT F: BER. COP., ASTM-B-196
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
 - FINISHES:
 - CENTER CONTACTS: HARD GOLD PLT. PER MIL-G-45204
 - OUTER CONTACT: SILVER PLT. PER QQ-S-365
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
 - ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - VOLTAGE RATING: 1500 VRMS
 - FREQUENCY RANGE: DC TO 4 GHz

DET1419

SCALE	4:1	
APPROX SURFACE AREA		
WAS:	E-19523	
USED ON		
REF:		
PLUG, ANGLE, HN		
DRAWN	MJB	DATE 08/13/93
DESIGN		DATE
APPR.	VLS	DATE 06/16/97

GSD

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

846-5-9