
# **Switches**

Molveno switches have been designed with special attention to aesthetic requirements as well as practical and performance considerations. All Molveno switches carry European and North American approvals, making them suitable for virtually any market. Because of the huge range and the large number of variations, we have only shown the most popular items on this page. If you have a specific requirement - please ask for the full Molveno catalogue which includes rotary, push button, toggle, slide and lever switches. All switches are available in a range of colours and markings (if required) as well as electrical ratings and terminations.

### A1 & A8 Rocker Switches



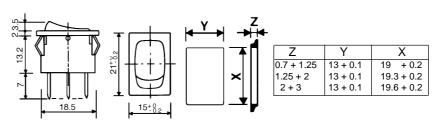

Order Code	Body Colour	Rocker/lens Col.	Configuration
A11131100000	black	black	SPST
A11131121000	black	black (marked 0/1)	SPST
A11132200000	white	white	SPST
A11331100000	black	black	SPDT
A11332200000	white	white	SPDT
A11561129000	black	black (marked I/O/II)	SPDT
A11631G00000	black	red*	SPST
A81821G00000	black	red*	DPST
A81221100000	black	black	DPST

(h) (i) KERA 🛆 👓 (S) 🕃 🎗 (h)

Electrical Rating: Resistive 16A/250VAC

4.8mm QC

Motor 10A - 1/2 HP 250VAC

#### Splash proof cover

IP44 Rating

**Termination:** 

Order Code: A1CAP

## **B1 Rocker Switches**

#### **B5** Indicators



Electrical Rating: Resistive 16A/250VAC Motor 3/4 HP 250VAC **Termination:** 6.3mm QC

Ζ v 0.70 + 1.25 11 + 0.21.25 + 2.00 11 + 0.2 2.00 + 3.00 11 + 0.2 3.00 + 4.00 11 + 0.2

\*Illuminated with neon for 230V

Order Code	Body Colour	Rocker/lens Colour	Configuration
B111C11210000	black	black (marked 0/1)	SPST
B113C11000000	black	black	SPDT
B113C12000000	black	white	SPDT
B113C22000000	white	white	SPDT
B116C1G000000	black	red*	SPST
B116C1H000000	black	amber*	SPST
B116C1E000000	black	green*	SPST
B51121G000000	black	red*	Indicator
B5112H000000	black	amber*	Indicator
B51121E000000	black	green*	Indicator

(1) (5) (F) KER △ ○ D (N (S) (5) (7) (8) \*Illuminated with neon for 230VAC

### Splash proof cover

IP44 Rating Order Code: B1PRT1

For more information, please contact our sales office.

Х

30

30.2

30.6

30.8