


AT1 TIMER BOARD

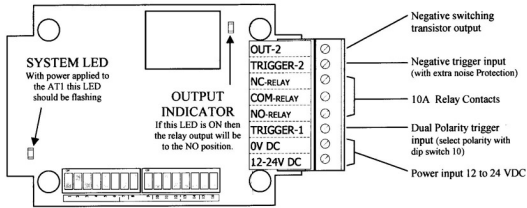

FEATURES

- 11 different timer Modes
- 4 timing Ranges
 - 1 to 127 seconds in 1 second increments
 - 10sec to 21 min in 10 second increments
 - 1 to 127 minutes in 1 minute increments
 - 10mins to 21 hours in 10 minute increments
- Fail Safe or Fail Secure operation
- High and low triggering inputs

SPECIFICATIONS

- OPERATION VOLTAGE: 12-24 DC
- CURRENT DRAW: STANDBY = 25mA MAX = 70mA
- RELAY: 10A @24VDC
- OUT-2: 500mA @ 24VDC

SETTING DIP SWITCHES

