



<http://www.casa.co.nz>

Edition: 23/04/2022

Primary Battery Lead-Cables for Intelcom Services

Type: **RLM6-RLM8-14AWG-0M32-RED(R1)**

General Data

Description: Battery lead RED 14AWG (2.5mm²), 320mm long with 1 x M6 + 1 x M8 pre-insulated crimp lugs at ends

Brand: CASA (OEM = TBA)

Model: RLM6-RLM8-14AWG-0M32-RED(R1)

BOM:

1 x H4127-Utilux Blue Pre-Insulated Crimp Ring-Lug M6 (1/4") hole for 2.5mm² cable...
...or... H3127 or H1437 **copper** (un-insulated)...
...or... H3134 or H1437A **copper** (un-insulated) if 6mm² (10AWG)


1 x H4128-Utilux Blue Pre-Insulated Crimp Ring-Lug M8 (5/16") hole for 2.5mm² cable...
...or... H3137 or H1495A **copper** (un-insulated) if 6mm² (10AWG)

320mm 2.5mm² (14AWG) RED hook-Up wire... or...
...6mm² (10AWG)

Weight: xx gms

M6 Ring Lug

M8 Ring Lug

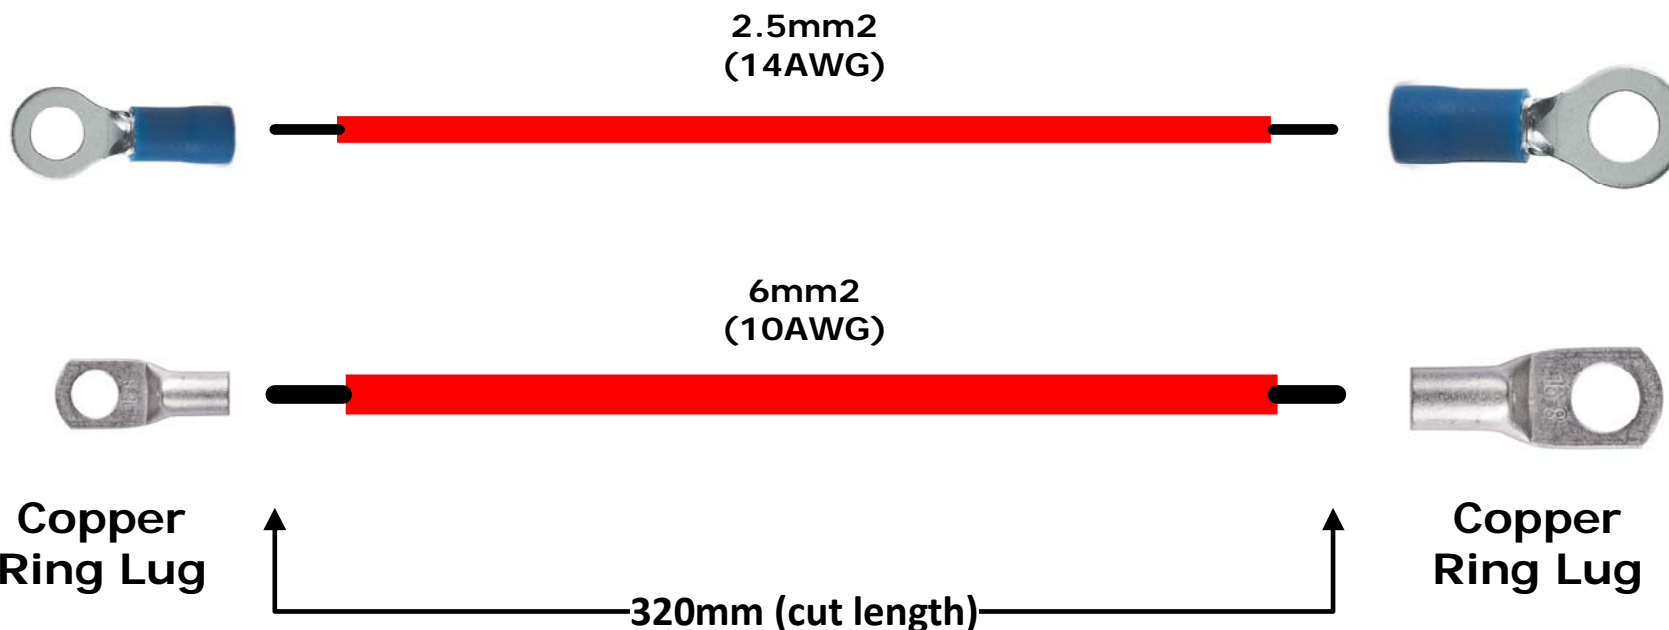

Heatshrink Option

Heatshrink Option

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.