



## Datasheet

### 25 way M-M sub-min D gender changer

Stock Number: 218-194



Accessory Type	Mini Gender Changer
For Use With	25 Way D-Sub Connector
Series	MNGC

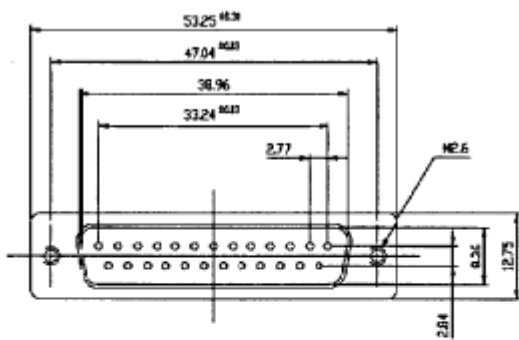

**MECHANICAL**

**INSULATOR MATERIAL**  
 PBT & Glass-fibre reinforced  
 UL 94V-0

**CONTACT**  
 Brass

**SHELL**  
 Steel

**FINISH**  
 Contact: Gold Plating  
 Shell: Nickel or Tin

**DURABILITY**  
 100 cycles

**ELECTRICAL**

**CURRENT RATING**  
 5 Amp

**DIELECTRIC WITHSTANDING VOLTAGE**  
 AC 1000V Min. (for 1 minute)

**INSULATION RESISTANCE**  
 1000  $\Omega$  Min. (at 500V DC)

**CONTACT RESISTANCE**  
 20m  $\Omega$  Max.

**WORKING TEMPERATURE**  
 -55°C to +105°C

