


SS-5710

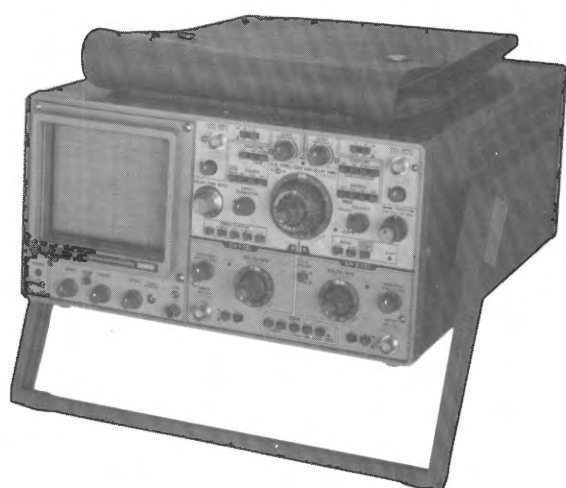

INSTRUCTION MANUAL

OSCILLOSCOPE

SS-5710

F4956-526401(I)

**IWATSU ELECTRIC CO., LTD.****Main Office:**7-41, 1-chome Kugayama Suginami-ku, Tokyo 168 Japan.
Telephone Tokyo (334) 1111.**Overseas Operation Department:**Yanagiya-Building, 1-10, Nishinbashi, 2-chome, Chuo-ku, Tokyo,
103 Japan. Telephone Tokyo (271) 5131. Telex J24225
(TELEIWA). Cable Address TELEPHIWATSU.

TABLE OF CONTENTS

SECTION 1	SPECIFICATIONS	1-1			
1-1	GENERAL.	1-1	2-5-4	Operation for Enlarging Waveforms on the CRT Screen	2-17
1-2	ELECTRICAL SPECIFICATIONS . .	1-1	2-5-5	Operation for ALT Sweep.	2-18
1-2-1	Cathode-Ray Tube (CRT)	1-1	2-5-6	Operation for Observing Television Composite Video Signal Waveforms.	2-19
1-2-2	Vertical Deflection System	1-1			
1-2-3	Triggering	1-2	2-5-7	Operation for Single Sweep.	2-20
1-2-4	Horizontal Deflection System . . .	1-3	2-5-8	Operation for Use as an X-Y Scope	2-21
1-2-5	X-Y Operation	1-4	2-5-9	Z Axis System	2-21
1-2-6	Z-Axis System	1-4			
1-2-7	Calibrator	1-4			
1-2-8	Power Supply	1-4			
1-3	PHYSICAL CHARACTERISTICS . .	1-4	SECTION 3	MEASURING PROCEDURES	3-1
1-4	ENVIRONMENTAL CHARACTERISTICS.	1-4	3-1	ADJUSTMENTS NECESSARY BEFORE MEASUREMENTS	3-1
1-5	ACCESSORIS.	1-5	3-1-1	TRACE ROTATION Adjustment. .	3-1
			3-1-2	GAIN Adjustment.	3-1
SECTION 2	OPERATING INFORMATION	2-1	3-1-3	x5 BAL Adjustment.	3-1
2-1	OPERATING PRECAUTIONS.	2-1	3-1-4	VARIABLE BAL Adjustment . . .	3-1
2-2	OPERATION OF THE HANDLE. . . .	2-2	3-1-5	Probe Phase Adjustment.	3-1
2-3	CONTROLS AND SWITCHES.	2-2	3-2	MEASURING METHODS.	3-2
2-3-1	Front Panel	2-3	3-2-1	Voltage Measurement.	3-2
2-3-2	Rear Panel	2-8	3-2-2	Current Measurement.	3-3
2-3-3	Bottom Cover.	2-8	3-2-3	Time Measurement	3-4
2-4	OPERATIONG INSTRUCTIONS. . . .	2-10	3-2-4	Frequency Measurement.	3-5
2-4-1	Basic Operation for Signal Observation	2-10	3-2-5	Phase Difference Measurement. .	3-5
2-4-2	Applying Signals	2-11	SECTION 4	THEORY OF OPERATION	4-1
2-4-3	Signal Input Coupling Section . .	2-11	4-1	GENERAL.	4-1
2-4-4	Vertical Deflection Factor Setting .	2-12	4-1-1	Pre-amplifiers for Channels 1, 2, 3, and 4	4-1
2-4-5	Triggering	2-12	4-1-2	Delay Cable Driver Circuit.	4-1
2-4-6	Sweep Rate Setting	2-15	4-1-3	Vertical Main Amplifier	4-1
2-5	APPLIED OPERATIONS FOR SIGNAL OBSERVATION.	2-15	4-1-4	Trigger Signal Circuit	4-1
2-5-1	Operation for Dual-Trace Observation.	2-15	4-1-5	TV Trigger Signal Separator Circuit. .	4-3
2-5-2	Operation for Observation of the Sum of Two Signals or Their Difference	2-16	4-1-6	A and B Trigger Circuits	4-3
2-5-3	Operation for Quadruple-Trace Observation	2-16	4-1-7	A and B Sawtooth Generator Circuits	4-3
			4-1-8	Horizontal Amplifier	4-3
			4-1-9	Z-Axis Amplifier	4-3
			4-1-10	CRT Circuit	4-4
			4-1-11	Low Voltage Circuit	4-4

4-1-12	Calibration Voltage and Current Generator Circuit	4-4	6-8	CALIBRATOR OUTPUT	6-14
			6-8-1	Output Voltage	6-14
			6-8-2	Repetition Rate	6-15
SECTION 5	MAINTENANCE.	5-1	6-9	VERTICAL DEFLECTION SYSTEM CHECK AND ADJUSTMENT . . .	6-16
5-1	PREVENTIVE MAINTENANCE.	5-1	6-9-1	X 5 Balance	6-16
5-1-1	Cleaning	5-1	6-9-2	Variable Balance	6-16
5-1-2	If Unused for a Long Time	5-1	6-9-3	Deflection Factor I (CH1. CH2) . . .	6-17
5-1-3	Checking	5-2	6-9-4	CH2 Polarity Balance and Position Center	6-19
5-1-4	Periodic Adjustment	5-2	6-9-5	Attenuator Compensation I (CH1. CH2)	6-20
5-2	PARTS REPLACEMENT	5-2	6-9-6	Deflection Factor II (CH3. CH4)	6-22
5-2-1	Cover Removal	5-2	6-9-7	Attenuator Compensation II (CH3. CH4)	6-23
5-2-2	Printed Circuit Board Removal.	5-2	6-9-8	Square Wave Response I (Sag)	6-24
5-2-3	Printed Circuit Board Parts Replacement.	5-2	6-9-9	Square Wave Response II (Overshoot and Others)	6-26
5-2-4	Replacing Resistors, Diodes or IC's.	5-2	6-9-10	Bandwidth	6-28
5-2-5	Power Transistor Replacement.	5-3	6-9-11	Linearity	6-29
5-2-6	CRT Replacement.	5-3	6-10	TRIGGERING SYSTEM CHECK AND ADJUSTMENT . . .	6-30
5-2-7	High-Voltage Power Transformer Replacement.	5-3	6-10-1	A Triggering	6-30
5-2-8	Replacing Control Knobs and Rotary Switches	5-3	6-10-2	B Triggering	6-31
SECTION 6	CHECK AND ADJUSTMENT	6-1	6-11	HORIZONTAL DEFLECTION SYSTEM CHECK AND ADJUSTMENT.	6-32
6-1	GENERAL.	6-1	6-11-1	Sweep Rate	6-32
6-2	PERIOD OF CHECK AND ADJUSTMENT.	6-1	6-11-2	Magnification Center	6-34
6-3	PRECAUTIONS FOR CHECK AND ADJUSTMENT.	6-1	6-11-3	Magnified Sweep Rate	6-35
6-4	EQUIPMENT REQUIRED	6-1	6-11-4	Sweep Trace Length.	6-36
6-5	CHECK AND ADJUSTMENT ITEMS	6-4	6-11-5	B Sweep Start	6-37
6-6	PREPARATION	6-6	6-11-6	Start and Stop of Delay	6-38
6-7	POWER SUPPLY AND CRT CHECK AND ADJUSTMENT . . .	6-6	6-11-7	Jitter.	6-40
6-7-1	Power Supply DC Level I (Voltage Range)	6-6	6-12	X-Y OPERATION.	6-42
6-7-2	Power Supply DC Level II (Ripple Voltage)	6-7	6-12-1	Deflection Factor and Intensity Level	6-42
6-7-3	AC Line Voltage Range	6-8	6-12-2	Phase Difference	6-43
6-7-4	High-Voltage Power Supply.	6-9	SECTION 7	SCHEMATIC DIAGRAMS	7-1
6-7-5	Intensity	6-10	SECTION 8	ELECTRICAL PARTS LIST	8-1
6-7-6	Focus	6-11		CH1 & CH2 ATTENUATOR	8-2
6-7-7	Pattern Distortion	6-12		CH1 PRE-AMPLIFIER	8-4

CH2 PRE-AMPLIFIER	8-6
CH3 & CH4 ATTENUATOR & PRE-AMPLIFIER	8-8
VERTICAL MAIN AMPLIFIER. . .	8-10
VERTICAL CONTROL	8-12
A & B TRIGGER GENERATOR . .	8-13
A SWEEP GENERATOR	8-16
B SWEEP GENERATOR	8-18
A & B TIMING CIRCUIT	8-20
HORIZONTAL AMPLIFIER.	8-21
HORIZONTAL CONTROL.	8-23
POWER SUPPLY & CALIBRATOR	8-24
Z-AXIS & CRT CIRCUIT.	8-26
PRINTED CIRCUIT BOARDS. . . .	8-28

SECTION 9	MECHANICAL PARTS LIST AND ILLUSTRATION.	9-1
-----------	--	-----

Specifications

1-1 GENERAL

The SS-5710 is an oscilloscope with a frequency bandwidth of DC to 60 MHz that can display 8 traces on 4 channels. The SS-5710 is useful in a wide range of applications for not only production lines and maintenance and service purposes but also for the research and development of a variety of electronic devices. The features of the SS-5710 are as follows:

- In addition to display of 8 traces on 4 channels, the SS-5710 has an ADD function for measuring the sum of two signals and CH 2 POLAR for measurement of the difference between two signals.
 - Both CH 1 and CH 2 have a high deflection factor of 1 mV/div (in the x5 MAG function), which permits accurate measurement of lower voltages.
 - The horizontal deflection system has sweep rates up to 5 nS/div (in the x10 MAG function) so that even high-speed phenomena can be measured with accuracy.
- The SS-5710 has delayed sweep, single sweep, ALT sweep, and X-Y operation functions, and a TV synchronizing signal separator circuit so that television and other composite video signal waveforms can be observed.

1-2 ELECTRICAL SPECIFICATIONS

1-2-1 Cathode-Ray Tube (CRT)

Shape	Rectangular, 6 inches
Display Area	8 div x10 div (1 div = 10 mm), with internal illuminated graticule of parallax-free type
Phosphor	B31 (Standard)
Accelerating Voltage	Approximately 15 kV

1-2-2 Vertical Deflection System

Modes	CH 1, CH 2, ALT, CHOP, ADD, QUAD (Quadruple) CHOP switching rate: 300 kHz $\pm 40\%$
Channels 1 and 2	
Deflection Factor	5 mV/div to 10 V/div, in 11 calibrated steps in a 1-2-5 sequence Accuracy: $\pm 2\%$ (at 10° C to 35° C) $\pm 5\%$ (at -10° C to 50° C) 5 mV/div to 25 V/div, continuously variable with the VARIABLE control x5 MAG: 1 mV/div to 2 V/div in 11 calibrated steps Accuracy: $\pm 4\%$ (at 10° C to 35° C) $\pm 8\%$ (at -10° C to +50° C)
Frequency Response	DC to 60 MHz, -3 dB (5 mV/div to 0.2 V/div) DC to 20 MHz, -3 dB (1 mV/div, 2 mV/div in the x5 MAG mode) Notes • 10° C to 35° C • AC coupling: The lowest useable frequency is 4 Hz.
Rise Time	5.8 nsec (5 mV/div) or less
Pulse Response	Overshoot: 5% or less Sag (at 1 kHz): 1.5% or less Other distortions: 5% or less (5 mV/div, 10° C to 35° C)

Signal Delay	Delay cable supplied
Input Coupling	AC, DC, GND
Input RC	Direct: 1 M Ω \pm 2%/32pF \pm 3pF With probe: 10 M Ω \pm 2%/15pF \pm 2pF
Maximum Input Voltage	Direct: 250 V (DC +peak AC) With probe: 600 V (DC +peak AC) (Refer to the instruction manual for the probe for the maximum input voltage where probe is used.)
Drift	0.5 div/hour (5 mV/div) or 2 div/hour (1 mV/div) 30 minutes after power is turned on (Standard)
Common Mode Rejection Ratio	5 mV/div 40 : 1 (1 kHz sine wave) 15 : 1 (5 MHz sine wave)
Polarity Inversion	CH 2 only
Channels 3 and 4	
Deflection Factor	0.1 V/div, 1 V/div, selectable Accuracy: \pm 4% (at 10 °C to 35 °C)
Frequency Response	DC to 50 MHz, -3 dB Notes • 10 °C to 35 °C • AC coupling: The lowest usable frequency is 4 Hz.
Pulse Response	Overshoot: 10% Sag (at 1 kHz): 2% Other Distortions: 10%

Input Coupling	AC, DC
Input RC	Direct: 1 M Ω \pm 3%/32 pF \pm 3 pF With probe: 10 M Ω \pm 2%/15 pF \pm 2 pF
Maximum Input Voltage	Direct: 250 V (DC +peak AC) With probe: 600V (DC +peak AC)

1-2-3 Triggering

A-Triggering

Triggering Mode	AUTO, NORM, SINGLE/RESET
Signal Source	CH 1, CH 2, CH 3, LINE, NORM (External trigger can be used by selecting CH 3 with SOURCE switch.)
Coupling	AC, DC, HF REJ, LF REJ, FIX, TV-H, TV-V
Slope	Positive-going (+), Negative-going (-)
Minimum Trigger Sensitivity	As shown in Table 1-1

Table 1-1

(at 10 °C to 35 °C)

Frequency Range	Sensitivity	
	CH 1, CH 2	CH 3, CH 4
DC to 1 kHz	1 div	1.5 div
1 kHz to 2 MHz	0.5 div	1 div
2 MHz to 20 MHz	1 div	1.5 div
20 MHz to 60 MHz	1.5 div	2 div

Note

- Fix: 1 div at 10 Hz to 2 MHz
2 div at 2 MHz to 30 MHz
Sine wave only
- TV-V, TV-H synchronizing signal level: 2.3 div or more on screen amplitude for a composite video signal

composed of 7 parts video signal and 3 parts synchronizing signal

- Trigger signals are attenuated in the following frequency ranges depending on coupling
AC: 10 Hz or less
HF REJ: 10 kHz or higher
LF REJ: 10 kHz or lower
- AUTO sweep mode: The lowest useable frequency is 50 Hz.

B-Triggering

Signal Sources

RUNS AFTER DELAY, CH 1, CH 2, CH 4 (External trigger can be used by selecting CH 4 with SOURCE switch.)

Coupling

AC, DC, HF REJ, TV-H

Slope

Positive-going (+),
negative-going (—)

Minimum Trigger Sensitivity

As shown in Table 1-1
However,
Sensitivity of 20 MHz to 60 MHz is 2 div at CH 1, CH 2.

1-2-4 Horizontal Deflection System

Modes

A, A INTEN, ALT,
B (DLT'D), X-Y

A-Sweep

Sweep Rates

50 nsec/div to 0.5 sec/div,
in 22 calibrated steps in a
1-2-5 sequence
50 nsec/div to 1.25 sec/div,
continuously variable with
the VARIABLE control
Accuracy I (Over center 8
divisions):
 $\pm 3\%$ at 50 nsec/div to
5 msec/div

$\pm 4\%$ at 10 msec/div to
0.5 sec/div

(at 10°C to 35°C)

$\pm 5\%$ (at -10°C to $+50^{\circ}\text{C}$)

Accuracy II (Over any 2 of
the center 8 divisions):

$\pm 5\%$ (at -10°C to $+50^{\circ}\text{C}$)

Variable with the HOLDOFF
control

Hold-Off Time

B-Sweep

Delay

Continuous delay (RUNS
AFTER DELAY), triggered
delay

Sweep Rates

50 nsec/div to 50 msec/div,
in 19 calibrated steps in a
1-2-5 sequence

Accuracy I (Over center 8
divisions):

$\pm 3\%$ (at 10°C to 35°C)

$\pm 5\%$ (at -10°C to $+50^{\circ}\text{C}$)

Accuracy II (Over 2 of the
center 8 divisions):

$\pm 5\%$ (at -10°C to $+50^{\circ}\text{C}$)

Time Difference Measurement

0.5 $\mu\text{sec/div}$ to 5 sec/div

Accuracy: $\pm 2\%$ of reading
 ± 0.01 graduation (Minimum
graduation of DELAY TIME
MULT dial)

Delay Jitter

1/20,000 or less

Sweep Magnification

10 times
(Maximum sweep rate: 5 nsec/
div)

Accuracy I of magnified sweep
rate (Over center 8 divisions)
 $\pm 5\%$ at 50 nsec/div to 0.1
 $\mu\text{sec/div}$

$\pm 4\%$ of 0.2 $\mu\text{sec/div}$ to 0.5
sec/div (at 10°C to 35°C)
Accuracy II of magnified
sweep rate (Over any 2 of the
center 8 divisions):

$\pm 10\%$ at 50 nsec/div to
0.1 $\mu\text{sec/div}$

$\pm 6\%$ at 0.2 μ sec/div to 0.5 sec/div (at 10° C to 35° C)
(Except 25 nsec before and after sweep)

Output Current

10 mA

Accuracy: $\pm 2\%$

(at 10° C to 35° C)

 $\pm 3\%$

(at -10° C to 50° C)

1-2-5 X-Y Operation

X Axis	(Same as CH 1 except for the following)
Deflection Factor	Same as that of CH 1 Accuracy: $\pm 5\%$ (at 10° C to 35° C) $\pm 6\%$ (at -10° C to +50° C)
Frequency Response	DC to 2 MHz, -3 dB
Y Axis	same as CH 2
X-Y Phase Difference	3° or less (at DC to 50 kHz)

1-2-8 Power Supply

Voltage Range	100V (90 to 110 V)/ 115V (103 to 128 V)/ 220V (195 to 242 V)/ 230, 240V (207 to 264 V)/ AC
	One of these voltage ranges can be selected with voltage selector plug
Frequency Range	50 to 440 Hz
Power Consumption	Approximately 50 W (at 100 VAC)

1-2-6 Z-Axis System

Sensitivity	0.5 Vp-p
Polarity	Positive decreases intensity, negative increases intensity
Frequency Range	DC to 3 MHz
Input Resistance	5 k $\Omega \pm 10\%$
Maximum Input Voltage	50 V (DC + peak AC)

1-3 PHYSICAL CHARACTERISTICS

Weight	Approximately 8.5 kg (without panel cover and accessories bag)
Dimensions	320 ± 2 (W) x 160 ± 2 (H) x 400 ± 2 (L) (mm) See Figure 1-1.

1-2-7 Calibrator

Waveform	Square wave
Repetition Frequency	1 kHz Accuracy: $\pm 30\%$ (at 10° C to 35° C)
Duty Ratio	40% to 60%
Output Voltage	0.3 V Accuracy: $\pm 1\%$ (at 10° C to 35° C) $\pm 2\%$ (at -10° C to +50° C)

1-4 ENVIRONMENTAL CHARACTERISTICS

Operating Temperature	-10° C to -50° C
Operating Humidity	40° C, 90% Relative Humidity
Storage Temperature	-20° C to 70° C
Storage Humidity	70° C, 80% Relative Humidity

Altitude	Operating: 5,000 m maximum (atmospheric pressure 428 mm Hg) Non-operating: 15,000 m maximum (atmospheric pressure 87 mmHg)
Vibration	From 10 Hz to 55 Hz and back in 1 minute; double amplitude 0.63 mm; for 15 minutes each in vertical, horizontal, and longitudinal directions for a total of 45 minute
Impact	One side is raised to an elevation angle of 45° (10 cm maximum), and let fall on a piece of hard wood. Each side is put to this test 3 times.
Drop	A package ready for transportation is dropped from a height of 60 cm.

1-5 ACCESSORIES

Power cord	1
Probe (SS-0011)	2
Fuse (FSA-1)	2
Panel cover	1
Dust cover	1
Instruction Manual	1
Accessories bag	1

For the method of removing the accessories bag, refer to Figure 1-2.

Figure 1-1. Dimensional Diagram


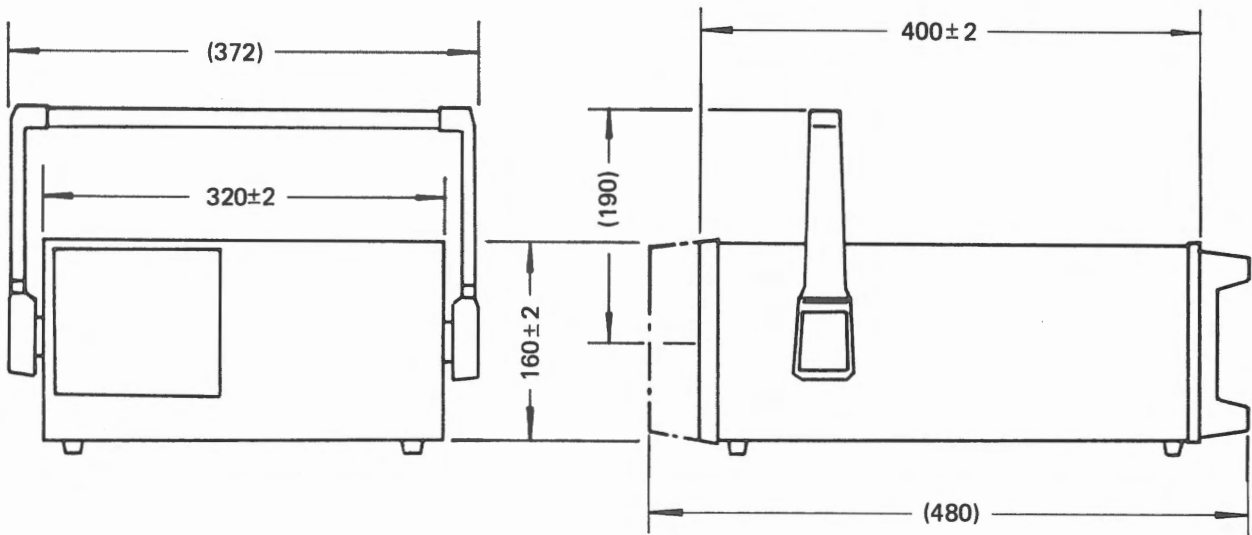


Figure 1-2. Accessories Bag

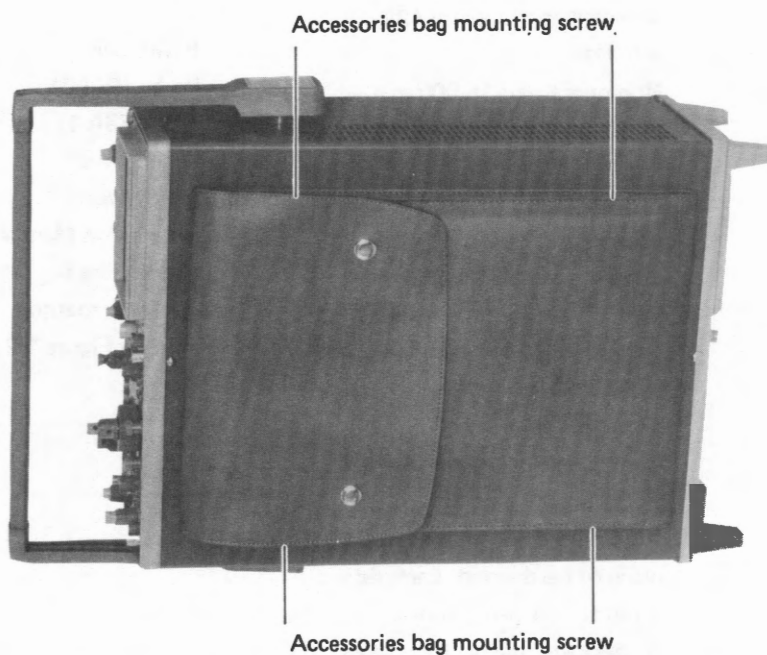

When removing the accessories bag from the upper cover of the SS-5710, remove the four accessories bag mounting screws shown in Figure 1-2.

Use the same screws for mounting the accessories bag on the upper cover again.
