


SPECIFICATIONS:

Safety approval: UL
 Water proof: IP≥55

Electrical

Rated current: 2 ~ 4P: 7A
 5P: 5A
 6 & 8P: 4A
 Rated Voltage: 125V
 Operation Voltage: 200VAC
 Withstanding Voltage: 1500VAC
 Insulation resistance: 2000MΩ DC 500V
 Contact resistance: 10 mΩ DC1A
 Solder cup mouth dia.: 2 ~ 4P: 1.6mm
 5P: 1.2mm
 6 & 8P: 0.9mm
 Solder diameter: 2 ~ 4P: 2.45mm
 5P: 2.00mm
 6 & 8P: 1.15mm

Pin Layout

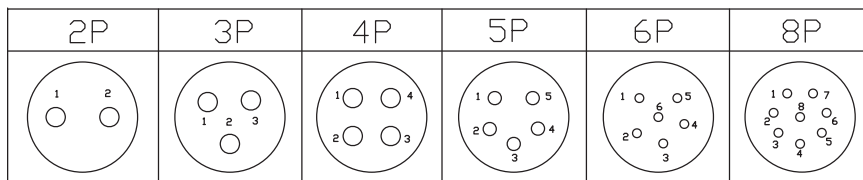

25-722-0 **25-723-0** **25-724-0** **25-725-0** **25-726-0** **25-728-0**

TITLE INLINE PLUG		SCALE
		NTS
DRAWING NO. 25-72X		
		UNITS mm
FILE NAME 25-72X.pdf		SHEET 1/1



Mode Electronics Part Number 'multi-parts'