


**SPECIFICATIONS:**

Safety approval: UL  
 Water proof: IP≥55

**Electrical**

Rated current: 2 ~ 4P: 7A  
 5P: 5A  
 6 & 8P: 4A  
 Rated Voltage: 125V  
 Operation Voltage: 200VAC  
 Withstanding Voltage: 1500VAC  
 Insulation resistance: 2000MΩ DC 500V  
 Contact resistance: 10 mΩ DC1A  
 Solder cup mouth dia.: 2 ~ 4P: 1.6mm  
 5P: 1.2mm  
 6 & 8P: 0.9mm  
 Solder diameter: 2 ~ 4P: 2.45mm  
 5P: 2.00mm  
 6 & 8P: 1.15mm

**Pin Layout**

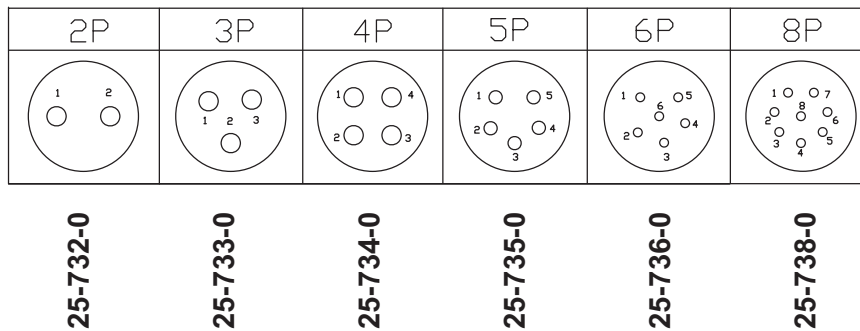

TITLE <b>CHASSIS JACK</b>		SCALE
DRAWING NO. <b>25-73X</b>		<b>NTS</b>
FILE NAME <b>25-73X.pdf</b>	UNITS <b>mm</b>	SHEET <b>1/1</b>



**Mode Electronics Part Number 'multi-parts'**