

# Primary Battery Lead-Cables for Intelcom Services



<http://www.casa.co.nz>

Edition: 23/04/2022

## General Data

**Description:** Battery lead RED 14AWG (2.5mm<sup>2</sup>), 320mm long with 1 x M6 + 1 x M8 pre-insulated crimp lugs at ends

**Brand:** CASA (OEM = TBA)

**Model:** RLM6-RLM8-14AWG-OM32-RED(R1)

**BOM:**  
1 x H3134-Utilux or H4127A Non-Insulated Crimp Ring-Lug M6 (1/4") hole for 6mm<sup>2</sup> (10AWG) cable

1 x H3137-Utilux or H1495A **copper** (un-insulated) if 6mm<sup>2</sup> (10AWG)

320mm 2.5mm<sup>2</sup> (14AWG) RED hook-Up wire... ..or... ..6mm<sup>2</sup> (10AWG)


2 x 20mm x 6mm medium wall Heatshrink sleeve.

**Weight:** xx gms

Type: **RLM6-RLM8-10AWG-OM32-RED+HS(R1)**

M6 Ring Lug

M8 Ring Lug

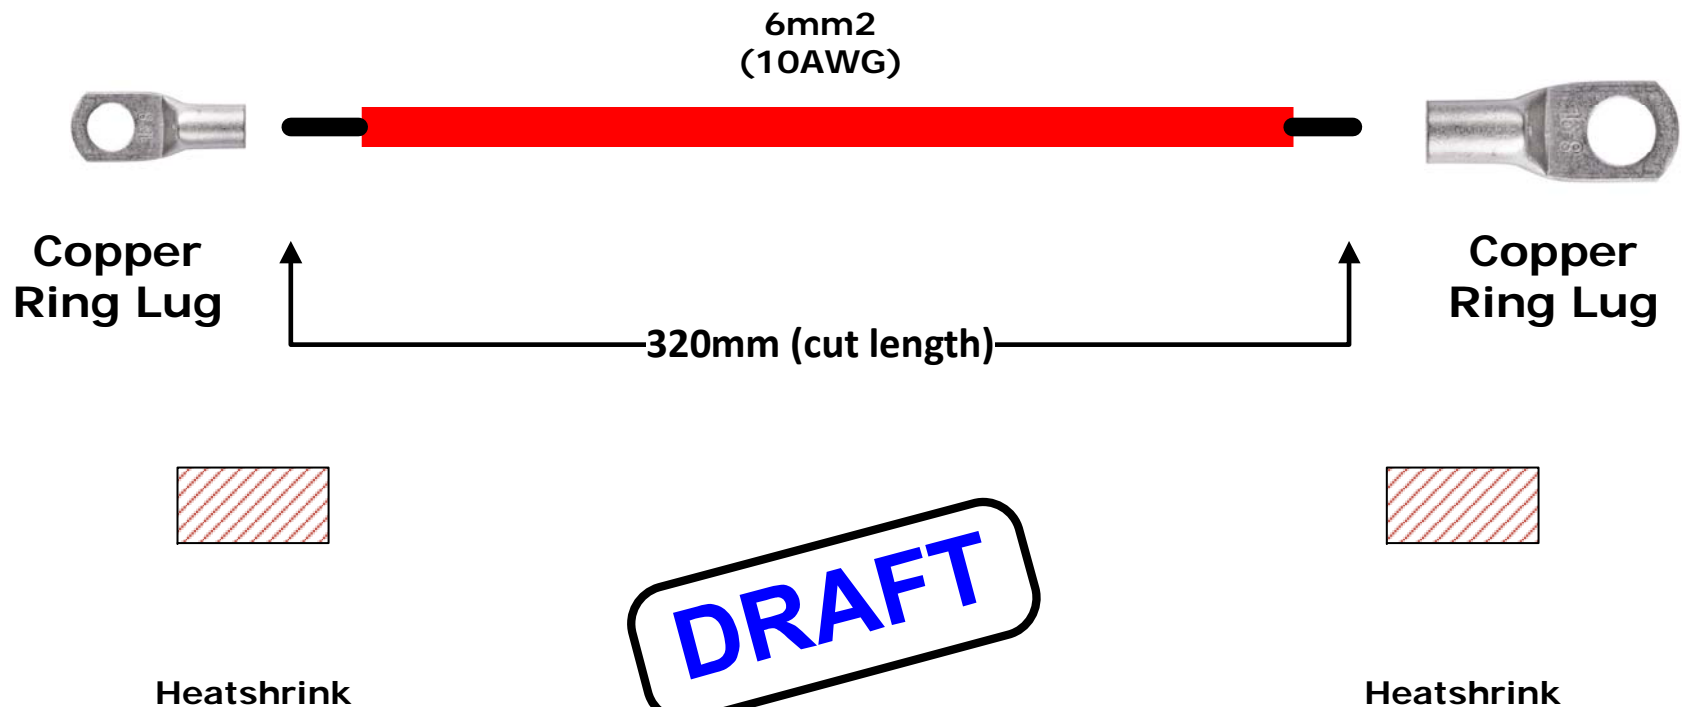

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (*neither expressed nor implied*) for any errors or the consequence therefrom.