

DISTORTION AND NOISE METER

F242A

Applies to Serial No. 586 Onwards

Handbook 1-70542R
Issue 3 31 Jan 80

AMALGAMATED WIRELESS (AUSTRALASIA) LIMITED
North Ryde Division
422 Lane Cove Road, NORTH RYDE. N.S.W. 2113
AUSTRALIA

TABLE OF CONTENTS

	Page
PART 1 GENERAL INFORMATION	
1.1 Introduction	1/1
1.2 Brief Description	1/1
1.3 Performance	1/2
1.3.1 Environmental	1/2
1.3.2 Distortion Factor Measurement	1/2
1.3.3 Level or Noise Measurement	1/2
1.3.4 Input Impedance	1/3
1.3.5 Frequency Response	1/3
1.3.6 Standard Filters	1/3
1.4 General Information	1/3
1.5 Mechanical Details	1/4
1.6 Accessories Provided	1/4
1.7 Optional Accessories	1/4
1.8 Ordering Information	1/5
PART 2 INSTALLATION	2/1
2.1 General	2/1
2.2 Mounting	2/1
2.2.1 Rack Mounting	2/1
2.3 Connections	2/2
2.3.1 Power	2/2
2.3.2 Input	2/2
2.3.3 Alternative Input Connectors	2/2
2.3.4 Output	2/2
2.4 Optional Program Weighting Network	2/3
2.5 Optional Telephone Weighting Network	2/3
2.6 Optional "C" Message Weighting Network	2/3
2.7 Repacking for Shipment	2/3

TABLE OF CONTENTS

	Page
PART 3 OPERATION	3/1
3.1 Operating Controls	3/1
3.1.1 Power Switch	3/1
3.1.2 Bal-Unbal. Switch	3/1
3.1.3 600 Ω - Bridging Switch	3/1
3.1.4 Filters Switch	3/1
3.1.5 Function Switch	3/1
3.1.6 Distortion Calibrate Controls	3/2
3.1.7 Meter Range Switch	3/2
3.1.8 Freq. Out Of Range Light	3/2
3.2 Level or Noise Measurements	3/2
3.2.1 Absolute Level or Noise Measurements	3/2
3.2.2 Relative Level or Noise Measurements	3/2
3.3 Distortion Factor Measurement	3/3
PART 4 TECHNICAL DESCRIPTION	4/1
4.1 Principles of Operation	4/1
4.2 Circuit Description, excluding Auto Notch Filter	4/1
4.2.1 Input Circuit	4/1
4.2.2 Attenuator & Preamplifier	4/1
4.2.3 Program Filter	4/2
4.2.4 20 kHz Hi-Cut Filter	4/2
4.2.5 400 Hz Lo-Cut Filter	4/2
4.2.6 Meter Amplifier & 120 kHz Filter	4/2
4.2.7 RMS - DC Converter	4/2
4.2.8 SET REF Attenuators and Amplifier	4/2
4.2.9 Power Supply	4/2

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

TABLE OF CONTENTS

	Page
PART 4 Continued	
4.3 Circuit Description of Auto Notch Filter	4/3
4.3.1 Bridge Circuit	4/3
4.3.1.1 Bridge Preamplifier	4/3
4.3.1.2 Modified Wien Bridge Circuit	4/3
4.3.1.3 Bridge Postamplifier	4/3
4.3.2 Nulling Circuits	4/3
4.3.2.1 Frequency Locked Loop In Phase and Quadrature Generator	4/3
4.3.2.2 Chopper Preamplifier	4/5
4.3.2.3 Chopper & Loop Integrators	4/5
4.3.3 Automated Range Control	4/5
4.3.3.1 Principle of Operation	4/5
4.3.3.2 Coarse Frequency Measurement	4/6
PART 5 MAINTENANCE	5/1
5.1 General	5/1
5.2 Service	5/1
5.3 Fault Finding, Repair and Adjustment After Repair	5/2
PART 6 CALIBRATION AND TEST PROCEDURE	6/1
6.1 Test Equipment Required	6/1
6.2 Adjustment and Testing	6/1
6.2.1 Level Meter Testing	6/1
6.2.1.1 Provisional Level Alignment	6/1
6.2.1.2 Frequency Response and A.C. Monitor	6/2
6.2.1.3 Attenuator Test at 1 kHz	6/2
6.2.1.4 High Level Attenuator Test for REL. LEVEL, UNBALANCED	6/3
6.2.1.5 High Level Attenuator Test for REL. LEVEL, BALANCED	6/3

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

TABLE OF CONTENTS

PART 6 Continued

6.2.1.6	COARSE SET REF Attenuator Test	6/4
6.2.1.7	FINE SET REF Attenuator Test	6/4
6.2.1.8	Attenuator Test at 100 kHz	6/4
6.2.1.9	Noise	6/4
6.2.1.10	Longitudinal Suppression Test	6/5
6.2.1.11	Return Loss	6/5
6.2.1.12	Lo-Cut Filter	6/6
6.2.1.13	Hi-Cut Filter	6/7
6.2.1.14	Test of Program Weighting Network	6/7
6.2.1.15	Test of Telephone Weighting Network	6/7
6.2.1.16	Level Calibration	6/8
6.2.1.17	Test of "C Message" Weighting Network	6/8
6.2.2	Nulling Loop Testing	6/9
6.2.2.1	Bridge Balance Adjustment	6/9
6.2.2.2	Auto Ranging Circuit Adjustment	6/10
6.2.2.3	Bridge Range Test	6/10
6.2.2.4	Frequency Out of Range Test	6/11
6.2.2.5	Residual Distortion Test	6/11

PART 7	COMPONENT SCHEDULE	7/1
7.1	Explanatory Notes	7/1
7.2	Distortion & Noise Meter F242A, 2A70542	7/1
7.2.1	Components Mounted on Chassis	7/1
7.2.2	Components Mounted on Printed Circuit Board 2R70543	7/1
7.2.2.1	Capacitors	7/1
7.2.2.2	Resistors	7/4
7.2.2.3	Variable Resistors	7/10

TABLE OF CONTENTS

Page

PART 7 Continued

7.2.2.4	Resistor Networks	7/10
7.2.2.5	Inductors	7/10
7.2.2.6	Photo-cells	7/10
7.2.2.7	Relays	7/10
7.2.2.8	Transistors	7/10
7.2.2.9	Integrated Circuits	7/11
7.2.2.10	Diodes	7/12
7.2.2.11	Switches	7/14
7.2.2.12	Connectors	7/14
7.2.3	Components on Set Reference Amplifier Assembly 2R70545	7/14
7.2.4	Meter Range Switch Assembly 2A70546	7/15

PART 8 DIAGRAMS

Simplified Block Schematic & Levels	Drg 70542-3-56
Circuit Diagram, Main	Drg 70542-0-71
Circuit Diagram, Nulling Loop	Drg 70542-0-70
Filter Response Curves	Drg 70550-3-26
Nulling Loop Block Diagram	Drg 70542-3-26
Nulling Loop Range Control	Drg 70542-3-57

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

PART 1GENERAL INFORMATION

This apparatus has been designed according to Class 1 of IEC Publication 348 Safety Requirements for Electronic Measuring Apparatus, and has been supplied in a safe condition. The present instruction manual contains information and warnings which shall be followed by the user to ensure safe operation and to retain the apparatus in safe condition.

1.1 INTRODUCTION

The AWA Distortion & Noise Meter F242A is suitable for the measurement of total harmonic distortion on balanced or unbalanced audio circuits including tape recorders. It features fully automatic fundamental rejection frequency tuning over the range 20 Hz to 20 kHz. The F242A will also measure both absolute and relative level, noise and hum-plus-noise in audio circuits in the frequency range 10 Hz to 100 kHz and sinad receiver sensitivity.

1.2 BRIEF DESCRIPTION

The F242A is a sensitive distortion and level meter which can be used to determine the performance of all types of audio amplifiers, oscillators, tape recorders, line equalizers and filters. Parameters which can be readily measured are: gain, frequency response, signal-to-noise ratio (weighted and unweighted) sinad receiver sensitivity and the distortion factor over a wide range of input levels.

Distortion measurements are referred to the incoming signal level and the meter is calibrated to indicate distortion factor either in dB or as a percentage. The fundamental rejection frequency is automatically tuned over the entire 20 Hz to 20 kHz operating frequency range, no manual selection or tuning being necessary. Residual distortion is typically less than -90 dB. An out of frequency range warning lamp indicates a frequency outside the operating range.

A simplified distortion calibrate control, independent of attenuator setting, enables easier calibration and rapid checking of calibration during measurements.

For level measurements, including noise, the meter is calibrated in dBm in 600 ohms (0 dBm = 1 mW) and V r.m.s. The meter circuit is true r.m.s. responding, necessary to produce accurate readings of the complex distortion waveforms and noise. The residual noise of the F242A is very low, being less than -110 dBm on full bandwidth.

Low-cut and high-cut filters are provided, and by the appropriate selection of these filters, noise above 20 kHz and mains hum-plus-noise below 400 Hz may be excluded. An optional programme weighting network complying with C.C.I.T.T. Recommendation J16 Annex, Geneva 1972, is available for weighted noise measurements.

1.3 PERFORMANCE

1.3.1 Environmental

Operating Temperature Range : 0 °C to 50 °C
Storage Temperature Range : -10 °C to 60 °C

1.3.2 Distortion Factor Measurement

Fundamental Frequency Range:

Balanced : 20 Hz to 20 kHz
Unbalanced : 20 Hz to 20 kHz

Harmonic Measurement Range : 100 kHz

Distortion Factor Range : Maximum -10 dB
Minimum determined by residual distortion of -84 dB balanced or unbalanced, but increasing to -60 dB at 30 Hz on balanced input. Typically better than -90 dB unbalanced.
For inputs below -10 dB ref. 0.775 V, minimum determined by residual noise of less than -74 dB. (100 kHz bandwidth), -84 dB (20 kHz bandwidth).

Accuracy of 2nd Harmonic Indication : +0, -0.5 dB

Input Level Range : -30 dB to +30 dB reference 0.775 V r.m.s.
2.5 mV to 30 V.

1.3.3 Level or Noise Measurement

Meter Ranges (For 0 dB Meter Indication) : -90 dBm to +30 dBm in 10 dB steps
(0.1 mV to 30 V FSD)

Level Accuracy at 1 kHz and 0 dB on meter : ± 0.2 dB (for any attenuator setting)

Absolute Level Accuracy 0 dBm at 25 °C and 1 kHz : ± 0.05 dB

Meter Indication : True r.m.s. responding

Meter Calibration : -30 dB to +2 dB, 0 to 3.2 and 0 to 10 for Volts or Percent

Meter Response : Response time to 99% of FSD in 250 \pm 50 ms

Meter Accuracy : $\pm 1\%$ of f.s.d.

RESIDUAL NOISE : Unbalanced : Less than -110 dBm (less than 2.5 μ V)

1.3.3.1 Relative Level Facility

Variable Gain : +22 dB to -38 dB

1.3.4 Input Impedance

Balanced and unbalanced : 600 Ω

Balanced Bridging : 50 k Ω (0.1 dB bridging loss)
10 Hz to 30 kHz

Unbalanced Bridging : 100 k Ω (10 Hz to 100 kHz)

RETURN LOSS OF TERMINATED INPUT

Balanced : 30 dB (10 Hz to 30 kHz)

Unbalanced : 40 dB (10 Hz to 30 kHz)

: 34 dB at 100 kHz

LONGITUDINAL SUPPRESSION OF
BALANCED INPUT

At least 40 dB with respect to transverse
: voltage (10 Hz to 30 kHz)

1.3.5 Frequency Response

Balanced Input : 10 Hz to 30 kHz ± 0.2 dB (typically less
than ± 0.3 dB to 100 kHz)

Unbalanced Input : 10 Hz to 100 kHz ± 0.2 dB

A.C. OUTPUT

: 2 Volts r.m.s. for FSD on meter
1 k Ω output impedance

1.3.6 Standard Filters

LOW CUT FILTER : ± 0.2 dB at 400 Hz
-45 dB at 50 Hz

HIGH CUT FILTER : Meets high frequency roll off
requirements of IEC Noise Filter
1 dB at 19 kHz
-18 dB at 32 kHz
-40 dB at 63 kHz

1.4 GENERAL INFORMATION

CONNECTORS

Standard Input Connector : Siemens Type 9, Relkli 6a 3-way
balanced or similar

POWER SUPPLY

Mains operation : 110 V - 120 V and 220 V - 240 V nominal, $\pm 10\%$
50 - 60 Hz

1.5 MECHANICAL DETAILS

Height	: 146 mm (including feet) 133 mm (with feet removed for rack mounting)
Width	: 430 mm
Depth	: 397 mm (including handles & rear feet) 345 (behind mounting face, when rack mounted)
Weight	: 7.1 kg.

1.6 ACCESSORIES PROVIDED

- 1 x Mains Cable
- 1 x Instruction Manual
- 1 x Mating Input Connector
(Siemens type Rel stp 6ac or similar)
- 1 x Spare Fuse

1.7 OPTIONAL ACCESSORIES

- | | |
|------------|--|
| Option 001 | CCITT PROGRAM WEIGHTING NETWORK complying with
CCITT Recommendation J16 Annex, Geneva, 1972. |
| Option 002 | CCITT TELEPHONE WEIGHTING NETWORK complying with
CCITT Green Book (1972) Vol V, Recommendation P53 |
| Option 003 | Alternative input connectors consisting of twin
jacks for carrier or tip ring and sleeve plus
an alternative rear panel connector. A mating
connector for the latter is supplied. |
| Option 004 | Alternative input connector, 3 binding posts. |
| Option 005 | Rack mounting kit enabling the unit to be
mounted in a standard 483mm rack, occupying 3
vertical units - 133mm total height. |
| Option 006 | Adaptor 3 pin male to BNC Female. |
| Option 007 | Adaptor 3 pin male to 3 binding posts. |
| Option 008 | A.M. Detector.

Distortion, less than 0.3% 500 kHz to 1.7 MHz
less than 1% 1.7 MHz to 36 MHz
for 2-10 Volt carriers at 30%
modulation.
R.F. input connector, BNC female.
Plugs into standard 3 pin balanced input
socket of F242A. |
| Option 009 | A.M. Detector
Specification as for Option 008
Mates with alternative input connector
Option 004, 3 Binding Posts. |

1.7 OPTIONAL ACCESSORIES (contd)

Option 010

"C" MESSAGE WEIGHTING NETWORK complying with
Bell Systems Technical Reference Publications
41009, May, 1975.

1.8 ORDERING INFORMATION

The instrument is described as A.W.A. Distortion & Noise Meter F242A,
Type 2A70542.

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.

P A R T 2

I N S T A L L A T I O N

2.1 GENERAL

The F242A Distortion & Noise Meter is designed for bench operation or rack mounting and for operation from a.c. mains supply. For power and signal connections, see below.

The equipment should be inspected for any physical damage incurred during transportation. The accessories should be checked against the equipment schedule.

Whenever it is likely that the protection has been impaired, the apparatus shall be made inoperative and be secured against any unintended operation.

The protection is likely to be impaired if, for example:

- the apparatus shows visible damage;
- the apparatus fails to perform the intended measurements;
- after prolonged storage under unfavourable conditions;
- after severe transport stresses

Make sure that only fuses with the required rated current and of the specified type are used for replacement. The use of mended fuses and the short-circuiting of fuse-holders shall be avoided. The fuse should be of the current rating as marked on the rear panel for the mains voltage selected.

2.2 MOUNTING

The F242A is fitted with bottom feet and a tilt bar for bench operation. The tilt bar enables the unit to be tilted upwards for easier operation.

2.2.1 Rack Mounting

If it is required to rack mount the F242A, Option 005, Rack Mounting Adaptor, must be ordered. This adaptor kit is designed to mount the F242A in a standard 483 mm (19 inch) rack.

To prepare the F242A for rack mounting, remove the top and bottom covers, held on by two screws at each end of each cover. Remove the front feet, tilt bar and rear feet from the bottom cover. Refit the bottom and top covers.

Next, peel off the adhesive trim strip on the side of the two front handles and remove the outer two screws from the handles. Using the screws provided in the Rack Mounting Adaptor Kit, screw the angle brackets onto the ends of the case, flange forward. The instrument is now ready for mounting into the rack.

The F242A does not require any cooling in ambient temperatures up to +50 °C however the usual care of not mounting above high dissipation equipment without adequate ventilation should be followed.

2.3 CONNECTIONS

2.3.1 Power

The F242A will operate from 110 V to 120 V and 220 V to 240 V nominal a.c. mains supply, 50 Hz - 60 Hz. The voltage range is selected by a slide switch on the rear panel of the instrument. This voltage range should be checked before connecting to the supply. Ensure that the correct fuse rating is fitted for the supply voltage range selected. These are shown on the rear of the instrument. For 110 V to 120 V range, a 200 mA Anti-Surge fuse should be used.

For 220 V to 240 V range, a 100 mA Anti-Surge fuse should be used.

An international mains socket is fitted on the rear panel of the F242A. The power cord supplied should be plugged into this and connected then to the mains power receptacle.

The mains plug shall only be inserted in a socket-outlet provided with a protective earth contact. The protective action shall not be negated by the use of an extension cord without protective conductor.

Warning!

Any interruption of the protective conductor inside or outside the apparatus or disconnection of the protective earth terminal is likely to make the apparatus dangerous. Intentional interruption is prohibited.

2.3.2 Input

The standard Siemens Halske Type 9 Rel kli 6a or equivalent input connector is a 3-contact in-line socket. The top contact is connected to chassis earth. Balanced input from a 600 ohm line to the other two contacts is normally bridged but may be terminated by selecting 600 ohm TERM. The bridging resistance is 50 kilohms. With unbalanced inputs the centre contact is "active" and the bottom contact is earthed internally. This condition is achieved when the push-button switch marked "BAL"/"UNBAL" is in the 'out' position. The unbalanced bridging input impedance is 100 kilohms.

2.3.3 Alternative Input Connectors

Optional twin jacks for carrier or ring tip and sleeve are available. This kit also provides an alternative rear-panel connector.

If this option is ordered with the instrument it will normally be factory fitted.

If the option is ordered separately, it is supplied with a set of fitting instructions, Modification Bulletin 70542/1, for Distortion & Noise Meter F242A, to enable the easy fitting of these alternative input connectors.

2.3.4 Output

An a.c. output is provided via two binding posts on the right-hand end of the front panel, so that the distortion products may be displayed on an oscilloscope. Two volts r.m.s. from this output correspond to full scale deflection of the meter. The source impedance of this output is 1 kilohm.

2.4 OPTIONAL PROGRAM WEIGHTING NETWORK

To fit the optional C.C.I.T.T. Program Weighting Network, remove the covers of the F242A, plug the Network into the socket on the main printed circuit board (centre left), with components side facing the front of the instrument. Fit clamp supplied over the Network and then replace the covers of the F242A.

2.5 OPTIONAL TELEPHONE WEIGHTING NETWORK

To fit the optional C.C.I.T.T. Telephone Weighting Network, carry out instructions as for 2.4.

2.6 OPTIONAL "C" MESSAGE WEIGHTING NETWORK

To fit the optional C.C.I.T.T. Message Weighting Network, carry out the instructions as for 2.4.

2.7 RE-PACKING FOR SHIPMENT

General guidance is furnished below in the event that re-packing of the instrument for shipment may be necessary at any time.

1. Should the original container be available, re-pack in the same manner as received. It is advisable to retain the original container and packing case for this purpose.
2. If the original container is not available, the unit should be wrapped in heavy paper or plastic sheet prior to placing in an inner container. Place liberal quantities of packing materials, which should be reasonably dust-free, on all sides of the container but DO NOT pack tightly. The instrument front panel side should receive extra attention when the container is being packed into the packing case.
3. Mark the case in which the instrument is shipped "DELICATE INSTRUMENT" or "FRAGILE".

PART 3OPERATION**Warning!**

Any interruption of the protective conductor inside or outside the apparatus or disconnection of the protective earth terminal is likely to make the apparatus dangerous. Intentional interruption is prohibited.

The following controls are mounted on the front panel of the F242A.

3.1.1 Power Switch

This switch applies mains power to the instrument. For safety, both line and neutral are switched.

An associated red l.e.d. lamp indicates the presence of mains power.

Before switching on the apparatus, make sure that it is set to the voltage of the power supply.

3.1.2 Bal-Unbal Switch

This push button switch selects whether the input circuit to the instrument is balanced (button depressed) or unbalanced. In the balanced condition the two lower sockets of the input connector are active. In the unbalanced condition, only the centre socket is active and the lower socket is earthed.

3.1.3 600 Ω - Bridging Switch

With this switch in its non-depressed position, the instrument input will be in the bridging condition. The bridging impedance is 50 kilohms on balanced and 100 kilohms on unbalanced.

With the switch depressed the input will be terminated in 600 ohms.

3.1.4 Filters Switch

This is a bank of three push button switches. When all push buttons are 'out', then the response of the F242A will be flat. By depressing the 'wtg' button the CCITT Programme Weighting Network or CCITT Telephone Weighting Network will be selected, if either of these options are fitted. If neither of these options are fitted, no reading will be obtained on the meter. The 'Lo Cut' and 'Hi Cut' filters may be selected separately or together, again by depressing the appropriate button or buttons. When using the 'Lo Cut' and/or the 'Hi Cut' filters ensure that the 'Wtg' button is not depressed as this button over-rides the other two.

3.1.5 Function Switch

This is a bank of four interlocked push button switches. With the 'LEVEL dBm' button depressed the instrument may be used for absolute level and noise measurements. With the 'LEVEL rel' button depressed the instrument calibration level may be changed by use of the coarse and fine SET REF controls to allow measurements to be carried out relative to some reference input. The remaining two buttons are for distortion measurement. The 'DISTORTION cal' button is again

used in conjunction with the coarse and fine 'SET REF' controls, to set the reference level for distortion measurements. The calibration is carried out independent of the Meter Range Switch setting. Once the reference level has been set, the 'DISTORTION read' button should be depressed to obtain a distortion reading.

3.1.6 Distortion Calibrate Controls

These consist of a coarse and a fine control, the coarse control being switched. These are used when the Distortion Cal switch is depressed to set the reference level for distortion readings.

3.1.7 Meter Range Switch

This switch is used to adjust the meter range for both level and distortion readings.

3.1.8 Freq. Out Of Range Light

This indicator lamp will light on Distortion measurement only, if the fundamental frequency of the incoming signal is outside the range of the instrument.

3.2 LEVEL OR NOISE MEASUREMENTS

3.2.1 Absolute Level or Noise Measurements

Select the appropriate input configuration on the 'bal'-'unbal' and '600 Ω '-'bridging' switches. Next, if it is required to limit the frequency bandwidth, i.e., if noise above 20 kHz or hum and low frequency noise are to be excluded from the measurement, select 'Hi-Cut' and/or 'Lo-Cut' as required. If a weighted measurement is required and the optional weighting network is fitted, select 'Wtg'.

Select 'LEVEL dBm' on the function switch, set the meter range switch to the appropriate range and read the meter.

3.2.2 Relative Level or Noise Measurements

Select the appropriate input conditions and filters as for 3.2.1 Absolute Level and Noise Measurements.

Select 'LEVEL, rel' on the function switch, set the meter range switch to the 0dB position. The coarse and fine SET REF controls may now be used to adjust the meter reading to set the reference for other relative level or noise readings. The meter range switch operates normally enabling relative readings from 30 dB to -110 dB. The meter range switch may be set at other than the 0dB range for adjustment of the SET REF controls, however under these circumstances the operator must remember the range setting and subtract this from the relative measurements obtained from attenuator and meter. Example: If the SET REF controls are set with the meter range switch on -40 dB and another signal is fed in and reads -26 dB the true relative reading would be $(-26 \text{ dB}) - (-40 \text{ dB})$ i.e. $-26 \text{ dB} + 40 \text{ dB}$ giving a relative reading of +14 dB.

3.3 DISTORTION FACTOR MEASUREMENT

NOTE: The F242A measures distortion factor either as a percentage or in dB as follows:

$$\text{Percentage distortion factor} = 100 \frac{V_2^2 + V_3^2 + \dots V_n^2 + N^2}{V_1^2 + V_2^2 + \dots V_n^2 + N^2}$$

$$\text{Distortion factor in dB} = 10 \log \frac{V_2^2 + V_3^2 + \dots V_n^2 + N^2}{V_1^2 + V_2^2 + \dots V_n^2 + N^2}$$

where V_1 , V_2 , etc. represent the amplitudes of fundamental and harmonics, V_n represents the amplitude of the last harmonic in the admitted bandwidth, and N represents noise.

Select the appropriate input configuration on the 'bal'-'unbal' and '600 Ω ' - 'bridging' switches. If noise above 20 kHz or hum and low frequency noise are to be excluded from the measurement, select 'Hi-Cut' and/or 'Lo-Cut' as required. Note however, the use of the filters restricts the range of signal frequencies that may be used for accurate measurement. Next, select 'Distortion-Cal' and adjust the associated coarse and fine calibrate controls for a meter scale reading the 0dB or 10. The setting of the meter range switch is immaterial.

Select 'Distortion-Read' and adjust the meter range switch for optimum meter reading. The automatic frequency notch filter will start to null as soon as the Distortion-Cal button is depressed and in most cases, by the time the calibration controls have been set and the Distortion-Read button selected, the nulling will be complete. The higher the distortion, the more rapid the nulling time.

As the calibration procedure is independent of the meter range switch, the meter range may be left on the appropriate distortion range where a series of distortion measurements are being taken, thus avoiding the tedious winding back to 0dB/100 percent range for calibration and then back again to the required distortion range as on earlier generations of distortion meters.

PART 4TECHNICAL DESCRIPTION

4.1 PRINCIPLES OF OPERATION

Refer to Simplified Block Schematic drawing 70542-3-56.

The incoming signal feeds through the input circuit and then takes one of three routes to the main meter range attenuator/preamplifier. In the 'Level-dBm' mode, the signal feeds directly to the attenuator, in the 'Level-rel', 'Distortion-Cal' and 'Distortion-Read' modes the signal feeds through the coarse SET REF attenuator, SET REF amplifier and fine SET REF attenuator, thence directly to the main attenuator on 'Level-Rel' and 'Distortion-Cal' and via the automatic frequency notch filter on 'Distortion-Read'.

In all four modes signal path is common from the main meter range attenuator/preamplifier to the meter. The signal level is adjusted in the main attenuator and preamplifier and thence to the meter amplifier directly or via the selected filter/s. The output from the meter amplifier then feeds to the output on the front of the instrument and to the rms to d.c. converter, the output of which drives the meter.

4.2 CIRCUIT DESCRIPTION excluding auto notch filter

Refer to Circuit Drawing 70542-0-52.

4.2.1 Input Circuit

Capacitors C1, C2 block d.c. from the input circuit BUT DO NOT BLOCK d.c. FROM TERMINATING RESISTOR, hence d.c. should not be applied across input when using terminated input.

The maximum safe d.c. level unterminated is limited to ± 60 Volts.

Input mode is selected by switch SWA. Balanced signals are passed via a 1:1 transformer (TRI). For meter range settings of +20 dB and +30 dB a 30 dB pad is inserted in the balanced mode. This reduces the distortion generated by the transformer. The centre tap of the pad is a.c. grounded in order to maintain longitudinal suppression. If longitudinal suppression for high levels is unimportant this capacitor may be removed.

4.2.2 Attenuator & Preamplifier

Refer also to Level Diagram & Attenuator Control Circuit 70542-3-56. The level diagram shows for each input level the corresponding attenuation in the attenuator and the gain setting of the preamplifier. The attenuator has a constant 100 k Ω input impedance. Transmission gates IC1 select either 30 dB, 50 dB, 60 dB or 80 dB attenuation. As the transmission gates are in series with a high load impedance (100 k Ω) their on-resistance variation has negligible effect on accuracy. Transmission gates IC2 are used to prevent attenuator feedthrough. For meter ranges of -40 dBm and above transmission gate "6" is on and "12" is off and thus preventing relay (RLD) feedthrough. The preamplifier is a three-stage low noise amplifier. Q3 serves as a dynamic load for Q2 to attain high gain. Overall negative feedback, selected by RLA, RLB and RLC sets a gain from 6 dB to 36 dB in steps of 10 dB.

4.2.3 Program Filter

The LC-network shapes the frequency response to conform to the C.C.I.T.T. Recommendation J16 Annex Geneva, 1972. Feedback pair Q5, Q6 is used to achieve an overall gain of +12.2 dB at 6.3 kHz. The exact gain is set by RV401. For program filter characteristic refer to DWG 70550-3-26.

4.2.4 20 kHz Hi-Cut Filter

This filter is a five-pole active low-pass Chebyshev design. The first section contributes a complex pole and uses a complementary emitter follower with near unity gain. The second section provides a real pole as well as a complex pole pair. The roll-off meets I.E.C. noise filter specification with $f_m = 16000$ Hz. For Hi-Cut characteristic refer to DWG 70550-3-26.

4.2.5 400 Hz Lo-Cut Filter

This filter is a three-pole active high-pass Chebyshev design. It uses an operational amplifier to provide a unity gain stage. For high-pass characteristics refer to DWG 70550-3-26.

4.2.6 Meter Amplifier & 120 kHz Filter

This filter is a three-pole elliptical low-pass design. It attenuates out-of-band high frequency noise. The meter amplifier is a multistage, wideband negative feedback amplifier. An input differential stage is followed by two voltage gain stages and an output emitter follower. Q17 serves as a current source for Q16. L2 and C62 are used in the balanced mode to compensate for the high frequency response of transformer T1.

4.2.7 RMS-DC Converter

IC3 and associated components function as a full-wave rectifier. The four transistors of IC5 square the absolute value input signal and divide this by the output d.c.-signal. Zener diode D41 is used to protect the meter against heavy overloads.

4.2.8 SET REF Attenuators and Amplifier

The coarse SET REF control is used to provide from 20 dB of gain to 30 dB of attenuation in 10 dB steps to set the reference level in conjunction with the fine SET REF control RV301. The SET REF amplifier is a low distortion, high input impedance amplifier circuit with switchable gains of 23, 13 and 3 dB. Transistor Q302 is operated at constant collector-base voltage due to Q301 thereby minimising any source-impedance induced distortion effects. Q302 provides additional loop gain and Q304 and Q305 form a compound emitter follower. Feedback from Q305 emitter to Q302 emitter sets the amplifier gain.

4.2.9 Power Supply

The power supply circuit consists of a +12 V series regulated supply IC8 and a -12 V series regulated supply IC9. Both supplies are internally protected against short circuits and thermal overloads.

4.3 CIRCUIT DESCRIPTION OF AUTO NOTCH FILTER

Refer to Circuit Drawing 70542-0-55.

The automatic nulling circuit consists of 3 sections: the Wien bridge with associated amplifiers, a nulling circuit to control the variable resistors in the bridge and automatic bridge range control circuits.

4.3.1 Bridge Circuit

4.3.1.1 Bridge Preamplifier

The output from the calibrate control potentiometer RV315 is fed into the bridge preamplifier which has very high open loop gain and only 10 dB closed loop gain. This ensures that distortion produced by the instrument is kept to a minimum. Local preamplifier feedback is combined with overall nulling bridge feedback on one input of the amplifier.

4.3.1.2 Modified Wien Bridge Circuit

The bridge circuit used to remove the fundamental frequency signal in distortion mode is a Wien Bridge with a variable resistor PCC1 connected across the reactive arm series section resistor and part of the reactive arm parallel section resistor. The resistor ratios are chosen so that varying PCC1 changes the bridge rejection frequency without varying the bridge attenuation. Thus the bridge resistive arm need only have a fine adjustment which is done by PCC2.

To keep the signal across the PCC's down and hence to minimise PCC induced distortion the Wien Bridge needs sixteen separate ranges to cover the frequency band. Four major divisions are made by selecting one of four bridge capacitor sizes by relays RLK and RLJ. Each of these major frequency bands is further sub-divided by selecting one of four resistive ranges by relays RLL and RLM to make up the complete reactive arm of the bridge.

4.3.1.3 Bridge Postamplifier

The output of the Wien Bridge resistive and reactive arms are fed to opposite inputs of a differential amplifier to reject any common mode signal and amplify the difference. An emitter follower lowers the output impedance of the amplifiers. Feedback is taken from the postamplifier output via R153 to the preamplifier input to sharpen the rejection notch and set the gain for harmonics, which are not blocked, at 10 dB.

4.3.2 Nulling Circuits

4.3.2.1 Frequency Locked Loop. In Phase and Quadrature Generator.

To achieve the automatic nulling function the signal which appears across the Wien Bridge and postamplifier must be examined for phase shift. Any imbalance in the reactive arm of the bridge will result in fundamental appearing at the output phase shifted relative to the bridge input. Any imbalance in the resistive arm will result in an in-phase fundamental component referred to the input. To separate the bridge output signal into in-phase and out-of-phase components reference signals must be generated with zero phase shift (in-phase) and 90° phase shift (Quadrature) referred to the bridge input signal.

The outputs of the bridge preamplifier and the set reference amplifier are passed through isolation amplifiers IC24 which further amplify these signals and prevent switching transients from entering the bridge circuitry. According to the state of the Q output of the monostable 1/2 IC27, either of these signals is fed via an analog switch to an additional isolation amplifier IC25 whose output is squared by the comparator 1/4 IC32. D63 prevents excessive voltage swing from being applied to the comparator input. The comparator output is then buffered and inverted by 1/4 IC26. Pulses at twice the incoming signal frequency are created by exclusive OR gate, 1/4 IC26 with R273 and C131. These are fed to the frequency locked loop incorporating a retriggerable variable pulse width monostable as the oscillator. The output of the monostable at pin 13 of IC27 is a square wave at twice the incoming signal frequency. The square wave period is controlled by the variable current source Q43 and R300, which charges C133 until its voltage exceeds the reference voltage set by R278 and R279. At this point, comparator 1/2 IC32 changes state and resets the monostable via the reset line of 1/2 IC27. Q42 is then turned on and discharges C133. The monostable is now ready for the next input pulse. The mark space ratio of the monostable output is compared to unity by the integrator, 1/2 IC25, whose reference voltage is derived from the voltage divider R301 and R302. The integrator ramps up or down according to the error in the mark space ratio, and adjusts the charging current of C133 accordingly.

The frequency locked loop (f.l.l.) output frequency is halved by 1/2 IC30 and by the appropriate gating of signals, is phase shifted 90° by the other half of IC30. The IN Phase and Quadrature relationship of the output signal of IC30 with the bridge frequency is ensured by 1/4 IC35 by gating the bridge frequency with pulses provided by R303, and C136 at the derived bridge frequency. The IN Phase and Quadrature signals are then taken to the control loop integrator choppers.

Whenever unstable states are present on the frequency range relays, i.e. any one state does not exist sufficiently long for the bridge to null, pulses appear at pin 9 of IC21. Each pulse is used to trigger a monostable 1/2 IC27, C140, R305 which has a period of approximately 600 msecs. To ensure that each trigger pulse results in a full monostable period, the pulses from IC21 are blocked by a gating circuit IC35 with C139 and R304, for the discharge period of C140. This 500 msec pulse is used to change the state of the analog switch 1/3 IC12, which allows the f.l.l. to be fed from the set reference amplifier for this period, rather than the bridge preamplifier. This is done to assist the lock up of the f.l.l. onto the wanted fundamental frequency if another interfering signal was present in the nulling circuitry before the fundamental frequency was introduced into the instrument. Because of the lack of feedback around the bridge preamp and bridge, for the frequency being nulled, this frequency will appear at the preamp output selectively amplified over other frequencies present.

Thus, if, for example, the distortion of a 20 kHz signal were to be measured in the presence of severe hum, present in the bridge before the 20 kHz was introduced, the hum component would be amplified at the bridge preamp relative to the 20 kHz signal. This would deteriorate the lock-up behaviour of the f.l.l. However, once the coarse ranging circuitry has stabilised, the f.l.l. is fed from the bridge preamp, which transmits more accurate phase information to the IN Phase and Quadrature Generator about the state of null in the bridge, enabling faster nulls to be achieved.

4.3.2.2 Chopper Preamplifier

The bridge postamplifier output signal has to be amplified before it is dissected for information. Two conflicting requirements have to be met. For very low distortion signals, the preamplifier has to have very high gain so that error signals dominate integrator off-set voltages. For highly distorted signals, the high gain would cause clipping in the pre-amp.

To meet these requirements the amplifier gain is set according to the front panel attenuator switch. For attenuator settings of -30 dB or less, the gain is approximately 29 dB. When the attenuator is set to -20 dB or above, a transmission gate 1/4 IC11 is turned on, switching in a lower feedback resistor across the amplifier changing its gain to approximately 9 dB.

4.3.2.3 Chopper and Loop Integrators

The signal from the Chopper Preamplifier is switched through CMOS analog switches using the In Phase and Quadrature signals as control voltages.

The reactive arm balance is controlled by the Quadrature signal and is the critical path in the control loop. Any fundamental which is phase shifted with regard to the bridge input signal appears as a d.c. error signal after being chopped by the Quadrature signal.

The active integrator in the reactive arm constitutes a second order control loop so the steady state error signal is zero. Phase lead loop compensation is provided by R234 in parallel with C108. The integrator input offset error voltage is adjusted to zero by RV3.

The integrator output drives a loop filter which provides further loop gain and phase compensation required for loop stability. The loop filter output then drives a Darlington emitter follower which has the capacity needed to drive the control element LED. Q44 provides correction for nonlinearity in the control element characteristic.

The resistive arm loop is only a fine trim to make up for component tolerances. Therefore the resistive arm loop gain is lower and the integrator filter is simpler. After the Chopper Preamplifier output signal is chopped by the In Phase signals it is integrated through an RC low pass filter. The integrator drives an emitter follower which in turn drives the resistive arm control element LED.

The gain, of both the reactive and resistive arm integrators is increased, by reducing the input resistance via transmission gates IC11, when the front panel attenuator switch is set to -20 dB or above. This compensates for the reduction in gain of the chopper preamplifier, and maintains constant loop gains in both arms.

4.3.3 Automated Range Control

4.3.3.1 Principle of Operation

The d.c. error signal derived by the control loop to drive the bridge control elements is a function of the frequency difference between the bridge frequency and the input frequency. If the frequency difference is sufficiently large the bridge cannot null. To avoid this an approximate determination is continually made of the incoming frequency. This is compared with the range actually operating and if a difference of more than one range is detected the range is

changed. Operating in parallel with this system are two comparators that detect if the reactive arm control voltage exceeds its normal operating limits. This also causes the range to step in the required direction.

4.3.3.2 Coarse Frequency Measurement

Each bridge range covers a frequency ratio of approximately 1.55 to 1. Therefore the frequency of the nth range is $(1.55)^n$ times the frequency of the bottom range or -

$$T_{low} = \left(\frac{1}{1.55}\right)^n T_n$$

where T_n is the period of the incoming signal.

T_{low} is the longest period on the bottom range.

or rearranging
$$n = \frac{1}{\ln 1.55} \ln \frac{T_n}{T_{low}}$$

If a capacitor is charged to a voltage proportional to the period of the incoming signal and allowed to decay exponentially to a reference voltage then,

$$V_{ref} = V_p e^{-\frac{t}{RC}}$$

where V_{ref} is the reference voltage

V_p is the voltage proportional to input period

RC is the exponential delay time constant

or rearranging
$$t = RC \ln \frac{V_p}{V_{ref}}$$

If the delay time t is measured by a conversion clock whose period is T_c then,

$$n T_c = RC \ln \frac{V_p}{V_{ref}}$$

$$\text{or } n = \frac{RC}{T_c} \ln \frac{KT_n}{V_{ref}}$$

when n = number of clock cycles

$$KT_n = V_p$$

Thus if R, C and T_c are chosen so that $\frac{RC}{T_c} = \frac{1}{\ln 1.55}$ and the constant of

proportionality K is chosen such that $\frac{V_{ref}}{K} = T_{low}$ then the number of cycles of the conversion clock is a direct digital indication of the required range.

In the circuit the voltage proportioned to signal period is derived from the Quadrature signal by a constant current generator consisting of IC28 and Q51 which charge C143 for one half period. Resistor R293 is switched across the capacitor by the CMOS analog switches 3/4 IC31. The exponential delay is always completed in less than one quarter of a period so for the last quarter period the capacitor is shorted to ground by the CMOS analog switch 1/4 IC31. This discharges the capacitor ready for the next cycle. The exponential delay capacitor is connected to a voltage comparator IC29 whose input offset voltage is nulled by RV6. After amplification by Q52 the exponential period is used to gate a clock oscillator consisting of IC16 and NAND gate 1/3 IC13 whose frequency can be adjusted by RV4. This adjustment also removes any errors in exponential delay time constant.

The clock output is taken to a four bit digital coarse ranging counter IC17 which counts to the required range before being reset ready for the next cycle. Before the counter is reset its output is compared with the output of a second counter IC18 which controls the bridge relays.

The comparison is performed by a four bit subtractor IC19 and exclusive OR gates IC23 whose outputs are NANDed. The least significant bit of the subtractor is ignored which permits the counters to differ by one bit without causing a range change. When the coarse range counter differs by more than one bit from the relay control counter a preset pulse is fed into an integrator delay circuit and then via the delay circuit 1/2 IC14 to the preset input of the relay control counter. This parallel loads the contents of the coarse ranging counter into the relay control counter.

The integrator delay circuit prevents the preset enable by disabling the delay circuit 1/2 IC14 until the coarse range error has been present for approximately 200 mS to avoid range changing due to heavy noise during SINAD measurements and during loss or break-up of signal on tape recorder distortion measurements.

A separate fine ranging control is generated by comparing the bridge reactive arm control voltage with two limit voltages via comparators 1/2 IC32. If the control voltage exceeds its normal operating limits clock pulses are generated via a free running multivibrator to clock the relay control counter in the required direction.

If the relay control counter is already at one extreme of its range then the "carry out" output of the counter paralyses the clock input via gate 1/3 IC13, and instead enables the "freq. out of range" LED.

The four outputs of the relay control counter operate four relay drivers which can feed the current needed to operate the relays.

In the event that no signal is present at the input to the bridge, transistor Q53 turns off and paralyses the fine ranging multivibrator, preventing unwanted range changes. Also if the frequency is outside the range of the bridge a signal from the carry output of IC18 is gated with the fine ranging error signal by transistors Q48 and Q49 to turn on the "freq. out of range" light D61.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

PART 5MAINTENANCE

5.1 GENERAL

This is a high performance instrument and to maintain this performance level, periodic checks are advisable. Inspection should include checks on resistors to ensure that no signs of over-heating are evident. The wire used has an insulating coating of polyvinyl chloride, and the styroseal capacitors also contain thermo-plastics which must not be subjected to excessive heat. Should servicing be required, take care against a hot soldering iron coming into contact with or being placed near the wiring forms or capacitors.

The opening of covers or removal of parts, except those to which access can be gained by hand, is likely to expose live parts, and also accessible terminals may be live.

The apparatus shall be disconnected from all voltage sources before any adjustment, replacement or maintenance and repair during which the apparatus shall be opened.

If afterwards any adjustment, maintenance or repair of the opened apparatus under voltage is inevitable, it shall be carried out only by a skilled person who is aware of the hazard involved.

5.2 SERVICE

It is important to note when servicing this instrument, that any replacement of circuit components may require a re-adjustment of the pre-set controls to restore the instrument to its original calibrated condition.

Service work of any kind, particularly on sub-miniature components, should be carried out with care. Transistors and diodes, when being replaced, should receive scrupulous care because permanent damage may be caused by the application of excessive heat.

Should it be found during inspections that dust accumulation has built-up inside the instrument this should be removed, preferably by a low pressure jet, or alternatively a soft brush may be lightly used.

Switch control cleaning and lubricating should always be done with a recommended agent and the use of abrasives should be avoided.

The following solution may be made up and applied with a fine brush:

- 12 oz. Anhydrous Lanoline (British Pharmacopeia Standard)
- 1 fl. oz. Mobil Aero Instrument Oil (MIL-L-7870A or NATO-O-142)
- 25 fl. oz. 1, 1, 1 Inhibited Trichlorethane (Dow Chemical Company "Chlorothene NU")

A convenient package of cleaner-lubricant is now available for contacts of wiping, knifing or sliding types. This fluid is pressure packed and the container is fitted with a flexible tube to facilitate the directing of fluid to obscure points. Packaged in 12 oz. cans, it may be ordered as AWA Electrical Contact Cleaning Lubricant.

5.3 FAULT FINDING, REPAIR AND ADJUSTMENT AFTER REPAIR

In the event of a fault or an apparent fault in the instrument, check that the a.c. mains supply is present and the front panel power switch is turned on, next check the fuse in the rear of the instrument. Check the mains voltage selector switch is on the correct setting for the a.c. mains voltage being used. Check that the audio input is connected to the instrument and that a signal is present.

Next check that the power supply is functioning by probing the two T0220 integrated circuit voltage regulators on the right hand rear corner of the main P.C.B. Their outputs should be + and -12 V ± 0.5 V.

Level Meter Section:-

No output for any attenuator setting. If the weighting filter is selected when the option has not been plugged into the machine then no output appears.

Check that the plug and socket assy. connecting the attenuator selector switch to the P.C.B. is mating properly.

Check that a signal appears on the F242A OUTPUT terminals. If so, then the fault lies in the true RMS to DC convertor, if not, then the fault lies in the attenuator, preamplifier filters or meter amplifier.

Nulling Loop & Frequency Ranging:-

The nulling loop can be divided up into seven sections.

- a) Bridge and Associated Amplifiers
- b) Bridge resistive arm control
- c) Isolation amplifier
- d) Frequency locked loop
- e) Bridge reactive arm control
- f) Coarse Ranging circuitry
- g) Fine Ranging circuitry

Failure of one part of the system will often produce an apparent fault in a completely different area.

a) and b) Failures in either the bridge amplifiers or bridge resistive arm control will usually only cause a poor null without affecting the ranging circuitry. The fault cause may then be separated by examining T.P.16. If the fault lies in the resistive arm loop the signal will appear as shown in Fig. 5.1a.



FIG. 5.1


Failure in any of the amplifiers will usually produce gross distortion which is being nulled as far as possible by the control loop and will appear as shown in Fig. 5.1b.

c) Failures in any of the isolation amplifiers will not allow the frequency locked loop to lock up. To check these amplifiers, examine pin 1 of IC25. If the ranging circuitry is hunting, the output should be a sine wave whose amplitude momentarily changes. If the ranging circuitry is not hunting, the output should be a constant amplitude sine wave.

d) Frequency Locked Loop and In Phase and Quadrature Generators. Failure of this section can cause the ranging circuit to hunt but usually will not. The f.l.l. can be checked by examining pins 13 and 12 of IC27. The outputs should be antiphase square waves at twice the incoming signal frequency. To check the In Phase and Quadrature generator, verify that pins 13 and 12 IC30 are antiphase square waves at the incoming signal frequency and that IC30 pin 1 is in phase with IC26 pin 4. Also pin 1 IC30 should be 90° phase shifted with respect to pin 13 IC30, while pin 2 IC30 is antiphase with pin 1 IC30.

e), f) & g) Failure in the bridge reactive arm control, coarse ranging or fine ranging circuitry will cause the relay control counter to hunt, jumping between ranges.

In order to locate the fault the system must first be stabilised. Applying either a 20 Hz or 20 kHz signal should stop the oscillation. If under one of these conditions the "FREQ OUT OF RANGE" light comes on and the loop stops hunting, then the fault probably lies in the reactive arm control loop. This can be verified by examining TP16 again. The signal should appear as shown in Fig. 5.2

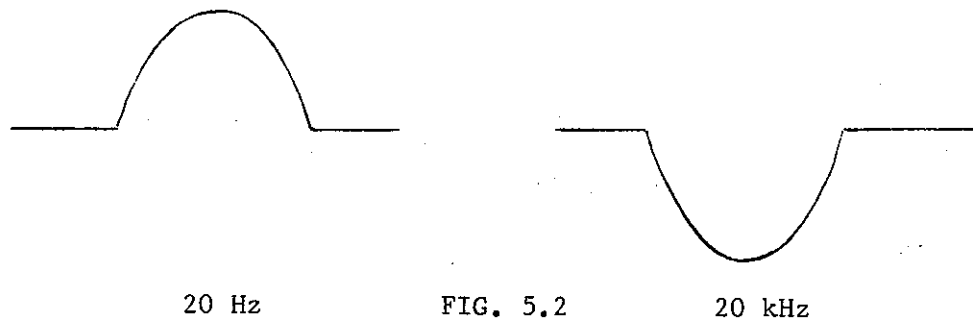

If the F242 nulls correctly at either 20 Hz or 20 kHz or the ranging circuitry continues to hunt then the fault lies in the range control circuitry. To separate out faults in the fine and coarse ranging circuitry set up an oscilloscope as for Test Specification No. 6.2.2.2. With a 20 Hz input signal 15 clock positive going edges should appear in each clock burst and at 20 kHz none should appear. For intermediate frequencies the bridge range can be counted off by the number of clock edges appearing as shown in Table 1. It is normal for the clock burst to be momentarily disturbed by any relay operation.

Table 1.

| Number of Clock Edges | Lower End of Range |
|-----------------------|--------------------|
| 0 | 14,000 |
| 1 | 9,000 |
| 2 | 5,800 |
| 3 | 3,730 |
| 4 | 2,400 |
| 5 | 1,550 |
| 6 | 1,000 |
| 7 | 640 |
| 8 | 414 |
| 9 | 266 |
| 10 | 172 |
| 11 | 111 |
| 12 | 71.1 |
| 13 | 45.8 |
| 14 | 29.5 |
| 15 | 19.00 |

If the coarse ranging circuitry is functioning correctly and the ranging circuit is still hunting, examine IC14 pin 10 and 6. If pin 10 has positive going $\frac{1}{2}$ second wide pulses then the fault probably lies in the comparator circuitry (IC's 19, 21 and 23). The pulses may be so close together that they appear a continuous +12 V. If the positive pulses appear on pin 6, then the fault probably is in the fine ranging circuit.

After several years of operation the offset voltage in the resistive and reactive arm integrator operational amplifier inputs may become excessive. The machine can be readjusted according to Test Specification section 6.2.2.1. Any frequency between 20 Hz and 20 kHz can be used; the major requirement is better than -84 dB noise and distortion.

PART 6CALIBRATION AND TEST PROCEDURE

6.1 TEST EQUIPMENT REQUIRED

1. AWA G251 Level Oscillator or equivalent.
2. Input cable with 5 turns wound on toroid core TDK 1 X 27 H5C2, with three contact plug.
3. 75 Ω precision attenuator 0 - 100 dB.
4. Precision resistors (0.5%)
2 x 300 Ω
1 x 600 Ω
1 x 75 Ω
5. Siemens Selective Level Meter (Rel 3W29 3D 332) or equivalent.
- 6.* AWA ULTRA LOW DISTORTION Oscillator G233.
7. 15 MHz Cathode Ray Oscilloscope.
- 8.* AWA G231 Oscillator.
9. Counter of accuracy ± 0.1 Hz on low range.
10. Wandel u. Goltermann EPM-1 Milliwatt Test Set with 600 Ω balanced probe.
11. High voltage amplifier as supplied.
 - (a) 25 V r.m.s. output into high impedance.
 - (b) Linearity ± 0.05 dB for a 10 dB change in level.
 - (c) Gain 30 dB.
 - (d) Input impedance 10 k Ω .

* AWA Low Distortion Oscillator G232, may be used as an alternative to both these instruments.

6.2 ADJUSTMENT AND TESTING

6.2.1 Level Meter Testing

6.2.1.1 Provisional Level Alignment

1. With the power turned off, mechanically zero the F242A meter.
2. SETTINGS:
G251 1 kHz, 600 Ω , 0 dBm
F242A 600 Ω , LEVEL dBm, UNBAL. 0 dBm
3. Adjust G251 level to exactly 0 dBm with its fine level control.
4. Adjust F242A Cal-control RV1 for 0 dB on F242A meter scale.

6.2.1.2 Frequency Response and A.C. Monitor

1. Set-up:

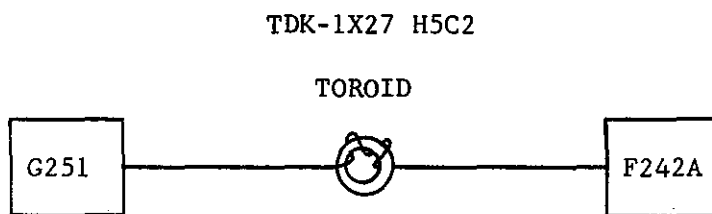


FIG. 1

2. SETTINGS: F242A 600 Ω , 0 dBm, LEVEL dBm,
All filters out

G251 600 Ω , 0 dBm

3. Set G251 frequency to 1 kHz. Set level of G251 so that F242A meter reads 0 dB.
4. Check the F242A meter indications at the following frequencies. Make allowance for the G251 response calibration. CHECK both "BAL" and "UNBAL".
- 4a. Use G231 to check 10 Hz response.

| FREQUENCY
Hz | 10 | 100 | 1 k | 10 k | 30 k | 100 k |
|-----------------------|-----|-----|------|------|------|------------------------|
| TOLERANCE
\pm dB | 0.2 | 0.2 | Ref. | 0.2 | 0.2 | 0.2 UNBAL.
0.3 BAL. |

5. Check that the "OUTPUT" terminal gives about 2 V r.m.s. unloaded.

6.2.1.3 Attenuator Test at 1 kHz

1. Set-up: 0 dBm to -80 dBm

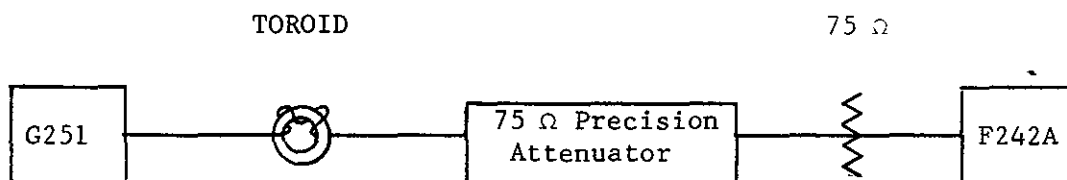


FIG. 2

2. SETTINGS: F242A BRIDGING, LEVEL dBm,
 ALL FILTERS OUT, UNBAL.

 G251 1 kHz, 9 dBm, 75 Ω

 ATTENUATOR 0 dB
3. Set F242A to 0 dBm range and adjust level of G251 to read 0 dB on F242A meter.
4. Switch in 10 dB attenuation and ensure that the F242A meter indicates -10 dB ± 0.5 dB. Switch out the 10 dB attenuator again.
5. Switch in successively 10 dB more attenuation whilst increasing the sensitivity of the F242 in 10 dB steps. Check that the F242A meter stays always within 0 dB ± 0.2 dB.
6. Set-up: 0 dBm to +30 dBm

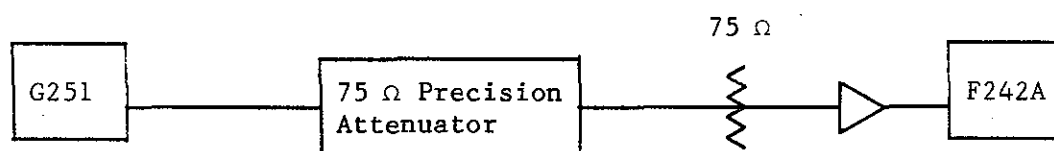


FIG. 3

7. SETTINGS: F242A BRIDGING, LEVEL dBm
 ALL FILTERS OUT, UNBAL

 G251 1 kHz, 9 dBm, 75 Ω

 ATTENUATOR 30 dB
8. Set F242A to 0 dBm range and adjust level of G251 to read 0 dB on F242A meter.
9. Switch out successively 10 dB attenuation whilst decreasing the sensitivity of the F242A in 10 dB steps. Check that the F242A meter stays always within 0 dB ± 0.2 dB.

6.2.1.4 High Level Attenuator Test for REL. LEVEL, UNBALANCED

Repeat tests 6, 7 & 9 of 6.2.1.3 with the F242A set to REL. LEVEL, UNBAL, BRIDGING, COARSE SET REF switch in 4th position from full anticlockwise, FINE SET REF control adjusted for 0 dB on F242A meter with G251 level as in test 4.1.3.8.

6.2.1.5 High Level Attenuator Test for REL. LEVEL, BALANCED

Repeat tests 6, 7 & 9 of 6.2.1.3 for +20 dBm only, with F242A set to BAL, other settings as for 6.2.1.4.

6.2.1.6 COARSE SET REF Attenuator Test

1. Test set-up as in test 6.2.1.3.6
2. Settings: F242A BRIDGING, UNBAL, REL. LEVEL, 0 dBm, ALL FILTERS OUT, FINE SET REF control as for 6.2.1.4, COARSE SET REF. switch fully clockwise.

G251 1 kHz, 75 Ω , Level as in 6.2.1.3.8.

ATTENUATOR 50 dB.

3. Successively rotate the COARSE SET REF Switch anti-clockwise whilst switching out 10 dB steps on the attenuator and check that the F242A Meter reading remains within ± 0.5 dB. Tick result only.
4. Switch F242A to BAL and check reading does not vary by more than 0.5 dB (RLG Test). Tick result only.

6.2.1.7 FINE SET REF Attenuator Test

1. Test set-up as in test 6.2.1.3.6.
2. Settings: F242A BRIDGING, UNBAL, 0 dB range, REL. LEVEL, ALL FILTERS OUT, COARSE SET REF control 4th position from fully anti-clockwise.

G251 1 kHz, 75 Ω , Level as in 6.2.1.3.8.

ATTENUATOR 32 dB.

3. Rotate FINE SET REF control fully clockwise and check F242A meter reading is 1 ± 0.5 dB. Tick only.
4. Rotate FINE SET REF control fully anti-clockwise and check F242A meter reading is 12 ± 1 dB. Tick only.

6.2.1.8 Attenuator Test at 100 kHz

Repeat all tests of 6.2.1.3 with a frequency of 100 kHz instead of 1 kHz.

6.2.1.9 Noise

1. Set F242A to 600 Ω , range switch to -80 dBm, no filter button depressed.
2. Check that reading is below 0.4 V on the 10 V scale of the meter, both for "Bal" and "Unbal".
3. Set F242A to "BRIDGING", check that reading is below -13 dB.

6.2.1.10 Longitudinal Suppression Test

1. Set-up:

Note * Resistors should be 0.5% to ensure matching.

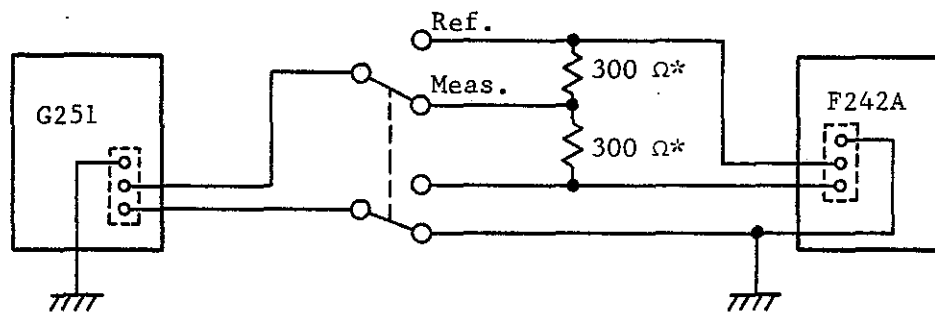


FIG. 4

2. SETTINGS: F242A "Bal" "Bridging"

G251 600 Ω, 30 kHz

3. In the reference position adjust G251 level for 0 dBm reading on F242A.

4. Switch to "Meas" position and check that F242A reading is below -40 dBm

6.2.1.11 Return Loss

1. Set up: For 30 kHz and 100 kHz

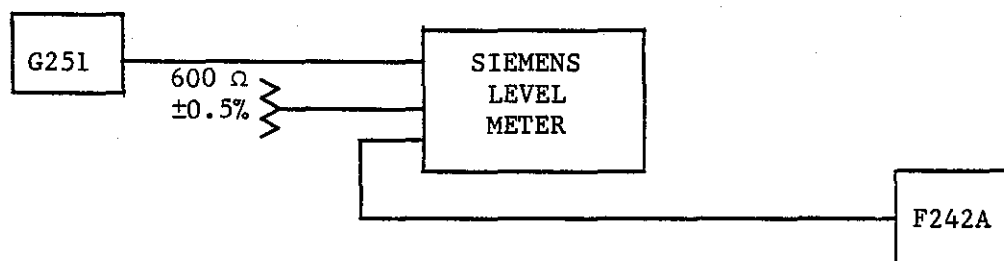


FIG. 5

2. SETTINGS: Siemens Meter Z-switch to 600 Ω high, function switch to wide band return loss, range switch -10 dBm

G251) 600 Ω, "Low Z-out", adjust level for 0 dB
G231) on Siemens level meter

F242A 0 dBm range, 600 Ω

3. Work through the following table, set G251 to respective frequency and F242A to respective mode. For 100 kHz reading it is necessary to use equal lengths of cable to F242 and 600 Ω termination.

| | 10 Hz | 30 kHz | 100 kHz |
|------------|-------|--------|---------|
| Balanced | 30 dB | 30 dB | - |
| Unbalanced | 40 dB | 40 dB | 34 dB |

4. 10 Hz Return Loss Set-up

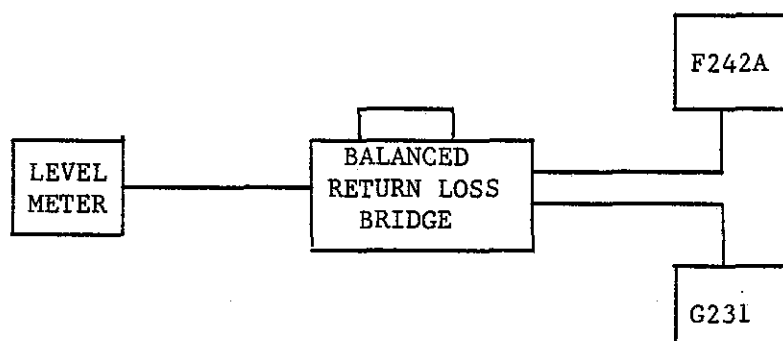


FIG. 6

5. Level Meter Balanced 600 Ω - 10 dB
 F242A 600 Ω ; Bal or Unbal
 G231 10 Hz; level so that level meter reads -10 dB
 with bridge on calibrate
6. Calibrate bridge at 10 Hz with bridge internal termination switch in OUT position.
- Switch bridge to READ and read balanced return loss on level meter. Repeat for Unbalanced F242A.

6.2.1.12 Lo-Cut Filter

- Set up: See Fig. 7
- Settings: G251 0 dBm, 600 Ω , 1 kHz
 F242A 0 dBm, 600 Ω , LEVEL, UNBAL
- Set G251 so that F242A reads exactly 0 dB on meter.
- Switch F242A to LO-CUT and check that the meter indication is 0 dB \pm 0.15 dB.
- Set G251 to 400 Hz and check that F242A meter indication is 0 dB \pm 0.2 dB.

6. Set G251 to 50 Hz and check that F242A indicates a level of less than -45 dBm.

6.2.1.13 Hi-Cut Filter

1. Same as for Lo-cut Filter steps 1, 2 and 3 (6.2.1.12).
2. Switch F242A to Hi-Cut and check that the meter indication is 0 dB ± 0.1 dB
3. Switch G251 to 10 kHz and check that F242A meter indication is above -0.5 dB.
4. Set G251 to 32 kHz and check that F242A meter indication is below -18 dB.

6.2.1.14 Test of Program Weighting Network (Option 001)

1. Set up:




FIG. 7

2. SETTINGS: G251 0 dBm, 600 Ω , 6300 Hz
F242A 0 dBm, 600 Ω , LEVEL dBm, UNBAL, ALL FILTERS OUT.
3. Set G251 so that F242A reads exactly -0.2 dB on meter.
4. Switch F242A to WTG and +10 dB. Adjust RV401 so that the meter reads +2.0 dB. Increase G251 level by 0.2 dB.
5. LEAVE THE OSCILLATOR LEVEL CONSTANT and check the F242A WTG response against the following table.

| Hz Frequency | 31.5 | 63 | 100 | 200 | 400 | 800 | 1k | 2k | 3.15k | k4 | 5k |
|--------------|-----------|-----------|-----------|-----------|----------|----------|-----|----------|----------|-----------|-----------|
| Response | -
29.9 | -
23.9 | -
19.8 | -
13.8 | -
7.8 | -
1.9 | 0 | +
5.6 | +
9.0 | +
10.5 | +
11.7 |
| Tolerance | 2.0 | 1.4 | 1.0 | 0.85 | 0.7 | 0.55 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |

| Frequency Hz | 6.3k | 7.1k | 8k | 9k | 10k | 12.5k | 14k | 16k | 20k | 31.5k |
|--------------------|-----------|-----------|-----------|-----------|----------|-------|----------|-----------|-----------|--------------|
| Response dB | +
12.2 | +
12.0 | +
11.4 | +
10.1 | +
8.1 | 0 | -
5.3 | -
11.7 | -
22.2 | -
42.7 |
| Tolerance \pm dB | 0 | 0.2 | 0.4 | 0.6 | 0.8 | 1.2 | 1.4 | 1.65 | 2.0 | +2.8
-0.5 |

6.2.1.15 Test of Telephone Weighting Network (Option 002)

1. Set-up: As in 6.2.1.14.1.
2. Settings: G251 0 dBm, 600 Ω , 800 Hz
F242A 0 dBm, 600 Ω , UNBAL, ALL FILTERS OUT

3. Set G251 so that F242A reads exactly 0 dB on meter.
4. Switch F242A to Tel. Wtg. and adjust RV1 on the Telephone Weighting Network so that meter reads exactly 0 dB.
5. Leave G251 level constant and check Tel. Wtg. response against following table.

| | | | | | | | |
|----------------|-----------|-----------|-----------|-----------|-----------|-----|-----------|
| Frequency (Hz) | 50 | 100 | 200 | 400 | 600 | 800 | 1K |
| Response (db) | -63 | -41 | -21 | -6.3 | -2.0 | 0.0 | +1.0 |
| Tolerance (dB) | <u>+2</u> | <u>+2</u> | <u>+2</u> | <u>+1</u> | <u>+1</u> | 0 | <u>+1</u> |

| | | | | | | | |
|----------------|-----------|-----------|-----------|-----------|-----------|-----------|------|
| Frequency (Hz) | 1.2K | 1.5K | 2K | 3K | 4K | 5K | >5K |
| Response (dB) | 0 | -1.3 | -3 | -5.6 | -15 | -36 | <-36 |
| Tolerance (dB) | <u>+1</u> | <u>+1</u> | <u>+1</u> | <u>+1</u> | <u>+3</u> | <u>+3</u> | |

6.2.1.16 Level Calibration

Calibrate the G251 at a setting of 1 kHz 600 Ω 0 dBm, using the W & G EPM-1 Milliwatt Test Set.

The G251 may then be used for level calibration as below:-

1. Settings: G251 1 kHz 600 Ω 0 dBm
F242 600 Ω LEVEL dBm UNBAL 0 dBm
2. Adjust G251 to exactly 0 dBm.
3. Adjust F242A CAL control RV1 for 0 dB on F242A scale.

6.2.1.17 Testing of "C" Message Weighting Network

1. Set-up: As in 6.2.1.14.1.
2. Settings: G251 0 dBm 600 Ω 1 kHz
F242A 0 dBm 600 Ω UNBAL. ALL FILTERS OUT.
3. Check that the F242A reads exactly 0 dB on the meter
4. Switch to WTG on the F242A and adjust RV1 on the weighting network so that the meter again reads exactly 0 dB.

5. Leave the G251 level constant and check the "C" Message frequency response against the following table.

| Freq. | Level (dB) | Tol. (dB) |
|----------|------------|---------------------|
| 60 Hz | -55.7 | ± 1 |
| 200 Hz | -25.0 | ± 1 |
| 500 Hz | - 7.5 | ± 0.5 |
| 800 Hz | - 1.5 | ± 0.5 |
| 1 kHz | 0 | ± 0 (reference) |
| 2 kHz | - 1.3 | ± 0.5 |
| 3 kHz | - 2.5 | ± 0.5 |
| 5 kHz | -28.5 | ± 1.5 |
| 25.3 kHz | <-60.0 | $\pm 0 - \infty$ |

6.2.2 Nulling Loop Testing

6.2.2.1. Bridge Balance Adjustment

Bottom cover must be fitted.

- Settings: F242A Bridging Unbal. All filters out.
AWA G233 Ultra Low Distortion Oscillator
2000 Hz, Level 0.3 Volts
15 MHz c.r.o. Trigger mode EXT from G233 Oscillator
sync output.
Input from F242A Internal Test Point 16
Vert gain as desired.
- Set COARSE FREQ. CLOCK ADJ RV4 and EXPONENT COMPARATOR OFFSET ADJ RV6 to approx. mid. point.
- Calibrate F242A for distortion measurement with switched calibrate attenuator in the 4th position from full anti-clockwise. If necessary, adjust the signal level.
- Ensure that F242A is nulling at least approximately.
- Adjust X ARM [OR NUL RV3 and R ARM [OR NULL RV2 to completely null signal. Use oscilloscope to aid adjustment as shown below. The low cut filter may be used if hum is present.



R ARM out of adjustment




X ARM out of adjustment

Allow at least 30 seconds for loop to settle completely before verifying that adjustment is complete. For final adjustment refer to F242A meter not c.r.o. A display of the F242A output is also useful. The null should be -88 dB to -90 dB distortion.

6.2.2.2 Auto Ranging Circuit Adjustment

1. Settings: F242A Bridging Unbal.
All filters out
G233 0.3 volts approx.
29.5 Hz ± 0.1 Hz (33.9 ± 0.1 ms)
15 MHz C.R.O. triggered externally from TP19
Monitoring TP13
Vert 5 V/div Hor 20 μ sec/div
2. Go through normal procedure for distortion measurement on F242A.
3. Short TP15 to TP14.
4. Adjust EXPONENT COMPARATOR OFFSET ADJ RV6 to centre of band where oscillation is observed. Remove short circuit.
5. Move oscilloscope probe to TP12. Adjust COARSE FREQ CLOCK ADJ RV4 so that waveform on c.r.o. appears as shown below with 15th rising edge just appearing.

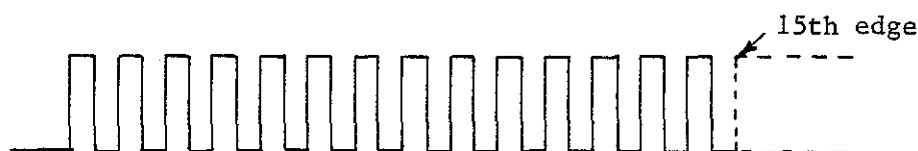

6.2.2.3 Bridge Range Test

1. Settings: F242A Bridging Unbal. All filters out
G233 0.8 volt approx.
Counter monitoring G233 frequency accurate to ± 1 Hz.
2. Set G233 frequency to 90 Hz and operate F242A for normal distortion readings. Distortion should be of the order of -86 dB.
3. Slowly increase the frequency, so the nulling loop is able to keep track of the change in frequency with the attenuation set at -40dB until the F242A changes range. This will show as an audible click from the range control relays combined with the F242A meter momentarily going off scale. Note the frequency at which the range occurs referring to the table below.
4. Slowly decrease the frequency as above until the range changes back again. Note the frequency at which the range change occurs.

5. Repeat steps 3 and 4 as per the following table of frequencies.

| Starting
Frequency | Range Change UP
Greater than | Range Change DOWN
Less than |
|-----------------------|---------------------------------|--------------------------------|
| 90 | 119 | 115 |
| 600 | 700 | 667 |
| 900 | 1092 | 1037 |
| 1400 | 1708 | 1610 |
| 2100 | 2652 | 2500 |
| 3500 | 4093 | 3882 |

6. Set the frequency to 19.25 ± 0.1 Hz (51.9 ± 0.25 msec period) and 21000 Hz ± 100 Hz and verify that bridge nulls without FREQ OUT OF RANGE lights front panel coming on.

6.2.2.4 Frequency Out of Range Test

- Settings: F242A Bridging Unbal. All Filters out
G233 0.8 volts approx.
15 MHz C.R.O. monitoring either side of C99
Vert. 1 V/div Hor. 10 μ sec/div
- Set the G233 frequency to 30 kHz ± 1 kHz, and operate the F242A for normal distortion readings. Verify that the FREQ OUT OF RANGE light on the front panel comes on.
- Switch the front panel attenuator to -20 dB and check that the waveform on C99 is a sine wave of approx. 2.4 volts p-p. Check that this waveform is present for all attenuator settings above -20 dB.
- Set the G233 to 100 kHz ± 10 kHz and verify that the FREQ OUT OF RANGE light stays on.

6.2.2.5 Residual Distortion Test

- Settings: F242A Bridging Unbal. All filters out.
G233 Ultra Low Distortion Oscillator
Level set to 0.3 volts.
- Calibrate F242A with the COARSE SET REF attenuator in the 4th position from fully anti-clockwise.
- Set oscillator to the frequencies in the table below and ensure that the observed residual distortion is less than the figure given. Allow at least 10 seconds for the F242A and oscillator to settle after each frequency change.

| FREQ. | RESIDUAL |
|--------|----------|
| 20 Hz | -84 dB |
| 200 Hz | -84 dB |
| 2 kHz | -86 dB |
| 20 kHz | -84 dB |

PART 7COMPONENT SCHEDULE

7.1 EXPLANATORY NOTES

The component schedule is laid out as follows:

Column 1 Circuit Reference Number
 Column 2 Description
 Column 3 AWA Stock Code Number

Because of unavailability at the date of manufacture, some components in the equipment may differ slightly from the components listed in the schedule. These substitute components do not degrade the performance of the equipment.

When ordering replacement components from AWA, the type number of the unit (or sub-unit) and the circuit reference number of the component should be quoted in addition to the details appearing in the component schedule. This information will ensure the supply of a suitable substitute component should the listed component be obsolete or unavailable.

7.2 DISTORTION & NOISE METER F242A, 2A70542

7.2.1 Components Mounted on Chassis

| | | |
|------|---------------------------------------|-----------------------------|
| SWF | Switch, power | C&K Toggle DPDT 7201-P3PYZQ |
| SWG | Voltage switch | Arco T225/SD |
| D100 | LED Indicator | Rodan type BD701R |
| SKC | International Mains Socket | 1019556 |
| ME1 | Meter | AWA 70542W6 |
| T1 | Input transformer | AWA 3TW69964 |
| T2 | Power transformer | AWA 1TU69967 |
| FS1 | 20mm fuse link, 100mA, delayed action | Australux DA205 (for 240 V) |
| | 20mm fuse link, 200mA, delayed action | Australux DA205 (for 120 V) |

7.2.2 Components on Printed Circuit Board 2R70543

7.2.2.1 Capacitors

| | | |
|-----|---|---------|
| C1 | Capacitor, electrolytic, aluminium, 220 μ F, +50-10%, 63V | 1007837 |
| C2 | Capacitor, electrolytic, aluminium, 220 μ F, +50-10%, 63V | 1007837 |
| C3 | Capacitor, met. polyester, 100nF, \pm 10%, 250V | 227096 |
| C4 | Capacitor, ceramic disc, 22pF, \pm 5%, 500V NPO | 220883 |
| C5 | Capacitor, electrolytic, tantalum, 10 μ F, \pm 10%, 20V | 228772 |
| C6 | Capacitor, ceramic disc, 22pF, \pm 5%, 500V NPO | 220883 |
| C7 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C8 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C9 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C10 | Capacitor, electrolytic, tantalum, 2 μ 2F, \pm 10%, 20V | 1004176 |
| C11 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C12 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C13 | Not used | |

| | | |
|-----|--|-------------------------|
| C14 | Capacitor, electrolytic, tantalum, 2 μ 2F, \pm 10%, 20V | 1004176 |
| C15 | Capacitor, electrolytic, tantalum, 2 μ 2F, \pm 10%, 20V | 1004176 |
| C16 | Capacitor, electrolytic, tantalum, 330 μ F, \pm 10%, 6V | 229778 |
| C17 | Capacitor, electrolytic, tantalum, 68 μ F, \pm 10%, 15V | 229628 |
| C18 | Capacitor, electrolytic, tantalum, 47 μ F, \pm 20%, 35V | 1008308 |
| C19 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C20 | Capacitor, ceramic disc, 33pF, \pm 5%, 500V, NPO | 221162 |
| C21 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C22 | Capacitor, electrolytic, tantalum, 180 μ F, \pm 10%, 6V | 229747 |
| C23 | Capacitor, ceramic disc, 4p7F, \pm 0p5F, 500V, NPO | 220217 |
| C24 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C25 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C26 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C27 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C28 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C29 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C30 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C31 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C32 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C33 | Capacitor, polystyrene, 729pF, \pm 2% | AEE Type PFE216-LB3729G |
| C34 | Capacitor, polystyrene, 31n4F, \pm 1% | AEE Type PFE216-DC5314F |
| C35 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C36 | Capacitor, polystyrene, 11n6F, \pm 2% | AEE Type PFE216-DC5116G |
| C37 | Capacitor, polystyrene, 20n5F, \pm 2% | AEE Type AFE216-DC5205G |
| C38 | Capacitor, polystyrene, 1n75F, \pm 2% | AEE Type PFE216-GC4175G |
| C39 | Capacitor, ceramic disc, 22pF, \pm 5%, 500V, NPO | 220883 |
| C40 | Capacitor, met. polyester, 100nF, \pm 10%, 250V | 227096 |
| C41 | Capacitor, ceramic disc, 22pF, \pm 5%, 500V, NPO | 220883 |
| C42 | Capacitor, electrolytic, tantalum, 47 μ F, \pm 10%, 6V | 229556 |
| C43 | Capacitor, polystyrene, 100nF, \pm 1% | RIFA Type PFE216-DD61 |
| C44 | Capacitor, polystyrene, 100nF, \pm 1% | RIFA Type PFE216-DD61 |
| C45 | Capacitor, ceramic, disc, 47 nF, +80%-20%, 25 V, Hi-K | 226822 |
| C46 | Capacitor, polystyrene, 100nF, \pm 1% | RIFA Type PFE216-DD61 |
| C47 | Not used | |
| C48 | Not used | |
| C49 | Capacitor, polystyrene, 578pF, \pm 2% | AEE Type PFE216-LB3578G |
| C50 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C51 | Capacitor, polystyrene, 562pF, \pm 2% | AEE Type PFE216-LB3562G |
| C52 | Capacitor, polystyrene, 578pF, \pm 2% | AEE Type PFE216-LB3578G |
| C53 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C54 | Capacitor, ceramic disc, 47nF, +48-20%, 25V, HiK | 226822 |
| C55 | Capacitor, ceramic disc, 4p7F, \pm 0p5F, 500V | 220217 |
| C56 | Capacitor, electrolytic, tantalum, 180 μ F, \pm 10%, 6V | 229747 |
| C57 | Capacitor, ceramic disc, 150pF, \pm 5%, 500V, N750 | 222716 |
| C58 | Capacitor, met. polyester, 100nF, \pm 10%, 250V | 227096 |
| C59 | Capacitor, electrolytic, tantalum, 180 μ F, \pm 10%, 6V | 229747 |
| C60 | Capacitor, electrolytic, tantalum, 150 μ F, \pm 10%, 15V | 229736 |
| C61 | Capacitor, electrolytic, tantalum, 47 μ F, \pm 20%, 35V | 1008308 |
| C62 | Capacitor, polystyrene, 560pF, \pm 2% | AEE Type PFE216-LB356G |
| C63 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C64 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C65 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C66 | Capacitor, ceramic disc, 10pF, \pm 1pF, 500V, NPO | 220456 |
| C67 | Capacitor, ceramic disc, 33pF, \pm 5%, 500V, NPO | 221162 |
| C68 | Capacitor, ceramic disc, 1nF, \pm 20%, 500V, HiK | 1005387 |
| C69 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C70 | Capacitor, electrolytic, tantalum, 1 μ F, \pm 10%, 35V | 227739 |

| | | |
|------|---|---------------------------|
| C71 | Capacitor, electrolytic, aluminium, 2200 μ F, +100-10%, 25V | |
| | AEE Type PEG123-HL422 | |
| C72 | Capacitor, electrolytic, aluminium, 2200 μ F, +100-10%, 25V | |
| | AEE Type PEG123-HL422 | |
| C73 | Capacitor, met. polyester, 330nF, \pm 10%, 250V | 1014720 |
| C74 | Capacitor, met. polyester, 330nF, \pm 10%, 250V | 1014720 |
| C75 | Capacitor, electrolytic, tantalum, 1 μ F, \pm 10%, 35V | 227739 |
| C76 | Capacitor, met. polycarbonate, 1 μ F, \pm 2%, 63V | Anelco, MFD 1 μ FG63V |
| C77 | Capacitor, polystyrene, 172nF, \pm 1% | AEE Type PFE216-DF6172F |
| C78 | Capacitor, polystyrene, 29n5F, \pm 1% | AEE Type PFE216-DC5295F |
| C79 | Capacitor, polystyrene, 5n09F, \pm 1% | AEE Type PFE216-GC4509F |
| C80 | Capacitor, ceramic, disc, 22 pF, \pm 5%, NPO | 220883 |
| C81 | Capacitor, met. polycarbonate, 1 μ F, \pm 2%, 63V | Anelco, MFD 1 μ FG63V |
| C82 | Capacitor, polystyrene, 172nF, \pm 1% | AEE Type PFE216-DF6172F |
| C83 | Capacitor, polystyrene, 29n5F, \pm 1% | AEE Type PFE216-DC5295F |
| C84 | Capacitor, polystyrene, 5n09F, \pm 1% | AEE Type PFE216-GC4509F |
| C85 | Not used | |
| C86 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C87 | Capacitor, ceramic disc, 22pF, \pm 5%, 500V, NPO | 220883 |
| C88 | Capacitor, electrolytic, tantalum, 100 μ F, \pm 10%, 10V | 229699 |
| C89 | Capacitor, ceramic disc, 15pF, \pm 1pF, 500V, NPO | 220704 |
| C90 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C91 | Capacitor, electrolytic, tantalum, 330 μ F, \pm 10%, 6V | 229778 |
| C92 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C93 | Capacitor, electrolytic, tantalum, 100 μ F, \pm 10%, 10V | 229699 |
| C94 | Capacitor, ceramic disc, 100pF, \pm 5%, 500V, N750 | 222214 |
| C95 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C96 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C97 | Capacitor, ceramic plate, 22pF, \pm 2%, 100V, NPO | Philips 2222-632-10229 |
| C98 | Capacitor, ceramic plate, 220pF, \pm 2%, 100V, N750 | Philips 2222-632-58221 |
| C99 | Capacitor, electrolytic, tantalum, 220 μ F, \pm 10%, 10V | 229765 |
| C100 | Capacitor, ceramic disc, 100pF, \pm 5%, 500V, N750 | 222214 |
| C101 | Not used | |
| C102 | Capacitor, electrolytic, tantalum, 100 μ F, \pm 10%, 10V | 229699 |
| C103 | Capacitor, met. polyester, 220nF, \pm 10%, 250V | 1006225 |
| C104 | Capacitor, ceramic plate, 220pF, \pm 10%, 100V | Philips 2222-630-03221 |
| C105 | Not used | |
| C106 | Capacitor, met. polycarbonate, 2 μ 2F, \pm 10%, 250V | 1005249 |
| C107 | Capacitor, ceramic disc, 100pF, \pm 5%, 500V, N750 | 222214 |
| C108 | Capacitor, met. polyester, 1 μ F, \pm 10%, 250V | 227851 |
| C109 | Capacitor, met. polycarbonate, 4 μ 7F, \pm 10%, 100V | 1018620 |
| C110 | Not used | |
| C111 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C112 | Capacitor, ceramic disc, 1nF, +80-20%, 500V, HiK | 225026 |
| C113 | Capacitor, ceramic disc, 4n7F, \pm 20%, 500V, HiK | 225987 |
| C114 | Capacitor, electrolytic, tantalum, 150 μ F, \pm 10%, 15V | 229736 |
| C115 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C116 | Capacitor, ceramic disc, 10pF, \pm 1pF, 500V, NPO | 220456 |
| C117 | Capacitor, met. polyester, 470nF, \pm 10%, 250V | 227472 |
| C118 | Capacitor, met. polyester, 100nF, \pm 10%, 250V | 227096 |
| C119 | Capacitor, met. polyester, 100nF, \pm 10%, 250V | 227096 |
| C120 | Capacitor, polystyrene, 120pF, \pm 2% | AEE Type PFE210-GB312G |
| C121 | Capacitor, ceramic disc, 1nF, +80-20%, 500V, HiK | 225026 |
| C122 | Capacitor, ceramic disc, 6p8F, \pm 0p5F, 500V, NPO | 220380 |
| C123 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C124 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C125 | Capacitor, electrolytic, tantalum, 10 μ F, \pm 10%, 20V | 228772 |

| | | |
|------|---|------------------------|
| C126 | Not used | |
| C127 | Capacitor, electrolytic, tantalum, 39 μ F, $\pm 10\%$, 10V | 229530 |
| C128 | Capacitor, ceramic disc, 100pF, $\pm 5\%$, 500V, N750 | 222214 |
| C129 | Capacitor, ceramic disc, 10pF, ± 1 pF, 500V, NPO | 220456 |
| C130 | Capacitor, ceramic disc, 100pF, $\pm 5\%$, 500V, N750 | 222214 |
| C131 | Capacitor, ceramic plate, 47pF, $\pm 2\%$, NPO | Philips 2222-632-10479 |
| C132 | Capacitor, ceramic plate, 68pF, $\pm 2\%$, NPO | Philips 2222-632-10689 |
| C133 | Capacitor, ceramic plate, 1n5, $\pm 10\%$ | Philips 2222-630-03152 |
| C134 | Capacitor, ceramic disc, 10nF, +80-20%, 30V, HiK | 1021119 |
| C135 | Capacitor, ceramic plate, 6p8F, $\pm 2\%$, NPO | Philips 2222-632-09688 |
| C136 | Capacitor, ceramic plate, 47pF, $\pm 2\%$, NPO | Philips 2222-632-10479 |
| C137 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 225822 |
| C138 | Capacitor, met. polyester, 2 μ 2F, $\pm 10\%$, 63V DC | ERO MKT 1822 |
| C139 | Capacitor, met. polyester, 22nf, $\pm 10\%$, 400V DC | ERO MKT 1822 |
| C140 | Capacitor, electrolytic, tantalum, 1 μ F, $\pm 10\%$, 35V | 227739 |
| C141 | Capacitor, electrolytic, tantalum, 2 μ 2F, $\pm 10\%$, 20V | 1004176 |
| C142 | Capacitor, ceramic disc, 47pF, $\pm 5\%$, 500V, NPO | 221431 |
| C143 | Capacitor, polystyrene, 27nF, $\pm 2\%$ | AEE Type PFE216-DC527G |
| C144 | Capacitor, ceramic disc, 470pF, $\pm 20\%$, 500V, HiK | 224204 |
| C145 | Not used | |
| C146 | Capacitor, ceramic disc, 10pF, ± 1 pF, 500V, NPO | 220456 |
| C147 | Capacitor, electrolytic, aluminium, 680 μ F, +50-10%, 16V | 1024575 |
| C148 | Capacitor, electrolytic, aluminium, 680 μ F, +50-10%, 16V | 1024575 |
| C149 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C150 | Not used | |
| C151 | Capacitor, electrolytic, tantalum, 1 μ F, $\pm 10\%$, 35V | 227739 |
| C152 | Capacitor, ceramic disc, 330pF, $\pm 20\%$, 500V, HiK | 223707 |
| C153 | Capacitor, ceramic disc, 100pF, $\pm 5\%$, 500V, N750 | 222214 |
| C154 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 225822 |

7.2.2.2 Resistors

| | | |
|-----|---|--------------|
| R1 | Resistor, metal film, 604 Ω , $\pm 2\%$, 2W | Corning FP42 |
| R2 | Resistor, metal film, 38k3 Ω , $\pm 1\%$, 100ppm, 1/4W | 1021403 |
| R3 | Resistor, metal film, 38k3 Ω , $\pm 1\%$, 100ppm, 1/4W | 1021403 |
| R4 | Resistor, metal film, 1k3 Ω , $\pm 1\%$, 100ppm, 1/4W | 1008749 |
| R5 | Resistor, metal film, 10 Ω , $\pm 2\%$, 1/4W | 1008698 |
| R6 | Resistor, metal film, 1k3 Ω , $\pm 1\%$, 100ppm, 1/4W | 1008749 |
| R7 | Resistor, metal film, 470k Ω , $\pm 2\%$, 1/4W | 1008810 |
| R8 | Resistor, metal film, 87k6 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R9 | Resistor, metal film, 820k Ω , $\pm 2\%$, 1/4W | 1008816 |
| R10 | Resistor, metal film, 330 Ω , $\pm 2\%$, 1/4W | 1008734 |
| R11 | Resistor, metal film, 6k65 Ω , $\pm 1\%$, 100ppm, 1/4W | 1021348 |
| R12 | Resistor, metal film, 5k90 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R13 | Resistor, metal film, 820k Ω , $\pm 2\%$, 1/4W | 1008816 |
| R14 | Resistor, metal film, 1k27 Ω , $\pm 1\%$, 100ppm, 1/4W | 1021296 |
| R15 | Resistor, metal film, 96k5 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R16 | Resistor, metal film, 866 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R17 | Resistor, metal film, 787 Ω , $\pm 1\%$, 100ppm, 1/4W | 1021281 |
| R18 | Resistor, metal film, 240 Ω , $\pm 2\%$, 1/4W | 1008731 |
| R19 | Resistor, metal film, 732 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R20 | Resistor, metal film, 3k28, $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R21 | Not used | |
| R22 | Resistor, metal film, 80R6 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R23 | Resistor, metal film, 12k Ω , $\pm 2\%$, 1/4W | 1008772 |
| R24 | Resistor, metal film, 220k Ω , $\pm 2\%$, 1/4W | 1008801 |
| R25 | Resistor, metal film, 82 Ω , $\pm 2\%$, 1/4W | 1008720 |

| | | |
|-----|---|-----------------|
| R26 | Not used | |
| R27 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R28 | Not used | |
| R29 | Not used | |
| R30 | Not used | |
| R31 | Not used | |
| R32 | Not used | |
| R33 | Resistor, metal film, 1k Ω , $\pm 2\%$, 1/4W | 1008746 |
| R34 | Not used | |
| R35 | Not used | |
| R36 | Resistor, metal film, 200k Ω , $\pm 2\%$, 1/4W | 1008801 |
| R37 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R38 | Resistor, metal film, 15k4 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R39 | Resistor, metal film, 2k43 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R40 | Not used | |
| R41 | Resistor, metal film, 665 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R42 | Resistor, metal film, 200 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R43 | Resistor, metal film, 12k4 Ω , $\pm 0.5\%$, 50ppm, 1/4W | RN60C |
| R44 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R45 | Not used | |
| R46 | Resistor, metal film, 68k Ω , $\pm 2\%$, 1/4W | 1008790 |
| R47 | Resistor, metal film, 390 Ω , $\pm 2\%$, 1/4W | 1008736 |
| R48 | Resistor, metal film, 1k8 Ω , $\pm 2\%$, 1/4W | 1008752 |
| R49 | Resistor, metal film, 1k Ω , $\pm 2\%$, 1/4W | 1008746 |
| R50 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R51 | Resistor, metal film, 150 Ω , $\pm 2\%$, 1/4W | 1008726 |
| R52 | Resistor, metal film, 150 Ω , $\pm 2\%$, 1/4W | 1008726 |
| R53 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R54 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R55 | Not used | |
| R56 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R57 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R58 | Resistor, metal film, 1k5 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008750 |
| R59 | Resistor, metal film, 1k5 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008750 |
| R60 | Not used | |
| R61 | Resistor, metal film, 1k Ω , $\pm 2\%$, 1/4W | 1008746 |
| R62 | Resistor, metal film, 3k3 Ω , $\pm 2\%$, 1/4W | 1008758 |
| R63 | Resistor, metal film, 1k5 Ω , $\pm 2\%$, 1/4W | 1008750 |
| R64 | Resistor, metal film, 1k5 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008750 |
| R65 | Not used | |
| R66 | Resistor, metal film, 1k5 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008750 |
| R67 | Resistor, metal film, 1k5 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008750 |
| R68 | Resistor, metal film, 1k Ω , $\pm 2\%$, 1/4W | 1008746 |
| R69 | Resistor, metal film, 1k5 Ω , $\pm 2\%$, 1/4W | 1008750 |
| R70 | Resistor, metal film, 3k3 Ω , $\pm 2\%$, 1/4W | 1008758 |
| R71 | Resistor, metal film, 22k Ω , $\pm 2\%$, 1/4W | 1008778 |
| R72 | Resistor, metal film, 3k28 Ω , $\pm \frac{1}{2}\%$, 25ppm, 0.4W | Roederstein Mk2 |
| R73 | Resistor, metal film, 942 Ω , $\pm \frac{1}{2}\%$, 25ppm, 0.4W | Roederstein Mk2 |
| R74 | Resistor, metal film, 40k2 Ω , $\pm \frac{1}{2}\%$, 25ppm, 0.4W | Roederstein Mk2 |
| R75 | Not used | |
| R76 | Not used | |
| R77 | Not used | |
| R78 | Not used | |
| R79 | Not used | |
| R80 | Not used | |

| | | |
|------|--|-------------------|
| R81 | Resistor, metal film, 1k2 Ω , $\pm 2\%$, 1/4W | 1008748 |
| R82 | Resistor, metal film, 1k2 Ω , $\pm 2\%$, 1/4W | 1008748 |
| R83 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R84 | Resistor, metal film, 5k1 Ω , $\pm 2\%$, 1/4W | 1008763 |
| R85 | Not used | |
| R86 | Resistor, metal film, 120k Ω , $\pm 2\%$, 1/4W | 1008796 |
| R87 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R88 | Resistor, metal film, 1k5 Ω , $\pm 2\%$, 1/4W | 1008750 |
| R89 | Resistor, metal film, 681 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008742 |
| R90 | Resistor, carbon, 10M Ω , $\pm 10\%$, 1/3W | Philips Type CR25 |
| R91 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R92 | Resistor, metal film, 220 Ω , $\pm 2\%$, 1/4W | 1008730 |
| R93 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R94 | Resistor, metal film, 33k Ω , $\pm 2\%$, 1/4W | 1008782 |
| R95 | Not used | |
| R96 | Resistor, metal film, 19k1 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021381 |
| R97 | Resistor, metal film, 1k27 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021296 |
| R98 | Resistor, metal film, 32k4 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021398 |
| R99 | Resistor, metal film, 220k Ω , $\pm 2\%$, 1/4W | 1008802 |
| R100 | Resistor, metal film, 27 Ω , $\pm 2\%$, 1/4W | 1008708 |
| R101 | Resistor, metal film, 47k Ω , $\pm 2\%$, 1/4W | 1008786 |
| R102 | Resistor, metal film, 1k Ω , $\pm 2\%$, 1/4W | 1008746 |
| R103 | Resistor, metal film, 47 Ω , $\pm 2\%$, 1/4W | 1008714 |
| R104 | Resistor, metal film, 33 Ω , $\pm 2\%$, 1/4W | 1008710 |
| R105 | Resistor, metal film, 6.8k Ω , $\pm 2\%$, 1/4W | 1008766 |
| R106 | Resistor, metal film, 4k42 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021335 |
| R107 | Resistor, metal film, 4k42 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021335 |
| R108 | Resistor, metal film, 4k42 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021335 |
| R109 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R110 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R111 | Resistor, metal film, 1k Ω , $\pm 2\%$, 1/4W | 1008746 |
| R112 | Resistor, metal film, 2k21 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008754 |
| R113 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R114 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R115 | Not used | |
| R116 | Resistor, metal film, 390 Ω , $\pm 2\%$, 1/4W | 1008736 |
| R117 | Resistor, metal film, 390 Ω , $\pm 2\%$, 1/4W | 1008736 |
| R118 | Resistor, metal film, 4k42 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021335 |
| R119 | Resistor, metal film, 3k83 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021331 |
| R120 | Not used | |
| R121 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R122 | Resistor, metal film, 470 Ω , $\pm 2\%$, 1/4W | 1008738 |
| R123 | Resistor, metal film, 1k6 Ω , $\pm 2\%$, 1/4W | 1008751 |
| R124 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R125 | Not used | |
| R126 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R127 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R128 | Not used | |
| R129 | Not used | |
| R130 | Resistor, metal film, 1k65 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021304 |
| R131 | Resistor, metal film, 1k58 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021303 |
| R132 | Resistor, metal film, 1k54 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021302 |
| R133 | Resistor, metal film, 2k15 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021313 |
| R134 | Resistor, metal film, 2k55 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021318 |
| R135 | Not used | |
| R136 | Resistor, metal film, 3k01 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008757 |
| R137 | Resistor, metal film, 3k16 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021325 |
| R138 | Resistor, metal film, 4k02 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021332 |

| | | |
|------|--|---------|
| R139 | Resistor, metal film, 5k11 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008763 |
| R140 | Not used | |
| R141 | Resistor, metal film, 8k45 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021355 |
| R142 | Resistor, metal film, 6k34 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021346 |
| R143 | Resistor, metal film, 4k75 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008762 |
| R144 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R145 | Not used | |
| R146 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R147 | Resistor, metal film, 3k3 Ω , $\pm 2\%$, 1/4W | 1008758 |
| R148 | Resistor, metal film, 3k3 Ω , $\pm 2\%$, 1/4W | 1008758 |
| R149 | Resistor, metal film, 680 Ω , $\pm 2\%$, 1/4W | 1008742 |
| R150 | Not used | |
| R151 | Resistor, metal film, 390 Ω , $\pm 2\%$, 1/4W | 1008736 |
| R152 | Resistor, metal film, 634 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021274 |
| R153 | Resistor, metal film, 665 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021276 |
| R154 | Resistor, metal film, 68k Ω , $\pm 2\%$, 1/3W | 1008790 |
| R155 | Not used | |
| R156 | Resistor, metal film, 825 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008744 |
| R157 | Resistor, metal film, 270 Ω , $\pm 2\%$, 1/4W | 1008732 |
| R158 | Resistor, metal film, 1k5 Ω , $\pm 2\%$, 1/4W | 1008750 |
| R159 | Resistor, metal film, 681 Ω , $\pm 1\%$, 400mW | 1008742 |
| R160 | Not used | |
| R161 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R162 | Resistor, metal film, 680 Ω , $\pm 2\%$, 1/4W | 1008742 |
| R163 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R164 | Resistor, metal film, 470 Ω , $\pm 2\%$, 1/4W | 1008738 |
| R165 | Not used | |
| R166 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R167 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R168 | Resistor, metal film, 12k Ω , $\pm 2\%$, 1/4W | 1008772 |
| R169 | Resistor, metal film, 75 Ω , $\pm 2\%$, 1/4W | 1008719 |
| R170 | Resistor, metal film, 10 Ω , $\pm 2\%$, 1/4W | 1008698 |
| R171 | Resistor, metal film, 75 Ω , $\pm 2\%$, 1/4W | 1008719 |
| R172 | Resistor, metal film, 15k Ω , $\pm 2\%$, 1/4W | 1008774 |
| R173 | Resistor, metal film, 18k Ω , $\pm 2\%$, 1/4W | 1008776 |
| R174 | Resistor, metal film, 15k Ω , $\pm 2\%$, 1/4W | 1008774 |
| R175 | Not used | |
| R176 | Resistor, metal film, 806 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021282 |
| R177 | Resistor, metal film, 2k7 Ω , $\pm 2\%$, 1/4W | 1008756 |
| R178 | Resistor, metal film, 1k00 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008746 |
| R179 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R180 | Not used | |
| R181 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R182 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R183 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R184 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R185 | Not used | |
| R186 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R187 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R188 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R189 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R190 | Not used | |
| R191 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R192 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R193 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R194 | Not used | |
| R195 | Not used | |

| | | |
|------|---|--------------|
| R196 | Not used | |
| R197 | Not used | |
| R198 | Not used | |
| R199 | Not used | |
| R200 | Not used | |
| R201 | Resistor, metal film, 182k Ω , $\pm 1\%$, 400mW | 1008800 |
| R202 | Resistor, metal film, 5k6 Ω , $\pm 2\%$, 1/4W | 1008764 |
| R203 | Resistor, metal film, 3k3 Ω , $\pm 2\%$, 1/4W | 1008758 |
| R204 | Resistor, metal film, 33k Ω , $\pm 2\%$, 1/4W | 1008782 |
| R205 | Resistor, metal film, 560 Ω , $\pm 2\%$, 1/4W | 1008740 |
| R206 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R207 | Resistor, metal film, 1k5 Ω , $\pm 2\%$, 1/4W | 1008750 |
| R208 | Not used | |
| R209 | Not used | |
| R210 | Not used | |
| R211 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R212 | Resistor, metal film, 3k3 Ω , $\pm 2\%$, 1/4W | 1008758 |
| R213 | Resistor, metal film, 15k Ω , $\pm 2\%$, 1/4W | 1008774 |
| R214 | Resistor, metal film, 11k Ω , $\pm 2\%$, 1/4W | 1008771 |
| R215 | Not used | |
| R216 | Resistor, metal film, 390 Ω , $\pm 2\%$, 1/4W | 1008736 |
| R217 | Resistor, metal film, 5k6 Ω , $\pm 2\%$, 1/4W | 1008764 |
| R218 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R219 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R220 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R221 | Resistor, metal film, 47k Ω , $\pm 2\%$, 1/4W | 1008786 |
| R222 | Not used | |
| R223 | Resistor, metal film, 47k5 Ω , $\pm 1\%$, 400mW | 1008786 |
| R224 | Resistor, metal film, 2k7 Ω , $\pm 2\%$, 1/4W | 1008756 |
| R225 | Not used | |
| R226 | Resistor, metal film, 4k3 Ω , $\pm 2\%$, 1/4W | 1008761 |
| R227 | Resistor, metal film, 680 Ω , $\pm 2\%$, 1/4W | 1008742 |
| R228 | Resistor, metal film, 47 Ω , $\pm 2\%$, 1/4W | 1008714 |
| R229 | Resistor, metal film, 1k Ω , $\pm 2\%$, 1/4W | 1008746 |
| R230 | Resistor, metal film, 1M Ω , $\pm 2\%$, 1/4W | 1008818 |
| R231 | Resistor, carbon, 1M5 Ω , $\pm 10\%$, 1/3W | Philips CR25 |
| R232 | Resistor, metal film, 2M21 Ω , $\pm 1\%$, 400mW | 1021545 |
| R233 | Resistor, metal film, 432k Ω , $\pm 1\%$, 400mW | 1008809 |
| R234 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R235 | Resistor, metal film, 47k Ω , $\pm 2\%$, 1/4W | 1008786 |
| R236 | Resistor, metal film, 2k7 Ω , $\pm 2\%$, 1/4W | 1008756 |
| R237 | Resistor, metal film, 47k5 Ω , $\pm 1\%$, 400mW | 1008786 |
| R238 | Not used | |
| R239 | Resistor, metal film, 220 Ω , $\pm 2\%$, 1/4W | 1008730 |
| R240 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R241 | Resistor, metal film, 3k9 Ω , $\pm 2\%$, 1/4W | 1008760 |
| R242 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R243 | Resistor, metal film, 390k Ω , $\pm 2\%$, 1/4W | 1008808 |
| R244 | Resistor, metal film, 390k Ω , $\pm 2\%$, 1/4W | 1008808 |
| R245 | Not used | |
| R246 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R247 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R248 | Resistor, metal film, 27k Ω , $\pm 2\%$, 1/4W | 1008780 |
| R249 | Resistor, metal film, 27k Ω , $\pm 2\%$, 1/4W | 1008780 |
| R250 | Resistor, metal film, 470k Ω , $\pm 2\%$, 1/4W | 1008810 |
| R251 | Resistor, metal film, 820 Ω , $\pm 2\%$, 1/4W | 1008744 |
| R252 | Resistor, metal film, 3k0 Ω , $\pm 2\%$, 1/4W | 1008760 |
| R253 | Resistor, metal film, 6k8 Ω , $\pm 2\%$, 1/4W | 1008766 |

| | | |
|------|--|------------------------|
| R254 | Resistor, metal flkm, 470 Ω , $\pm 2\%$, 1/4W | 1008734 |
| R255 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R256 | Resistor, metal film, 22k Ω , $\pm 2\%$, 1/4W | 1008698 |
| R257 | Resistor, metal film, 10 Ω , $\pm 2\%$, 1/4W | 1008698 |
| R258 | Resistor, metal film, 10 Ω , $\pm 2\%$, 1/4W | 1008698 |
| R259 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R260 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R261 | Resistor, metal film, 220k Ω , $\pm 2\%$, 1/4W | 1008802 |
| R262 | Resistor, metal film, 75k Ω , $\pm 2\%$, 1/4W | 1008719 |
| R263 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R264 | Resistor, metal film, 1k Ω , $\pm 2\%$, 1/4W | 1008746 |
| R265 | Not used | |
| R266 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R267 | Resistor, metal film, 2k Ω , $\pm 2\%$, 1/4W | 1008753 |
| R268 | Not used | |
| R269 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R270 | Not used | |
| R271 | Resistor, metal film, 6k2 Ω , $\pm 2\%$, 1/4W | 1008765 |
| R272 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R273 | Resistor, metal film, 22k Ω , $\pm 2\%$, 1/4W | 1008778 |
| R274 | Resistor, metal film, 47k Ω , $\pm 2\%$, 1/4W | 1008786 |
| R275 | Resistor, carbon, 3M3 Ω , $\pm 10\%$, 1/3W | Philips 2322-211-12335 |
| R276 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R277 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R278 | Resistor, metal film, 22k1 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008778 |
| R279 | Resistor, metal film, 44k2 Ω , $\pm 1\%$, 100ppm, 400 mW | 1021466 |
| R280 | Resistor, metal film, 220k Ω , $\pm 2\%$, 1/4W | 1008802 |
| R281 | Resistor, metal film, 4k7 Ω , $\pm 2\%$, 1/4W | 1008762 |
| R282 | Resistor, metal film, 220k Ω , $\pm 2\%$, 1/4W | 1008802 |
| R283 | Resistor, metal film, 2k Ω , $\pm 2\%$, 1/4W | 1008753 |
| R284 | Resistor, metal film, 22k Ω , $\pm 2\%$, 1/4W | 1008778 |
| R285 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R286 | Resistor, metal film, 51k Ω , $\pm 2\%$, 1/4W | 1008787 |
| R287 | Resistor, metal film, 400k Ω , $\pm 2\%$, 1/4W | 1008805 |
| R288 | Resistor, metal film, 114k Ω , $\pm 1\%$, 100ppm, 400 mW | 1021436 |
| R289 | Resistor, metal film, 100 Ω , $\pm 2\%$, 1/4W | 1008722 |
| R290 | Resistor, metal film, 100k Ω , $\pm 2\%$, 1/4W | 1008794 |
| R291 | Resistor, metal film, 10k Ω , $\pm 2\%$, 1/4W | 1008770 |
| R292 | Resistor, metal film, 2k2 Ω , $\pm 2\%$, 1/4W | 1008754 |
| R293 | Resistor, metal film, 825 Ω , $\pm 1\%$, 100ppm, 400 mW | 1008744 |
| R294 | Resistor, metal film, 1M Ω , $\pm 2\%$, 1/4W | 1008818 |
| R295 | Resistor, metal film, 470k Ω , $\pm 2\%$, 1/4W | 1008810 |
| R296 | Resistor, carbon, 10M Ω , $\pm 10\%$, 1/3W | Philips Type CR25 |
| R297 | Resistor, carbon, 10M Ω , $\pm 10\%$, 1/3W | Philips Type CR25 |
| R298 | Resistor, metal film, 27k Ω , $\pm 2\%$, 1/4W | 1008780 |
| R299 | Resistor, metal film, 15k Ω , $\pm 2\%$, 1/4W | 1008774 |
| R300 | Resistor, metal film, 4k3 Ω , $\pm 2\%$, 1/4W | 1008761 |
| R301 | Resistor, metal film, 100k Ω , $\pm 1\%$, 100ppm, 400 mW | 1008794 |
| R302 | Resistor, metal film, 100k Ω , $\pm 1\%$, 100ppm, 400 mW | 1008794 |
| R303 | Resistor, metal film, 22k Ω , $\pm 2\%$, 1/4W | 1008778 |
| R304 | Resistor, metal film, 220k Ω , $\pm 2\%$, 1/4W | 1008802 |
| R305 | Resistor, metal film, 909k Ω , $\pm 1\%$, 100ppm, 400 mW | 1021508 |

7.2.2.3 Variable Resistors

| | | |
|-----|--|--------------|
| RV1 | Resistor, variable, cermet, 5k Ω , $\pm 10\%$ | Beckman 72PM |
| RV2 | Resistor, variable, cermet, 100k Ω , $\pm 10\%$ | Beckman 72PM |
| RV3 | Resistor, variable, cermet, 100k Ω , $\pm 10\%$ | Beckman 72PM |
| RV4 | Resistor, variable, cermet, 20k Ω , $\pm 10\%$ | Beckman 72PM |
| RV5 | Not used | |
| RV6 | Resistor, variable, cermet, 20k Ω , $\pm 10\%$ | Beckman 72PM |

7.2.2.4 Resistor Networks

| | | |
|-----|--|-----------------------|
| RN1 | Resistor network, 15X100k Ω , $\pm 2\%$ | Bournes 4116R-002-104 |
|-----|--|-----------------------|

7.2.2.5 Inductors

| | | |
|----|--|----------------|
| L1 | Inductor, 1mH, $\pm 5\%$ | TDK0810 SK102J |
| L2 | Inductor, 1m2H, $\pm 5\%$, kinked leads | TDK0810 SK122J |

7.2.2.6 Photocells

| | | |
|------|-----------------------|----------------------------------|
| PCC1 | Photo conductive cell | Clairex Electronics Type CLM6500 |
| PCC2 | Photo conductive cell | Clairex Electronics Type CLM6500 |

7.2.2.7 Relays

| | | |
|-----|-------------------|---------------------------|
| RLA | Relay, 1C.O., 12V | National RSD-12V |
| RLB | Relay, 1C.O., 12V | National RSD-12V |
| RLC | Relay, 1C.O., 12V | National RSD-12V |
| RLD | Relay, 1C.O., 12V | National RSD-12V |
| RLE | Relay, 4C.O., 12V | Siemens V23030-A1017-A104 |
| RLF | Relay, 1C.O., 12V | National RSD-12V |
| RLG | Used on 2R70545 | |
| RLH | Relay, 1C.O., 12V | National RSD-12V |
| RLI | Not used | |
| RLJ | Relay, 2C.O., 12V | National NF2-12V |
| RLK | Relay, 4C.O., 12V | Siemens V23030-A1017-A104 |
| RLL | Relay, 4C.O., 12V | Siemens V23030-A1017-A104 |
| RLM | Relay, 6C.O., 12V | Siemens V23030-A1017-A106 |
| RLN | Relay, 1C.O., 12V | National RSD-12V |
| RLO | Not used | |
| RLP | Relay, 1C.O., 12V | National RSD-12V |

7.2.2.8 Transistors

| | | |
|-----|--------------------|---------|
| Q1 | Transistor, BC549 | 1024854 |
| Q2 | Transistor, PN4121 | |
| Q3 | Transistor, BC549 | 1024854 |
| Q4 | Transistor, PN3643 | |
| Q5 | Not used | |
| Q6 | Transistor, BC549 | 1024854 |
| Q7 | Transistor, PN4250 | 906790 |
| Q8 | Transistor, BC549 | 1024854 |
| Q9 | Transistor, PN4250 | 906790 |
| Q10 | Not used | |
| Q11 | Not used | |
| Q12 | Not used | |

| | | |
|-----|--------------------|---------|
| Q13 | Transistor, BC549 | 1024854 |
| Q14 | Transistor, BC549 | 1024854 |
| Q15 | Transistor, PN3643 | |
| Q16 | Transistor, PN4121 | |
| Q17 | Transistor, BC549 | 1024854 |
| Q18 | Transistor, PN3643 | |
| Q19 | Transistor, BC549 | 1024854 |
| Q20 | Transistor, BC549 | 1024854 |
| Q21 | Transistor, BC549 | 1024854 |
| Q22 | Transistor, PN4121 | |
| Q23 | Transistor, PN4121 | |
| Q24 | Transistor, PN3643 | |
| Q25 | Not used | |
| Q26 | Transistor, BC549 | 1024854 |
| Q27 | Transistor, BC549 | 1024854 |
| Q28 | Transistor, BC549 | 1024854 |
| Q29 | Transistor, BC549 | 1024854 |
| Q30 | Transistor, BC549 | 1024854 |
| Q31 | Transistor, BC549 | 1024854 |
| Q32 | Transistor, BC549 | 1024854 |
| Q33 | Transistor, BC549 | 1024854 |
| Q34 | Transistor, BC549 | 1024854 |
| Q35 | Transistor, BC549 | 1024854 |
| Q36 | Transistor, BC549 | 1024854 |
| Q37 | Transistor, BC549 | 1024854 |
| Q38 | Not used | |
| Q39 | Not used | |
| Q40 | Not used | |
| Q41 | Not used | |
| Q42 | Transistor, PN4121 | |
| Q43 | Transistor, BC549 | 1024854 |
| Q44 | Transistor, PN4250 | 906790 |
| Q45 | Transistor, BC549 | 1024854 |
| Q46 | Transistor, 2N5962 | |
| Q47 | Transistor, BC549 | 1024854 |
| Q48 | Transistor, BC549 | 1024854 |
| Q49 | Transistor, 2N4250 | 906790 |
| Q50 | Not used | |
| Q51 | Transistor, PN4250 | 906790 |
| Q52 | Transistor, BC549 | 1024854 |
| Q53 | Transistor, BC549 | 1024854 |

7.2.2.9 Integrated Circuits

| | | |
|------|--|------------------------|
| IC1 | Integrated circuit, CD4066BE <u>or</u> MC4066BCP | |
| IC2 | Integrated circuit, CD4016BE <u>or</u> MC4016BCP | |
| IC3 | Integrated circuit, LM318N | National Semiconductor |
| IC4 | Integrated circuit, CA3100E | RCA |
| IC5 | Integrated circuit, CA3046 | RCA |
| IC6 | Integrated circuit, LM301AN | National Semiconductor |
| IC7 | Integrated circuit, LM301AN | National Semiconductor |
| IC8 | Integrated circuit, CA3130E | RCA |
| IC9 | Integrated circuit, CA3130E | RCA |
| IC10 | Integrated circuit, CA3100E | |
| IC11 | Integrated circuit, CD4016BE or MC14016BCP | |
| IC12 | Integrated circuit, CD4053BE | RCA |

| | | |
|------|--|------------------------|
| IC13 | Integrated circuit, CD4023BE <u>or</u> MC4023BCP | |
| IC14 | Integrated circuit, CD4098BE <u>or</u> MC14528BCP | |
| IC15 | Integrated circuit, CA3140E | RCA |
| IC16 | Integrated circuit, CA3130E | RCA |
| IC17 | Integrated circuit, CD4029BE <u>or</u> MC4029BCP | |
| IC18 | Integrated circuit, CD4029BE <u>or</u> MC4029BCP | |
| IC19 | Integrated circuit, CD4008BE <u>or</u> MC4008BCP | |
| IC20 | Not used | |
| IC21 | Integrated circuit, CD4023BE <u>or</u> MC4023BCP | |
| IC22 | Integrated circuit, CD4049UBE <u>or</u> MC4049UBCP | |
| IC23 | Integrated circuit, CD4070BE <u>or</u> MC14070BCP | |
| IC24 | Integrated circuit, CA3240E | |
| IC25 | Integrated circuit, CA3240E | |
| IC26 | Integrated circuit, CD4070BE <u>or</u> MC14070BCP | |
| IC27 | Integrated circuit, CD4013BE <u>or</u> MC14013BCP | |
| IC28 | Integrated circuit, CA3130E | RCA |
| IC29 | Integrated circuit, μ A734DC | Fairchild |
| IC30 | Integrated circuit, CD4013BE <u>or</u> MC14013BCP | |
| IC31 | Integrated circuit, CD4066BE <u>or</u> MC4066BEP | |
| IC32 | Integrated circuit, LM339N | National Semiconductor |
| IC33 | Integrated circuit, MC7812CT, c/w mounting Kit MK199-3 | Motorola |
| IC34 | Integrated circuit, MC7912CT, c/w mounting Kit MK199-3 | Motorola |
| IC35 | Integrated circuit, CD4081BE <u>or</u> MC14081BCP | |
| IC36 | Integrated circuit, CD4075BE | RCA |
| IC37 | Integrated circuit, CD4071BE | RCA |
| IC38 | Integrated circuit, CD4081BE | RCA |
| IC39 | Integrated circuit, CD4049BE | RCA |
| IC40 | Not used | |
| IC41 | Integrated circuit, CD4075BE | RCA |
| IC42 | Integrated circuit, CD4072BE | RCA |
| IC43 | Integrated circuit, CD4071BE | RCA |
| IC44 | Integrated circuit, CD4081BE | RCA |
| IC45 | Integrated circuit, CD4081BE | RCA |

7.2.2.10 Diodes

| | | |
|-----|-------------------------|---------|
| D1 | Diode, 1N914 | 597291 |
| D2 | Diode, 1N914 | 597291 |
| D3 | Diode, 1N914 | 597291 |
| D4 | Diode, 1N914 | 597291 |
| D5 | Not used | |
| D6 | Not used | |
| D7 | Diode, 1N914 | 597291 |
| D8 | Not used | |
| D9 | Not used | |
| D10 | Not used | |
| D11 | Zener Diode, BZX79 C5V6 | 1006326 |
| D12 | Not used | |
| D13 | Not used | |
| D14 | Not used | |
| D15 | Not used | |
| D16 | Not used | |
| D17 | Not used | |
| D18 | Not used | |
| D19 | Not used | |
| D20 | Not used | |
| D21 | Not used | |

| | | |
|------|----------------------------------|-----------------|
| D22 | Not used | |
| D23 | Not used | |
| D24 | Not used | |
| D25 | Not used | |
| D26 | Not used | |
| D27 | Not used | |
| D28 | Not used | |
| D29 | Not used | |
| D30 | Not used | |
| D31 | Not used | |
| D32 | Zener diode, BZX79 C5V1 | 1005272 |
| D33 | Zener diode, BZX79 C6V8 | 596891 |
| D34 | Diode, 1N914 | 597291 |
| D35 | Not used | |
| D36 | Diode, 1N914 | 597291 |
| D37 | Diode, 1N914 | 597291 |
| D38 | Diode, 1N914 | 597291 |
| D39 | Diode, 1N914 | 597291 |
| D40 | Not used | |
| D41 | Zener diode, BZX79 C4V7 | 596857 |
| D42A | Diode, 1N4003 | 1004811 |
| D42B | Diode, 1N4003 | 1004811 |
| D42C | Diode, 1N4003 | 1004811 |
| D42D | Diode, 1N4003 | 1004811 |
| D43 | Diode, 1N914 | 597291 |
| D44 | Diode, 1N914 | 597291 |
| D45 | Diode, 1N914 | 597291 |
| D46 | Diode, 1N914 | 597291 |
| D47 | Diode, 1N914 | 597291 |
| D48 | Diode, 1N914 | 597291 |
| D49 | Not used | |
| D50 | Not used | |
| D51 | Diode, 1N914 | 597291 |
| D52 | Diode, 1N914 | 597291 |
| D53 | Diode, 1N914 | 597291 |
| D54 | Diode, 1N914 | 597291 |
| D55 | Not used | |
| D56 | Diode, 1N914 | 597291 |
| D57 | Diode, 1N914 | 597291 |
| D58 | Not used | |
| D59 | Not used | |
| D60 | Not used | |
| D61 | Diode, light emitting, 5082-4484 | Hewlett Packard |
| D62 | Diode, 1N914 | 597291 |
| D63 | Diode, MB7501 | Motorola |
| D64 | Diode, 1N914 | 597291 |
| D65 | Diode, 1N914 | 597291 |
| D66 | Diode, 1N914 | 597291 |
| D67 | Diode, 1N914 | 597291 |
| D68 | Diode, 1N914 | 597291 |
| D69 | Diode, 1N914 | 597291 |
| D70 | Diode, 1N914 | 597291 |
| D71 | Diode, 1N914 | 597291 |
| D72 | Diode, 1N914 | 597291 |
| D73 | Diode, 1N914 | 597291 |
| D74 | Diode, 1N914 | 597291 |

7/14

1-70542R

7.2.2.11 Switches

| | | |
|-----|--------|----------------|
| SWA | Switch | AWA 70543-4-29 |
| SWB | Switch | AWA 70543-4-02 |
| SWC | Switch | AWA 70543-4-29 |

7.2.2.12 Connectors

| | | |
|-----|---|----------------------------|
| SKA | Printed circuit board socket, 7 way | AWA 70543-4-10 |
| PLB | Printed circuit board plug, 15 pin | Utilux M4030-15A |
| SKC | Printed circuit board connector, 18 way | AWA 70543-4-06 |
| SKD | Socket, coaxial, P.C.B. mounting | Belling-Lee Type L1465/PCS |

7.2.3 Components on Set Reference Amplifier Assembly 2R70545

| | | |
|------|---|--------|
| C301 | Capacitor, electrolytic, tantalum, 180 μ F, \pm 10%, 6V | 229747 |
| C302 | Capacitor, electrolytic, tantalum, 1 μ F, \pm 10%, 35V | 227739 |
| C303 | Capacitor, ceramic disc, 22pF, \pm 5%, 500V, NPO | 220883 |
| C304 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C305 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C306 | Capacitor, electrolytic, tantalum, 22 μ F, \pm 10%, 15V | 229320 |
| C307 | Capacitor, ceramic disc, 47nF, +80-20%, 25V, HiK | 226822 |
| C308 | Capacitor, ceramic disc, 100pF, \pm 5%, 500V, N750 | 222214 |


| | | |
|------|---|---------|
| R301 | Resistor, metal glaze, 68k Ω , \pm 2%, 1/4W | 1008790 |
| R302 | Resistor, metal glaze, 22k Ω , \pm 2%, 1/4W | 1008778 |
| R303 | Resistor, metal glaze, 6k8 Ω , \pm 2%, 1/4W | 1008766 |
| R304 | Resistor, metal glaze, 3k3 Ω , \pm 2%, 1/4W | 1008758 |
| R305 | Resistor, metal glaze, 100 Ω , \pm 2%, 1/4W | 1008722 |
| R306 | Resistor, metal glaze, 3k3 Ω , \pm 2%, 1/4W | 1008758 |
| R307 | Resistor, metal glaze, 62k Ω , \pm 2%, 1/4W | 1008789 |
| R308 | Resistor, metal glaze, 100 Ω , \pm 2%, 1/4W | 1008722 |
| R309 | Resistor, metal glaze, 100k Ω , \pm 2%, 1/4W | 1008794 |
| R310 | Resistor, metal glaze, 100k Ω , \pm 2%, 1/4W | 1008794 |
| R311 | Resistor, metal glaze, 560 Ω , \pm 2%, 1/4W | 1008740 |
| R312 | Resistor, metal glaze, 100 Ω , \pm 2%, 1/4W | 1008722 |
| R313 | Resistor, metal glaze, 7k5 Ω , \pm 2%, 1/4W | 1008767 |
| R314 | Resistor, metal glaze, 2k7 Ω , \pm 2%, 1/4W | 1008756 |
| R315 | Resistor, metal glaze, 240 Ω , \pm 2%, 1/4W | 1008731 |
| R316 | Resistor, metal glaze, 1k2 Ω , \pm 2%, 1/4W | 1008748 |
| R317 | Resistor, metal glaze, 560 Ω , \pm 2%, 1/4W | 1008740 |
| R318 | Resistor, metal glaze, 100 Ω , \pm 2%, 1/4W | 1008722 |
| R319 | Resistor, metal glaze, 1k5 Ω , \pm 2%, 1/4W | 1008750 |
| R320 | Resistor, metal glaze, 10k Ω , \pm 2%, 1/4W | 1008770 |
| R321 | Resistor, metal glaze, 10k Ω , \pm 2%, 1/4W | 1008770 |


| | | |
|-------|---|-----------------|
| RV301 | Resistor, variable, plastic film, 5k Ω , \pm 10% | Clarostat 380C3 |
|-------|---|-----------------|


| | | |
|-----|-------------------|-----------------|
| RLG | Relay, IC.O., 12V | National RSD12V |
|-----|-------------------|-----------------|

| | | |
|------|--------------------|---------|
| Q301 | Transistor, 2N2857 | |
| Q302 | Transistor, BC550 | |
| Q303 | Transistor, PN4121 | |
| Q304 | Transistor, PN5962 | |
| Q305 | Transistor, BC549 | 1024854 |
| Q306 | Transistor, BC549 | 1024854 |
| Q307 | Transistor, PN4250 | 906790 |

| | | |
|-------|-------------------------------------|---------------------------------------|
| D301 | Diode 1N914 | 597291 |
| SWD | Switch Assembly (includes RV315) | AWA 70545-4-02 |
| 7.2.4 | Meter Range Switch Assembly 2A70546 | |
| SWE | Switch | AWA 70546-4-01 |
| SKB | Connector, female, 15 way | Utilux M2695-15
c/w Contacts M2759 |



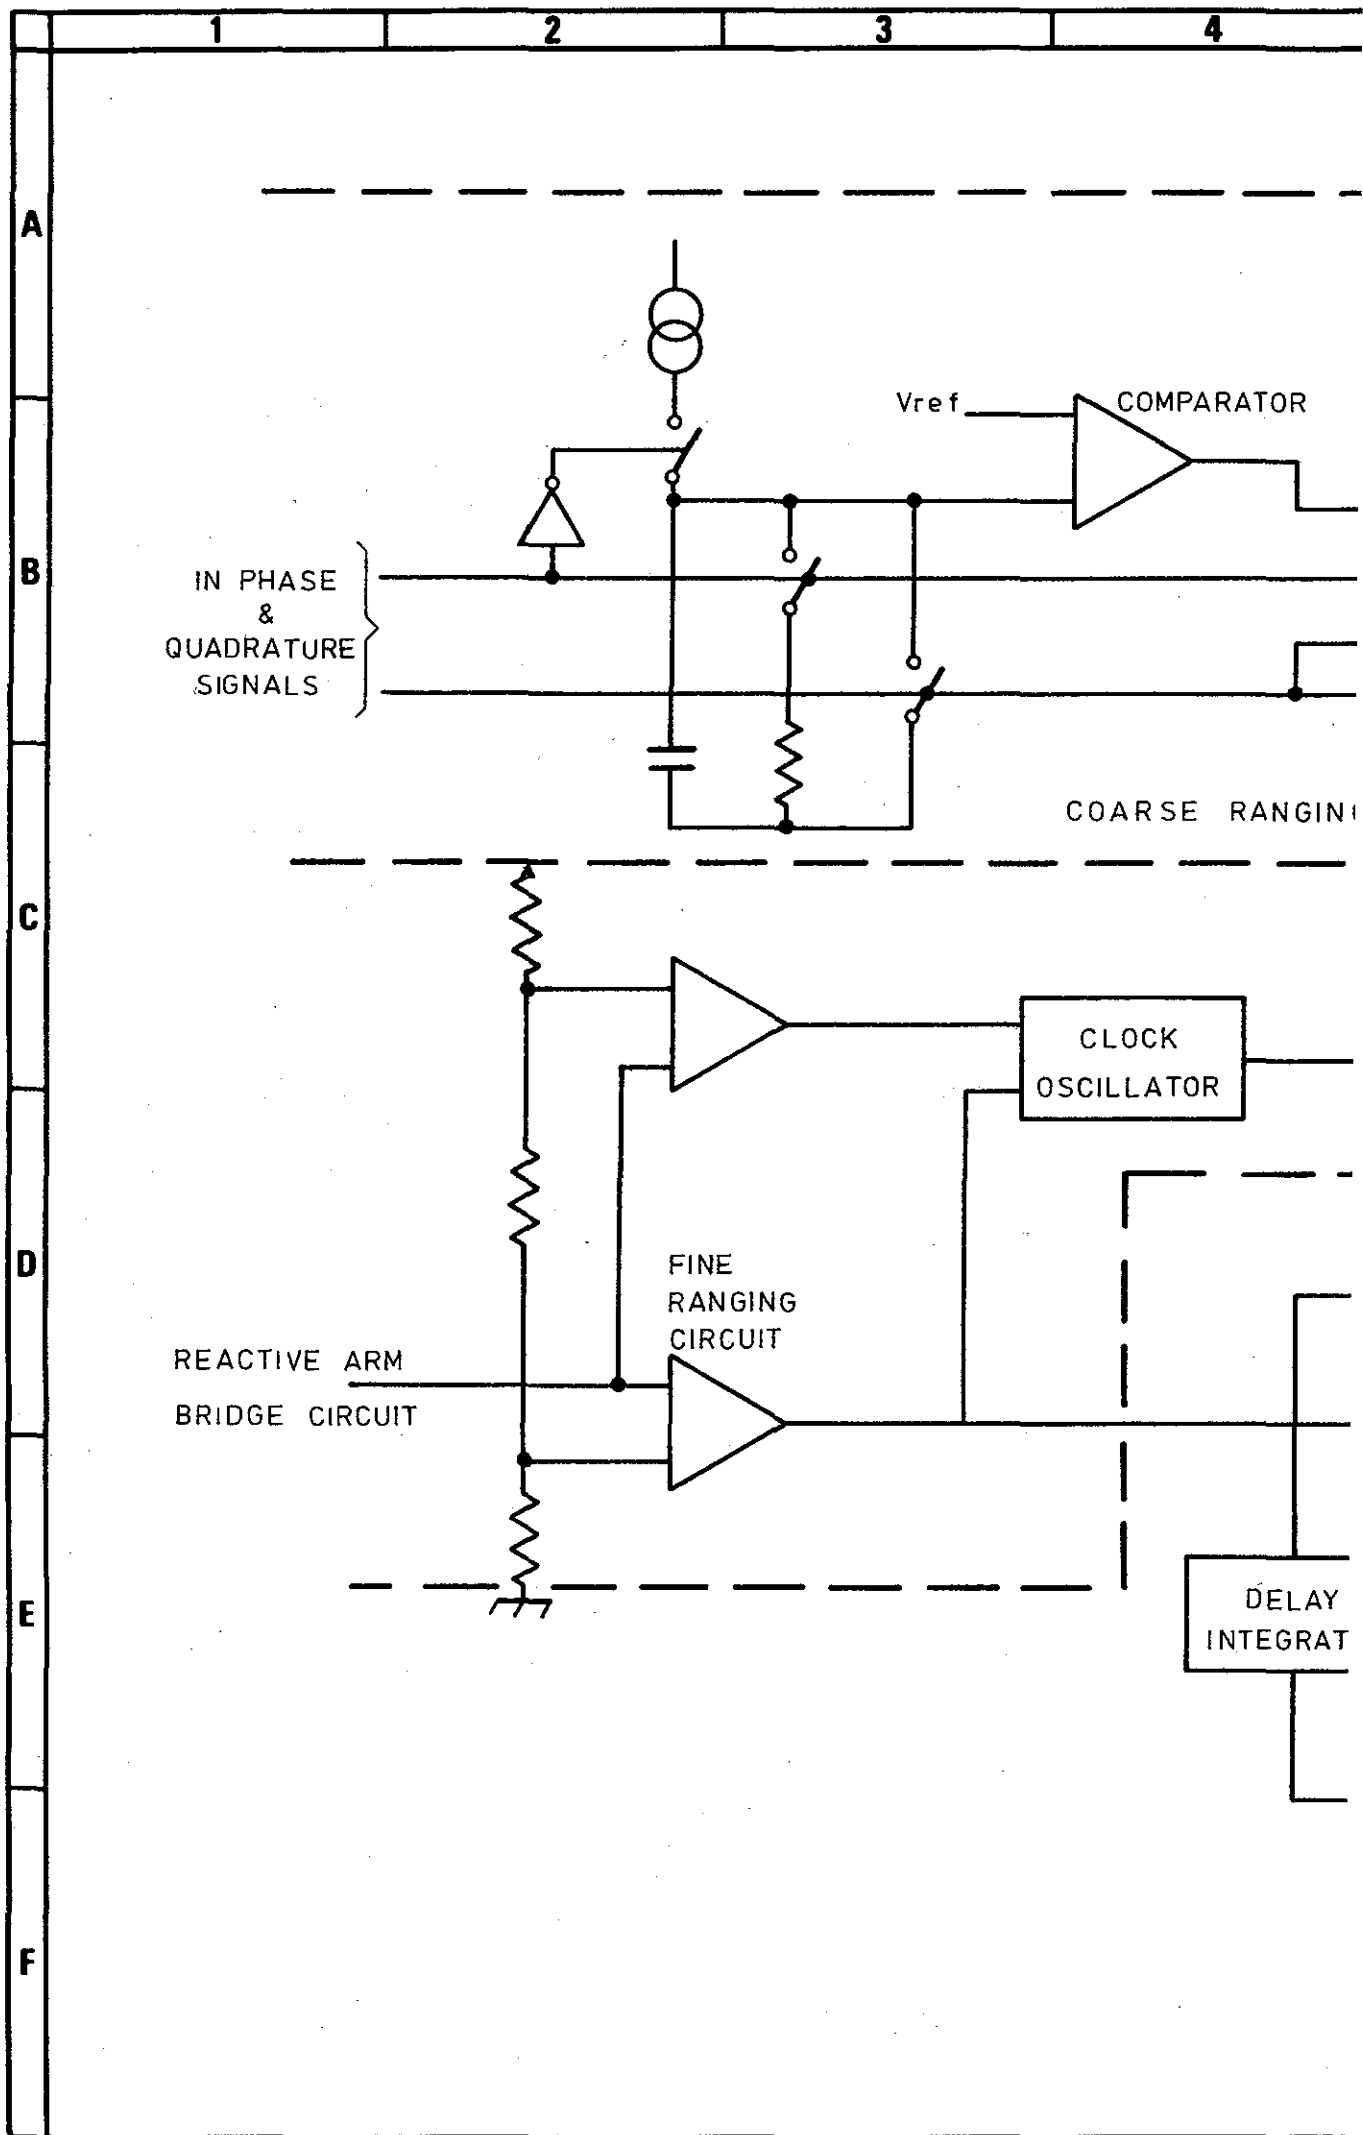

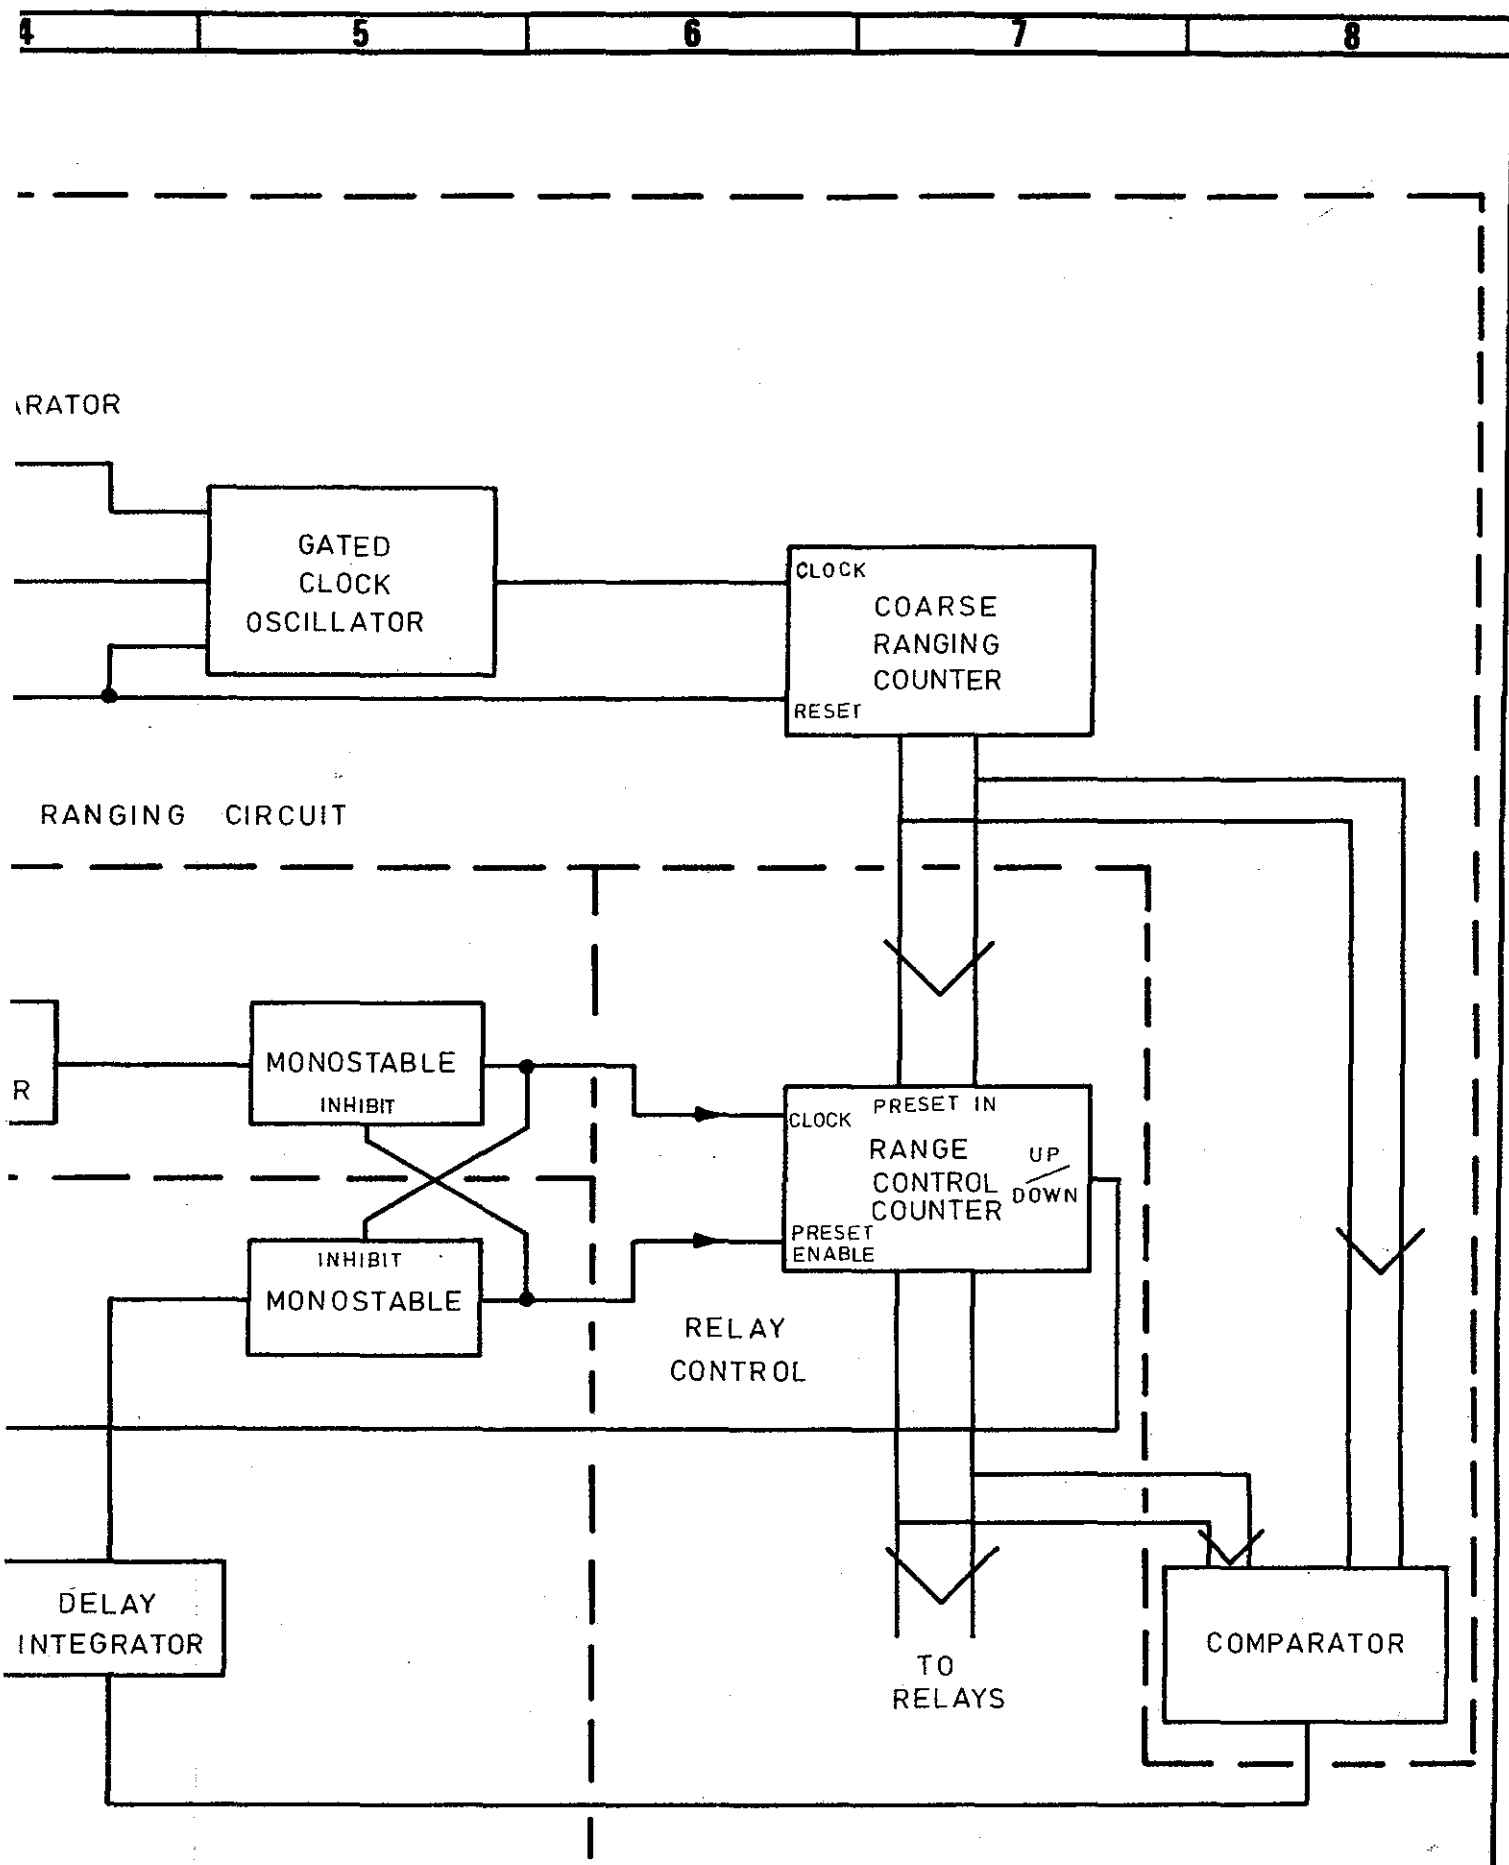

**AMALGAMATED WIRELESS
(AUSTRALASIA) LTD**

ENGINEERING PRODUCTS DIVISION


TYPE No.

TITLE BLOCK DIAGRAM
NULLING LOOP RANGE CONTROL
DISTORTION AND NOISE METER

DRAWING No.

70542-3-57

ISSUE

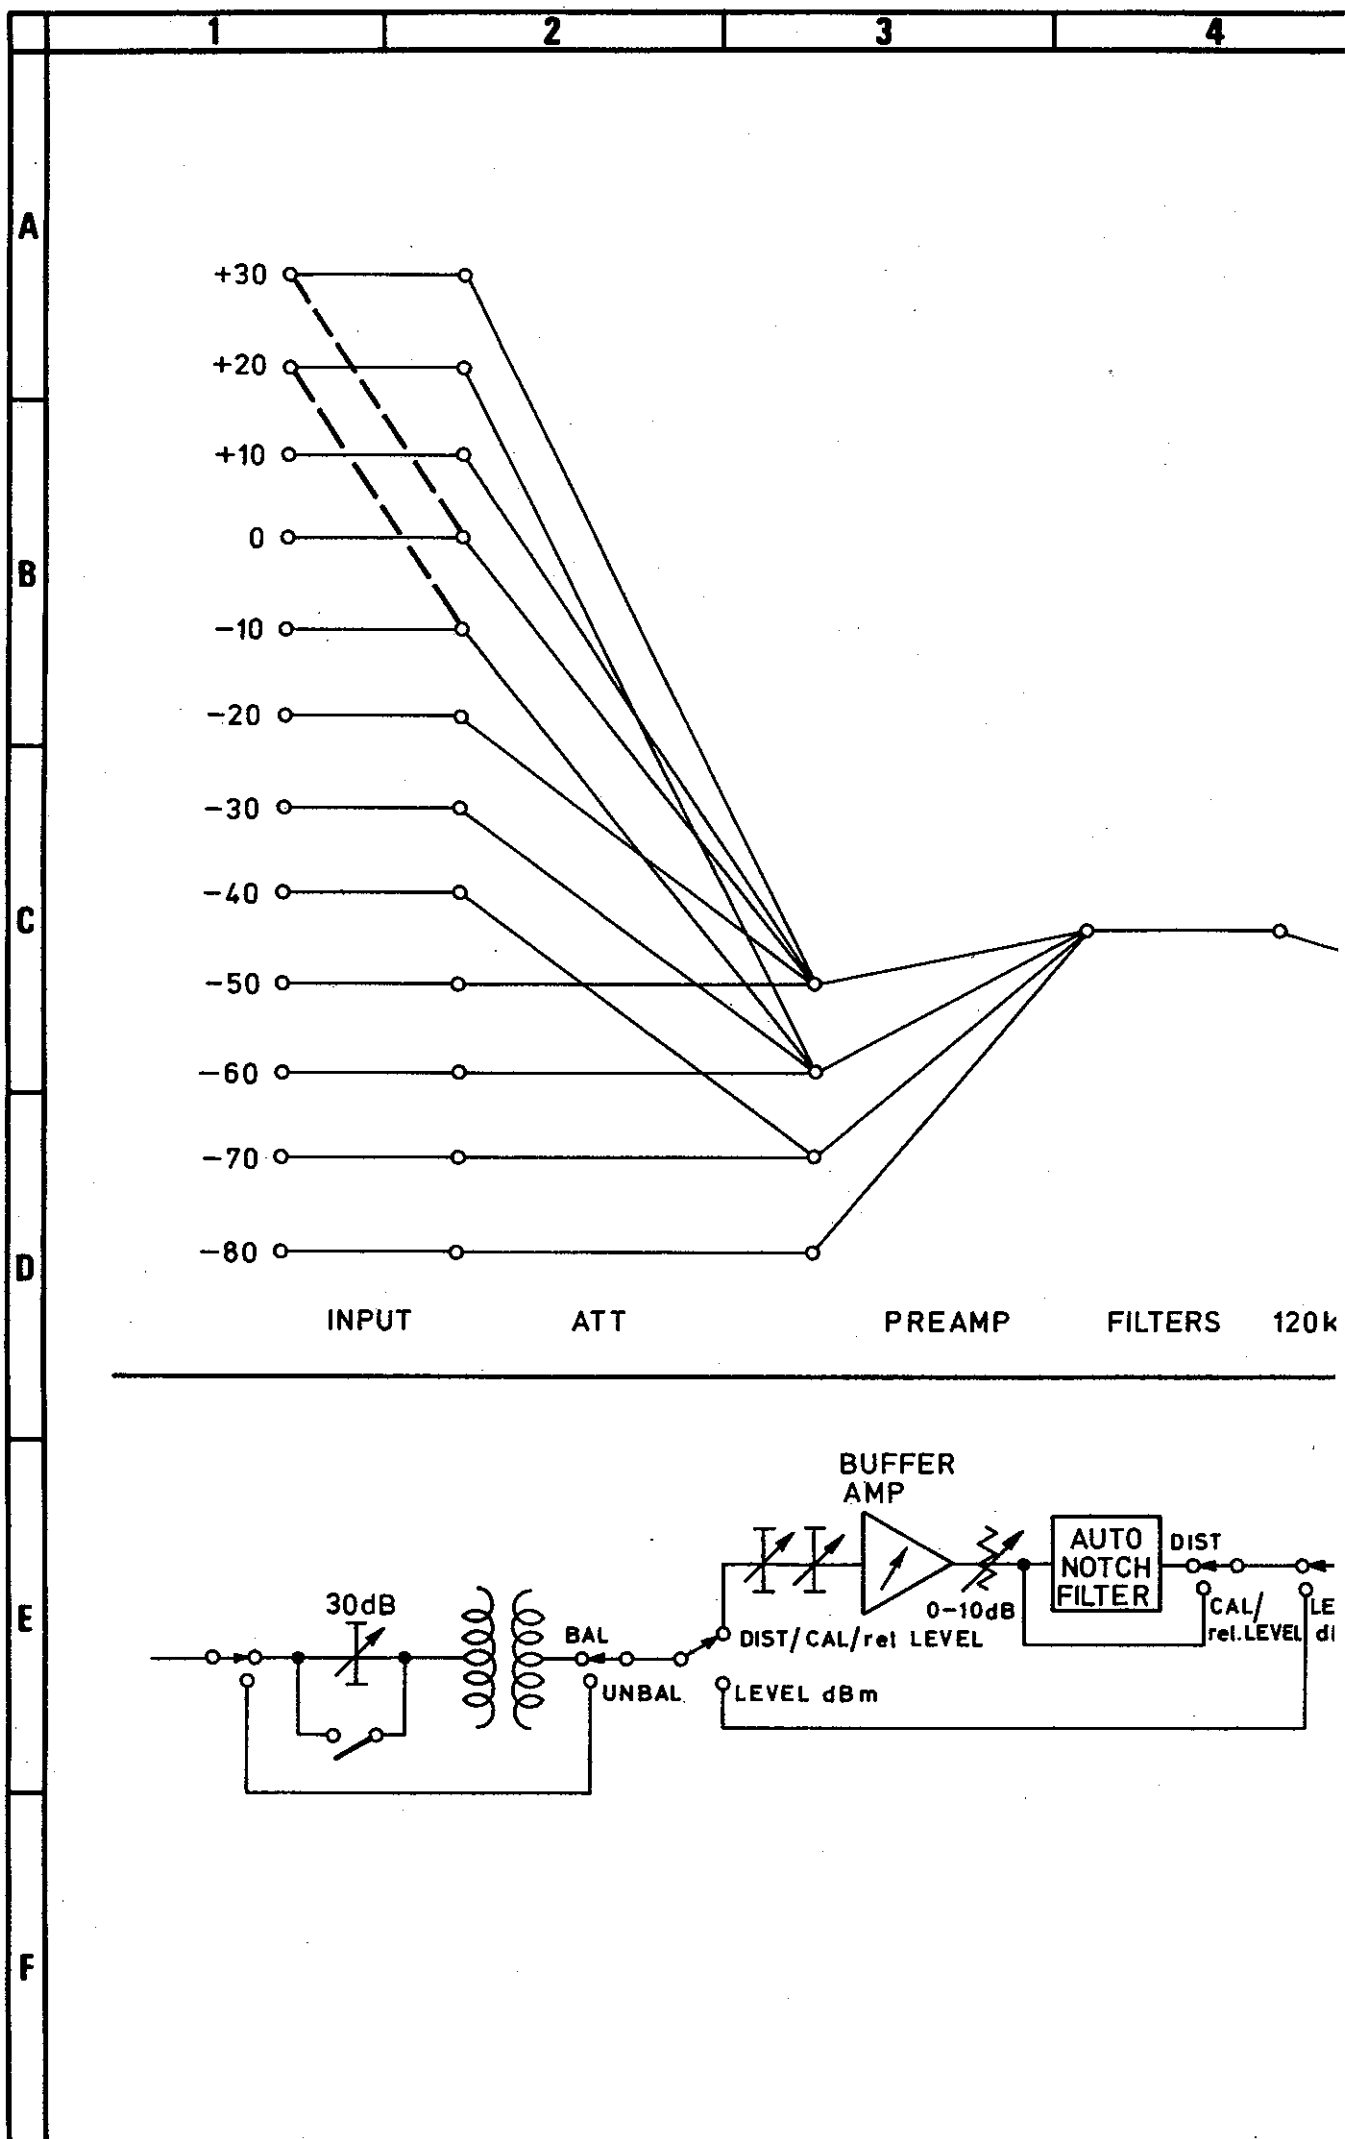

| INPUT | LEVEL, dBm | | LEVEL, rel. | |
|-------|--------------|-----------------|--------------------|-----------------|
| | UNBAL | BAL | UNBAL | BAL |
| +30 | C, 6, 5, 6' | C, E, 13, 5, 6' | C, N, P, 13, 5, 6' | C, E, 13, 5, 6' |
| +20 | 6, 5, 6' | E, 13, 5, 6' | N, P, 13, 5, 6' | E, 13, 5, 6' |
| +10 | C, 12, 5, 6' | | N, P, C, 5, 6' | C, E, 5, 6' |
| 0 | C, 13, 5, 6' | | | N, P, 5, 6' |
| -10 | 13, 5, 6' | | | |
| -20 | C, 5, 6' | | | |
| -30 | 5, 6' | | | |
| -40 | B, 5, 6' | | | |
| -50 | C, D, 12' | | | |
| -60 | D, 12' | | | |
| -70 | B, D, 12' | | | |
| -80 | A, B, D, 12' | | | |


~2V rms

--- BALANCED

LEVEL DIAGRAM

MODE CONTROL SET TO LEVEL dBm

ERS 120kHz LP METER
AMP

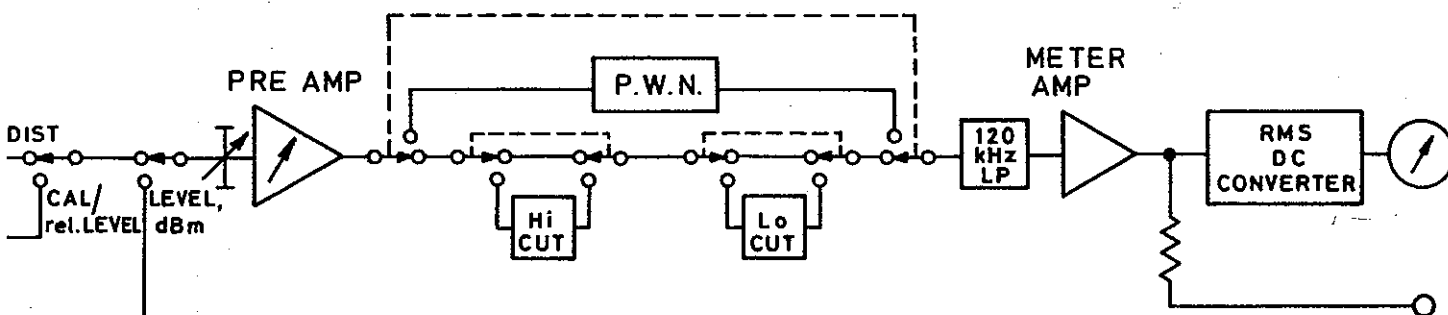

**AMALGAMATED WIRELESS
(AUSTRALASIA) LTD**

ENGINEERING PRODUCTS DIVISION

TYPE No.

TITLE


**F242A SIMPLIFIED
BLOCK SCHEMATIC
AND LEVEL DIAGRAM**


DRAWING No.


70542-3-56


ISSUE

0

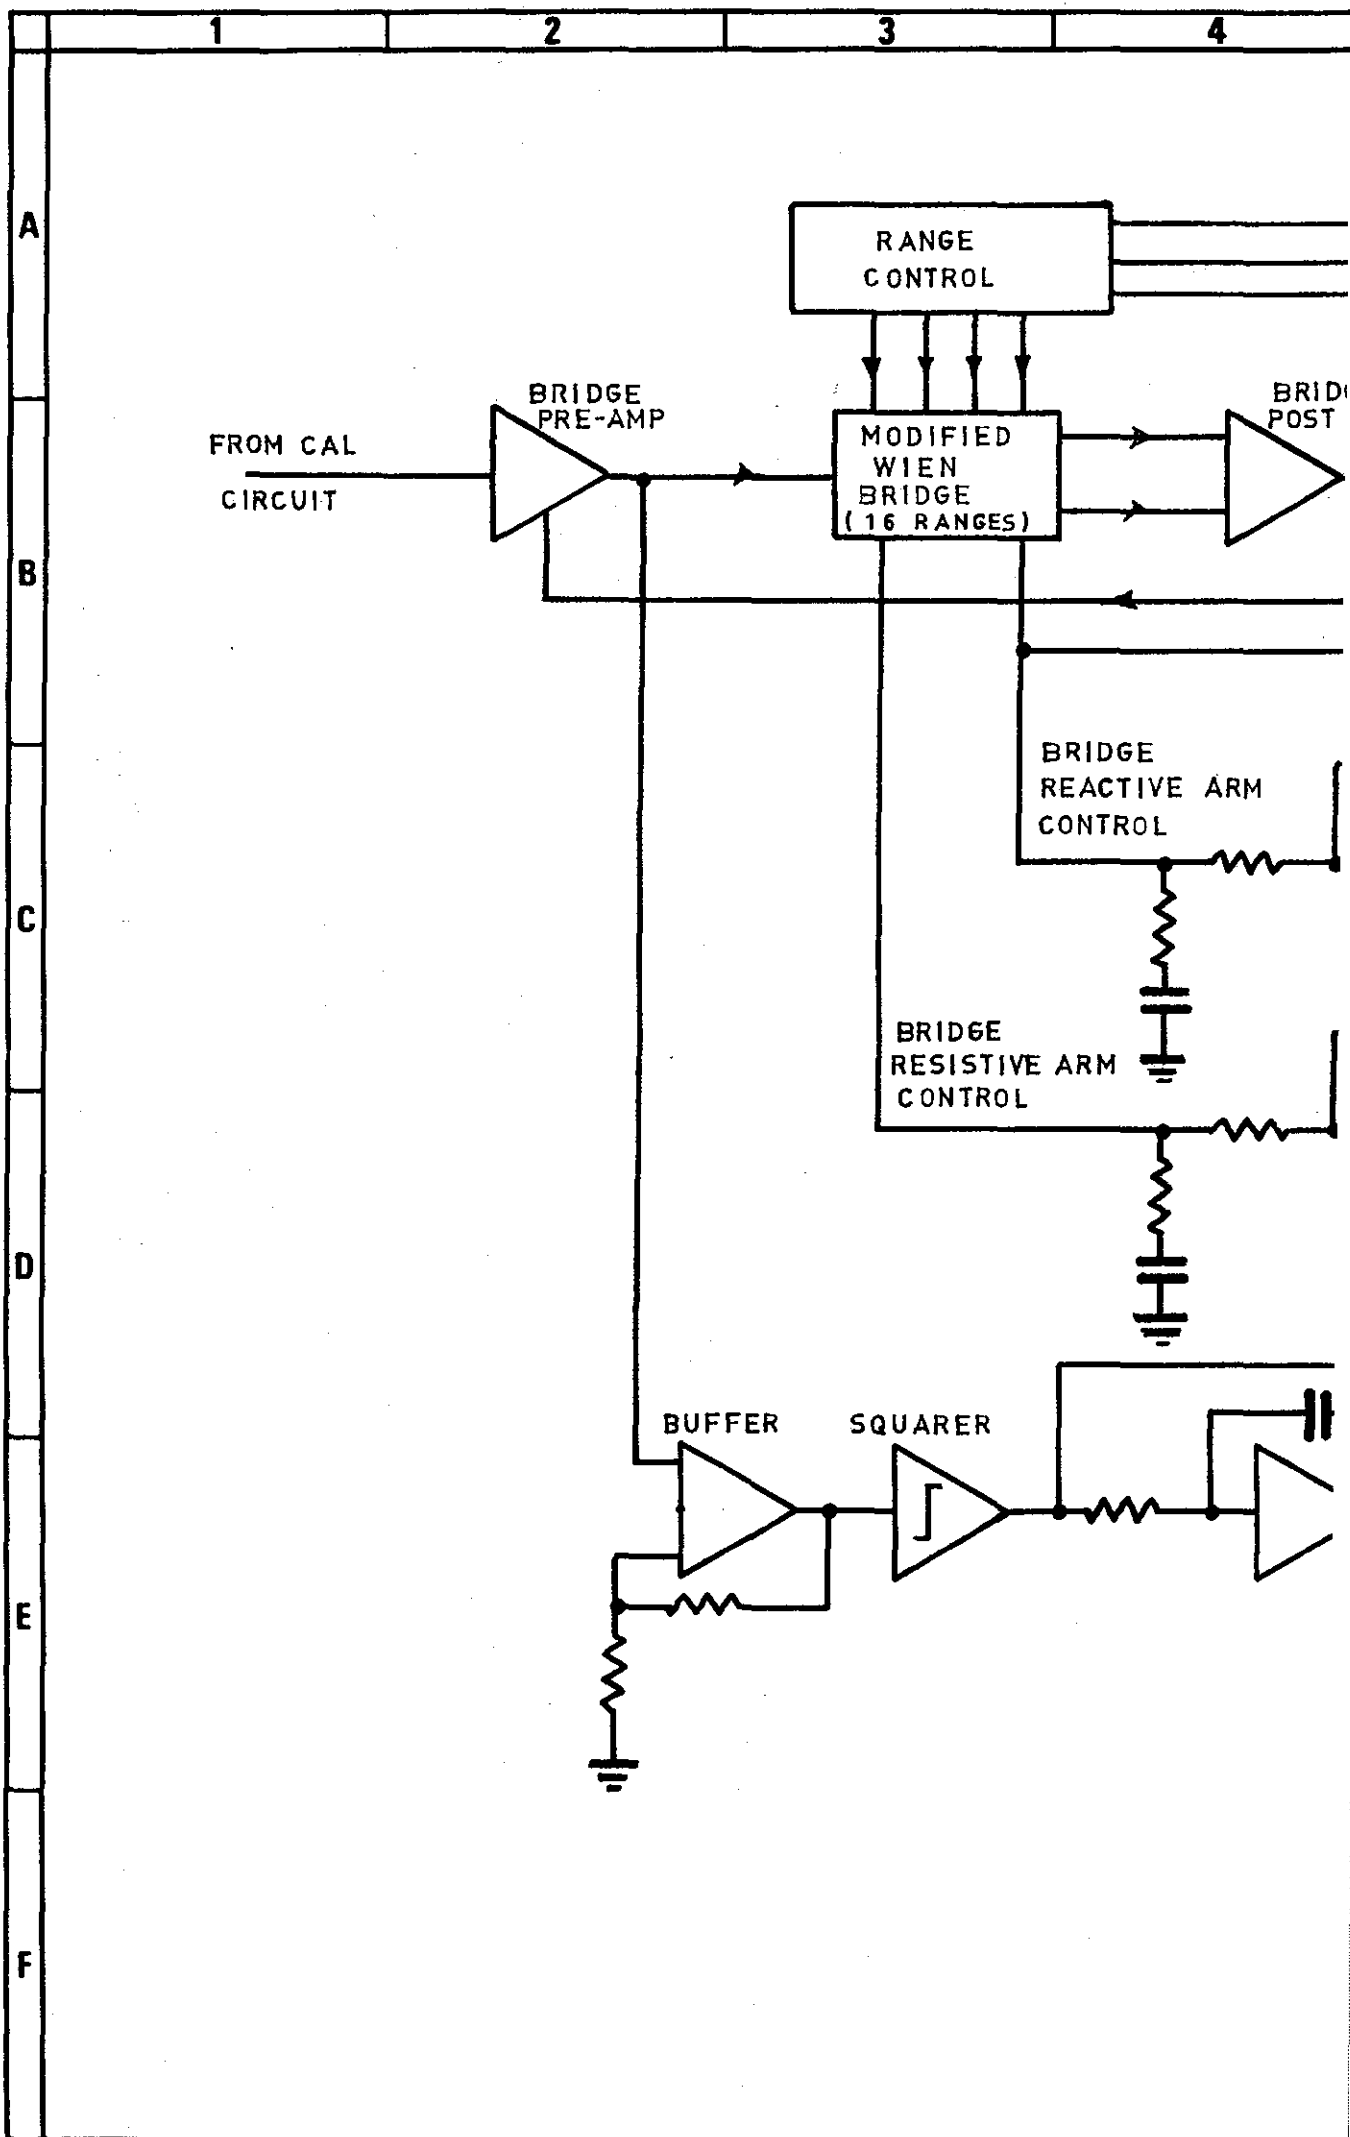

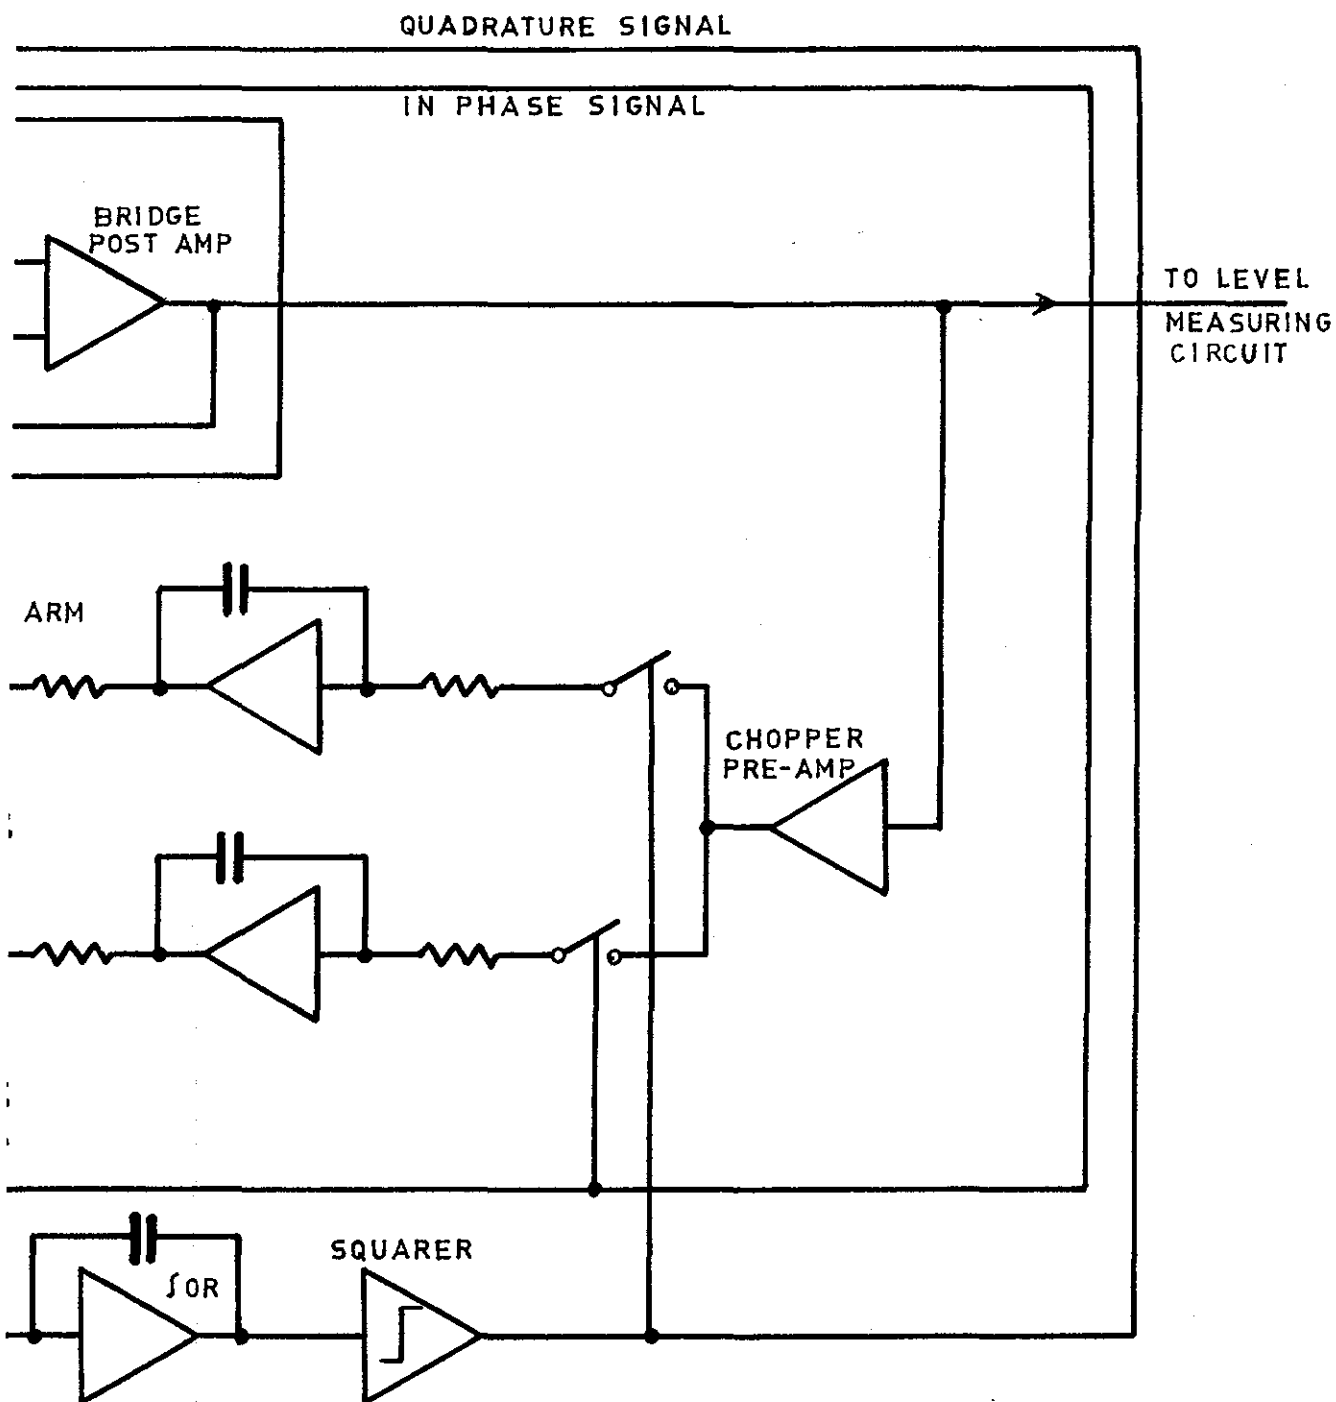

| | | | | |
|---|---|--|--|--------------|
|  | AMALGAMATED WIRELESS
(AUSTRALASIA) LTD | | TITLE BLOCK DIAGRAM
NULLING LOOP
F242
DISTORTION AND NOISE METER | |
| | ENGINEERING PRODUCTS DIVISION | | DRAWING No.
70542 - 3 - 26 | |
| TYPE No. | | | | ISSUE |

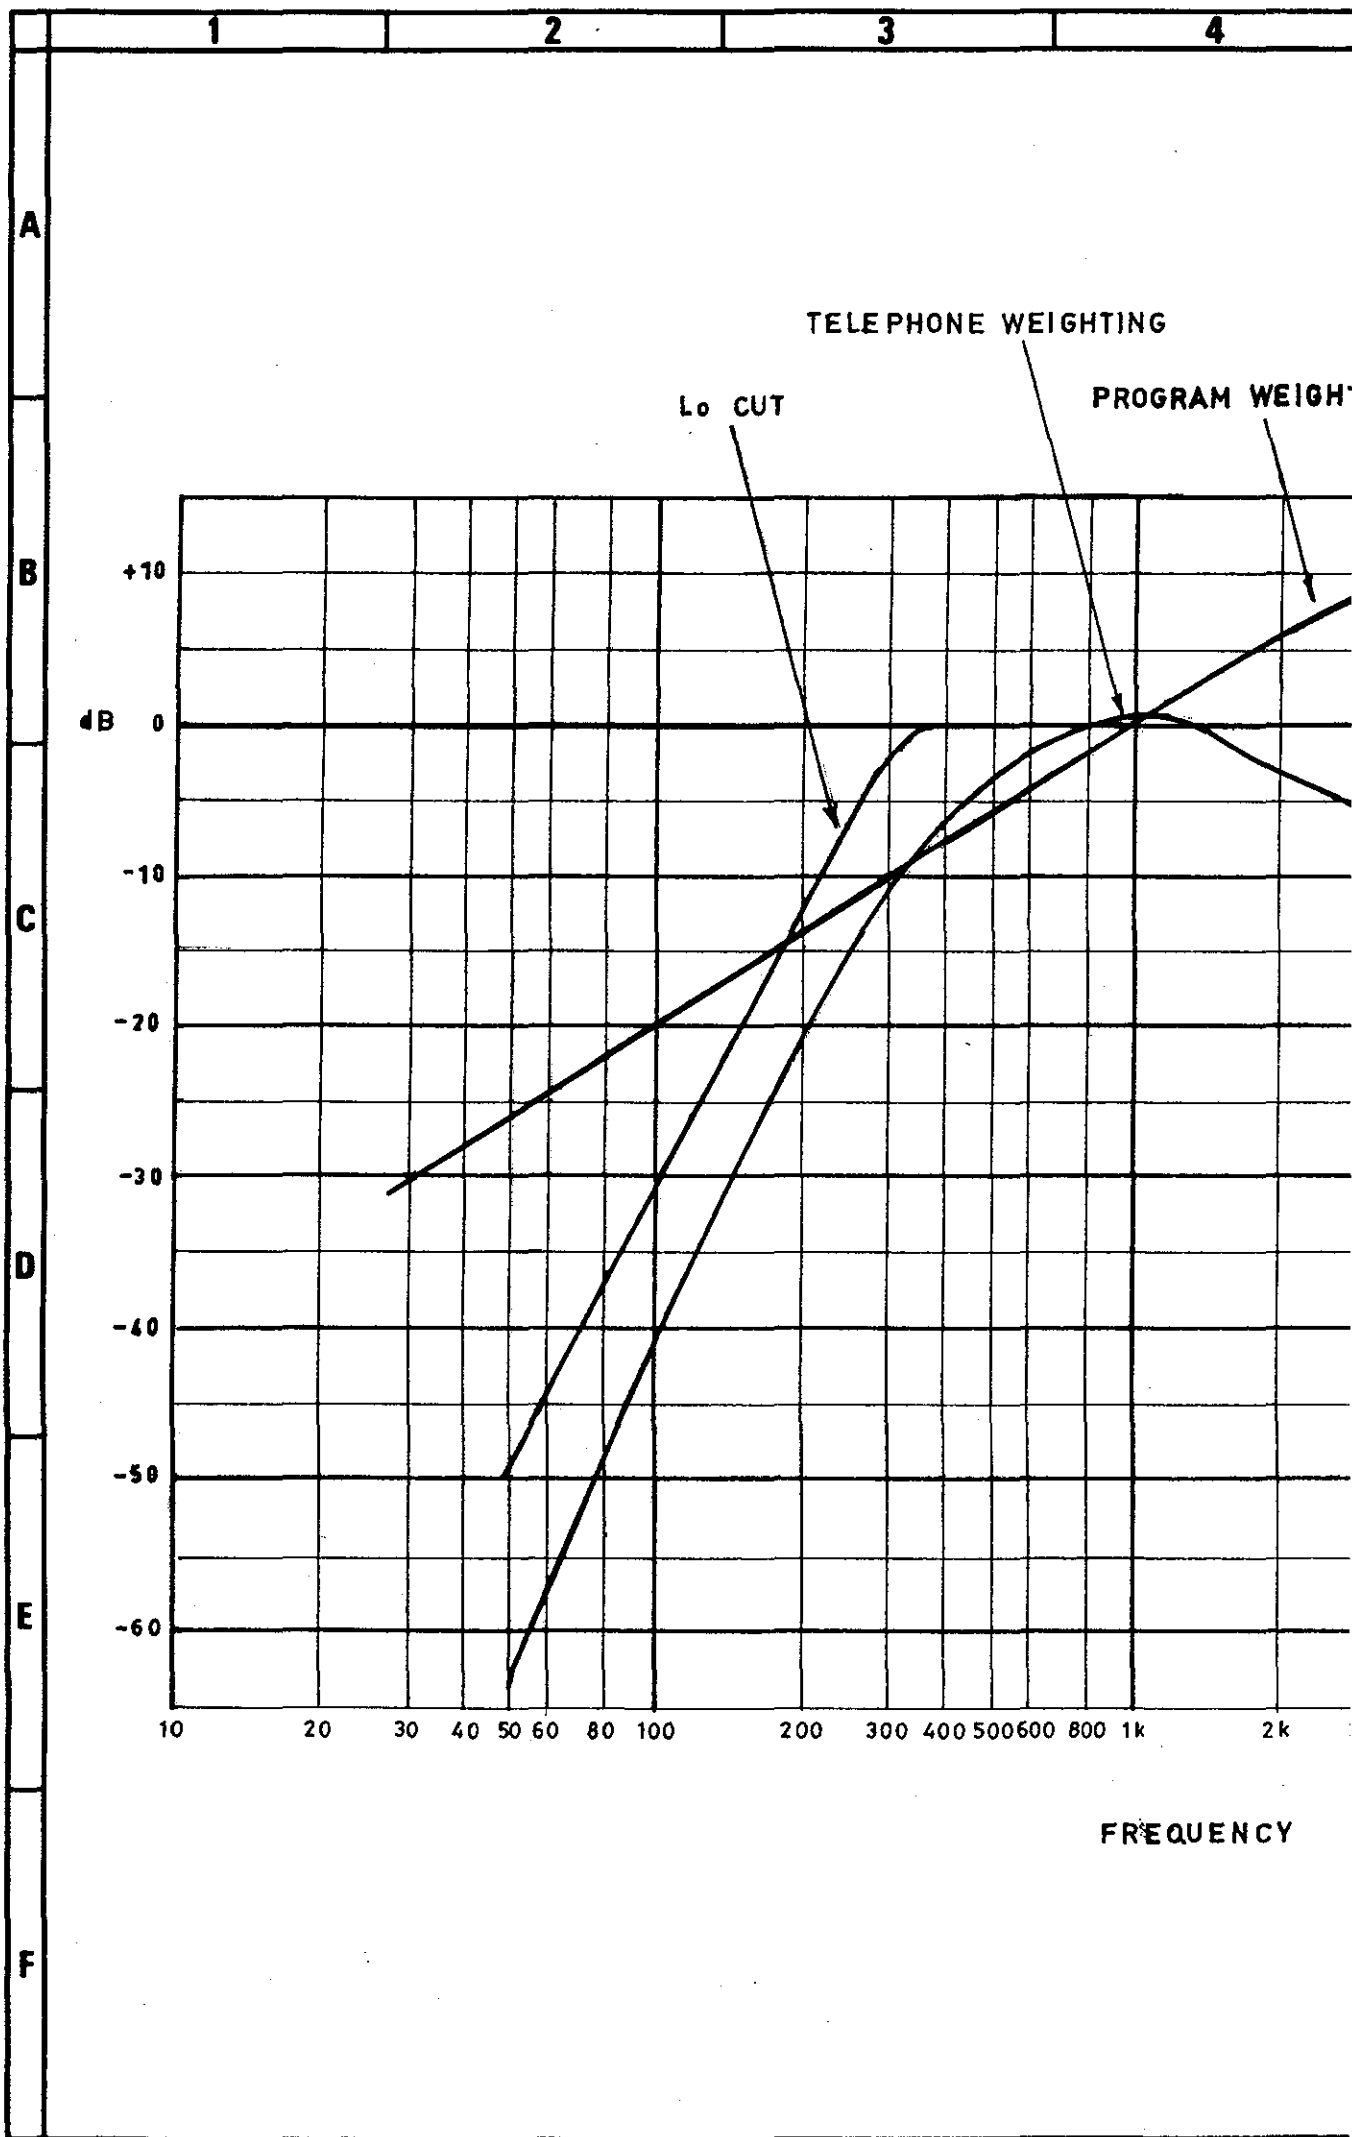


RAM WEIGHTING


HI CUT


FLAT RESPONSE
UNBALANCED

QUENCY


**AMALGAMATED WIRELESS
(AUSTRALASIA) LTD**
ENGINEERING PRODUCTS DIVISION
TYPE No.
TITLE
FILTER RESPONSE CURVES
DRAWING No.
70550-3-26
ISSUE

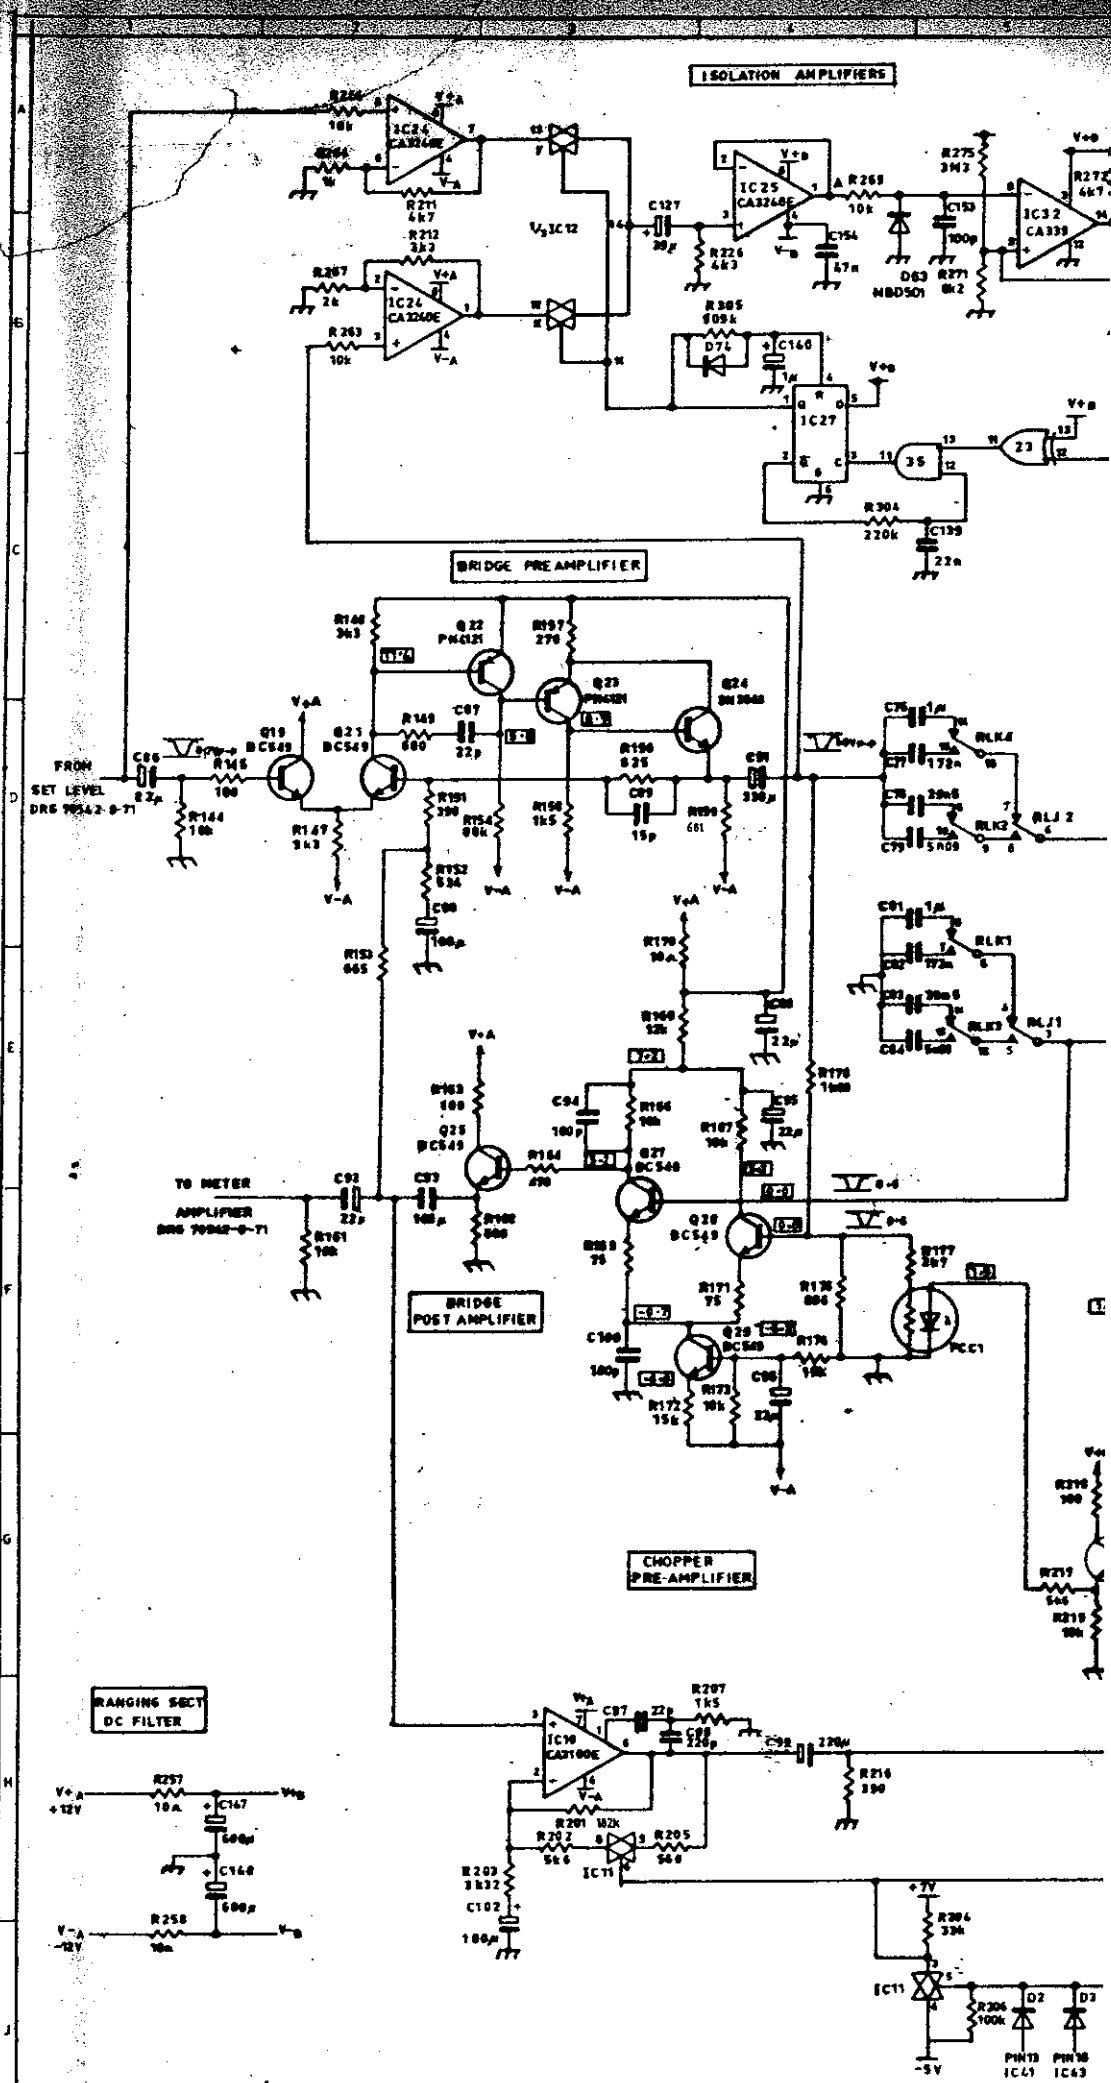


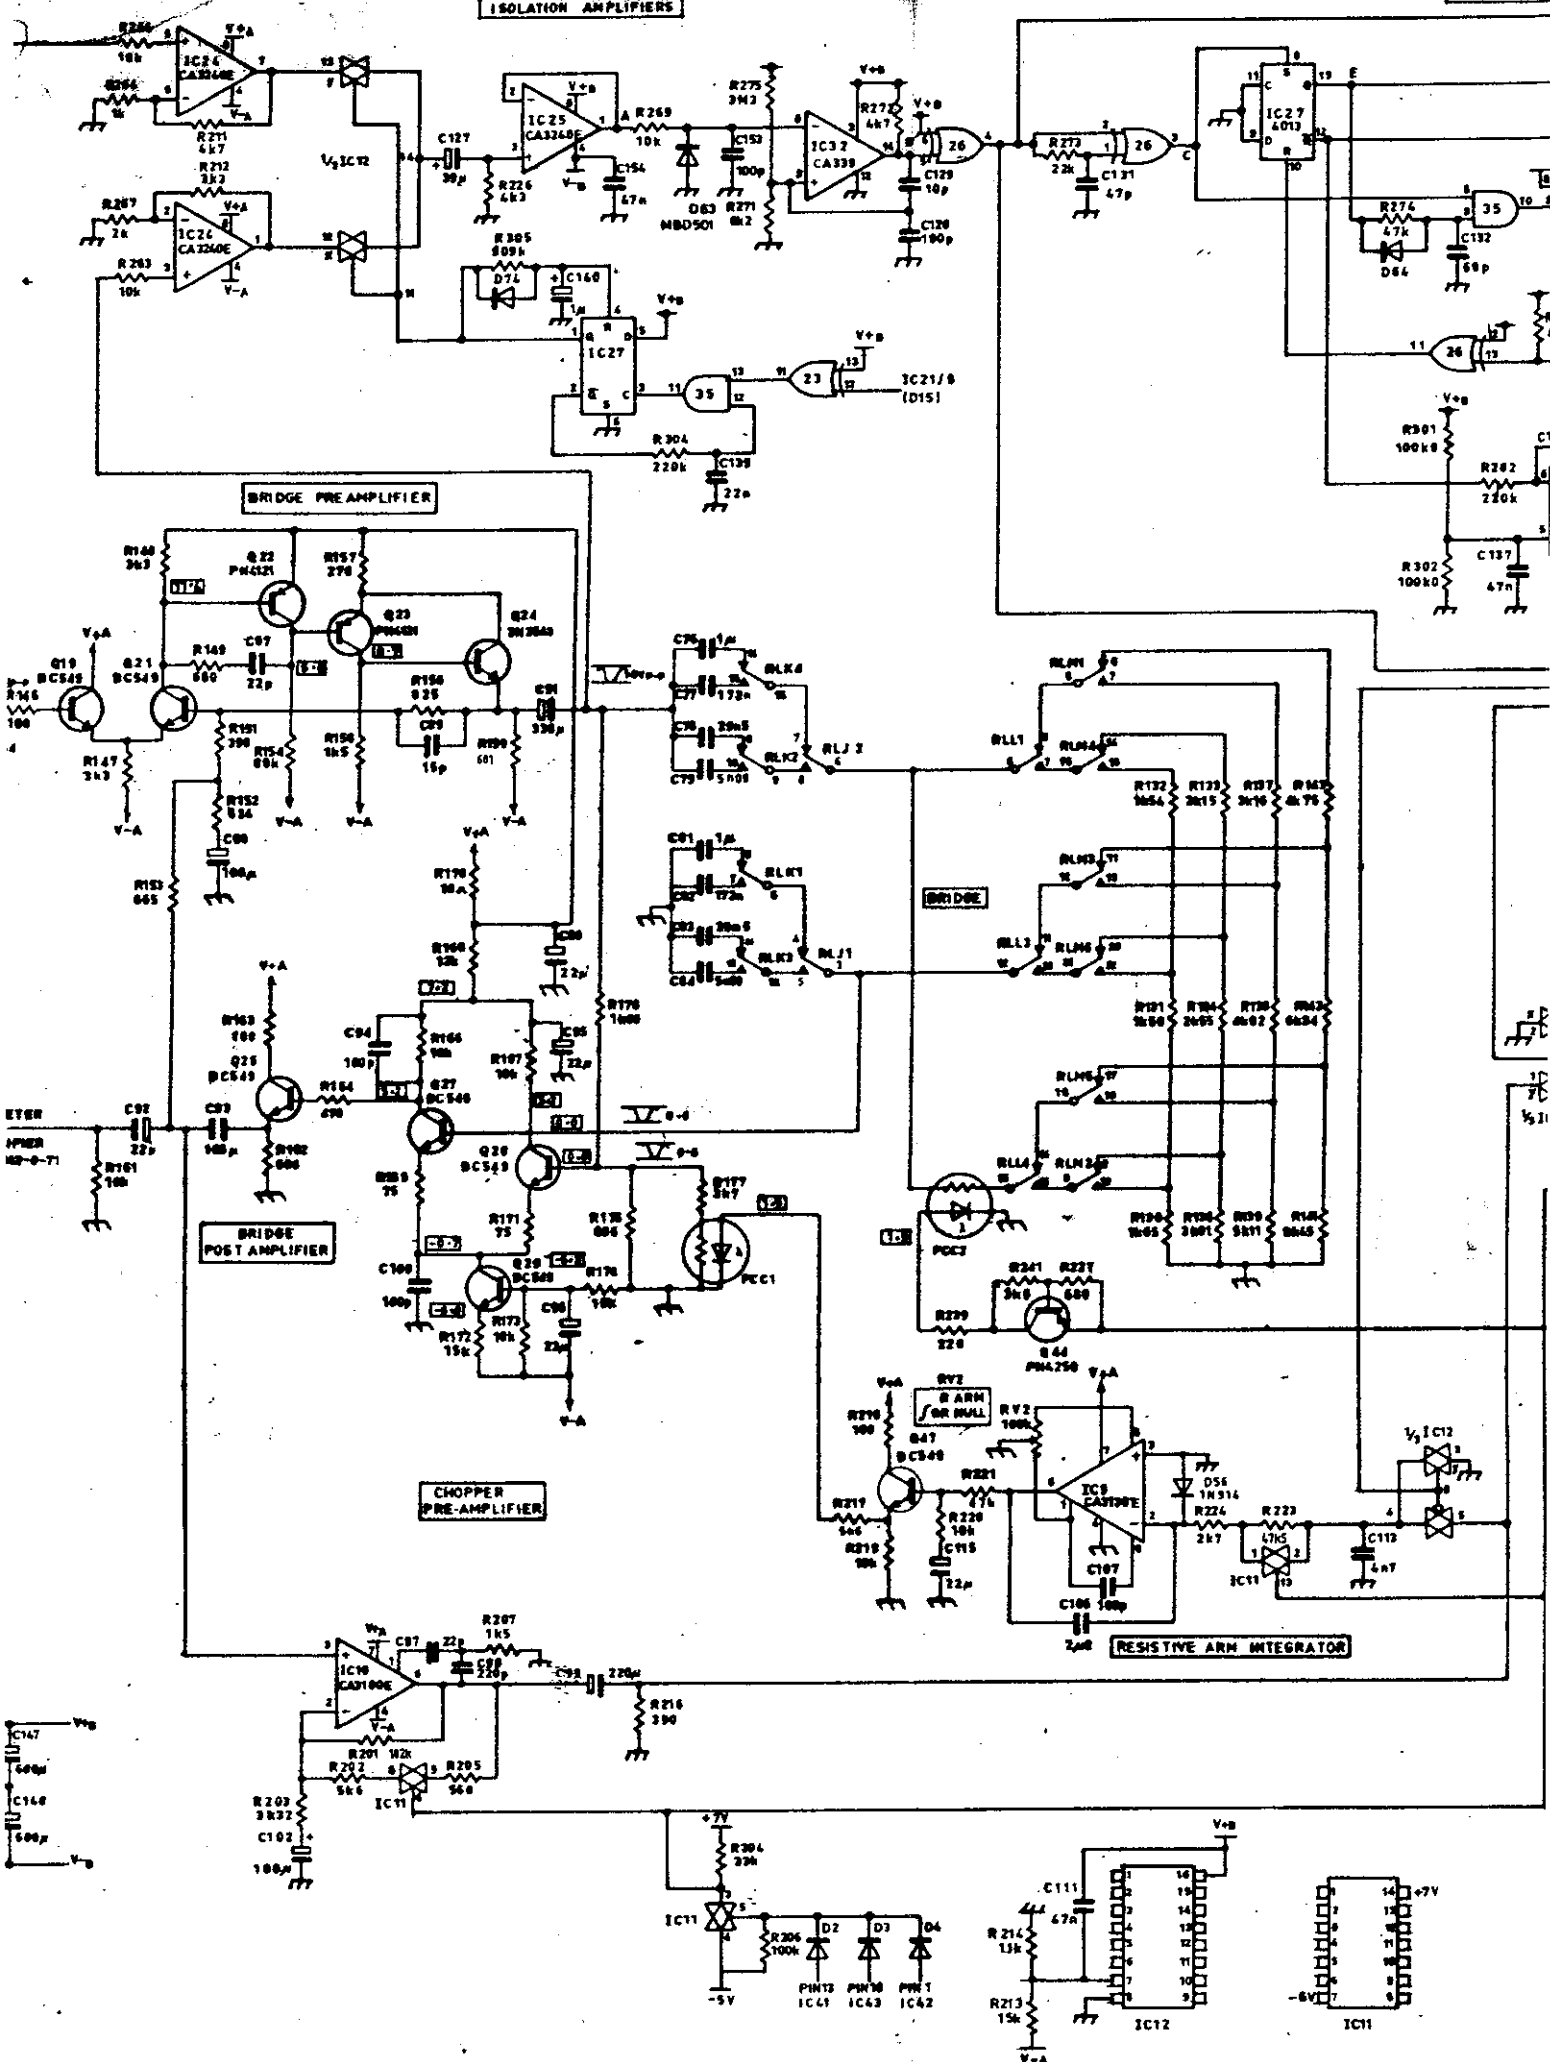

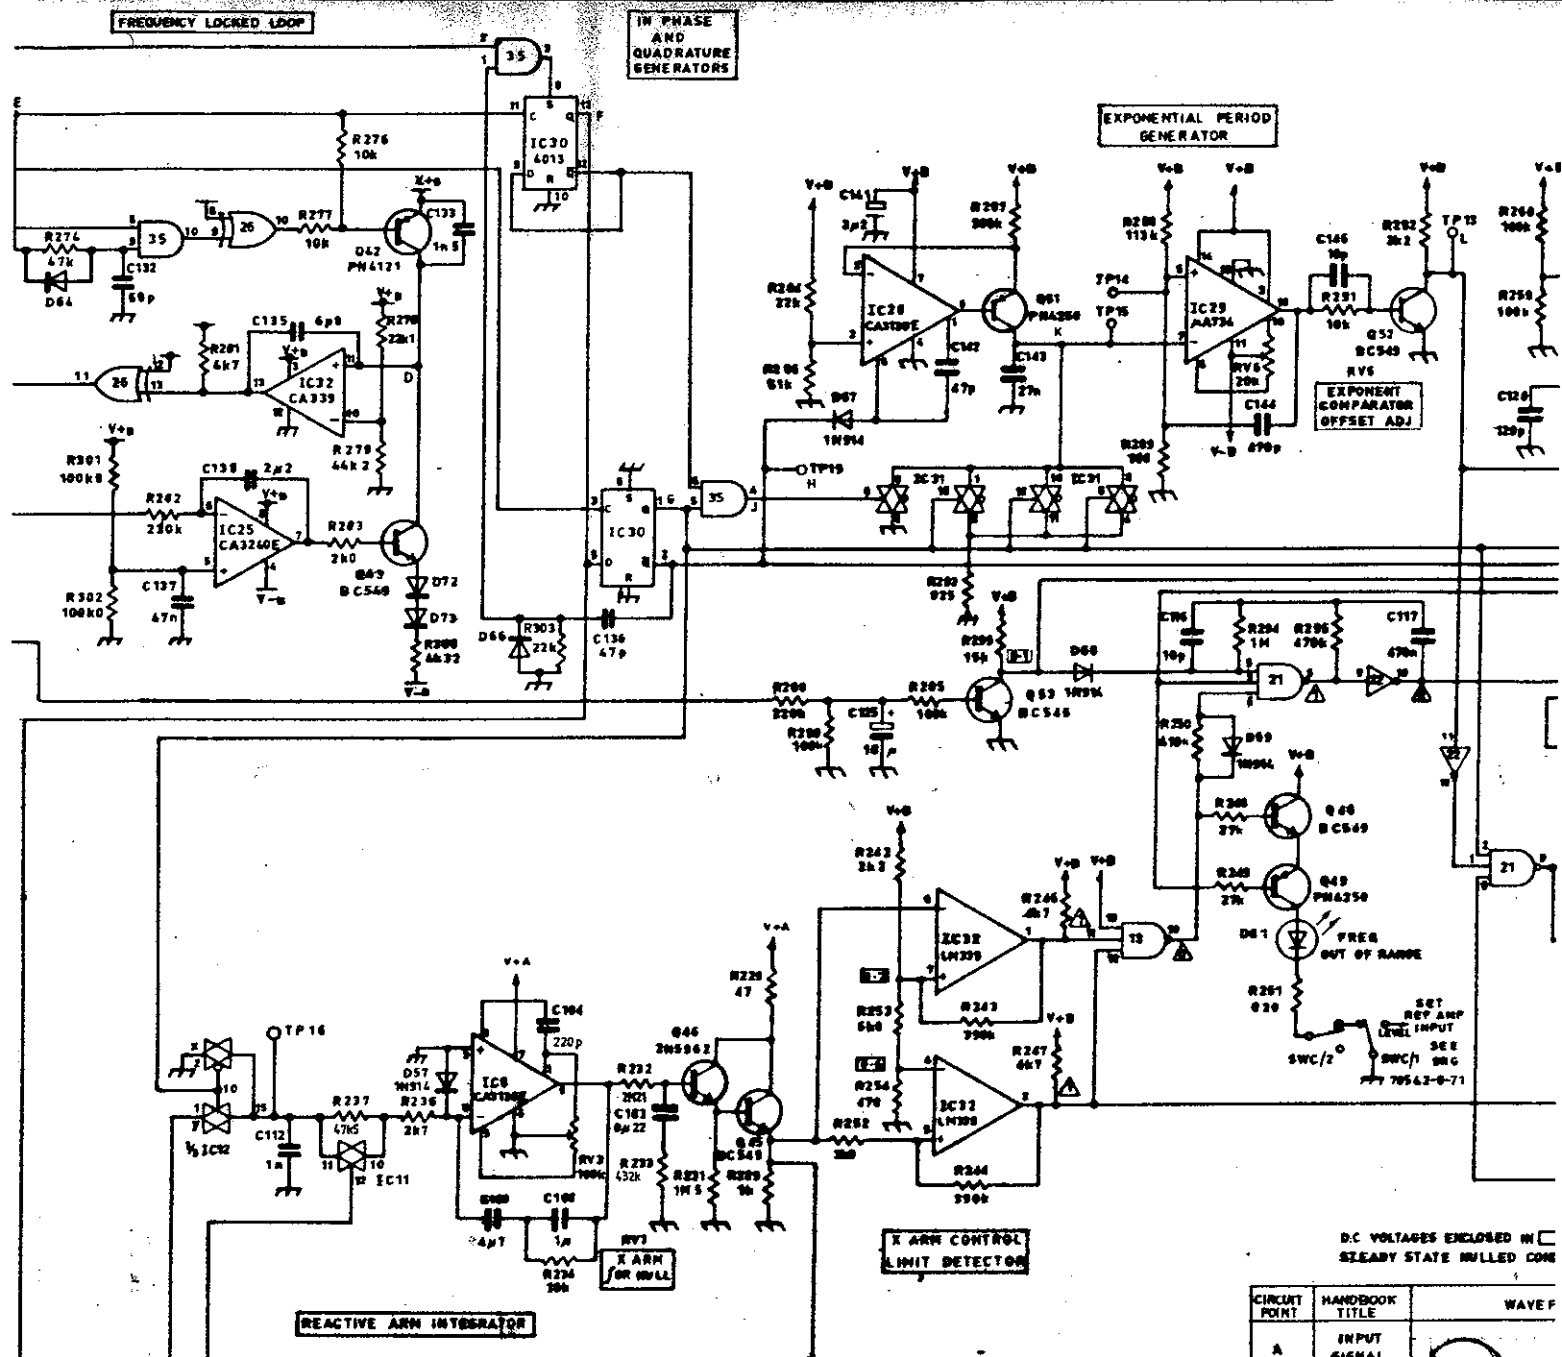

| IC | TYPE | IC | TYPE | IC | TYPE | IC | TYPE |
|----|---------|----|---------|----|---------|----|-------|
| 1 | | 11 | 4016 | 21 | 4023 | 31 | 4044 |
| 2 | | 12 | 4053 | 22 | 4049 | 32 | LM339 |
| 3 | | 13 | 4023 | 23 | 4030 | 33 | |
| 4 | | 14 | 4023 | 24 | CA3240E | 34 | |
| 5 | | 15 | | 25 | CA3240E | 35 | 4001 |
| 6 | | 16 | CA3130E | 26 | 4070 | 36 | |
| 7 | | 17 | 4023 | 27 | 4013 | 37 | |
| 8 | CA3130E | 18 | 4023 | 28 | CA3130E | 38 | |
| 9 | CA3130E | 19 | 4000 | 29 | CA734 | 39 | |
| 10 | CA3130E | 20 | | 30 | 4013 | 40 | |


4016, 4049, 4053, 4070, 4084, 4090, 4091, 4092, 4093, 4094, 4095, 4096, 4097, 4098, 4099, 4100, 4101, 4102, 4103, 4104, 4105, 4106, 4107, 4108, 4109, 4110, 4111, 4112, 4113, 4114, 4115, 4116, 4117, 4118, 4119, 4120, 4121, 4122, 4123, 4124, 4125, 4126, 4127, 4128, 4129, 4130, 4131, 4132, 4133, 4134, 4135, 4136, 4137, 4138, 4139, 4140, 4141, 4142, 4143, 4144, 4145, 4146, 4147, 4148, 4149, 4150, 4151, 4152, 4153, 4154, 4155, 4156, 4157, 4158, 4159, 4160, 4161, 4162, 4163, 4164, 4165, 4166, 4167, 4168, 4169, 4170, 4171, 4172, 4173, 4174, 4175, 4176, 4177, 4178, 4179, 4180, 4181, 4182, 4183, 4184, 4185, 4186, 4187, 4188, 4189, 4190, 4191, 4192, 4193, 4194, 4195, 4196, 4197, 4198, 4199, 4200, 4201, 4202, 4203, 4204, 4205, 4206, 4207, 4208, 4209, 4210, 4211, 4212, 4213, 4214, 4215, 4216, 4217, 4218, 4219, 4220, 4221, 4222, 4223, 4224, 4225, 4226, 4227, 4228, 4229, 4230, 4231, 4232, 4233, 4234, 4235, 4236, 4237, 4238, 4239, 4240, 4241, 4242, 4243, 4244, 4245, 4246, 4247, 4248, 4249, 4250, 4251, 4252, 4253, 4254, 4255, 4256, 4257, 4258, 4259, 4260, 4261, 4262, 4263, 4264, 4265, 4266, 4267, 4268, 4269, 4270, 4271, 4272, 4273, 4274, 4275, 4276, 4277, 4278, 4279, 4280, 4281, 4282, 4283, 4284, 4285, 4286, 4287, 4288, 4289, 4290, 4291, 4292, 4293, 4294, 4295, 4296, 4297, 4298, 4299, 4300, 4301, 4302, 4303, 4304, 4305, 4306, 4307, 4308, 4309, 4310, 4311, 4312, 4313, 4314, 4315, 4316, 4317, 4318, 4319, 4320, 4321, 4322, 4323, 4324, 4325, 4326, 4327, 4328, 4329, 4330, 4331, 4332, 4333, 4334, 4335, 4336, 4337, 4338, 4339, 4340, 4341, 4342, 4343, 4344, 4345, 4346, 4347, 4348, 4349, 4350, 4351, 4352, 4353, 4354, 4355, 4356, 4357, 4358, 4359, 4360, 4361, 4362, 4363, 4364, 4365, 4366, 4367, 4368, 4369, 4370, 4371, 4372, 4373, 4374, 4375, 4376, 4377, 4378, 4379, 4380, 4381, 4382, 4383, 4384, 4385, 4386, 4387, 4388, 4389, 4390, 4391, 4392, 4393, 4394, 4395, 4396, 4397, 4398, 4399, 4400, 4401, 4402, 4403, 4404, 4405, 4406, 4407, 4408, 4409, 4410, 4411, 4412, 4413, 4414, 4415, 4416, 4417, 4418, 4419, 4420, 4421, 4422, 4423, 4424, 4425, 4426, 4427, 4428, 4429, 4430, 4431, 4432, 4433, 4434, 4435, 4436, 4437, 4438, 4439, 4440, 4441, 4442, 4443, 4444, 4445, 4446, 4447, 4448, 4449, 4450, 4451, 4452, 4453, 4454, 4455, 4456, 4457, 4458, 4459, 4460, 4461, 4462, 4463, 4464, 4465, 4466, 4467, 4468, 4469, 4470, 4471, 4472, 4473, 4474, 4475, 4476, 4477, 4478, 4479, 4480, 4481, 4482, 4483, 4484, 4485, 4486, 4487, 4488, 4489, 4490, 4491, 4492, 4493, 4494, 4495, 4496, 4497, 4498, 4499, 4500, 4501, 4502, 4503, 4504, 4505, 4506, 4507, 4508, 4509, 4510, 4511, 4512, 4513, 4514, 4515, 4516, 4517, 4518, 4519, 4520, 4521, 4522, 4523, 4524, 4525, 4526, 4527, 4528, 4529, 4530, 4531, 4532, 4533, 4534, 4535, 4536, 4537, 4538, 4539, 4540, 4541, 4542, 4543, 4544, 4545, 4546, 4547, 4548, 4549, 4550, 4551, 4552, 4553, 4554, 4555, 4556, 4557, 4558, 4559, 4560, 4561, 4562, 4563, 4564, 4565, 4566, 4567, 4568, 4569, 4570, 4571, 4572, 4573, 4574, 4575, 4576, 4577, 4578, 4579, 4580, 4581, 4582, 4583, 4584, 4585, 4586, 4587, 4588, 4589, 4590, 4591, 4592, 4593, 4594, 4595, 4596, 4597, 4598, 4599, 4600, 4601, 4602, 4603, 4604, 4605, 4606, 4607, 4608, 4609, 4610, 4611, 4612, 4613, 4614, 4615, 4616, 4617, 4618, 4619, 4620, 4621, 4622, 4623, 4624, 4625, 4626, 4627, 4628, 4629, 4630, 4631, 4632, 4633, 4634, 4635, 4636, 4637, 4638, 4639, 4640, 4641, 4642, 4643, 4644, 4645, 4646, 4647, 4648, 4649, 4650, 4651, 4652, 4653, 4654, 4655, 4656, 4657, 4658, 4659, 4660, 4661, 4662, 4663, 4664, 4665, 4666, 4667, 4668, 4669, 4670, 4671, 4672, 4673, 4674, 4675, 4676, 4677, 4678, 4679, 4680, 4681, 4682, 4683, 4684, 4685, 4686, 4687, 4688, 4689, 4690, 4691, 4692, 4693, 4694, 4695, 4696, 4697, 4698, 4699, 4700, 4701, 4702, 4703, 4704, 4705, 4706, 4707, 4708, 4709, 4710, 4711, 4712, 4713, 4714, 4715, 4716, 4717, 4718, 4719, 4720, 4721, 4722, 4723, 4724, 4725, 4726, 4727, 4728, 4729, 4730, 4731, 4732, 4733, 4734, 4735, 4736, 4737, 4738, 4739, 4740, 4741, 4742, 4743, 4744, 4745, 4746, 4747, 4748, 4749, 4750, 4751, 4752, 4753, 4754, 4755, 4756, 4757, 4758, 4759, 4760, 4761, 4762, 4763, 4764, 4765, 4766, 4767, 4768, 4769, 4770, 4771, 4772, 4773, 4774, 4775, 4776, 4777, 4778, 4779, 4780, 4781, 4782, 4783, 4784, 4785, 4786, 4787, 4788, 4789, 4790, 4791, 4792, 4793, 4794, 4795, 4796, 4797, 4798, 4799, 4800, 4801, 4802, 4803, 4804, 4805, 4806, 4807, 4808, 4809, 4810, 4811, 4812, 4813, 4814, 4815, 4816, 4817, 4818, 4819, 4820, 4821, 4822, 4823, 4824, 4825, 4826, 4827, 4828, 4829, 4830, 4831, 4832, 4833, 4834, 4835, 4836, 4837, 4838, 4839, 4840, 4841, 4842, 4843, 4844, 4845, 4846, 4847, 4848, 4849, 4850, 4851, 4852, 4853, 4854, 4855, 4856, 4857, 4858, 4859, 4860, 4861, 4862, 4863, 4864, 4865, 4866, 4867, 4868, 4869, 4870, 4871, 4872, 4873, 4874, 4875, 4876, 4877, 4878, 4879, 4880, 4881, 4882, 4883, 4884, 4885, 4886, 4887, 4888, 4889, 4890, 4891, 4892, 4893, 4894, 4895, 4896, 4897, 4898, 4899, 4900, 4901, 4902, 4903, 4904, 4905, 4906, 4907, 4908, 4909, 4910, 4911, 4912, 4913, 4914, 4915, 4916, 4917, 4918, 4919, 4920, 4921, 4922, 4923, 4924, 4925, 4926, 4927, 4928, 4929, 4930, 4931, 4932, 4933, 4934, 4935, 4936, 4937, 4938, 4939, 4940, 4941, 4942, 4943, 4944, 4945, 4946, 4947, 4948, 4949, 4950, 4951, 4952, 4953, 4954, 4955, 4956, 4957, 4958, 4959, 4960, 4961, 4962, 4963, 4964, 4965, 4966, 4967, 4968, 4969, 4970, 4971, 4972, 4973, 4974, 4975, 4976, 4977, 4978, 4979, 4980, 4981, 4982, 4983, 4984, 4985, 4986, 4987, 4988, 4989, 4990, 4991, 4992, 4993, 4994, 4995, 4996, 4997, 4998, 4999, 5000

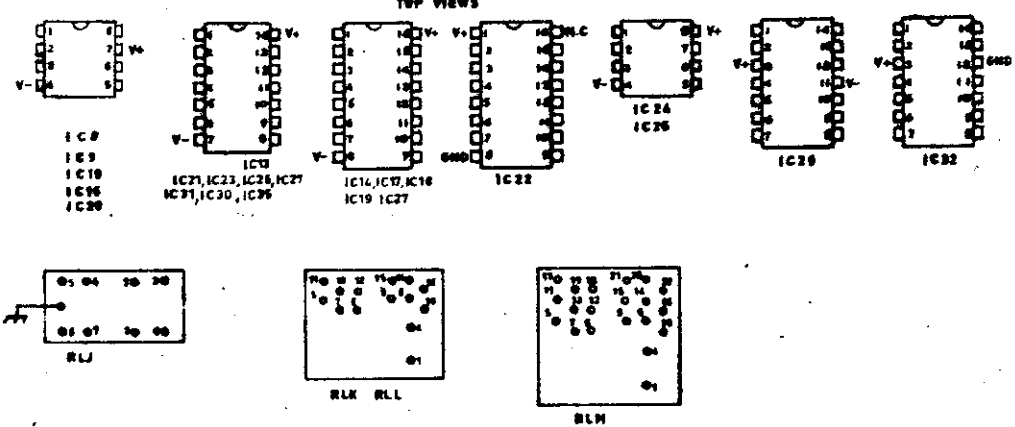



| CIRCUIT POINT | HANDBOOK TITLE | WAVEF |
|---------------|---------------------------|-------|
| A | INPUT SIGNAL | |
| B | COMPARATOR OUTPUT | |
| C | IC 26 PIN 2 | |
| D | F.L.T. COMPARATOR INPUT | |
| E | F.L.T. OUTPUT | |
| F | IN PHASE | |
| G | QUADRATURE | |
| H | QUADRATURE | |
| I | EXPONENTIAL ZERO | |
| J | EXPONENTIAL | |
| K | EXPONENTIAL PERIOD OUTPUT | |
| L | COARSE RANGING CLOCK | |
| M | | |
| N | | |



| RELAY
IC10 PINS | J | K | L | M | FREQUENCY
COVERED |
|--------------------|----|----|---|---|----------------------|
| 2 | 14 | 11 | 6 | | |
| 0 | 0 | 0 | 0 | 0 | 19 — 29.5 |
| 0 | 0 | 0 | 1 | 1 | 24.5 — 45.8 |
| 0 | 0 | 1 | 0 | 0 | 45.0 — 71.1 |
| 0 | 0 | 1 | 1 | 1 | 71.1 — 110.5 |
| 0 | 1 | 0 | 0 | 0 | 110.5 — 171.5 |
| 0 | 1 | 0 | 1 | 1 | 171.5 — 266.3 |
| 0 | 1 | 1 | 0 | 0 | 266.3 — 413.5 |
| 0 | 1 | 1 | 1 | 1 | 413.5 — 642 |
| 1 | 0 | 0 | 0 | 0 | 642 — 997 |
| 1 | 0 | 0 | 0 | 1 | 997 — 1540 |
| 1 | 0 | 1 | 0 | 0 | 1540 — 2404 |
| 1 | 0 | 1 | 1 | 1 | 2404 — 3733 |
| 1 | 1 | 0 | 0 | 0 | 3733 — 5796 |
| 1 | 1 | 0 | 1 | 1 | 5796 — 9000 |
| 1 | 1 | 1 | 0 | 0 | 9000 — 14000 |
| 1 | 1 | 1 | 1 | 1 | 14000 — 21000 |


| | | | |
|---|---|--------------|---|
|  | AMALGAMATED WIRELESS
(AUSTRALASIA) LTD | TITLE | F742A
DISTORTION AND NOISE METER
NULLING LOOP SECTION |
| | ENGINEERING PRODUCTS DIVISION | DRAWING No. | 70542-8-70
SERIAL No 586 FORWARD |
| TYPE No.
2A70542
PCB JRT8543 | | EDITION
1 | |

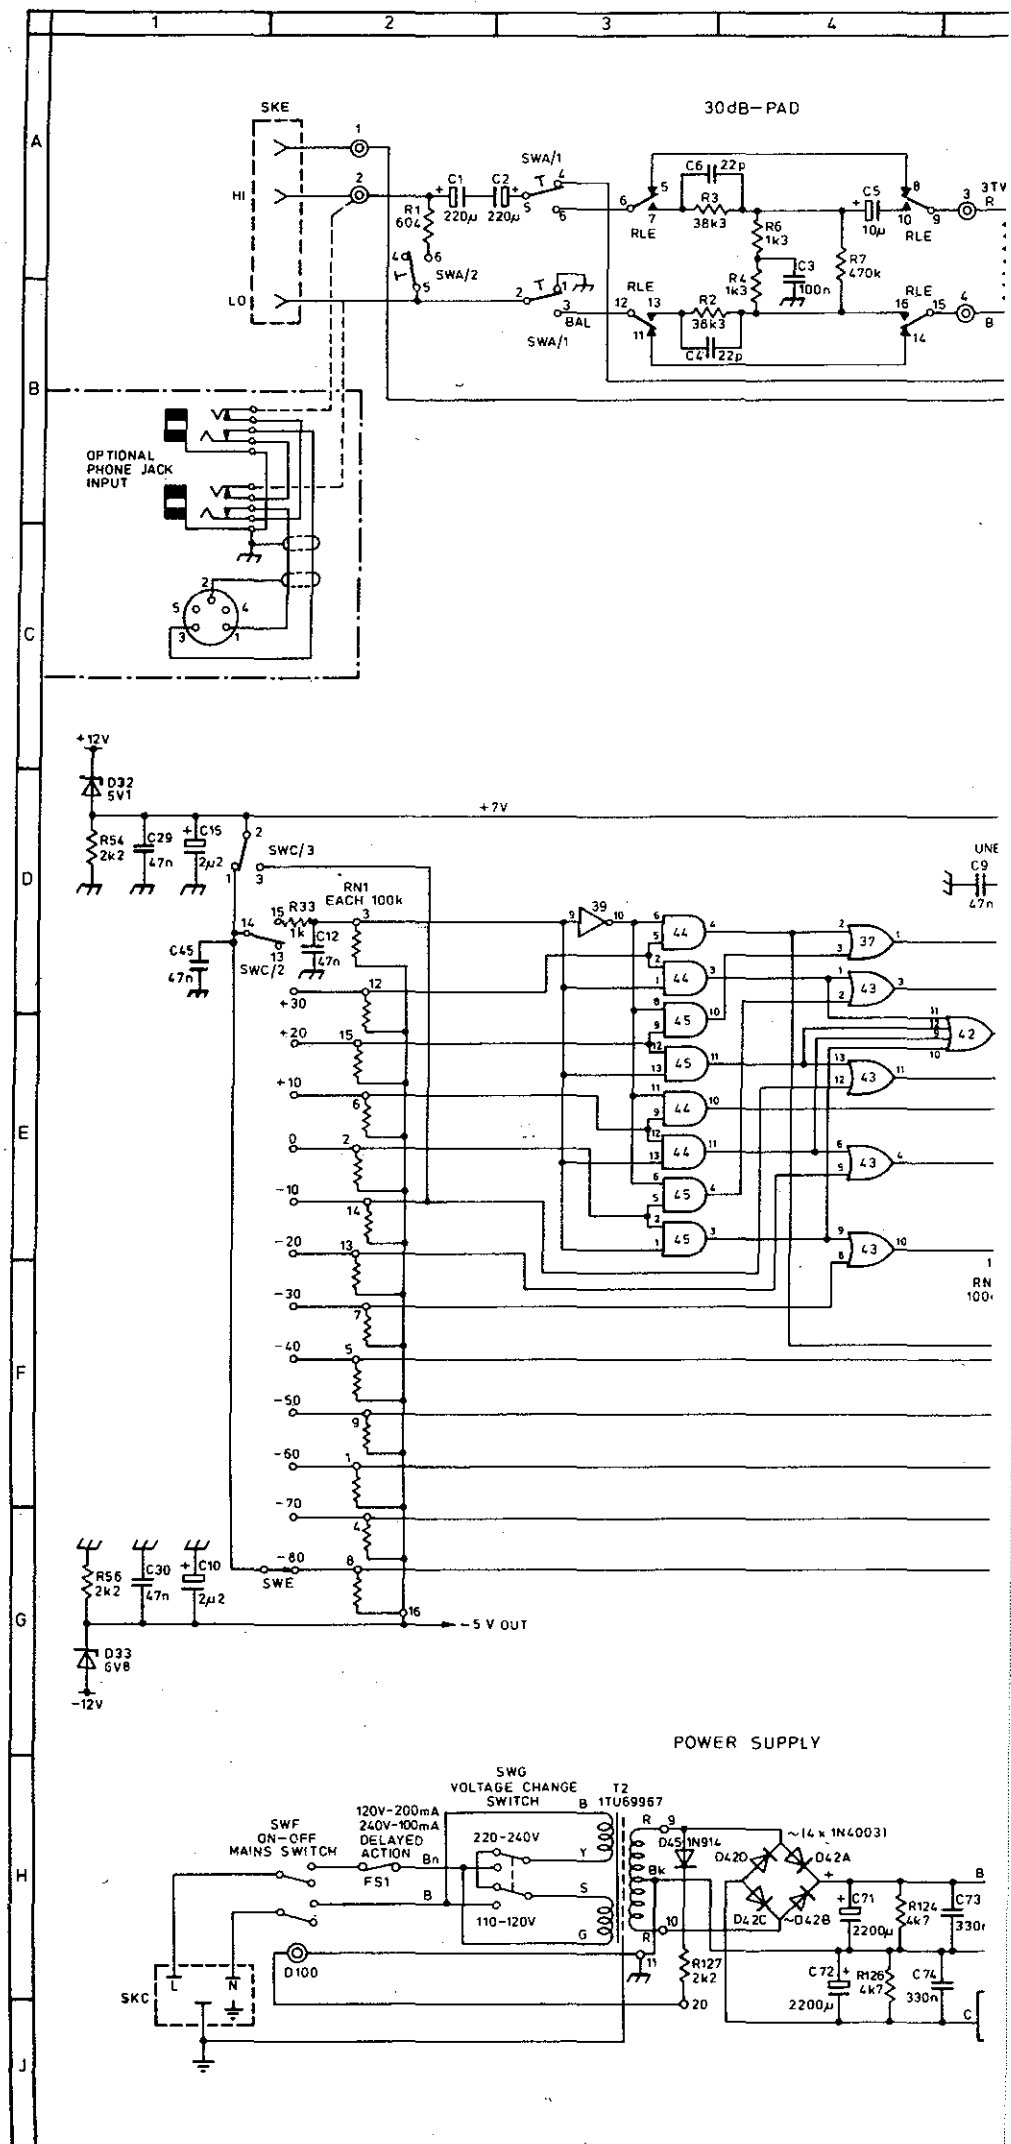



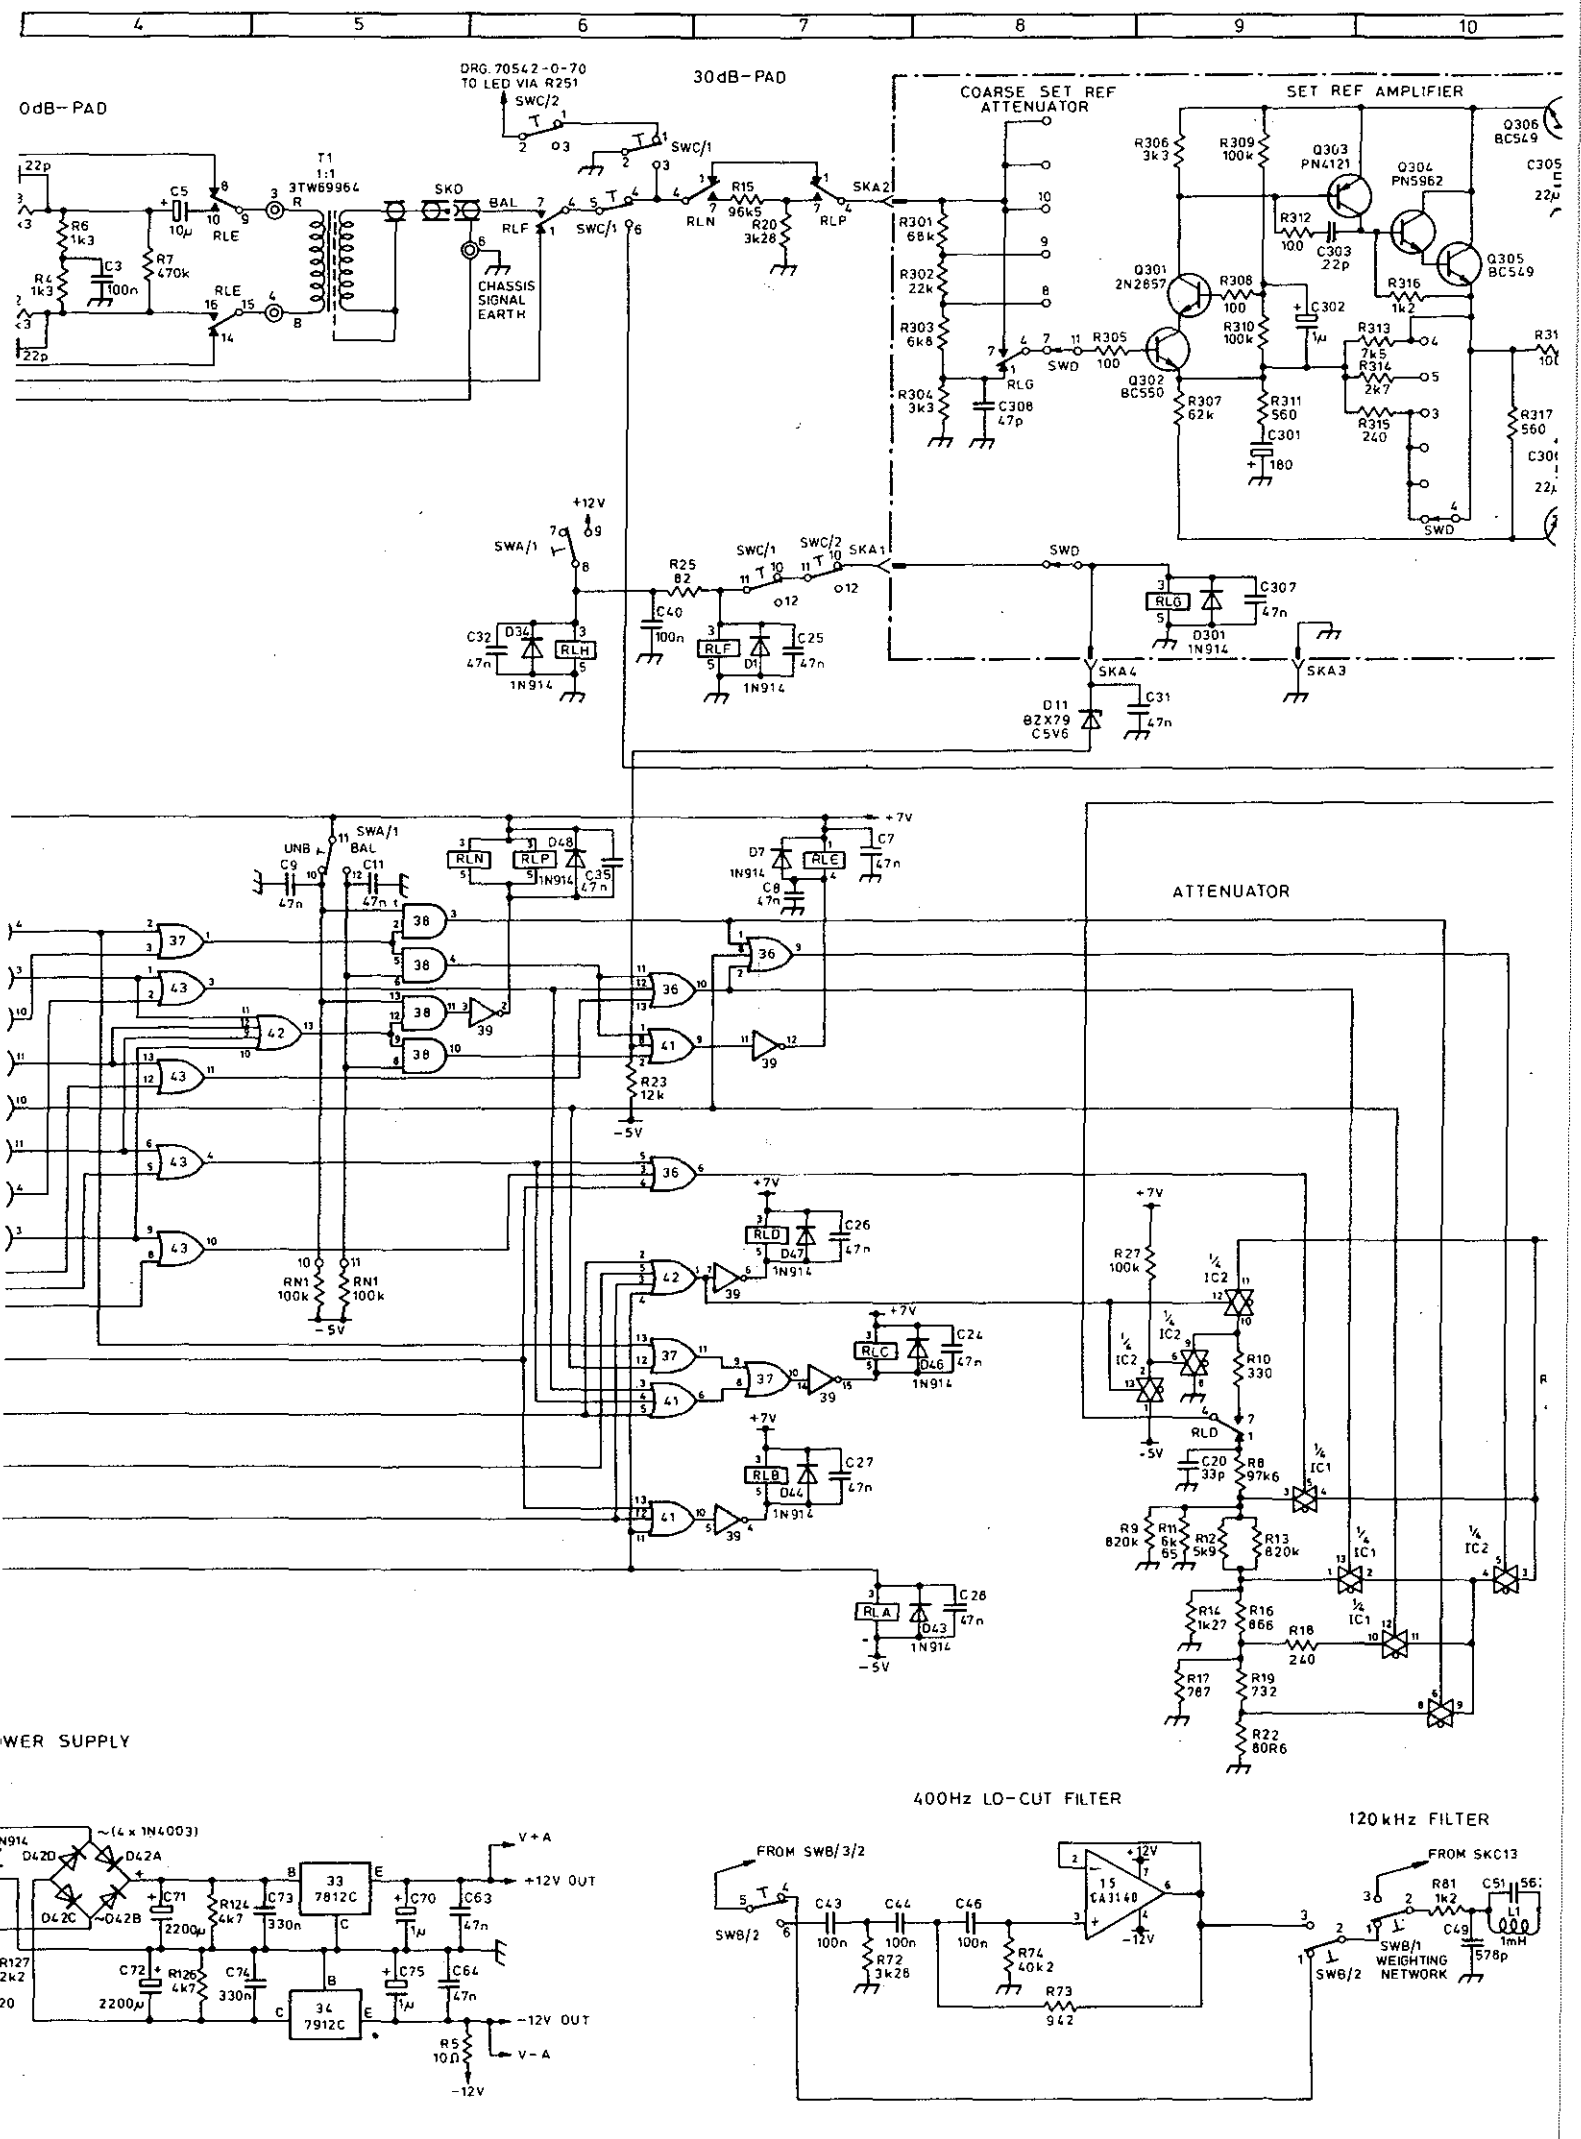


| | |
|-------|--------------------|
| SWA/1 | BAL/UNBAL |
| SWA/2 | BRIDGING/600Ω |
| SWB/1 | WEIGHTING NETWORK |
| SWB/2 | L ₀ CUT |
| SWB/3 | H ₀ CUT |
| SWC/1 | LEVEL/dBm |
| SWC/2 | LEVEL/REL |
| SWC/3 | DISTORTION/CAL |
| SWC/4 | DISTORTION/READ |

IC TOP VIEWS

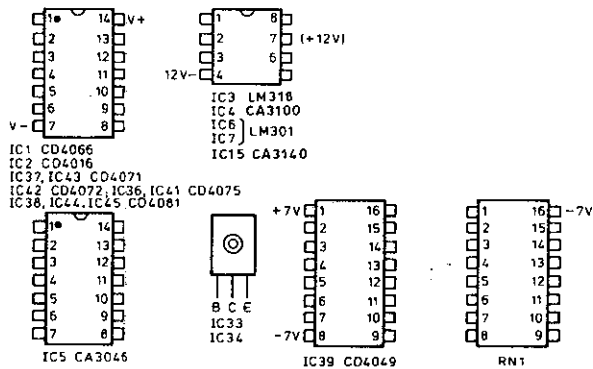

WIRING VIEWS OF RELAYS

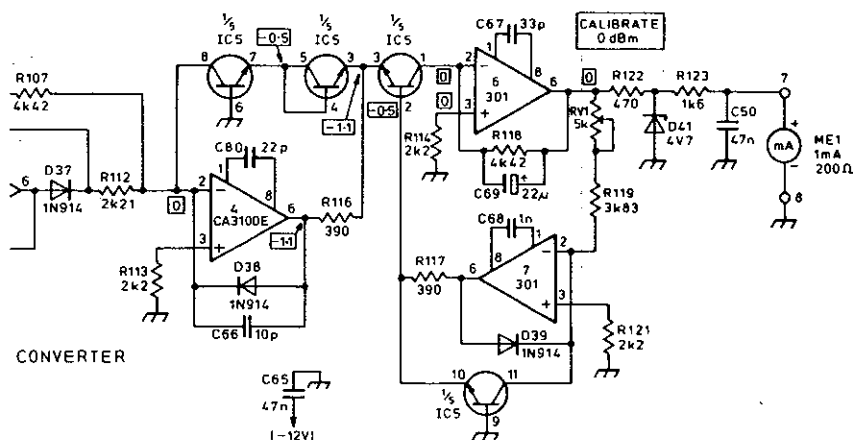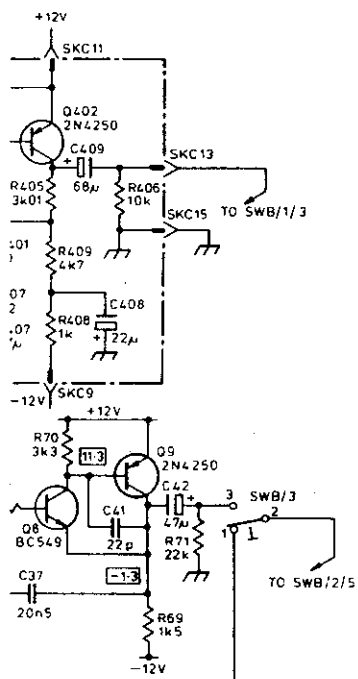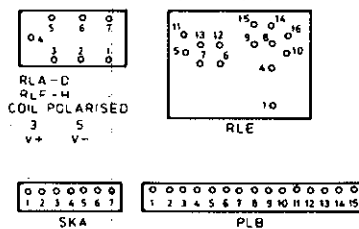

| | | | |
|--|--|--|--|
| | AMALGAMATED WIRELESS (AUSTRALASIA) LTD
ENGINEERING PRODUCTS DIVISION | | TITLE
F742A
DISTORTION AND NOISE METER
LEVEL METER SECTION |
| | TYPE NO.
2A70542 | DRAWING NO.
70542-0-71
SERIAL No 586 ONWARD | ISSUE
0 |