


N•INC

TELEPHONE Instruction Manual

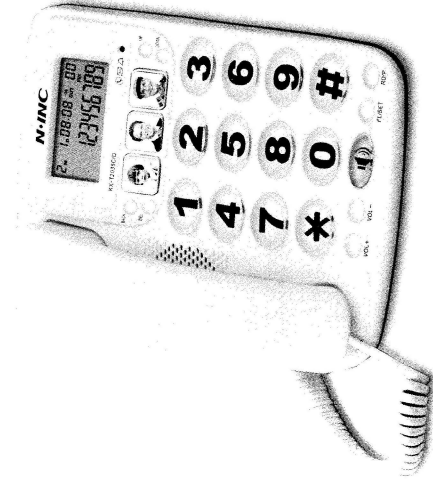

KX-T2035CID

3.1.7 LCD brightness control: press the set key to select 7. LCD LCD con 4, will be prompted at this point according to the up and down keys to adjust the LCD brightness, the default value is level 4, level 5 in total.

3.2 hang up function

3.2.1 callback: the appropriations or number when going through direct press callback key can set aside the selected number; If you want to add before the number "0", long press callback key for 3 seconds.

3.2.2 telephone inquiries: hang up or off-hook state, turned on or under the up button to view the electricity information; In hot press the # key for 3 seconds, can quickly into the telephone inquiries.

3.2.3 In the hot long press the * key for 3 seconds, query condition can quickly access to electricity.

3.2.4 hang appropriations number: under the hook state, directly enter the phone number, if there are any mistakes can use the delete button to modify, number input is completed, can lift machine or press callback key directly to the number allocated (a hands-free set aside when busy chasing dial), long press callback for 3 seconds to add "0" callback.

3.2.5 delete function: in the condition of the input number, use the delete button to delete the input wrong number; In the query number state, use the delete button to delete the current number and information or long press the key for 3 seconds to delete all call or to number.

3.2.6 single bond storage: appropriations number input number or find out number, long press Mx (x for M1 - M 3) can be stored, screen display: SAVE, said storage success; Hang up the press Mx dial out the number directly.

3.3.3 volume function:

The volume + / : press this button to enter the time bell volume + mode, each time you press the 1, up to 3 files, hands-free pick machine press the volume + key, each time you press the add 1 ", Until the third end, the handle is picked up by volume +, which is added one at a time

Volume - : the engine will press the button to enter the ringtone - mode, each time minus 1, until the first off. The speakerphone press the loud-key, one shift at a time; Until 1 file: Handle pick up the volume - for each one, the lowest to the first.

3.3.4 Software lock function: under the predial number

Cancel software lock 0*3 Redial/Pause #3 seconds (last # long press for 3 seconds)

Lock 9: 1*3 Redial/Pause #3 seconds (last # long press for 3 seconds)

Lock 0: 2*3 Redial/Pause #3 seconds (last # long press for 3 seconds)

Lock 9 and 0: 3*3 Redial/pause #3 seconds (last # long press for 3 seconds)

Full lock (open 110, 119, 120) : 4*3 Redial/pause #3 seconds

(last # long press for 3 seconds)

Please read this manual before use

1. Product introduction:

Dear customer, thank you for your choose our product! The machine appearance generous, novel, stable performance, unique function, easy to use. Phone choose double system (DTMF/FSK) compatible with caller display according to the keyboard, advanced microcomputer control. In order to better develop the function of this machine is superior, please read the instructions before use.

2. Functional features

• Handle the volume can be adjusted

- DTMF/FSK double standard caller id (to be automatic recognition)
- Telephone number and call time record 54 group (8) or 34 (16)
- 3 groups of single bond memory
- To number 14 (8) or 8 group (16) and the talk time record

- Real-time date and week display, LCD brightness level 5 is adjustable
- Don't disturb 1 ~ 99 hours
- 16 the first ringtones choice
- Software to set the ringing volume, buttons to set the ringing volume and speaker volume, no need to switch

- Software set up electronic anti-theft, Optional soft set P/T, do not need to switch
- The keys 4 lock function, hardware

- 90/95 100/120 180/300 600/1000 FLASH time optional ms software
- Three groups of alarm function setting, alarm sound is different in each group
- In bad forget lines or hang machine, automatic line (line no clutter interference)
- Intelligent rob line exit code 8-bit Settings

- Local code 8-bit Settings, telephone automatic filtering

3.1 set menu functions

Hot press SET button to enter setting state, under the LCD display SET 1234567 , the press numeric keys or press wave choose Settings. LCD displays the corresponding item SET at the same time, in a through up and down keys to choose the delete key to exit a directory, then press the number keys or going setting is completed, press the delete key to select the setting item, will enter the submenu items, need to press the set key again to turn up and down keys to select, here is introduced with the digital key choice set items only). Specific set project is as follows:

sets out.

3.1.2 ring and ring volume: press the set key option 2, LCD will be prompted to 1 1 2 VIP 3 vol, 1 into the ordinary phone ring selection, LCD display ring type 01 press up and down turn key at this time choose ringing the bell, and then press the set key to confirm, click the delete button to return to a directory.

Choose 3 into the ringtone volume, LCD display ring vol 2 at this time in turning up and down keys to adjust the bell volume, according to the hands-free sets out.

3.1.3 alarm Settings, press the set key choice 3, LCD will be prompted to AL 1-2-3, choose 1 to enter the first set of alarm Settings, LCD display ALAR OFF, see OFF flashing alarm time direct input, finally press the "set" key to confirm, if you want to close the alarm to press set key to shut down after a group of selected choose OFF again with the flip up and down key, The other two groups set same as group 1 set; The first set the alarm for a one-time, 2, 3 groups for the alarm clock every day, in the process of the alarm, press any key to stop.

3.1.4 don't disturb time setting: choose 4 press set key, the LCD will display off 00-00, font flashing input time (maximum 99, when the maximum 99) after press the set key, press the delete key to exit. Don't disturb function starts, the LCD will display time don't disturb, cancelled automatically after the countdown to 00 00 - don't disturb, machine or a hands-free out of don't disturb. Don't disturb during calls don't ring (except VIP number).

3.1.5 special features to choose set: press the set key to select 5, LCD will be prompted to 1-2 - f pt 3-d , option 1 into the flash time setting, LCD display flash 600, according to flip up and down keys to select flash time at this time: Failure time is: 90,95,100,120,180,300,600,1000 ms; Option 2 into the P - T conversion, LCD display pt tone according to turn up and down keys selection methods at this time, the initial value for audio dial-up state; Choose 3 into the security set, LCD display defend off according to turn up and down button on/off (security code to * #).

3.1.6 local code and exit code set: choose 6 press set key, the LCD will be prompted to 1-LOC , 2-OL option 1 to enter the local code set, LCD display LOC.... The direct input 1 ~ 8 digits press set key to confirm again, if you want to cancel the local code, press the delete key to delete the input when the input state number, press the set key again to confirm. Option 2 enter exit code set, screen out off, setting method and the local code setting in the same way, if you want to cancel out code, can choose off by turning up and down keys.