



- ▶ Controls a single AutoDome Camera System or Standard Allegiant Receiver/Drivers
- ▶ Up to 16 individual Bi-Phase control code outputs available
- ▶ Controls all AutoDome System features including auto playback
- ▶ Small, compact design
- ▶ Ergonomic layout for single-handed control

Functions

The LTC 5136 AutoDome Controller includes a 22-key control unit with integral vector-solving pan/tilt/zoom joystick, interface box, and an appropriate power supply.


Electromagnetic Compatibility (EMC)

Complies with FCC Part 15, ICES-003, and CE regulations

Product Safety


Complies with CE regulations, UL, CSA, EN, and IEC Standards

Installation/configuration notes

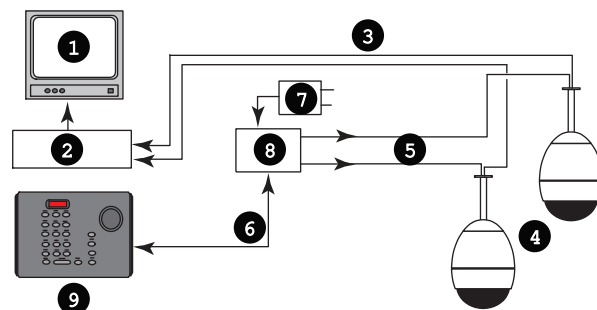

Typical Installation

- 1 Video Monitor
- 2 DVR or Video Switcher
- 3 Video Coax Cable
- 4 Typical AutoDome Camera or Allegiant Receiver/Driver Units
- 5 Up to 16 Bi-Phase Control Code Outputs
- 6 RS-232 Data and Power
- 7 Power Supply Adapter (Supplied)
- 8 Data Converter Unit
- 9 AutoDome Controller

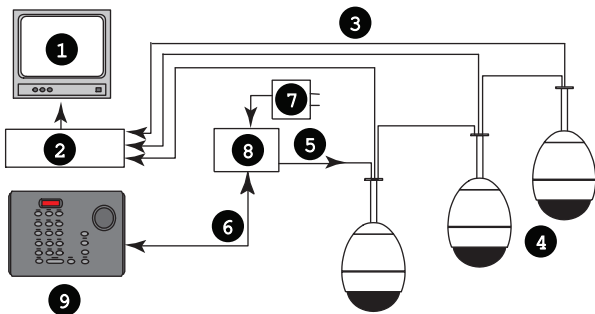

Typical Multiple Camera Sites using Daisy Chain Bi-Phase Control Code Wiring Configuration

- 1 Video Monitor
- 2 DVR or Video Switcher
- 3 Video Coax Cable
- 4 Typical AutoDome Cameras or Allegiant Receiver/Driver Units
- 5 Typical Bi-Phase Control Code Output
- 6 RS-232 Data and Power
- 7 Power Supply Adapter (Supplied)
- 8 Data Converter Unit
- 9 AutoDome Controller

Technical specifications

Electrical

Includes Control Unit and Interface Box with applicable power supply.

Model No.	Rated Voltage	Voltage Range	Power at Rated Voltage
LTC 5136/51	230 VAC 50/60 Hz	195.5 to 253	6 W

LTC 5136/61	120 VAC 50/60 Hz	105 to 132	6 W
-------------	---------------------	------------	-----

Transmission Distance

1.5 km (5000 ft) using 1 mm² (18 AWG) shielded twisted pair cable (Belden 8760 or equivalent)

Control Unit

Indicators	Camera/entry data; 4-digit 7-segment LED display
Controls	Set, User, Camera, Shot, On, Off, Enter, Clear, Focus, Iris, 10-Digit Numeric Keypad, Joystick
Connector	RJ-11
Finish	Charcoal
Dimensions (W x D x H)	220 x 155 x 101 mm (8.67 x 6.11 x 4.00 in.)
Weight	0.55 kg (1.2 lb)

Interface Box

Indicator	Green data LED
Connectors	
Data In	9-pin D connector
Bi-Phase Output	Removable terminal blocks with three connections: "+", "-", and "S" (Shield) for each of the sixteen Bi-Phase code outputs
Control Unit Connection	RJ-11
Control Unit to Interface Box Cable	3 m (10 ft) with RJ-11 connector
Power Connector	Bayonet type
Case	Black plastic with metal mounting flanges
Dimensions - Overall (W x D x H)	154 x 132 x 38 mm (6.08 x 5.25 x 1.5 in.)
Weight	0.132 kg (0.7 lb)

Environmental

Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	–10°C to 50°C (14°F to 122°F)
Humidity	10%–90%, non-condensing

Ordering information

LTC 5136/51 AutoDome Controller
with 16 outputs for AutoDomes or for Allegiant
Receiver/Drivers units, 230 VAC, 50/60 Hz
Order number **LTC 5136/51**

LTC 5136/61 AutoDome Controller

with 16 outputs for AutoDomes or for Allegiant
Receiver/Drivers units, 110 VAC, 50/60 Hz
Order number **LTC 5136/61**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com