



SERVICE MANUAL

R-2000 DCK-1

COMMUNICATIONS RECEIVER



CONTENTS

SPECIFICATIONS	2	DISASSEMBLY	22
CIRCUIT DESCRIPTION	3	PACKING	23
PARTS LIST	11	ADJUSTMENT	24
PC BOARD VIEW AND SCHEMATIC DIAGRAM		ADJUSTMENT POINT	29
RX UNIT (X55-1340-00)	16	TERMINAL FUNCTION	30
PLL UNIT (X50-1920-00)	18	BLOCK DIAGRAM	31
SWITCH UNIT (X41-1480-00)	20	DCK-1 (OPTION)	BACK COVER
SCHEMATIC DIAGRAM	21		

SPECIFICATIONS

Frequency Range: 150 kHz ~ 30 MHz
 150 kHz ~ 26 MHz (W2 type)
 2 MHz ~ 30 MHz (X type)

Mode: AM, FM, SSB (USB/LSB), CW

Sensitivity: (0 dB μ = 1 μ V)

Mode \ Frequency	150 kHz ~ 2 MHz	2 MHz ~ 30 MHz
SSB/CW (S+N/N 10 dB)	Less than 2 μ V	Less than 0.4 μ V
AM (S+N/N 10 dB)	Less than 20 μ V	Less than 4 μ V
FM (S+N/N 20 dB)	-	Less than 1 μ V

Selectivity:

Mode \ Selectivity	Selectivity	
AM-WIDE	6 kHz (-6 dB)	18 kHz (-50 dB)
AM-NARROW	2.7 kHz (-6 dB)	5 kHz (-50 dB)
SSB/CW	2.7 kHz (-6 dB)	5 kHz (-50 dB)
CW-NARROW	500 Hz (-6 dB)*	820 Hz (-60 dB)*
FM	15 kHz (-6 dB)	30 kHz (-50 dB)

*: with YG-455C optional CW crystal filter

Image Ratio: Better than 70 dB

IF Rejection: Better than 70 dB

Frequency Stability: Within ± 300 Hz during the first hour after 1 minute of warm-up.

Within ± 50 Hz during any 30 minutes period thereafter.

Frequency Accuracy: $\pm 10 \times 10^{-6}$ or better (at normal temperatures)

Squelch Sensitivity: (threshold, 0 dB μ = 1 μ V)

AM/SSB/CW = Less than 3.12 μ V

FM = Less than 0.5 μ V

Audio Load Impedance: 4 Ω to 16 Ω

Audio Output Power: 1.5W (8 Ω load, 10% distortion)

Antenna Impedance: 50 Ω /500 Ω

Power Consumption: (at no signal) = 14W AC

13.8V DC, 0.6A (with optional DCK-1)

(at Memory Back-up) = 3W AC

13.8V DC, 0.1A (with optional DCK-1)

Power Requirements: 100/120/220/240V AC, 50/60 Hz
 13.8V DC (with optional DCK-1)

Dimensions: 375 (14.8) W x 115 (4.5) H x 210 (8.3) D
 mm (inch)

Weight: 5.5 kg (12.1 lbs.) approx.

Symbol	Destination
K	U. S. A
M	General market
T	Britain
W	Europe
X	Australia & New Zealand

CIRCUIT DESCRIPTION

RX unit X55-1340-00

R-2000 is a triple conversion general coverage receiver with a first IF of 45.85 ~ 45.90 MHz, 9.85 ~ 9.90 MHz second IF and a 455 kHz third IF.

Both low (50 Ω) or high (500 Ω) impedance antenna terminals are provided for all bands.

The signal supplied through the antenna terminal goes to the antenna fuse (100 mA) and three step RF attenuator (10, 20, and 30 dB). It next enters the BPF (Band Pass Filter), which divides the 0.15 ~ 30 MHz range into 6 bands; 0.15 MHz ~ 1 MHz, 1 MHz ~ 2 MHz, 2 MHz ~ 4 MHz, 4 MHz ~ 8 MHz, 8 MHz ~ 17 MHz and 17 MHz ~ 30 MHz. Q58: SN74LS145N converts the BCD band data signal from the PLL control circuit to select the appropriate BPF for the frequency selected.

Exiting the BPF, the signal, is fed to RF amp Q1: 3SK73(GR), first IF trap (operating at 40.875 MHz) and emitter follower Q2: 2SC1815 (Y).

The RF signal is mixed with the first local oscillator 45.9 ~ 75.85 MHz and converted to the 45.85 ~ 45.90 MHz first IF by balanced mixer Q3 and Q4: 3SK73(GR).

Q3 and Q4 drain voltage is supplied through a switching circuit consisting of Q5 and Q6 controlled by Q47 and Q48: 2SC1815 (Y) will turn off when the VHB signal is applied from the PLL control circuit in the (optional) VHF reception mode. At the same time, the first IF circuit input is switched to the converter by switching diodes D13 and D14: 1S2588.

After passing the first IF LC filter the signal is converted to the 9.85 ~ 9.90 MHz second IF by the second balanced mixer Q7 and Q8: 3SK74(L) using the 36 MHz second local oscillator injection signal.

The second IF signal passes through ceramic filter F1 (f_o : 9.875 MHz) and is converted to the 455 KHz third IF by the third balanced mixer Q9 and Q10: 3SK73(GR) using the 9.445 ~ 9.395 MHz third local oscillator injection signal.

The signal is applied to the NB gate D15, 16. A part of the signal is also applied to the NB (Noise Blanker) amplifiers on the PLL unit via buffer Q11: 2SC1815(Y). The signal output from the NB gate is switched to the appropriate bandwidth third IF filter (F2 ~ F5 of 455 kHz), then fed to the third IF amplifiers.

The IF filter bandwidths are: F3; 2.7 kHz, F4; 6 kHz and F5; 15 kHz. Filter F3 is used in the AM narrow, SSB and CW wide modes, F4 in the AM wide mode and F5 in the FM mode. Filter position F2 is provided for the CW narrow mode and an optional YG-455C or YG-455CN filter can be used.

The third IF amplifiers are divided into two systems; one for the FM mode and one for all other modes.

In the FM mode, the signal passing through F5 is amplified by Q32: TA7060P, Q33: 2SC1675(L) and Q34: μ PC577H, then detected by ceramic discriminator F6, and diodes D41 and 42.

The noise component of the detected signal is amplified by Q35 and Q36: 2SC1775(E), rectified (D44 and 45), DC amplified (Q37 and 38), then applied to squelch gate switch Q41: 2SC1815(Y), center stop control Q40: 2SC1815(Y) and BUSY LED switch Q42 and Q43: 2SC1815(Y).

The DC voltage which is generated from the discriminator (F6) is fed to window comparator Q39: NJM4558D which forms an AND circuit together with Q40 and generates the

Program Scan center stop signal which is applied to the PLL control circuit via Q46: 2SC1815(Y). The FM IF signal from Q33 is amplified by Q59: 2SC1815(Y) and detected by D39 and D40: 1N60 to drive the S meter.

In all modes other than FM, the signal which has passed F2 through F4 are amplified by Q12 and Q13: 3SK73(GR). A sample of the IF signal is buffer by Q14: 2SC1815(Y) and is AM detected by D29: 1N60, buffered by Q15, and diode switched by D30 to the squelch-controlled switch Q16. Output from Q14 is also rectified by D37 and D38: 1N60.

This signal is also split: the rectified output is both AGC amplified by Q23: 2SC1815(Y) and squelch amplified by Q28: 2SC1815(Y), Q29: 2SK192A(GR), Q30: 2SA1015(Y) and Q31: 2SC1815(Y). Q24 (CW and SSB) and Q25 (AM) 2SC1815(Y) select the AGC slow time constant by mode.

AGC is applied back to the RF and IF amplified. The AGC voltage is also amplified by Q50: 2SK192A(GR) and Q51: 2SA1015(Y) to drive the S meter. Q26 and Q27: 2SC1815(Y) switch off power to the AM, CW, and SSB IF amplifiers and squelch amplifiers in the FM mode. The output of the squelch amplifiers (Q31) is applied to the BUSY LED switch Q44: 2SC1815(Y), scan stop switch Q45: 2SC1815(Y) and squelch gate Q16: 2SC2240(GR).

Q21: 2SC1815(Y) is the BFO circuit oscillator and Q22: 2SC1815(Y) the buffer. The BFO output is applied to the product detector D25 ~ D28 (1N60). Q20: 2SC1815(Y) is the LSB frequency shift switch.

The AM signal detected by D29 is buffered by Q15: 2SC2240(GR), and the audio signal is selected according to mode by either D30 (for AM) or D31 (for SSB and CW). This is fed through switch Q16 to audio amplifier Q17: 2SC2240(GR). The FM audio signal passes squelch gate Q52: 2SC2240(GR) and then goes to Q17.

Audio amplified by Q17 is first fed to the VOLUME and TONE controls. Q18: 2SC2240(GR) provides output to the REC jack.

The audio signal, having passed the VOLUME and TONE controls, is power amplified by Q57: HA1368R to drive the speaker.

As accessory circuits, a BEEP oscillator circuit (Q55 and 56) and standby mute circuit (Q49, 60 and 61) are provided.

In the mute mode, Q49: 2SC1815(Y) decreases the RB (receive B+) line to -6V to mute all modes except FM. The RB line then controls Q60 and 61 to disrupt FMB (FM B+) to Q33, which effectively mutes the FM mode.

The power supply circuits consists of a 9V AVR (automatic voltage regulator) Q54: AN7809 and a 14V ripple filter Q53.

Item	Rating
Nominal center frequency	within 9.875 MHz \pm 30 kHz
3 dB bandwidth	within 130 \pm 30 kHz
20 dB bandwidth	350 kHz or less
Loss	8 dB or less
Spurious response (within 9.875 \pm 2 MHz) (within 8.965 \pm 25 KHz)	30 dB or more 40 dB or more
Input and output impedance	330 Ω

Table 1. Ceramic filter (L72-0338-05) RX unit F1

CIRCUIT DESCRIPTION

Item	Rating
Center frequency	455 kHz ± 0.6 kHz
6 dB band width	2.8 ± 0.3 kHz
40 dB band width	5.5 kHz or less
Insertion loss (at maximum output)	6.0 dB or less
Guaranteed attenuation (within 455 ± 100 kHz)	55 dB or more
Spurious attenuation (within 0.1 to 1.0 MHz) for 600 to 700 kHz	45 dB or more 40 dB or more
I/O matching impedance	2.0 k Ω

Table 2. Ceramic filter (L72-0332-05, RX unit F3)
SSB, AM-N, CW-W

Item	Rating
Nominal center frequency	455 kHz
6 dB band width	± 3 kHz or more (from 455 kHz)
50 dB band width	± 9 kHz or less (from 455 kHz)
Ripple (within 455 ± 2 kHz)	2 dB or less
Insertion loss	6 dB or less
Guaranteed attenuation (within 455 ± 100 kHz)	60 dB or more
I/O matching impedance	2.0 k Ω

Table 3. Ceramic filter (L72-0319-05, RX unit F4)
AM-W

Item	Rating
Nominal center frequency	455 kHz
6 dB bandwidth	± 7.5 kHz or more
50 dB bandwidth	± 15 kHz or less
Ripple (within 455 ± 5 kHz)	3 dB or less
Loss	6 dB or less
Guaranteed attenuation (within 455 ± 100 kHz)	35 dB or more
Input and output impedance	1.5 k Ω

Table 4. Ceramic filter (L72-0316-05, RX unit F5)
FM

Item	Rating
Center frequency f_o	455.7 kHz
Center frequency deviation	$f_o \pm 50$ Hz at 6 dB
6 dB bandwidth	± 250 Hz or more
60 dB bandwidth	± 425 Hz or less
Ripple	2 dB or less
Loss	6 dB or less
Guaranteed attenuation	80 dB or more at 100 Hz to 455.1 kHz and 456.3 kHz to 2 MHz
Input and output impedance	2 k Ω // 15 pF

Table 5. CW Crystal filter (L71-0206-05)
YG-455C (Option)

Item	Rating
Center frequency f_o	455.7 kHz
Center frequency deviation	$f_o \pm 50$ Hz at 6 dB
6 dB bandwidth	± 125 Hz or more
60 dB bandwidth	± 250 Hz or less
Ripple	2 dB or less
Loss	6 dB or less
Guaranteed attenuation	80 dB or more at 100 Hz to 455.3 kHz and 456.1 kHz to 2 MHz
Input and output impedance	2 k Ω // 15 pF

Table 6. CW Crystal filter (L71-0207-05)
YG-455CN (Option)

PLL (Phase locked loop) unit X50-1920-00

The PLL unit houses the PLL oscillator circuit, microprocessor control circuit and the NB amplifier circuits. In the PLL circuit, there is a 9 MHz reference frequency crystal oscillator, the first local oscillator (45.90 ~ 75.85 MHz), second local oscillator (36 MHz) and third local oscillator (9.395 ~ 9.445 MHz), which are output to the Receiver unit.

The digital circuit peripheral to the microprocessor controls the PLL circuit frequency, display, clock/timer, input interface, rotary encoder mode (speed) and memory.

1. PLL circuit

1) Reference frequency oscillator

Q1 operates at a reference frequency of 9 MHz, which is supplied to the second and third local oscillator circuits through buffer Q2.

Via buffer Q3, a 4.5 MHz signal divided 1/2 by IC1 is supplied through buffer Q4 to the first local oscillator PLL circuit. The reference frequency is also buffered (Q6) and divided down to 1 kHz by IC2 for use as a clock reference signal.

2) First local oscillator circuit (LO1)

The first local oscillator is obtained from the PLL (Phase Locked Loop) circuit. Three VCOs (Voltage Controlled Oscillator) controlled by the microprocessor through Q20 ~ 22 cover the 45.90 ~ 75.85 MHz frequency range. The VCO output is amplified by Q26, Q27 and Q28. Part of the signal is applied to buffer Q16: 2SC1907 and PLL IC5: MN6147C. The spurious component is eliminated from the remaining signal by a BPF and is output via buffer Q29 and Q30: 2SC1707 as the LO1 signal.

IC5: MN6147C consists of a programmable frequency divider, reference frequency divider and phase comparator which compares the reference and VCO frequencies (comparison frequency; 25 kHz). The programmable divider's ratio (1836 ~ 3034; only even number) is controlled by the microprocessor.

The phase error signal from the comparator is applied to the VCO by active filter Q17, Q18 and Q19: 2SC1775.

3) Second local oscillator (LO2)

The reference frequency is quadrupled by Q5: 2SC1815 to obtain the 36 MHz second local oscillation frequency.

CIRCUIT DESCRIPTION

4) Third local oscillator (LO3)

This circuit consists of PLL IC2: MN6147C which incorporates a 5 kHz PLL and mixer. One VCO is provided; the frequency range is 39.505 ~ 44.500 MHz and the dividing ratio range is 7901 ~ 8900. This PLL circuit is composed of VCO Q11: 2SC1923, PLL IC2: MN6147C and a loop filter consisting of Q8, Q9 and Q10: 2SC1775. The VCO output is buffered (Q12), divided 1/100 to 395.05 ~ 455.00 kHz by IC3: MN54459L, buffered (Q13) and mixed with the 9 MHz reference signal by IC4: SN16913P to obtain the 9.39505 ~ 9.445 MHz third local oscillator frequency. This is filtered (CF1) and amplified (Q15), then sent to the Receiver unit.

5) Unlock muting

The output from PLL IC2 pin 2 (unlock) becomes an unlock signal through IC21: TA7324P and Q71, and is used to control the audio muting circuit on Switch unit "B" to reduce or eliminate any pulse noise which may be generated when the frequency is changed and the PLL momentarily resets.

2. Control unit

1) Rotary encoder input circuit

On the Encoder unit, a 50 slit rotary disc and 2 photointerruptors generate 2 clock signals having a 90° phase difference, which are input to the Control unit via the EN1 and EN2 lines. These clock signals are waveform shaped by IC6, quadrupled by the gate circuit consisting of IC7 and 8 (the 50 pulse/rev signal is changed to a 200 pulse/rev signal), and applied IC12, through Flip-Flop IC9 1/4 to the microprocessor pin No. 39 (T1 port). At the same time, the encoder's rotational direction is detected from the clock pulses by the FF circuit IC9 1/4 and is input to microprocessor pin 29 (Port 37). The waveforms at each point are shown in Fig. 1.

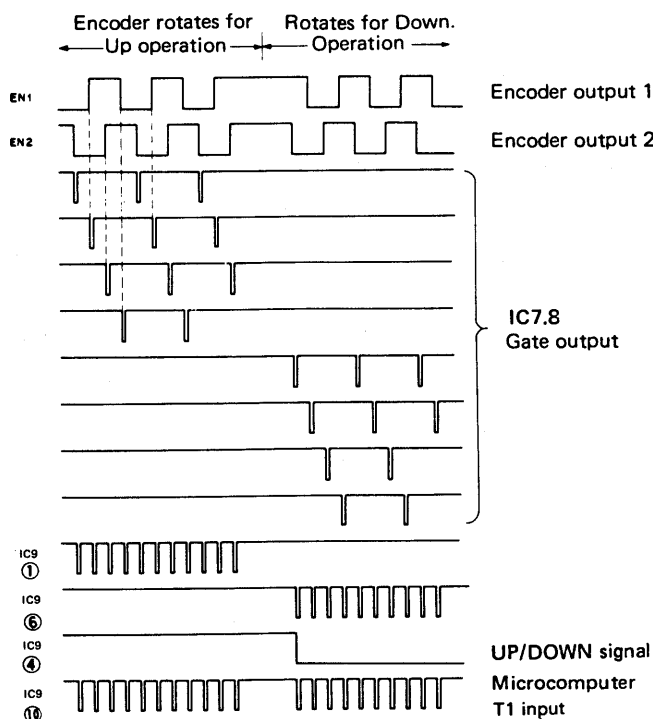


Fig. 1 Encoder output to micro-processor input timing and waveforms

2) Program scan circuit

IC10 on the Control circuit is an astable multivibrator circuit controlled by the PG. SCAN switch. Both its output, and the clock signal are applied to the microprocessor T1 port.

During scan, the multivibrator oscillators output pulse train is accessed by ICs 9 1/4, 10 1/4 and 11 1/2, while the oscillator stops in the HOLD mode and only the Encoder clock pulse is available.

The oscillator frequency is determined by C173, C174, R145 and VR1. When the tuning speed is SLOW or MID, the oscillator frequency is approximately 10 ~ 18 Hz. When it is FAST, Q34 turns on and the oscillator frequency is approximately 5 ~ 9 Hz.

3) Clock circuit

A 1 kHz clock signal is output from PLL IC2 (pin 6), waveform shaped by IC17 1/4 and applied to the microprocessor INT port (pin No. 6) to count the time.

When the HOUR and MINUTE switches are depressed simultaneously the time display shows 00:00. In CLOCK 1 mode, the time display stops flashing and the clock begins counting the seconds (which are not shown) when the switches are depressed. When the display is flashing, the HOUR and MINUTE switches cannot be used to set the time.

When the Function switch is set to any position other than FREQUENCY, depressing the HOUR switch will increment the HOUR digit by one. When the HOUR switch is held ON, the Hours digit increases continuously. The Minutes digit does not change during HOURS set.

Each time the MINUTE switch is depressed, the Minutes digit increases by one. When the switch is held ON, the Minutes digit advances. The Hours digit does not change during Minutes set.

To program the timer, set the timer ON time and place the timer switch ON. Receiver power remains off until the timer preset time is reached, when the relay is activated and the power is switched on.

When the timer OFF time is programmed, the power is turned off at that preset time. When the timer switch is ON, the power switch is inoperative. The timer relay output is available at the Remote control terminals on the rear panel.

4) Microprocessor power supply circuit

When the microprocessor IC12: μ PD80C49C is in operation, 5V should be applied to Vcc pin No. 40.

When the microprocessor is in the back-up standby mode, 2V should be applied. When the power switch is turned off, Q35 and Q36 change the level of RESET pin No. 4 to low to protect the RAM, the VDD pin No. 26 becomes low to stop the oscillator and the contents of the RAM are maintained by the low standby voltage (Vcc).

When the power is turned on, 5V is applied to the Vcc pin, the VDD pin becomes high while the RESET pin is held low to activate the oscillator, then the RESET pin returns to a logic high and the program is reset.

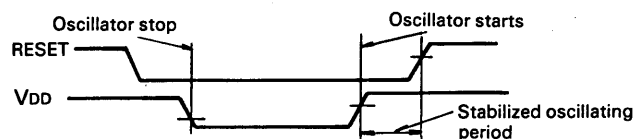


Fig. 2 Micro-processor power supply circuit

CIRCUIT DESCRIPTION

5) Dimmer circuit

The dimmer functions by controlling power to the DC/DC converter. When the main power is on, approximately 12V is supplied to Q41 and Q42 by Q61, Q72, Q73 and D40. When the main power is off or the DIMMER switch is ON, Q73 turns off, and the voltage to Q41 and Q42 is decreased to approximately 8.5V to reduce the display voltage, resulting in a dimmed display.

6) Display circuit

The seven segment and digit signals are output from IC14 to drive the 8-digit display. As the output current is active low, IC15, IC16, Q38, Q39 and Q40 are used.

3. Noise blanker circuit

Pulse noise is obtained through Q11 on the Receiver unit. It is amplified by Q62, Q63 and Q64, rectified by D43 and D44 and DC amplified by Q66 to drive the Receiver unit NB gate circuit. The NB is ON when Q66 is emitter is grounded through D45 varistor. Q65 is the NB AGC amplifier.

Item	Rating
Nominal center frequency	within 9.420 MHz \pm 30 kHz
3 dB bandwidth	within 130 \pm 30 kHz
20 dB bandwidth	350 kHz or less
Loss	8 dB or less
Spurious response (within 9.420 \pm 2 MHz) (within 8.510 \pm 25 KHz)	30 dB or more 40 dB or more
Input and output impedance	330 Ω

Table 7. Ceramic filter (L72-0337-05) PLL unit CF1

Microprocessor Operational Description

1. Digital VFO

1) Reception frequency

The VFO continuously covers 100 kHz - 29,999.95 kHz and stops at the end.

W2 type: 150 kHz - 25.99995 MHz

X type : 2 MHz - 29.99995 MHz

2) Frequency step

	Step	One VFO cycle
FAST	5 kHz	1 MHz
MID	500 Hz	100 kHz
SLOW	50 Hz	10 kHz

The step changeover frequency does not change.

When the VFO is operated with an increased step frequency, frequencies lower than the step frequency are rounded and the VFO scans up or down referring to that frequency.

Example: SLOW step \rightarrow FAST step

1

3,160.45 MHz

(3,160.4 MHz) \rightarrow 3,165.00 MHz (3,165.0 MHz) UP

3,155.00 MHz (3,155.0 MHz) DOWN

2

3,163.45 MHz

(3,163.4 MHz) \rightarrow 3,170 MHz (3,170.0 MHz) UP

3,160.00 MHz (3,160.0 MHz) DOWN

3

3,168.45 MHz

(3,168.4 MHz) \rightarrow 3,170.00 MHz (3,170.0 MHz) UP

3,160.00 MHz (3,160.0 MHz) DOWN

The above frequencies are displayed frequency; the 10 Hz digits are not displayed.

3) BAND function

The frequency changes by a 1 MHz step when the BAND switch is operated. When the switch is kept depressed, the frequency changes continuously every 0.2 seconds. A beep signal sounds every step. The BAND function stops at the frequency limit and the beep signal does not sound.

When the down operation below the receivable range, the final displayed frequency is the minimum receivable frequency.

Example:

DOWN

UP

1,034.6 kHz \rightarrow 0,100.0 kHz \rightarrow 1,100.0 kHz

4) F. LOCK

The VFO and BAND switch operation stop when the F. LOCK switch is set to ON.

5) BACK UP

When the memory is not backed up, the unit enters 15,000.00 kHz MODE (AM) after initial setting.

When the memory is backed up, the unit enters the last reception frequency mode.

2. MODE function

With the mode select operation, the 1st local oscillation frequency is shifted and the displayed frequency is received.

	1st local oscillation frequency shift width
AM	0 (Reference)
FM	0
USB	+1.7 kHz
LSB	-1.7 kHz
CW	+0.7 kHz

3. MEMORY function

1) Memory contents

Built-in 10-channel memory (Frequency and mode information is stored.)

2) M. IN function

When M.CH 1 - 0 switch is pressed with the M.IN switch kept pressed the selected memory channel data is displayed, the beep signal sounds and the displayed frequency and mode are stored. At that time, the previously stored data is replaced with new data.

3) MR function

When M.CH 1 - 0 is pressed, the stored memory contents are recalled to the VFO, enabling frequency shifting.

4) AUTO.M function

When the AUTO.M switch is pressed, the AUTO.M indicator lights and the auto memory function turns on.

When the switch is pressed again, the indicator goes off and the auto memory function turns off.

Auto memory ON: The shifted frequency and mode are stored in the displayed memory channel.

Auto memory OFF: The displayed memory channel contents are not changed even when the frequency is shifted or the mode is changed.

CIRCUIT DESCRIPTION

Function	Hour	Minute	Operation
CLOCK-2	ON	ON	Reset to 0:00 and the seconds digits count.
	ON	OFF	The minutes digits are maintained, the hours digit is incremented and the seconds digits count.
	OFF	ON	The hours digit is maintained, the minutes digits are incremented and the seconds digits count.

The clock employs the 24-hour system.
0.00 ... → 23.59 → 0.00 ... → 3.15 → 3.16 ...
Each time the HOUR or MINUTE switch is pressed, the corresponding digit is incremented by 1. When the switch is kept pressed, the digit is continuously incremented at an interval of 0.12 seconds.

3) When the power is shut off, the CLOCK-1 and CLOCK-2 are reset to 0:00. When the power is supplied again, the indication blinks.

7. Timer function

1) TIMER switch

When the TIMER switch is set to ON regardless of the POWER switch setting, the power is turned off and the timer functions. The CLOCK-1 and ON TIME are compared and power is supplied when the set times coincide. Then the CLOCK-2 and OFF time are compared and power is shut off when the set times coincide.

When the ON and OFF times are the same, the power is not turned on.
When CLOCK-1 indication blinks, setting the TIMER switch ON will not operate the timer and the TIMER ERROR indicator will lights.

2) Time setting

Function	Hour	Minute	Operation
ON/OFF	ON	ON	Reset to 0:00.
TIME	ON	OFF	The minutes digits are maintained and the hours digits are incremented.
	OFF	ON	The hours digit is maintained and the minutes digits are incremented.

The HOUR and MINUTE switches function in the same way as for the clock.

3) The CLOCK and ON/OFF TIME are displayed regardless of the POWER switch setting.

8. BACK UP

When the memory back up lithium battery is loaded, the data (frequency and mode) stored in the memory, last reception frequency and mode and ON/OFF TIME are backed up even when the power is shut off.

9. Dimmer function

When the DIMMER switch is set to ON or the POWER switch is set to OFF, the brightness of the digital display and meter decreases, resulting in a dimmer effect.

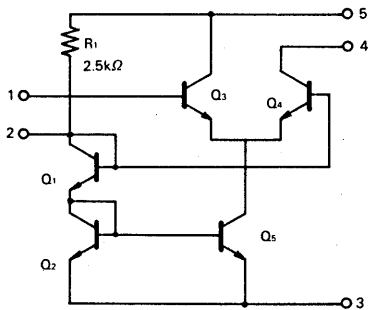


Fig. 3 TA7060P (RX unit Q32)

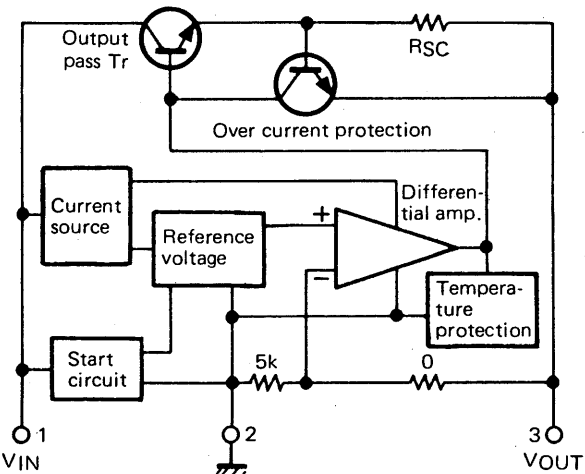


Fig. 4 AN7809 (RX unit Q54, PLL unit IC20)
AN7805 (PLL unit IC18, 19)

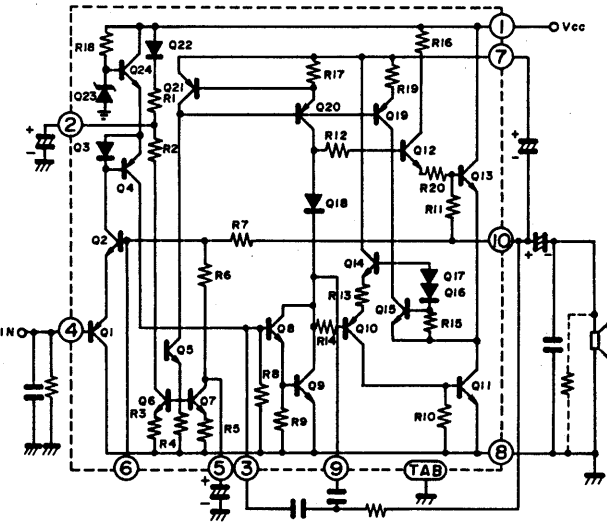


Fig. 5 HA1368R (RX unit Q57)

CIRCUIT DESCRIPTION

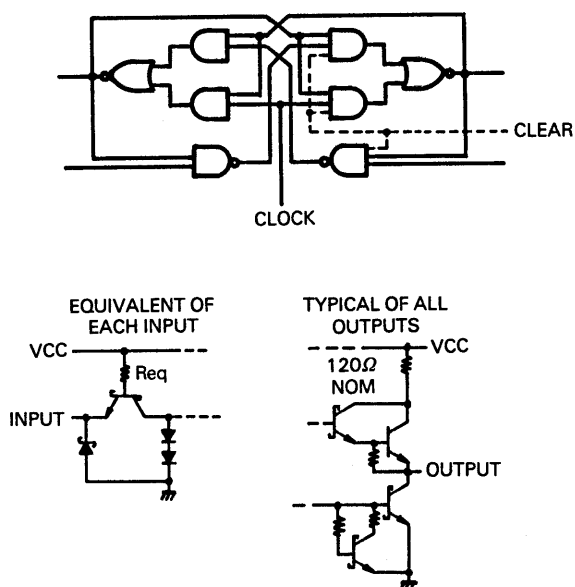
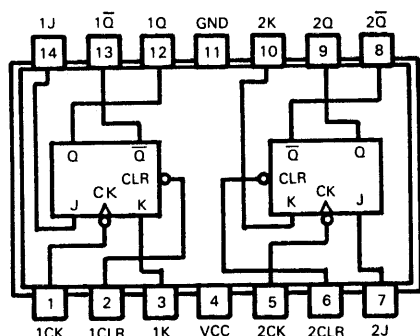


Fig. 6 SN74LS73N (PLL unit IC1)


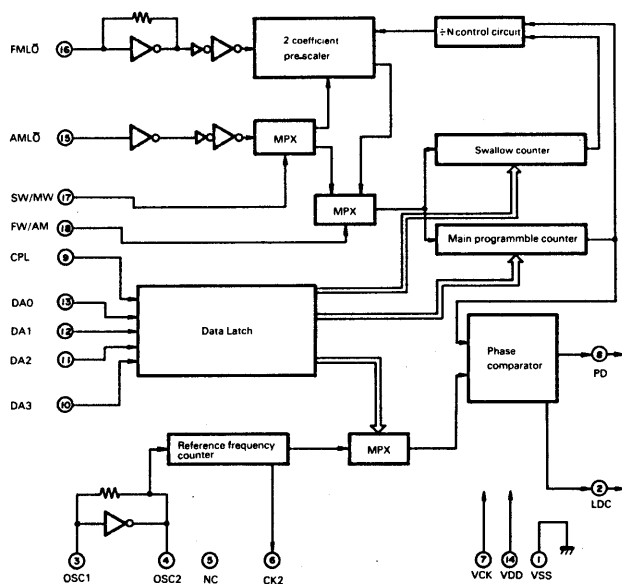


Fig. 7 MN6147C (PLL unit IC2, 5)

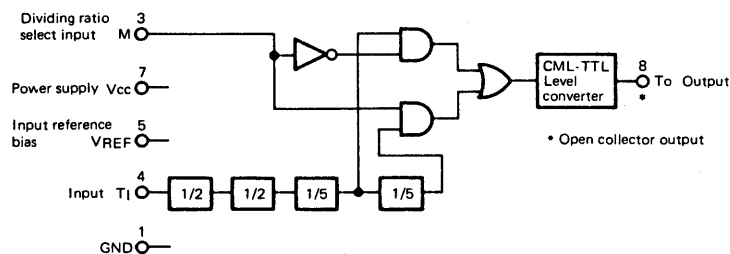

M	"L"	"H"
Dividing data output	1/20	1/100

Fig. 8 M54459L (PLL unit IC3)

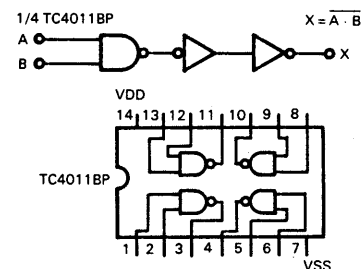


Fig. 9 TC4011BP (PLL unit IC6 ~ 11, 17)

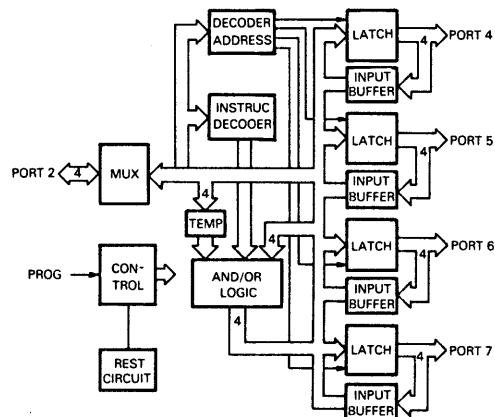


Fig. 10 μPD82C43C (PLL unit IC13, 14)

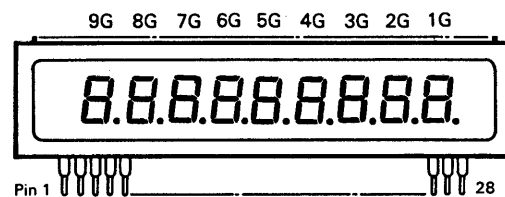


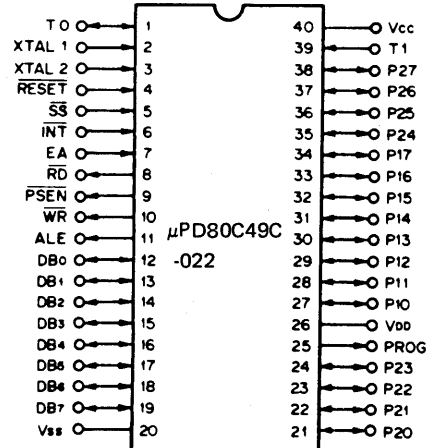
Fig. 11 FIP9D7 (PLL unit)

Table 8. FIP9D7 Terminals

Terminal No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Connection	F	NC	9G	NC	NC	8G	P(g)	P(f)	7G	P(e)	P(d)	6G	NC	NC
Terminal No.	15	16	17	18	19	20	21	22	23	24	25	26	27	28
Connection	5G	NP	NP	4G	P(d)	3G	P(c)	P(b)	2G	P(a)	NC	1G	NP	F

CIRCUIT DESCRIPTION

Item	Symbol	Rating	Unit
Operating voltage	V_{cc}	$V_{ss}-0.3 \sim +10$	V
Input voltage	V_i	$V_{ss}-0.3 \sim V_{cc}+0.3$	V
Output voltage	V_o	$V_{ss}-0.3 \sim V_{cc}+0.3$	V
Operating temperature	T_{opt}	$-40 \sim +85$	°C
Storage temperature	T_{stg}	$-65 \sim +150$	°C

Table 9. μ PD80C49C-022 Max. RatingFig. 12. μ PD80C49C-022 Terminal name μ PD80C49C-022 TERMINAL FUNCTIONS

Terminal No.	Name	Function	Input	Output
1	TO	Power ON/OFF DATA input	○	
2	X0	Microcomputer CLOCK (5.74MHz) input	○	
3	X1			
4	RST	RESET input, Normally:H	○	
5	SS	Normally 5V		
6	INT	Clock signal (1KHz) input	○	
7	EA	Normally GND		
8				
9				
10		Not used, Normally:open		
11				
12	B0	AM	○	
13	B1	USB	○	
14	B2	LSB	○	
15	B3	CW	○	
16	B4	FM	○	
17	B5	VCO-L	○	
18	B6	VCO-M	○	
19	B7	VCO-H	○	
20	GND	GND		

Terminal No.	Name	Function	Input	Output
21	P20	I/O EXPANDER control output		○
22	P21			○
23	P22			○
24	P23			○
25	PRG			○
26	VDD	STBY control input	○	
27	P10		○	
28	P11		○	
29	P12		○	
30	P13	DATA input	○	
31	P14		○	
32	P15		○	
33	P16		○	
34	P17	Program SCAN stop input	○	
35	P24	I/O EXPANDER SELECT (L:EX(O), H:EX(1))		
36	P25	TIMER OUT output		○
37	P26	Encoder UP/DOWN input (H:UP, L:Down)	○	
38	P27	VHF signal output (VHF:H)		○
39	T1	Encoder & program SCAN clock pulse input	○	
40	Vcc	Microcomputer 5V & Back up power supply		

I/O EXPANDER (0) IC13: μ PD82C43C

Terminal No.	Name	Function
2	P40	B.P.F. Data (BCD)
3	P41	
4	P42	
5	P43	
1	P50	PLL dividing ratio data, address output & DATA SELECTOR output
23	P51	
22	P52	
21	P53	
20	P60	PLL IC5 } Latch clock output
19	P61	PLL IC2 }
18	P62	Beep output
17	P63	TIMER error
13	P70	M. SCAN
14	P71	PG. SCAN
15	P72	HOLD
16	P73	AUTO. M

I/O EXPANDER (1) IC14: μ PD82C43C

Terminal No.	Name	Function
2	P40	Display DIGIT output 100HZ
3	P41	Display DIGIT output 1K
4	P42	Display DIGIT output 10K
5	P43	Display DIGIT output 100K
1	P50	Display DIGIT output 1M
23	P51	Display DIGIT output 10M
22	P52	Display DIGIT output 100M
21	P53	Display DIGIT output CH
20	P60	Display SEGMENT output a
19	P61	Display SEGMENT output b
18	P62	Display SEGMENT output c
17	P63	Display SEGMENT output d
13	P70	Display SEGMENT output e
14	P71	Display SEGMENT output f
15	P72	Display SEGMENT output g
16	P73	Display SEGMENT output point

PARTS LIST

CAPACITORS

CC 45 TH 1H 220 J
1 2 3 4 5 6

- 1 = Type ceramic, electrolytic, etc. 4 = Voltage rating
2 = Shape round, square, etc. 5 = Value
3 = Temp coefficient 6 = Tolerance

● Temperature coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm /°C	0	-80	-150	-220	-330	-470	-750

2nd Word	G	H	J	K	L
ppm /°C	±30	±60	±120	±250	±500

Example CC45TH = -470 ± 60ppm /°C

● Tolerance

Cord	C	D	G	J	K	M	X	Z	P	No cord
(%)	±0.25	±0.5	±2	±5	±10	±20	+40 -20	+80 -20	+100 -0	More than 10μF - 10 ~ +50 Less than 4.7μF - 10 ~ +75

Resistors not listed in this parts list are standard, fixed carbon composition, 1/4W or 1/8W.

The resistance values, in ohms, are indicated on the schematic diagram.

● Rating voltage

2nd word 1st word	A	B	C	D	E	F	G	H	J	K	V
0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0	—
1	10	12.5	16	20	25	31.5	40	50	63	80	35
2	100	125	160	200	250	315	400	500	630	800	—
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	—

● Capacitor value

0 1 0 = 1pF

1 0 0 = 10pF

1 0 1 = 100pF

1 0 2 = 1000pF = 0.001μF

1 0 3 = 0.01μF

2 2 0 = 22pF
1st number | Multiplier
2nd number

Less than 10 pF

Cord	B	C	D	F	G
(pF)	±0.1	±0.25	±0.5	±1	±2

Abbreviation		Abbreviation	
Cap	Capacitor	ML	Mylar
C	Ceramic	S	Styren
E	Electrolytic	T	Tantalum
MC	Mica		

SEMI CONDUCTOR

N: New Parts

Item	Name	Re- marks
Diode	1N60	
	1N4448	
	1S1007	
	1S1555	
	1S1587	
	1S2588	
	BA282	
	D33A	
	RD4.7EB3	
	V03C	
Zener-Diode	WZ-061	
	WZ-071	
	WZ-110	
	XZ-060	
LED	ON1110	
	LM358P	
	SG238D	
	SR538D	
	SY438D	
	TLG205	
	TLR205	

Item	Name	Re- marks
TR	TLY205	
	2SA1015(Y)	
	2SC1675(L)	
	2SC1775(E)	
	2SC1815(Y)	
	2SC1907	
	2SC1923(D)	
	2SC1959(Y)	
	2SC2240(GR)	
	2SC2878	
	2SD235(Y)	N
FET	2SK192A(GR)	
	3SK73(GR)	
	3SK74(L)	
IC	AN7805	N
	AN7809	N
	HA1368R	
	M54459L	
	MN6147C	
	NJM4558D	

Item	Name	Re- marks
	SN16913P	
	SN74LS145N	
	SN74LS73N	
	TA7060AP	
	TA7324P	
	TC4011BP	
	TC5065BP	
	TC5067BP	
	μPC577H	
	μPD80C49C-022	N
Varistor	μPD82C43C	N
	MV-13	
Vari-cap	1SV53A	
	1SV54GC	
Display tube	FIP9D7	
Surge-Absorber	ERZD03DK331	

PARTS LIST

Part No.	Re- marks	Description	Part No.	Re- marks	Description
GENERAL					
A01-0939-02	N	Case (upper)	J61-0019-05		Band x 3
A01-0940-02	N	Case (lower)	J61-0401-05		Nylon band x 20
A20-2465-03	N	Panel	K01-0411-05	N	Carring handle
A23-1472-02	N	Rear panel	K21-0769-04	N	Main knob
B03-0529-04	N	Carring handle back plate	K23-0738-04		Knob, FUNCTION
B03-0530-14	N	Switch name plate, NAR-WIDE	K23-0755-04	N	Knob x 4, AF, TONE, SQL, ATT
B03-0531-04	N	Ornamental plate, Meter	K27-0426-14		Band knob x 2
B30-0817-15		Lamp, 14V 80mA	K29-0758-04		Push knob x 2, POWER, TIMER
B31-0641-05	N	Meter	K29-0767-04		Push knob x 2, DIM, NB
B39-0407-04		Spacer x2	K29-0768-04		Push knob, AGC
B42-1722-24		FTZ plate	K29-0771-04		Knob ring
B43-0686-04	N	Badge	K29-0772-03	N	Knob ass'y
B43-0687-04	N	Badge	K29-0773-04	N	Push knob, MODE
B46-0058-10		Warranty card (TKC)	K29-0774-04	N	Push knob, NAR-WIDE
B50-4022-00	N	Instruction manual	K29-0775-04	N	Push knob, F. LOCK
B50-4023-00	N	Instruction manual	K29-0776-04	N	Push knob x 3, TUNING SPEED
B58-0637-00		Voltage warning paper	L01-8064-05	N	Power transformer
B58-0638-00		Warning paper	N09-0256-05		Ground screw, ANT
B58-0653-00	N	Warning paper	N09-0641-05		Screw x 7, Panel
B58-0654-00	N	Warning paper	N14-0508-04		Spanner nut, Panel
C91-0079-05		C, 0.01 AC125V	N15-1040-46		Washer x 2, Carring handle
E04-0152-05		UHF type receptacle, ANT	N30-2608-41		Screw x 2, DC
E07-0751-05		7P DIN plug, accessory	N30-3006-41		Screw x 7, Lamp, PLL, DIN
E12-0001-15		Phone plug, accessory	N30-3008-41		Screw x 2, AC
E18-0351-05		3P Inlet, AC power	N30-3012-46		Screw, Panel
E30-1643-15		AC Cable ass'y	N30-4006-46		Screw x 2, Carring handle
E30-1644-15		AC Cable ass'y	N32-2606-46		Flat screw x 4, Meter
E30-1645-05		AC Cable ass'y	N35-3006-41		Bind screw x 16, Case
E30-1647-05		AC Cable ass'y	N87-2606-46		Bind tapping screw x16
F05-1013-05		Fuse x 2, 0.1A, accessory	N87-2608-46		Self tapping screw x5
F05-1521-05		Fuse 1.5A, accessory	N87-3006-41		Knob ass'y x 5
F15-0646-04	N	Switch mask, Piano switch	N87-3008-41		Self tapping screw x 25
F19-0610-04		Connector mask, DC13.8V	N87-3010-46		Push switch, etc
F19-0622-04	N	Rear cover	N87-3012-46		Self tapping screw x 2, ANT, SP
G13-0669-04		Cushion, MODE	N88-3006-46		Self tapping screw x 3, SP
G16-0506-04		Anti vibration sheet, Case	S90-0405-05	N	Tap tight screw x 24, PC board
G53-0510-04		Packing x 2, Case	T07-0225-15	N	Tap tight screw x 10, Sub panel, etc.
H01-4463-04	N	Packing carton	X41-1480-00	N	Rotary remote switch, ATT
H01-4464-04	N	packing carton	X41-1480-61	N	Speaker
H03-2098-04	N	Packing carton	X41-1480-71	N	Switch unit
H10-2569-02	N	Packing fixture (R)	X50-1920-00	N	Switch unit
H10-2570-02	N	Packing fixture (L)	X54-1690-00	N	PLL unit
H12-1320-04	N	Cushion	X55-1340-00	N	Encoder unit
H20-1419-03	N	Protective cover			RX unit
H25-0029-04		Protective bag 60x100			
H25-0105-04		Protective bag 150x350			
J02-0323-05		Foot x 4, Case (lower)			
J02-0403-04		Rubber foot x 4, Case			
J02-0428-05	N	Assistant foot, Case (lower)			
J19-1369-04	N	Knob metal fittings, Piano switch			
J19-1372-14	N	Knob metal fittings, Piano switch			
J21-2573-04		Foot metal fittings x 2, Case			
J21-2788-04	N	Speaker metal fittings x 3			
J32-0767-04	N	Hex. boss x 4, Meter			

PARTS LIST

Part No.	Re- marks	Description	Ref. No.	Q'ty	Part No.	Re- marks	Description	Ref. No.	Q'ty
SWITCH UNIT (X41-1480-00)									
-00: K, M, T, W -61: W2, -71: X									
CE04W1C100M		E, 10 16V	C8	1	CC45CH1H150J		C, 15P	C52,76,150	3
CE04W1H4R7M		E, 4.7 50V	C2,4	2	CC45CH1H220J		C, 22P	C14,155	2
CQ92M1H102K		ML, 0.001	C5	1	CC45RH1H010C		C, 1P ± 0.25P	C135	1
CQ92M1H104K		ML, 0.1	C1,13	2	CC45RH1H020C		C, 2P ± 0.25P	C133,142	2
CQ92M1H683K		ML, 0.068	C3	1	CC45RH1H040C		C, 4P ± 0.25P	C138	1
CK45F1H103Z		C, 0.01	C6,7,9,12	4	CC45RH1H060D		C, 6P ± 0.5P	C140,143,146	3
CK45F1H473Z		C, 0.047	C21,23,24	3	CC45RH1H070D		C, 7P ± 0.5P	C51	1
C90-0814-05		C, 4700 25V	C22	1	CC45RH1H100D		C, 10P ± 0.5P	C115,120,125	3
E11-0413-05		US jack, phones		1	CC45RH1H220J		C, 22P	C144,	1
E11-0414-05	N	US jack, REC		1	CC45RH1H330J		C, 33P	C141	1
E23-0512-05		Terminal		2	CC45RH1H470J		C, 47P	C49,118	2
E40-0273-05		Mini connector 2P		2	CC45RH1H560J		C, 56P	C113	1
E40-0442-05		Power connector (4P)		1	CC45SL1H101J		C, 100P	C13,16,26	3
F05-1521-05		Fuse, 1.5A		1	CC45SL1H121J		C, 120P	C147	1
J13-0401-05		Fuse holder		2	CC45SL1H180J		C, 18P	C181,182	2
J30-0514-14		LED spacer		6	CC45SL1H181J		C, 180P	C68	1
R01-3421-05		Pot. 10KΩ (A), AF, tone	VR1,2	2	CC45SL1H330J		C, 33P	C11	1
R06-9406-05	N	Pot. 50KΩ (B), 10KΩ (B) SQL	VR3,	1	CC45SL1H560J		C, 56P	C65,67,112	3
RS14AB3A220J		Metal film 22Ω ± 5% 1W	R12	1	CE04W1A101M		E, 100 10V	C175,	1
RS14AB3A470J		Metal film 47Ω ± 5% 1W	R11	1	CE04W1A470M		E, 47 10V	C177,185	2
R92-0150-05		Jumper wire		25	CE04W1C101M		E, 100 16V	C222	1
S29-1429-05	N	Rotary switch, FUNCTION	S30	1	CE04W1C220M		E, 22 16V	C18,47,55,97, 100	5
S29-1430-05	N	Voltage select switch	S40	1	CE04W1C221M		E, 220 16V	C186	1
S40-2440-15		Push switch, NB, DIM, AGC	S27 ~ 29	3	CE04W1E100M		E, 10 25V	C187,189	2
S40-2442-05	N	Push switch, NAR-WIDE	S24	1	CE04W1E470M		E, 47 25V	C213,217	2
S42-2406-05	N	Push switch, power, timer	S31	1	CE04W1H0R1M		E, 0.1 50V	C180,	1
S42-4402-05	N	Push switch, tuning speed	S23	1	CE04W1H010M		E, 1 50V	C178,231	2
S50-1409-05		Tact switch, BAND	S25,26	2	CE04W1H100M		E, 10 50V	C190,191	2
S50-1411-05		Tact switch, MODE	S16 ~ 20	5	CE04W1HR47M		E, 0.47 50V	C227,230	2
S50-1412-05	N	Tact switch	S1 ~ 15,21,22	17	CE04W1H4R7M		E, 4.7 50V	C201	1
PLL UNIT (X50-1920-00)					CK45B1H102K		C, 0.001	C40,60,64,66,70,79,80,82, 90,148,153,157, ~ 159,166, 172,198,202,234,236	23
C05-0013-15		Ceramic trimmer 30pF	C1	1	CK45B1H221K		C, 220P	C12	1
CC45CH1H010C		C, 1P ± 0.25P	C75,	1	CK45F1H103Z		C, 0.01	C25,36,54,63,98,99,111, 131,132,137,149,152, 156,160,188,203,211, 235	18
CC45CH1H030C		C, 3P ± 0.25P	C88	1	CK45F1H223Z		C, 0.022	C24,28,29,39,56,59,74,83, 84,85,89,129,193 ~ 197, 204 ~ 210,237	27
CC45CH1H050C		C, 5P ± 0.25P	C15,22,37,38, 57,58,87,154	8	CK45F1H473Z		C, 0.047	C21,35,41,42,61,62,69,77, 91,167,170,176,179,184 199,212,216,224,225,228 232, 238	22
CC45CH1H0R5C		C, 0.5P ± 0.25P	C31,134,136	3	CQ92M1H103K		ML, 0.01	C92,93	2
CC45CH1H100D		C, 10P ± 0.5P	C23,33,53, 117,121,122, 126,127,151	9	CQ92M1H104K		ML, 0.1	C45,95,214, 215,218 ~ 221	8
CC45CH1H120J		C, 12P	C116	1	CQ92M1H123K		ML, 0.012	C43,44,94,	3
					CQ92M1H333K		ML, 0.033	C173,174	2
					CQ92M1H472K		ML, 0.0047	C48,128	2
					C90-0817-05		C, 1000 16V	C130	1
					C91-0456-05		E, 0.047 25V	C19,46,71 ~ 73,96,162,168, 169,171,183,192,200, 223,226,229	16
					E04-0154-05		Coax connector		4
					E06-0752-05	N	DIN connector, 7P, REMOTE		1

PARTS LIST

Part No.	Re- marks	Description	Ref. No.	Q'ty	Part No.	Re- marks	Description	Ref. No.	Q'ty
E06-1051-05	N	DIN connector, 10P		1	S51-2408-05		Relay	RL1	1
E11-0408-05		V. CONVERTER		1	W09-0323-05		Lithium battery		1
E23-0046-04		MIC jack, EXT SP		2	ENCODER UNIT (X54-1690-00)				
E40-0273-05		Square terminal		12	CE04W0J101M		E, 100 6.3V	C1	1
E40-0373-05		Mini connector, 2P		3	D09-0305-04		Encoder slit		1
E40-0473-05		Mini connector, 3P		4	D21-0824-05		Shaft ass'y		1
E40-0573-05		Mini connector, 4P		3	N30-2606-46		Screw		2
E40-0673-05		Mini connector, 5P		1	R12-2409-05		Trim. pot 5k Ω (B)	VR1,2	2
E40-0773-05		Mini connector, 6P		1	RX UNIT (X55-1340-00)				
J21-2792-04		Connector metal fittings (B)		1	CC45CG1H221J		C, 220P	C165	1
J31-0502-04		PC Board collar		9	CC45CH1H020C		C, 2P \pm 0.25P	C110	1
J42-0428-05		PC Board bush		9	CC45CH1H050C		C, 5P \pm 0.25P	C93	1
L19-0323-05		OSC transformer DC-DC	T9	1	CC45CH1H0R5C		C, 0.5P \pm 0.25P	C95	1
L32-0651-05		OSC coil VCO-L	T6	1	CC45CH1H070D		C, 7P \pm 0.5P	C96	1
L32-0652-05		OSC coil VCO-M	T7	1	CC45CH1H150J		C, 15P	C111	1
L32-0653-05		OSC coil VCO-H	T8	1	CC45CH1H151J		C, 150P	C175	1
L34-0540-05		Tuning coil 455KHz	T10	1	CC45CH1H220J		C, 22P	C188	1
L34-0863-05		Tuning coil 455KHz	T11	1	CC45CH1H270J		C, 27P	C164	1
L34-2058-05		Tuning coil VCO	T3	1	CC45CH1H330J		C, 33P	C169	1
L34-2147-05	N	Tuning coil 9.42MHz	T4	1	CC45RH1H020C		C, 2P \pm 0.25P	C80	1
L34-2148-05	N	Tuning coil 9.42MHz	T5	1	CC45RH1H070D		C, 7P \pm 0.5P	C90	1
L34-2149-05	N	Tuning coil 36MHz	T1,2	2	CC45SL1H101J		C, 100P	C141,144	2
L40-1001-03		Ferri-inductor 10 μ H	L22,39	2	CC45SL1H120J		C, 12P	C234,235	2
L40-1001-14		Ferri-inductor 10 μ H	L67,68	2	CC45SL1H151J		C, 150P	C29,31,36,37,67	5
L40-1011-03		Ferri-inductor 100 μ H	L6,11,19,40~44	15	CC45SL1H220J		C, 22P	C205,207	2
L40-1011-13		Ferri-inductor 100 μ H	L58,66	2	CC45SL1H241J		C, 240P	C27~29	3
L40-1011-14		Ferri-inductor 100 μ H	L51~56	6	CC45SL1H270J		C, 27P	C109	1
L40-1021-03		Ferri-inductor 1mH	L7~9,12,20,23,27,59,60	9	CC45SL1H301J		C, 300P	C30	1
L40-1092-14		Ferri-inductor 1 μ H	L32	1	CC45SL1H331J		C, 330P	C19,21	2
L40-1292-14		Ferri-inductor 1.2 μ H	L29,31,34	3	CC45SL1H511J		C, 510P	C16~18	3
L40-1501-03		Ferri-inductor 15 μ H	L26	1	CC45SL1H680J		C, 68P	C38	1
L40-1511-03		Ferri-inductor 150 μ H	L13,15,45	3	CC45SL1H820J		C, 82P	C40,170,243	3
L40-1541-27		Ferri-inductor 150 μ H	L21,	1	CE04W1A101M		E, 100 10V	C233,247	2
L40-1801-03		Ferri-inductor 18 μ H	L25,	1	CE04W1A470M		E, 47 10V	C156,158,160,226,231,237,251,252	8
L40-1892-14		Ferri-inductor 1.8 μ H	L30,	1	CE04W1C100M		E, 10 16V	C11,15,22,26,32,35,41,44,51,54,60,63,64,71,76,78,83,112,117~119,123~130,147,148,150,176,181,210,212,214,228,240	39
L40-2201-03		Ferri-inductor 22 μ H	L24,37,38,	3	CE04W1C101M		E, 100 16V	C217,	1
L40-2211-03		Ferri-inductor 220 μ H	L16	1	CE04W1C102M		E, 1000 16V	C238	1
L40-2225-04		Ferri-inductor 2.2mH	L14,	1	CE04W1C221M		E, 220 16V	C218,	1
L40-2282-14		Ferri-inductor 0.22 μ H	L33,36	2	CE04W1H0R1M		E, 0.1 50V	C149,	1
L40-3982-14		Ferri-inductor 0.39 μ H	L35,	1	CE04W1H010M		E, 1 50V	C3,69	8
L40-4701-03		Ferri-inductor 47 μ H	L10,28	2	CE04W1HR22M		E, 0.22 50V	155,157,159,172,197,255	3
L40-4711-03		Ferri-inductor 470 μ H	L1~5,17,18	7				C182,183,215	
L72-0337-05	N	Ceramic filter 9.42MHz	CF1	1					
L77-0984-05	N	Crystal 9MHz	X1	1					
L78-0005-05		Ceramic oscillator 5.745MHz	X2	1					
N09-0641-05		Screw		2					
N10-2030-46		Screw		2					
N30-2606-46		Screw		6					
N30-3006-46		Screw		1					
N30-3008-46		Screw		2					
R12-6401-05		Trim. pot 470K (B)	VR1	1					
RS14AB3D101J		Metal film 100 Ω \pm 5% 2W	R217	1					
RS14AB3D150J		Metal film 15 Ω \pm 5% 2W	R218,	1					
R90-0162-05		Inline block 47k Ω \times 8	IB2~4	3					
R92-0563-05		Inline block 150k Ω \times 5	IB5,6	2					
R92-0150-05		Short jumper		191					


PARTS LIST

Part No.	Re- marks	Description	Ref. No.	Q'ty	Part No.	Re- marks	Description	Ref. No.	Q'ty
CE04W1H2R2M		E, 2.2 50V	C152,178,179	3	L34-0858-05		Tuning coil 46MHz	T5	1
CE04W1H3R3M		E, 3.3 50V	C209	1	L34-0864-05		Tuning coil 455KHz	T14	1
CE04W1HR47M		E, 0.47 50V	C146,151,153,180	4	L34-0865-15		Tuning coil 455KHz	T15	1
CE04W1H4R7M		E, 4.7 50V	C211,	1	L34-0866-15		Tuning coil 455KHz	T16	1
CK45B1H102K		C, 0.001	C87,94,100	6	L34-0868-05		Tuning coil 455KHz	T18	1
CK45B1H681K		C, 680P	107,196,245		L34-2068-05		Tuning coil 46MHz	T6,7	2
CK45F1H103Z		C, 0.01	C8,10,20	3	L34-2109-15		Tuning coil 46MHz	T3	1
			C73,92,98,113,115,116,121,122,131,136,163,171,186,221,232,241	16	L34-2148-05		Tuning coil 9.42MHz	T13	1
					L34-2149-05		Tuning coil 36MHz	T9	1
CQ92M1H102K		ML, 0.001	C5 ~ 7,168,200,254	6	L34-2150-05	N	Tuning coil 46 MHz	T8	1
CQ92M1H103K		ML, 0.01	C206,222 ~ 225	5	L34-2151-05	N	Tuning coil 9.9MHz	T10	1
CQ92M1H104K		ML, 0.1	C219,220,239,253	4	L34-2152-05	N	Tuning coil 9.9MHz	T12	1
CQ92M1H122K		ML, 0.0012	C9,48,50	3	L34-2153-05	N	Tuning coil 9.9MHz	T11	1
CQ92M1H183K		ML, 0.018	C201,	1	L40-1001-02		Ferri-inductor 10μH	L24,26	2
CQ92M1H222K		ML, 0.0022	C47,202,204,208	4	L40-1011-03		Ferri-inductor 100μH	L41,42,44,45,	4
CQ92M1H272K		ML, 0.0027	C49,57,59,	3	L40-1021-03		Ferri-inductor 1mH	L39,40,46 ~ 48,51,52	7
CQ92M1H333K		ML, 0.033	C55,56,167,173,174	5	L40-1205-25		Ferri-inductor 12μH	L31,32	2
CQ92M1H392K		ML, 0.0039	C45,46,230	3	L40-1092-02		Ferri-inductor 1μH	L54	1
CQ92M1H393K		ML, 0.039	C203	1	L40-1292-02		Ferri-inductor 1.2μH	L9,10,14,16	4
CQ92M1H473K		ML, 0.047	C199,213,229	3	L40-1892-02		Ferri-inductor 1.8μH	L12,13,	2
CQ92M1H562K		ML, 0.0056	C58	1	L40-2282-14		Ferri-inductor 0.22μH	L20	1
CQ09FS1H561G		ML, 560P ±2%	C166	1	L40-2791-02		Ferri-inductor 2.7μH	L3,4,8,11	4
C90-0817-05		E, 1000 16V	C236	1	L40-3382-14		Ferri-inductor 0.33μH	L36,	1
C91-0131-05		C, 0.01 25V	C4,65,70,81,84,97,99,101,102,143,145,154,189,216,227	15	L40-3392-02		Ferri-inductor 3.3μH	L6,7	2
C91-0456-05		C, 0.047 25V	C82,248,249,12 ~ 14,23 ~ 25,33,34,42,43,52,53,61,62,72,74,75,77,79,85,86,91,103, ~ 106,108,114,120,132, ~ 135,137 ~ 140,142,177,184,185,187,190 ~ 195,198,66,88,89,244,246	1	L40-3982-14		Ferri-inductor 0.39μH	L22,23	2
C91-0490-05		Cap, 1000P 50V	C242	1	L40-3991-02		Ferri-inductor 3.9μH	L38	1
E04-0154-05		Coax connector		1	L40-4701-03		Ferri-inductor 47μH	L43,50	2
E04-0157-05		Mini pin jack A		3	L40-4711-03		Ferri-inductor 470μH	L33 ~ 35,37	4
E21-0461-05	N	4P pusck terminal		1	L40-4782-02		Ferri-inductor 0.47μH	L19,21	2
E23-0512-05		Terminal		2	L40-4791-02		Ferri-inductor 4.7μH	L2,5,25,	3
E29-0434-05		1P connector		1	L40-4791-14		Ferri-inductor 4.7μH	L53	1
E40-0273-05		Mini connector 2P		14	L40-6825-04		Ferri-inductor 6.8mH	L49	1
E40-0373-05		Mini connector 3P		1	L40-6882-02		Ferri-inductor 0.68μH	L15,17,18,	3
E40-0473-05		Mini connector 4P		2	L40-6891-02		Ferri-inductor 6.8μH	L27,28	2
E40-0573-05		Mini connector 5P		3	L40-8209-25		Ferri-inductor 82μH	L29,30	2
J13-0039-05		Fuse holder		2	L72-0316-05		Ceramic filter CFW 455E	F5	1
J31-0502-04		PC Board collar		12	L72-0319-05		Ceramic filter CFW 455HT	F4	1
J42-0428-05		PC Board bush		12	L72-0332-05		Ceramic filter CFW455K1	F3	1
L19-0324-05		Wide band width transformer	T1,2,4	3	L72-0338-05	N	Ceramic filter SFE9.8MK	F1	1
L30-0503-05		IFT 455KHz	T21	1	L79-0446-05		Ceramic discriminator CFY455S	F6	1
L30-0504-05		IFT 455KHz	T20	1	N09-0641-05		Round screw		2
L32-0646-05		OSC coil 455KHz, BFO	T19	1	N10-2030-46		Screw		3
L34-0540-05		Tuning coil 455KHz	T17	1	N30-3008-46		Screw		1
					N30-3010-46		Screw		2
					R12-1038-05		Trim. pot 1KΩ(B)	VR3,	1
					R12-1040-05		Trim. pot 4.7KΩ(B)	VR5,	1
					R12-1414-05		Trim. pot 1KΩ(B)	VR1,	1
					R12-2409-05		Trim. pot 5KΩ(B)	VR4,	1
					R12-3045-05		Trim. pot 10KΩ(B)	VR7,8,	2
					R12-3046-05		Trim. pot 47KΩ(B)	VR6	1
					R12-5030-05		Trim. pot 100KΩ(B)	VR10	1
					R12-6401-05		Trim. pot 470KΩ(B)	VR9	1
					R90-0522-05		Resistor block 47KΩ×6	RA-1	1
					R92-0150-05		Short jumper		70
					S90-0406-05	N	Slide switch, ATT	S1	1

R-2000


PC BOARD VIEW

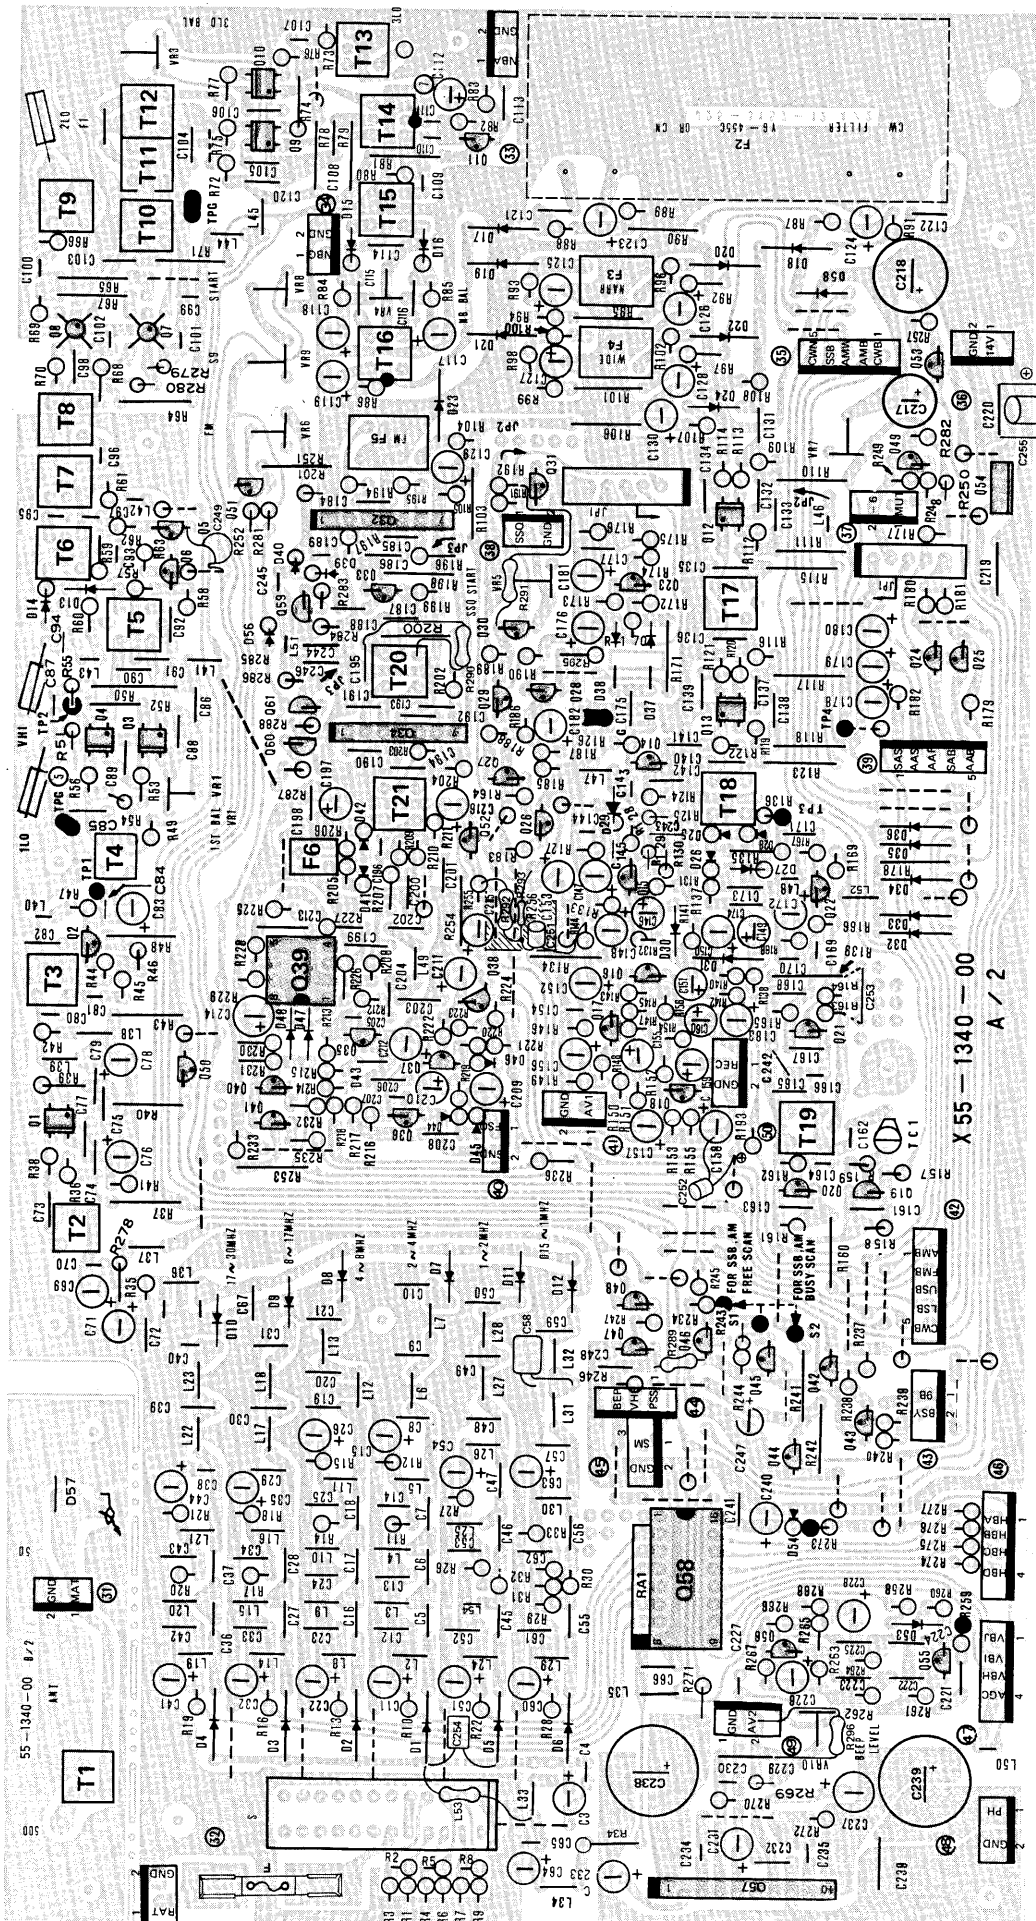16 RX UNIT (X55 - 1340 - 00) Component Side view




- 2SA1015 (Y)
- 2SC1675 (L)
- 2SC1775 (E)
- 2SC1815 (Y)
- 2SC1959 (Y)
- 2SC2240 (GR)
- 2SC2878


2SK192A




3SK73 (GR)



3SK74 (L)



μ PC577H



HA1368R

