



SPINNER || BROADCAST



Edition E | 2014

High Frequency Performance Worldwide
www.spinner-group.com



Auf unserer Webseite erhalten Sie immer die aktuellsten Updates.

Zum Schutz unserer Umwelt können Sie den Katalog dort als PDF-Datei downloaden.

On our website you will find our latest updates.

As your contribution to environmental protection you can also download our catalogues as PDF files.

Die aufgeführten technischen Daten und Abbildungen dienen zur Vorabinformation und werden erst bei schriftlicher Angebotsabgabe durch SPINNER bestätigt – Konstruktionsänderungen vorbehalten.

The specifications given here as well as the illustrations are for advance information. They shall only be confirmed by SPINNER's written offer and are subject to technical amendments.



INHALTSVERZEICHNIS | CONTENTS

Mehrsenderweichen Multi Channel Combiners.....	5
Bandpassfilter Bandpass Filters.....	81
Umschaltfelder Patch Panels	120
Parallelschalteneinrichtungen Parallel Switching Units.....	132
Koaxiale 2-Wege Schalter Coaxial 2-Way Switches.....	140
Rohrleitungen & Kabelstecker Rigid Lines & Cable Connectors	158
Kabelstecker Cable Connectors	186
Übergangsverbinder & Messzubehör Adaptors & Measurement Accessories	193
Koaxiale Abschlusswiderstände Coaxial Loads.....	201
Umweltbedingungen für Rundfunkprodukte Environmental Conditions for Broadcast Products.....	217
Index.....	218

Mehrsenderweichen
Multi Channel Combiners

Bandpassfilter
Bandpass Filters

Umschaltfelder
Patch Panels

Parallelschalteneinrichtungen
Parallel Switching Units

Koaxiale Schalter
Coaxial Switches

Rohrleitungen & Kabelstecker
Rigid Lines & Cable Connectors

Übergangsstecker & Meßzubehör
Adaptors & Measurement Accessories

Abschlußwiderstände
Loads



EXPLANATION OF THE MULTI CHANNEL COMBINER SPECIFICATIONS

Calculation of the maximum permissible output voltage

Various signals are added up within the combiner.

The peak voltages of the individual signal must be calculated and added up. The peak voltage must not be calculated from the combined power because this will result in a too low figure.

This sum must be less than the noted maximum output voltage. SPINNER recommends to keep a safety margin of 20%.

Calculation of the maximum permissible power at the narrow band inputs of starpoint, manifold or CIB combiner

The power is limited by the filters. The power ratings in the catalogue are always RMS figures. If the RMS figure of a signal is different from the nominal figure a correction factors must be applied (e.g. an analogue TX with 10/1 kW nominal power produces only 7 kW RMS power).

The RMS power specified in the data sheet can be applied. Only for adjacent channel operation a reduction may be necessary as explained below.

Calculation of the maximum permissible power at the wide band input of CIB combiners

The power ratings in the catalogue are always RMS figures. If the RMS figure of a signal is different from the nominal figure then correction factors must be applied (e.g. an analogue TX with 10/1 kW nominal power produces only 7 kW RMS power).

Typically the powers fed into the combiner inputs are different:

- only one transmitter is fed into the narrow band input
- the combined power of several transmitters is fed into the wide band input

In order to check if a CIB combiner model is suitable you must subtract 50% of the narrow band power from the maximum wide band power noted in the data sheet.

If the remainder is too small you must select a bigger combiner model.

Example:

Power at narrow band input in kW: ≤ 4.0

Power at wide band input in kW: ≤ 7.0

Possible combinations:

Narrow band input in kW: 0 1.0 2.0 3.0 4.0

Wide band input in kW: 7.0 6.5 6.0 5.5 5.0

SPINNER recommends to keep a safety margin of 20%.

Adjacent channel operation with CIB-Combiners

Only CIB combiners are suitable to combine adjacent channels or blocks.

The slope of the adjacent channel fed into the wide band input is not completely reflected by the band pass filters. A small part of the signal enters the filter and is converted to heat. This effect is called adjacent channel loss.

This load onto the band pass filters must be taken into account. For compensation the maximum permissible narrow band power must be reduced by 10 % - 30 % of the adjacent channel power fed into the wide band input.

Matching of CIB combiners outside the operating channels

To achieve best matching for the operating channels, non-used channels are handicapped. Therefore, please specify in the order all planned operating frequencies. The VSWR noted in the data sheet is guaranteed only for one channel per input.

Tuning specifications for filters and combiners

The filters must be tuned to the proper channel bandwidth (6, 7 or 8 MHz) and to satisfy the mask requirements.

The necessary information is defined in the tuning specifications (e.g. AS6148) which must be indicated with every order.

In the catalogue you can find filter data for the most common applications. However, alternative filter tunings can be made for other mask requirements, applications and bandwidths. Please do not hesitate to contact us.

BAND 3 COMBINERS

BAND 3 STRETCH LINE COMBINERS

Part number	Inputs	Channel spacing	Filters	Power per Input	Mask filtering
BN 57 46 81	2	≥ 2	-	≤ 2 kW	-

BAND 3 CIB COMBINERS WITHOUT MASK FILTERING

Part number	Channel spacing	Filters	NB power	WB power ¹⁾	Mask filtering
BN 57 46 84	≥ 2	3/150	≤ 12 kW	≤ 12 kW	-
BN 57 46 85	≥ 2	3/150	≤ 12 kW	≤ 30 kW	-
BN 57 49 45	≥ 1	4/150	≤ 12 kW	≤ 12 kW	-
BN 57 49 46	≥ 1	4/150	≤ 12 kW	≤ 30 kW	-

BAND 3 DAB STARPOINT COMBINERS (1.54 MHZ BLOCK WIDTH)

Part number	Block spacing	Filters	NB power	Mask filtering
BN 57 49 04	≥ 1	6/100	≤ 0.5 kW	DAB or T-DMB
BN 57 46 17	≥ 1	6/150	≤ 1.5 kW	DAB or T-DMB
BN 57 46 80	≥ 1	6/150	≤ 1.6 kW	DAB or T-DMB

BAND 3 DAB CIB COMBINERS (1.54 MHZ BLOCK WIDTH)

Part number	Block spacing	Filters	NB power	WB power ¹⁾	Mask filtering
BN 57 49 29	≥ 0	6/100	≤ 1 kW	≤ 3 kW	DAB or T-DMB
BN 57 49 69	≥ 0	6/100	≤ 1 kW	≤ 3 kW	DAB or T-DMB
BN 57 49 94	≥ 0	6/150	≤ 3 kW	≤ 14 kW	DAB or T-DMB
BN 57 49 96	≥ 0	6/150	≤ 3 kW	≤ 30 kW	DAB or T-DMB
BN 57 49 18	≥ 0	6/150	≤ 3.2 kW	≤ 14 kW	DAB or T-DMB
BN 57 49 16	≥ 0	6/150	≤ 3.2 kW	≤ 30 kW	DAB or T-DMB
BN 57 49 19	≥ 0	8/150	≤ 3.2 kW	≤ 14 kW	DAB or T-DMB
BN 57 49 25	≥ 0	8/150	≤ 3.2 kW	≤ 30 kW	DAB or T-DMB
BN 57 49 90	≥ 0	6/200	≤ 6 kW	≤ 30 kW	DAB or T-DMB
BN 57 49 92	≥ 0	6/200	≤ 6.0 kW	≤ 14 kW	DAB or T-DMB
BN 57 46 91	≥ 0	6/200LC	≤ 10.2 kW	≤ 14 kW	DAB or T-DMB
BN 57 46 90	≥ 0	6/200	≤ 6.0 kW	≤ 30 kW	DAB or T-DMB
BN 57 49 07	≥ 0	8/200	≤ 6.2 kW	≤ 14 kW	DAB or T-DMB
BN 57 46 97	≥ 0	8/200LC	≤ 10.2 kW	≤ 14 kW	DAB or T-DMB
BN 57 46 48	≥ 0	8/200	≤ 6.2 kW	≤ 30 kW	DAB or T-DMB

BAND 3 DTV STARPOINT COMBINERS

Part number	Block spacing	Filters	NB power	Mask filtering
BN 57 46 69	≥ 1	6/100	≤ 1.1 kW	DTV

BAND 3 DTV CIB COMBINERS

Part number	Block spacing	Filters	NB power	WB power ¹⁾	Mask filtering
BN 57 46 68	≥ 0	6/100	≤ 2.2 kW	≤ 3 kW	DTV
BN 57 49 36	≥ 0	6/150	≤ 8 kW	≤ 14 kW	DTV
BN 57 49 38	≥ 0	6/150	≤ 8 kW	≤ 30 kW	DTV
BN 57 46 86	≥ 0	8/150	≤ 7 kW	≤ 14 kW	DTV
BN 57 46 87	≥ 0	8/150	≤ 7 kW	≤ 30 kW	DTV

¹⁾ Attention: The power at the Wide Band input must be reduced by 50 % of the power fed into the Narrow Band input

²⁾ Attention: The output power must not be exceeded

UHF COMBINERS

UHF STRETCH LINE COMBINERS

Part number	Inputs	Channel spacing	Filters	Power per input	Mask filtering
BN 57 49 31	2	≥ 3	-	≤ 800W	-
BN 57 46 34	2	≥ 3	-	≤ 7 kW	-
BN 57 46 35	2	≥ 3	-	≤ 17.5 kW	-
BN 57 46 36	2	≥ 3	-	≤ 23 kW	-
BN 57 46 37	2	≥ 3	-	≤ 37 kW	-

UHF STARPOINT COMBINERS

Part number	Inputs	Channel spacing	Filters	NB power	Mask filtering
BN 57 46 55	2	≥ 1	6/38	≤ 100 W	DTV
BN 57 46 10	2	≥ 1	6/150	≤ 2.5 kW	DTV
BN 57 46 11	3	≥ 1	6/150	≤ 2.5 kW	DTV
BN 57 46 12	2	≥ 1	8/150	≤ 2 kW	DTV
BN 57 46 13	3	≥ 1	8/150	≤ 2 kW	DTV

UHF MANIFOLD LOW POWER COMBINERS

Part number	Inputs	Channel spacing	Filters	NB power	Output power ²⁾	Mask filtering
BN 57 45 82	2	≥ 2	4/34	≤ 50 W	-	-
BN 57 45 83	3	≥ 2	4/34	≤ 50 W	-	-
BN 57 45 84	4	≥ 2	4/34	≤ 50 W	-	-
BN 57 45 85	5	≥ 2	4/34	≤ 50 W	-	-
BN 57 45 86	6	≥ 2	4/34	≤ 50 W	-	-
BN 57 45 87	7	≥ 2	4/34	≤ 50 W	-	-
BN 57 45 88	8	≥ 2	4/34	≤ 50 W	-	-
BN 57 45 89	9	≥ 2	4/34	≤ 50 W	-	-
BN 57 55 62	2	≥ 1	6/60	≤ 130 W	-	DTV
BN 57 55 63	3	≥ 1	6/60	≤ 130 W	≤ 600 W	DTV
BN 57 55 64	4	≥ 1	6/60	≤ 130 W	≤ 600 W	DTV
BN 57 55 65	5	≥ 1	6/60	≤ 130 W	≤ 600 W	DTV
BN 57 55 66	6	≥ 1	6/60	≤ 130 W	≤ 600 W	DTV
BN 57 55 67	7	≥ 1	6/60	≤ 130 W	≤ 600 W	DTV
BN 57 55 68	8	≥ 1	6/60	≤ 130 W	≤ 600 W	DTV
BN 57 49 12	2	≥ 1	6/84	≤ 750 W	-	DTV
BN 57 49 13	3	≥ 1	6/84	≤ 750 W	-	DTV
BN 57 49 14	4	≥ 1	6/84	≤ 750 W	-	DTV
BN 57 49 11	5	≥ 1	6/84	≤ 750 W	-	DTV
BN 57 49 22	2	≥ 1	8/84	≤ 750 W	-	DTV
BN 57 49 23	3	≥ 1	8/84	≤ 750 W	-	DTV
BN 57 49 24	4	≥ 1	8/84	≤ 750 W	-	DTV
BN 57 49 21	5	≥ 1	8/84	≤ 750 W	-	DTV

¹⁾ Attention: The power at the **Wide Band** input must be reduced by 50 % of the power fed into the **Narrow Band** input

²⁾ Attention: The output power must not be exceeded



UHF COMBINERS

UHF CIB COMBINERS IN 19" DESIGN AND MINI CCS

Part number	Channel spacing	Filters	NB power	WB power ¹⁾	Mask filtering
BN 57 46 05	≥ 1	4/34	≤ 100 W	≤ 600 W	-
BN 57 46 06	≥ 0	6/38	≤ 150 W	≤ 1 kW	DTV
BN 57 49 06	≥ 0	6/38	≤ 200 W	≤ 1 kW	DTV
BN 57 55 01	≥ 0	6/40	≤ 260 W	≤ 1 kW	DTV
BN 57 55 06	≥ 0	8/40	≤ 240 W	≤ 1 kW	DTV
BN 57 49 48	≥ 0	6/60	≤ 750 W	≤ 1 kW	DTV
BN 57 49 49	≥ 0	6/60	≤ 750 W	≤ 4 kW	DTV
BN 57 49 50	≥ 0	8/60	≤ 750 W	≤ 1 kW	DTV
BN 57 49 51	≥ 0	8/60	≤ 750 W	≤ 4 kW	DTV
BN 57 46 03	≥ 1	4/84	≤ 1.5 kW	≤ 1 kW	-
BN 57 49 01	≥ 1	4/84	≤ 1.5 kW	≤ 7 kW	-
BN 57 46 73	≥ 1	4/84	≤ 1.5 kW	≤ 7 kW	-
BN 57 46 74	≥ 1	4/84	≤ 2.5 kW	≤ 7 kW	-
BN 57 46 41	≥ 0	6/84	≤ 1.5 kW	≤ 1 kW	DTV
BN 57 49 42	≥ 0	6/84	≤ 1.5 kW	≤ 7 kW	DTV
BN 57 46 75	≥ 0	6/84	≤ 1.5 kW	≤ 7 kW	DTV
BN 57 46 76	≥ 0	6/84	≤ 1.5 kW	≤ 7 kW	DTV
BN 57 46 43	≥ 0	8/84	≤ 1.5 kW	≤ 1 kW	DTV
BN 57 49 44	≥ 0	8/84	≤ 1.5 kW	≤ 7 kW	DTV
BN 57 46 77	≥ 0	8/84	≤ 1.5 kW	≤ 7 kW	DTV
BN 57 46 78	≥ 0	8/84	≤ 1.5 kW	≤ 7 kW	DTV

UHF HIGH POWER CIB COMBINERS

Part number	Channel spacing	Filters	NB power	WB power ¹⁾	Mask filtering
BN 57 55 11	≥ 0	6/120	≤ 3.2 kW	≤ 7.0 kW	DTV
BN 57 55 12	≥ 0	6/120	≤ 3.2 kW	≤ 7.0 kW	DTV
BN 57 55 13	≥ 0	6/120	≤ 3.2 kW	≤ 17.5 kW	DTV
BN 57 55 15	≥ 0	8/120	≤ 3.2 kW	≤ 7.0 kW	DTV
BN 57 55 16	≥ 0	8/120	≤ 3.2 kW	≤ 7.0 kW	DTV
BN 57 55 17	≥ 0	8/120	≤ 3.2 kW	≤ 17.5 kW	DTV
BN 57 49 02	≥ 1	4/150	≤ 7 kW	≤ 7.0 kW	-
BN 57 49 32	≥ 1	4/150	≤ 7 kW	≤ 17.5 kW	-
BN 57 49 33	≥ 1	4/150	≤ 7 kW	≤ 33.0 kW	-
BN 57 46 72	≥ 0	6/150	≤ 4 kW	≤ 7.0 kW	ATSC
BN 57 46 62	≥ 0	6/150	≤ 4 kW	≤ 17.5 kW	ATSC
BN 57 49 47	≥ 0	6/150	≤ 5 kW	≤ 7.0 kW	DTV
BN 57 49 34	≥ 0	6/150	≤ 5 kW	≤ 17.5 kW	DTV
BN 57 49 35	≥ 0	6/150	≤ 5 kW	≤ 33.0 kW	DTV
BN 57 49 62	≥ 0	8/150	≤ 4 kW	≤ 7.0 kW	DTV
BN 57 49 61	≥ 0	8/150	≤ 4 kW	≤ 17.5 kW	DTV
BN 57 49 63	≥ 0	8/150	≤ 4 kW	≤ 33.0 kW	DTV

¹⁾ Attention: The power at the Wide Band input must be reduced by 50 % of the power fed into the Narrow Band input
²⁾ Attention: The output power must not be exceeded

UHF COMBINERS

UHF HIGH POWER CIB COMBINERS

Mehrsenderweichen
 Multi-Channel Combiners

Part number	Channel spacing	Filters	NB power	WB power ¹⁾	Mask filtering
BN 57 55 20	≥ 0	6/170	≤ 7 kW	≤ 7 kW	DTV
BN 57 55 21	≥ 0	6/170	≤ 7 kW	≤ 17.5 kW	DTV
BN 57 55 22	≥ 0	6/170	≤ 7 kW	≤ 33 kW	DTV
BN 57 55 23	≥ 0	6/170	≤ 7 kW	≤ 60 kW	DTV
BN 57 55 25	≥ 0	8/170	≤ 7 kW	≤ 7 kW	DTV
BN 57 55 26	≥ 0	8/170	≤ 7 kW	≤ 17.5 kW	DTV
BN 57 55 27	≥ 0	8/170	≤ 7 kW	≤ 33 kW	DTV
BN 57 55 28	≥ 0	8/170	≤ 7 kW	≤ 60 kW	DTV
BN 57 42 30	≥ 2	3/200	≤ 7 kW	≤ 7 kW	-
BN 57 42 29	≥ 2	3/200	≤ 7 kW	≤ 17.5 kW	-
BN 57 42 26	≥ 2	3/200	≤ 7 kW	≤ 33 kW	-
BN 57 42 83	≥ 2	3/200	≤ 20 kW	≤ 17.5 kW	-
BN 57 42 81	≥ 2	3/200	≤ 20 kW	≤ 33 kW	-
BN 57 42 86	≥ 2	3/200	≤ 20 kW	≤ 60 kW	-
BN 57 49 76	≥ 1	4/200	≤ 7 kW	≤ 33 kW	-
BN 57 49 73	≥ 1	4/200	≤ 15 kW	≤ 17.5 kW	-
BN 57 49 75	≥ 1	4/200	≤ 15 kW	≤ 33 kW	-
BN 57 49 85	≥ 1	4/200	≤ 15 kW	≤ 60 kW	-
BN 57 49 70	≥ 1	6/200	≤ 7 kW	≤ 17.5 kW	ATSC
BN 57 46 71	≥ 1	6/200	≤ 9 kW	≤ 17.5 kW	ATSC
BN 57 46 70	≥ 1	6/200LC	≤ 20 kW	≤ 17.5 kW	ATSC
BN 57 46 93	≥ 0	6/200	≤ 7 kW	≤ 7 kW	DTV
BN 57 46 94	≥ 0	6/200	≤ 7 kW	≤ 17.5 kW	DTV
BN 57 46 95	≥ 0	6/200	≤ 7 kW	≤ 33 kW	DTV
BN 57 46 96	≥ 0	6/200	≤ 7 kW	≤ 60 kW	DTV
BN 57 49 28	≥ 0	6/200	≤ 10 kW	≤ 17.5 kW	DTV
BN 57 49 67	≥ 0	6/200	≤ 10 kW	≤ 33 kW	DTV
BN 57 49 00	≥ 0	6/200	≤ 10 kW	≤ 60 kW	DTV
BN 57 46 98	≥ 0	6/200LC	≤ 23 kW	≤ 17.5 kW	DTV
BN 57 49 71	≥ 0	6/200LC	≤ 23 kW	≤ 33 kW	DTV
BN 57 49 74	≥ 0	6/200LC	≤ 23 kW	≤ 60 kW	DTV
BN 57 49 40	≥ 0	8/200	≤ 7 kW	≤ 7 kW	DTV
BN 57 49 39	≥ 0	8/200	≤ 7 kW	≤ 17.5 kW	DTV
BN 57 49 37	≥ 0	8/200	≤ 7 kW	≤ 33 kW	DTV
BN 57 49 88	≥ 0	8/200	≤ 7 kW	≤ 60 kW	DTV
BN 57 49 65	≥ 0	8/200	≤ 8 kW	≤ 17.5 kW	DTV
BN 57 49 66	≥ 0	8/200	≤ 8 kW	≤ 33 kW	DTV
BN 57 49 91	≥ 0	8/200	≤ 8 kW	≤ 60 kW	DTV
BN 57 49 64	≥ 0	8/200LC	≤ 23 kW	≤ 17.5 kW	DTV
BN 57 49 89	≥ 0	8/200LC	≤ 23 kW	≤ 33 kW	DTV
BN 57 49 79	≥ 0	8/200LC	≤ 23 kW	≤ 50 kW	DTV
BN 57 55 30	≥ 0	6/230	≤ 17 kW	≤ 17.5 kW	DTV
BN 57 55 31	≥ 0	6/230	≤ 17 kW	≤ 33 kW	DTV
BN 57 55 32	≥ 0	6/230	≤ 17 kW	≤ 60 kW	DTV
BN 57 55 33	≥ 0	6/230	≤ 17 kW	≤ 60 kW	DTV
BN 57 55 40	≥ 0	6/230LC	≤ 23 kW	≤ 17.5 kW	DTV
BN 57 55 41	≥ 0	6/230LC	≤ 23 kW	≤ 33 kW	DTV
BN 57 55 42	≥ 0	6/230LC	≤ 23 kW	≤ 60 kW	DTV
BN 57 55 43	≥ 0	6/230LC	≤ 23 kW	≤ 80 kW	DTV
BN 57 55 35	≥ 0	8/230	≤ 17 kW	≤ 17.5 kW	DTV
BN 57 55 36	≥ 0	8/230	≤ 17 kW	≤ 33 kW	DTV
BN 57 55 37	≥ 0	8/230	≤ 17 kW	≤ 60 kW	DTV
BN 57 55 38	≥ 0	8/230	≤ 17 kW	≤ 60 kW	DTV
BN 57 55 45	≥ 0	8/230LC	≤ 23 kW	≤ 17.5 kW	DTV
BN 57 55 46	≥ 0	8/230LC	≤ 23 kW	≤ 33 kW	DTV
BN 57 55 47	≥ 0	8/230LC	≤ 23 kW	≤ 60 kW	DTV
BN 57 55 48	≥ 0	8/230LC	≤ 23 kW	≤ 80 kW	DTV

¹⁾ Attention: The power at the **Wide Band** input must be reduced by 50 % of the power fed into the **Narrow Band** input


²⁾ Attention: The output power must not be exceeded

CHANNEL COMBINERS

Multi channel combiners

In order to broadcast more transmitters via a common antenna it is necessary to connect the transmitter outputs via a combiner in such a way that they do not interfere (isolation) and to guide the whole RF power to the antenna (insertion loss). Band pass filters or phase adjusted transmission lines are used in the combiners as frequency determining devices.


The band pass filters can additionally be used to suppress spurious emissions (integrated mask filtering for DTV, DAB, T-DMB, ...).

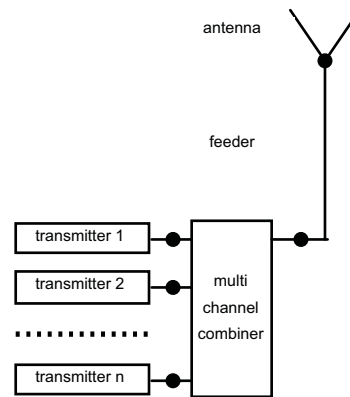

Starpoint or manifold combiners

The transmitters can be isolated from each other by connecting a band pass filter to every output. The outputs of these filters must be connected via a proper matching network to achieve good matching for the operating channels. This system will show total mismatch outside the operating channels because of the total reflection at the band pass filters.

Frequency changes or extensions are difficult with such combiners, because the matching networks must be optimized to the new frequencies.



Constant Impedance Broadband (CIB) combiners

Good isolation, broadband matching and ease of modifications are achieved in the CIB combiner by a tricky combination of band pass filters and 3 dB couplers.


The signal applied to the narrow band input is fed via the narrow band 3 dB coupler into the two band pass filters and is combined afterwards in the wide band 3 dB coupler and routed to the antenna output.

The signals fed into the wide band input go to the filter ports via the wide band 3 dB coupler where they are totally reflected back to the wide band coupler and routed to the antenna output.

All ports are broadband matched (Constant Impedance Broadband).

Any transmitter signal can be fed into the wide band input as long as the frequency spacing to the pass band range of the filters is big enough to get total reflection. Even adjacent channels can be combined if the slopes of the filter curves are steep enough.


The CIB combiners are preferred components for the design of multi channel combiners because they offer most flexibility for any configuration of channels and powers.



CHANNEL COMBINERS


Stretch line combiners

The difference in wave length of the transmitter frequencies is used with the stretch line combiner. The signals are split by the first 3 dB coupler to two transmission lines. The phases at the input of the second 3 dB coupler are modified by careful adjustment of the line lengths in such a way that all signals are routed to the antenna output. The stretch line combiner has very low insertion loss and high power rating but can combine only channels with more than 3 channels spacing.

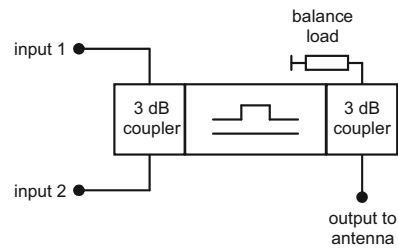


Combination of several combiners


CIB combiners may be cascaded nearly arbitrarily. Additional units can be connected to the wide band input or the output. Starpoint, manifold or stretch line combiners may be connected to the wide band input of CIB combiners to add further channels.

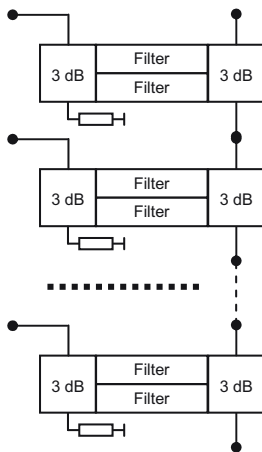

chain of CIB combiners



manifold and CIB combiner



stretch line and CIB combiner

How to select the proper combiner?

Start by making a list of channels, powers and mask requirements:

Channel	Power	Mask requirement
23	2 kW	DVB
27	2 kW	DVB
28	10 kW	no
57	1 kW	DVB

If the list contains adjacent channels they must be combined using CIB combiners.

If mask filters are necessary it is preferable to integrate them into the starpoint or manifold or CIB combiners because this gives the benefit of minimum overall insertion loss and maximum freedom for channel combinations.

Stretch line combiners and the wide band input of CIB combiners do not provide mask filtering. Therefore, proper band pass filters must be connected to the inputs to satisfy the mask requirements.

After selecting the combiner design (CIB or star point or manifold or stretch line) you must select a model with sufficient power rating.

The combiner engineers from SPINNER will be pleased to support you with the selection and planning of combiner systems. Please send the table with channels and specifications to: info@spinner-group.com

SOLUTIONS FOR LOW AND MEDIUM POWER COMBINERS

SPINNER offers a complete range of low and medium power combiners:

- 1 W up to 5 kW
- Band 3, UHF and Band L
- ATV, DAB and DTV

All designs are available:

- stretch line combiners without mask filtering
- starpoint combiners made of DAB and DTV mask filters
- manifold combiners with and without DTV mask filtering
- CIB combiners with and without DAB or DTV mask filtering

The compact combiners can be installed:

- inside 19" racks
- wall mount
- floor mount

Multiple combiner units can be stacked vertically inside a 19" rack or self supporting or be fixed with wall mounts to minimize foot print.

The 19" slide-in combiners are available in three versions:

- BN 57___ without front plate
- BN 57___C0001 with front plate, RF ports at the front side
- BN 57___C0002 with front plate, RF ports at the rear side

All SPINNER combiner systems consisting of multiple units are assembled, tuned and measured in the factory before shipping. SPINNER is shipping complete systems which can be easily installed by any skilled installer.


Thus the customer gets complete test results of insertion loss, mask filtering and matching which can be checked before starting the installation and compared afterwards with the on site results.



BN 57 46 05 C0001
UHF CIB combiner with 4 cavity filters




BN 57 46 06 C0001
UHF CIB combiner with DTV mask filter

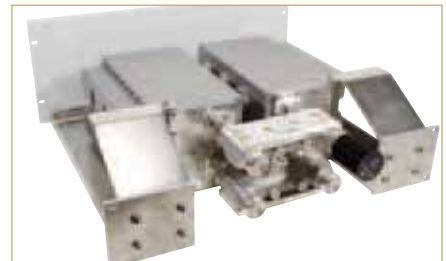

BN 57 49 48 C0002
UHF CIB combiner with DTV mask filters



BN 57 49 42 C0001
UHF CIB combiner with DTV mask filters

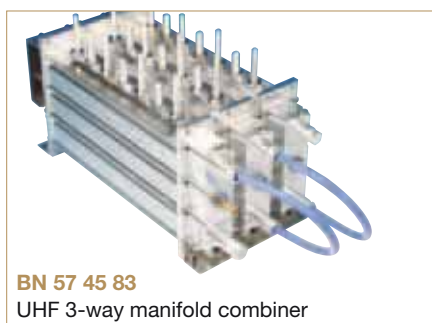

BN 57 45 83
UHF 3-way manifold combiner



BN 57 45 86
UHF 6-way manifold combiner



BN 57 48 39
UHF 3-way combiner with integrated DTV mask filters and monitoring

SOLUTIONS FOR LOW AND MEDIUM POWER COMBINERS

Mehrsenderweichen
Multi-Channel Combiners



BN 57 45 90
UHF 4-way CIB combiner
in wall mount



BN 57 48 78
UHF 6-way combiner
with integrated DTV mask filters



BN 57 54 81
Band 3 4-way combiner
with integrated DAB mask filters



BN 57 52 72
5-way combiner
with integrated DTV mask filters



BN 57 56 23 C1000
Double UHF 6-way combiner
with integrated DTV mask filters
and N+1 switching system



BN 57 45 98
Double UHF 6-way combiner
with integrated DVB mask filters

SOLUTIONS FOR COMPACT COMBINING & SWITCHING SYSTEM 1 KW - 80 KW

Modular system of combiners and patch panels to implement all functions with minimum foot print

SPINNER has standardized and minimized the combiners and patch panels so much that a half square meter footprint per channel is sufficient to realize the combination, mask filtering and many switching functions. This design is called **CCS** and has many advantages:

- The combiner planning is very simple because only 0.5 m² are sufficient per channel.
- The DTV mask filtering (uncritical or critical) can be integrated into the **CCS** combiner module without increasing the foot print.
- **CCS** combiner modules are available for up to 80 kW combined power in one output. For higher powers parallel, phase equalized combiner chains can be made.
- **CCS** systems can be equipped with monitoring couplers, trimming lines and other accessories.
- The installation is very simple because the **CCS** modules are delivered as individual units which can be handled easily. On site the combiner modules only need to be fixed to the bottom frame and connected with the prefabricated rigid lines to be ready for operation. Thus, even complicated combiner systems can be installed within one day.
- The installation of the interconnection lines to the transmitters and the antenna is simple, quick and cheap because all RF ports are free upwards. So one vertical piece of rigid line is sufficient per port.
- The optional **CCS** patch panels allow reserve operation facilities, bypassing of individual combiner modules, switching to a common dummy load and precise measurement of the combiner performance without dismantling rigid lines.
- The off-air periods for frequency changes and other modifications can be reduced to minutes if **CCS** patch panels are used.
- The standardization even allows the replacement of combiner modules for later changes to adjacent channel operation or increases of transmitter power.

The SPINNER **CCS** systems offers the network operator enormous advantages in planning, installation, operation and future expansion which should be taken into account in comparison with the competition.



testing in the factory




transportation



ready for operation on site

SOLUTIONS FOR COMPACT COMBINING & SWITCHING SYSTEM 1 KW - 80 KW


Mehrsenderweichen
Multi-Channel Combiners

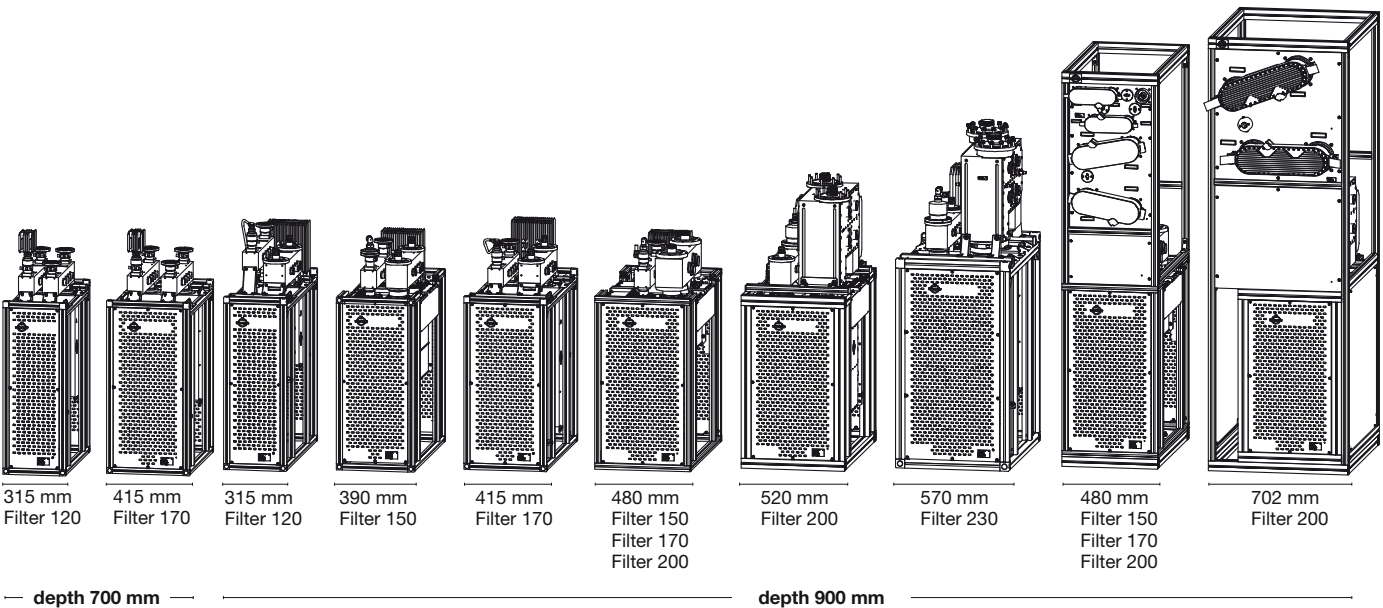

SOLUTIONS FOR COMPACT COMBINING & SWITCHING SYSTEM 1 KW - 80 KW

CCS combiner system without patch panels - minimum configuration


For a straightforward system the combiner modules can be connected via simple rigid lines. Such a system is very efficient but any measurements or modification will require interruption of transmission.

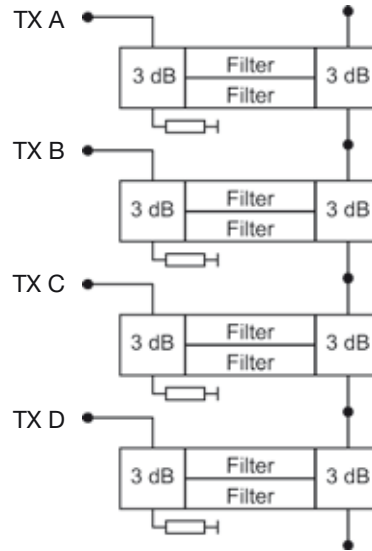

CCS combiner system with combiner bypass patch panels for increased availability

To increase the availability of the combiner system every combiner module is equipped with a 4 port patch panel in such a way that any combiner can be bypassed within minutes to be free for measurements or frequency changes.

The transmission of the remaining channels can continue within minutes and even the bypassed channel can be transmitted by feeding it into the free wide band input.

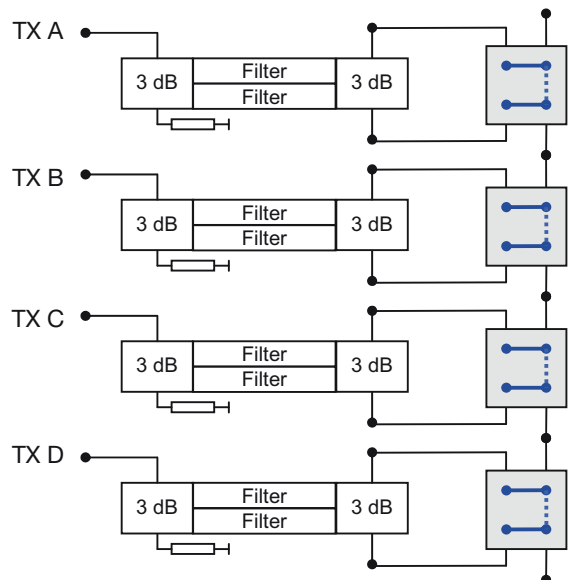

SOLUTIONS FOR COMPACT COMBINING & SWITCHING SYSTEM 1 KW - 80 KW

CCS combiner system with transmitter routing and combiner bypassing patch panels for maximum flexibility



For maximum flexibility the combiner module can be equipped with 4 port patch panels at the input and the output side:

Transmitter routing at the input side:

- For normal operation the transmitter is directly connected to the combiner input.
- For measurements the transmitter signal can be switched to a common dummy load.
- For frequency changes the transmitter can be switched to the wide band input of the combiner system to continue operation while the combiner unit is returned.


Combiner bypassing at the output side:

- For normal operation the module is in the combiner chain.
- For measurements or frequency changes the combiner module is bypassed and isolated.

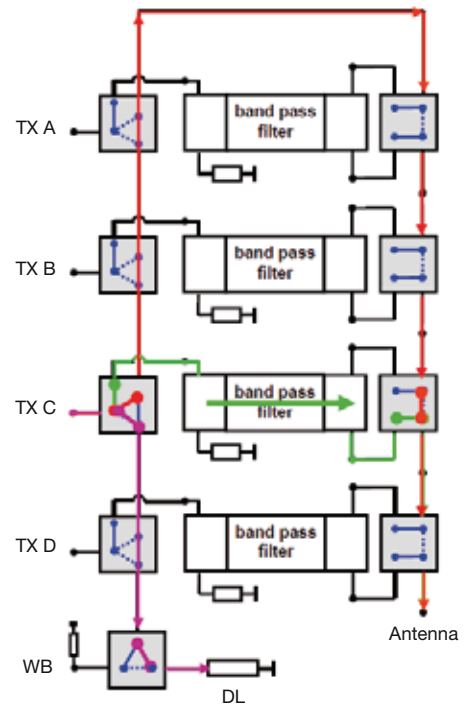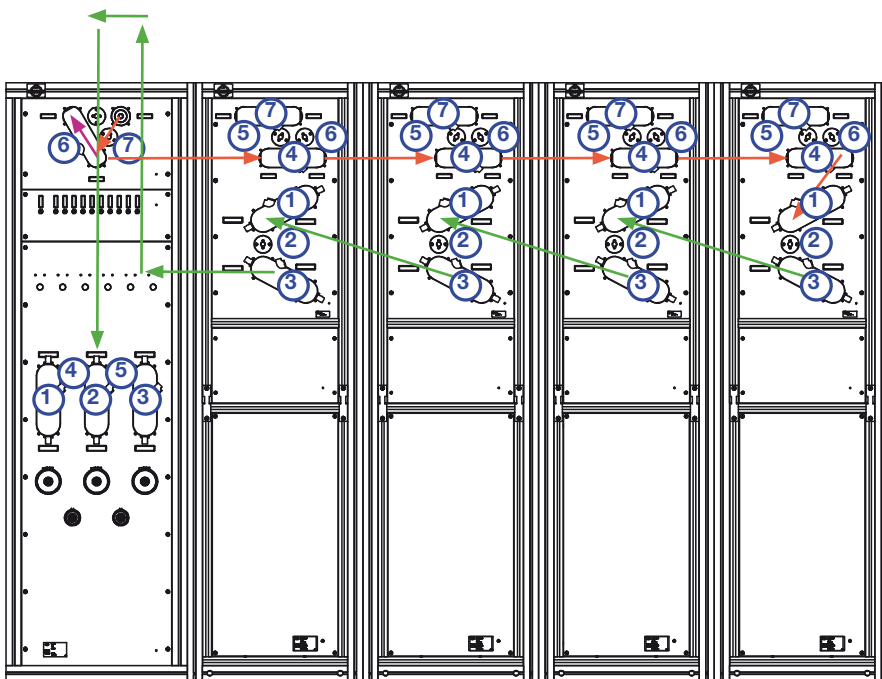

- Standard operation: Transmitter via combiner to antenna
- Measurement of transmitter: Transmitter routed to common dummy load
- Combiner measurement or retuning: Operation is continued via the wide band input of the system while the combiner module is bypassed

SOLUTIONS FOR COMPACT COMBINING & SWITCHING SYSTEM 1 KW - 80 KW

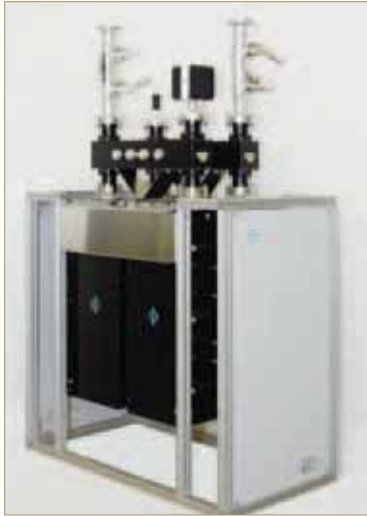

Single UHF CIB combiner unit



BN 57 54 02 Rennes, France
UHF combiner for 8 x 5.6 kW DVB
with integrated mask filters and monitoring couplers



BN 57 53 06 Turkmenistan
UHF combiner for 8 x 4 kW DVB with integrated mask filters, combiner bypass
and antenna patch panel with bent front for installation in circular transmitter hall



front side



rear side

BN 57 52 65 Argentina
UHF combiner for 4 x 2 kW ISDB-T
(expandable to 8 x 2 kW) with integrated
8 cavity mask filter and N+1 switching
and dummy load for testing

SOLUTIONS FOR COMPACT COMBINING & SWITCHING SYSTEM 1 KW - 80 KW

Mehrsenderweichen
Multi-Channel Combiners



front side



rear side

BN 57 54 96 Russia

UHF Combiner for 5 kW DVB with integrated mask filters and 20 kW ATV, combiner bypass and antenna patch panel and 10 kW dummy load



BN 57 56 26 Pfänder, Austria

Band 3 combiner for 5 x 2.5 kW DAB (expandable to 10 x 2.5 kW DAB) with integrated mask filters and antenna patch panel



BN 57 56 37 South Africa

UHF combiner for 3 x 3 kW DVB with integrated liquid cooled filters



BN 57 50 84 Pontop Pike, England

UHF combiner for 3 x 15 kW DVB with integrated liquid cooled filters, input isolation U-links and pump unit



BN 57 44 72 Knockmore, Scotland

Double UHF combiner for 6 x 1.7 kW DVB with integrated 8 MHz DVB mask filters 2 port input isolation patch panel

DESIGN AND OFFERS

A lot of knowledge and experience is necessary to design multichannel combiner systems with good technical and economical performance. The following aspects must be taken into account:

- power of the individual signals
- voltage of the individual signals
- frequency spacings (adjacent channels)
- requirements for mask filtering
- patch panels for emergency operation
- space consumption
- future frequency changes or extensions
- performance of combiners, patch panels, etc.

For the design of a complete transmitting station the specifications of the combiner system (insertion losses, matching) must be fixed in the planning stage.

SPINNER has a team of experienced RF engineers to design combiner systems. Please send us your requirements. We will prepare an offer with detailed technical and mechanical specifications similar to the data sheet at the right page.

The complete combiners system is shown in the picture below.




Example:

- UHF-Combiner for 3 x 5 kW DVB
- for adjacent channel operation
- with integrated 8 MHz DVB mask filters
- 4 port combiner bypass patch panels
- 4 port TX rerouting patch panels
- 6 port half antenna patch panel

DESIGN AND OFFERS

Mehrsenderweichen
Multi-Channel Combiners

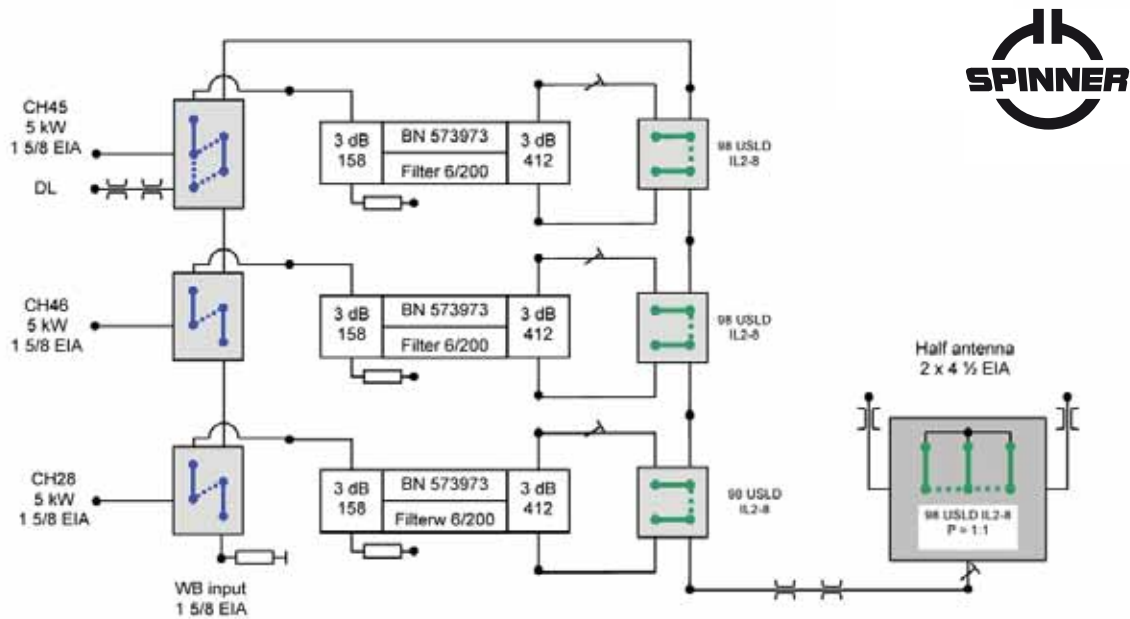

monitoring couplers NB inputs:
reference frequency center of channel
coupling forward 54 dB
coupling reflected 54 dB
(54 dB = 13 dBm @ 5kW)



monitoring couplers outputs:
reference frequency 666 MHz
coupling forward 54 dB
coupling reflected 54 dB
(54 dB = 13 dBm @ 5kW)

Mechanical Data							
Size (height x width x depth)		1,98 m x 2,29 m x 0,9 m					
Weight		appr. 1000 kg					
RF connectors inputs		1 5/8" EIA free upwards					
RF connectors antenna outputs		4 1/2" EIA free upwards					
Electrical Data of Antenna Patch Panel							
Frequency range		470 – 860 MHz					
Input Power		≤ 35 kW					
Peak voltage		19 kV					
Power splitter		P = 1:1, in phase					
Interlock loops		6 loops wired					
Electrical Data of Combiner							
channel	frequency in MHz	max. power in kW	filter tuning specification	insertion loss in dB (tolerance ± 0,05 dB)			max VSWR
				$f_{0, -3,8 \text{ MHz}}$	f_0	$f_{0, +3,8 \text{ MHz}}$	
28D	526 - 534	5	AS6006	0,90	0,40	0,90	1,06
45D	662 - 670	5	AS6006	1,10	0,60	2,60	1,08
46D	670 - 678	5	AS6007	1,50	0,50	1,50	1,08
WB input		3 x 5		0,30 - 0,50			
Minimum channel spacing		≥ 0					
Isolation between inputs		> 40 ± 5 dB					
DVB Mask filtering		attenuation in dB		$f_{0, +4,2 \text{ MHz}}$	$f_{0, +6 \text{ MHz}}$	$f_{0, +12 \text{ MHz}}$	
				≥ 4	≥ 20	≥ 40	
Scope of Supply							
1	6 port antenna patch panel P=1:1						
2	4+4 port combiner switching panel						
1	4+5 port combiner switching panel						
3	UHF CIB combiner 158-412 6/200						
6	monitoring couplers						
1	set of rigid lines						


SB – Go	UHF Combiner Mt. Grütten for 3 x 5 kW (expandable to 6 x 5 kW) with uncritical DVB mask filtering of the narrow band inputs	BN 574156 Version 1
---------	---	-------------------------------

CCS BAND 3 STRETCHLINE COMBINERS


- compact design
- suitable for ATV and DTV
- for 6 and 7 MHz channel bandwidth



BN 57 46 81



bottom mounting





wall mounting

Part number	BN 57 46 81
Frequency range	174 - 240 MHz
Channel spacing	≥ 2
Narrow band inputs	7-16 female
Average input power	≤ 2 kW
Mask filtering	no
Insertion loss	typically ≤ 0,5 dB
Output	1 5/8" EIA
Peak output voltage	≤ 3,5 kV
Isolation between inputs	≥ 32 dB
VSWR	≤ 1,06
Dimensions (L x W x H) mm	≈ 486 x 460 x 350
Weight	≈ 26 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products “

CCS BAND 3 CIB COMBINERS

- compact design
- suitable for ATV and DTV
- for 6 and 7 MHz channel bandwidth
- tuneable within the whole band 3 range
- temperature compensated





BN 57 49 46

Part number	BN 57 46 84	BN 57 46 85	BN 57 49 45	BN 57 49 46
Frequency range	174 - 230 MHz			
Channel spacing	≥ 2		≥ 1	
Narrow band input	1 5/8" EIA			
Filter type integrated	3/150 ≡ BN617118		4/150 ≡ BN617119	
Average input power	≤ 12 kW			
Mask filtering	no			
Insertion loss	AS3003 ≤ 0.15 dB		AS4004 ≤ 0.25 dB	
Wide band input	1 5/8" EIA	3 1/8" EIA male	1 5/8" EIA	3 1/8" EIA male
Average input power	≤ 12 kW	≤ 30 kW	≤ 12 kW	≤ 30 kW
	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input			
Mask filtering	no			
Insertion loss	≤ 0.05 dB			
Output	1 5/8" EIA	3 1/8" EIA male	1 5/8" EIA	3 1/8" EIA male
Peak output voltage	≤ 3.5 kV	≤ 12.7 kV	≤ 3.5 kV	≤ 12.7 kV
Isolation between inputs	≥ 35 dB			
VSWR	≤ 1.06			
Dimensions (L x W x H) mm	≈ 800 x 520 x 1420		≈ 800 x 520 x 1420	
Weight	≈ 115 kg		≈ 130 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

BAND 3 DAB STARPOINT COMBINERS

- compact design
- for 1.54 MHz block width
- integrated mask filters for DAB and T-DMB
- temperature compensated





Typical design


Part number	BN 57 49 04 with cross coupling	BN 57 46 17 without cross coupling	BN 57 46 80 with cross coupling	
Frequency range	174 - 240 MHz		170 - 240 MHz	
Block spacing	≥ 1			
Narrow band inputs	7-16 female			
Filter type integrated cavities/size	6/100 ≡ BN 617116	6/150 ≡ BN 617171	6/150 ≡ BN 617144	
Temperature stability	≤ 1 kHz / K			
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz			
DAB and T-DMB Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms}=13$ dB)			
Average input power	≤ 600 W	≤ 1.5 kW	≤ 1.6 kW	
Tuning instruction	AS6033	AS6010	AS6137	AS6149
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 1.0 dB $f_0 \pm 0.77$ MHz ≤ 2.3 dB $f_0 \pm 0.97$ MHz ≥ 15 dB $f_0 \pm 1.75$ MHz ≥ 45 dB $f_0 \pm 2.2$ MHz ≥ 53 dB $f_0 \pm 3.0$ MHz ≥ 53 dB	f_0 ≤ 1.0 dB $f_0 \pm 0.77$ MHz ≤ 1.6 dB $f_0 \pm 0.97$ MHz ≥ 8 dB $f_0 \pm 1.75$ MHz ≥ 43 dB $f_0 \pm 2.2$ MHz ≥ 53 dB $f_0 \pm 3.0$ MHz ≥ 73 dB	f_0 ≤ 0.75 dB $f_0 \pm 0.77$ MHz ≤ 1.6 dB $f_0 \pm 0.97$ MHz ≥ 15 dB $f_0 \pm 1.75$ MHz ≥ 45 dB $f_0 \pm 2.2$ MHz ≥ 58 dB $f_0 \pm 3.0$ MHz ≥ 52 dB	≤ 0.65 dB ≤ 0.90 dB n.d. ≥ 15 dB ≥ 40 dB ≥ 50 dB
Group delay variation	$\Delta\tau \leq 1200$ ns	$\Delta\tau \leq 700$ ns	$\Delta\tau \leq 1000$ ns	$\Delta\tau \leq 400$ ns
Output	7-16 female		1 5/8" EIA	
Isolation between inputs	≥ 35 dB			
VSWR	≤ 1.2			
Dimensions (L x W x H) mm	550 x 448 x 500	750 x 550 x 750		
Weight	≈ 55 kg	≈ 90 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

BAND 3 DAB CIB COMBINERS

- compact design
- for 1.54 MHz block width
- integrated mask filters for DAB and T-DMB
- adjacent block operation
- temperature compensated
- filters with cross coupling (notch function)



BN 57 49 69





BN 57 49 29


Part number	BN 57 49 69 CCS design	BN 57 49 29 19" design
Frequency range	174 - 240 MHz	
Block spacing	≥ 0	
Narrow band input	7-16 female	
Filter type integrated cavities/size	6/100 ≡ BN 617116	
Temperature stability	≤ 1 kHz / K	
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz	
DAB and T-DMB Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms}=13$ dB)	
Average input power	≤ 1.2 kW	
Tuning instruction	AS6033	
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 1.0 dB $f_0 \pm 0.77$ MHz ≤ 2.3 dB $f_0 \pm 0.97$ MHz ≥ 15 dB $f_0 \pm 1.75$ MHz ≥ 45 dB $f_0 \pm 2.2$ MHz ≥ 53 dB $f_0 \pm 3.0$ MHz ≥ 53 dB	
Group delay variation	$\Delta\tau \leq 1200$ ns	
Wide band input	7-16 female	
Average input power	≤ 3 kW Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input	
Mask filtering	no	
Insertion loss	≤ 0.1 dB (non adjacent)	
Output	7-16 female	
Peak output voltage	≤ 3.2 kV	
Isolation between inputs	≥ 35 dB	
VSWR	≤ 1.1	
Dimensions (L x W x H) mm	≈ 660 x 220 x 950	≈ 680 x 448 x 600
Weight	≈ 70 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

BAND 3 DAB CIB COMBINERS

- **CCS** compact design
- for 1.54 MHz block width
- integrated mask filters for DAB and T-DMB
- adjacent block operation
- temperature compensated
- filters without cross coupling (notch function)



BN 57 49 94





BN 57 49 96


Part number	BN 57 49 94	BN 57 49 96
Frequency range	170 - 240 MHz	
Block spacing	≥ 0	
Narrow band input	1 5/8" EIA	
Filter type integrated cavities/size	6/150 ≡ BN 61 71 71	
Temperature stability	≤ 1 kHz / K	
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz	
DAB and T-DMB Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms}=13$ dB)	
Average input power	≤ 3 kW	
Tuning instruction	AS6010	
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 1.0$ dB $f_0 \pm 0.77$ MHz ≤ 1.6 dB $f_0 \pm 0.97$ MHz ≥ 8 dB $f_0 \pm 1.75$ MHz ≥ 43 dB $f_0 \pm 2.2$ MHz ≥ 53 dB $f_0 \pm 3.0$ MHz ≥ 73 dB	
Group delay variation	$\Delta\tau \leq 700$ ns	
Wide band input	1 5/8" EIA	3 1/8" EIA male
Average input power	≤ 14 kW	≤ 30 kW
Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input	
Insertion loss	no	
	≤ 0.1 dB (non adjacent)	
Output	1 5/8" EIA	3 1/8" EIA male
Peak output voltage	≤ 7.7 kV	≤ 12.7 kV
Isolation between inputs	≥ 35 dB	
VSWR	≤ 1.1	
Dimensions (L x W x H) mm	800 x 390 x 1420	
Weight	≈ 120 kg	≈ 130 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

BAND 3 DAB CIB COMBINERS

- **CCS** compact design
- for 1.54 MHz block width
- integrated mask filters for DAB and T-DMB
- adjacent block operation
- temperature compensated
- filters with cross coupling (notch function)



BN 57 49 18





BN 57 49 16


Part number	BN 57 49 18	BN 57 49 16		
Frequency range	170 - 240 MHz			
Block spacing	≥ 0			
Narrow band input	1 5/8" EIA			
Filter type integrated cavities/size	6/150 ≡ BN 61 71 44			
Temperature stability	≤ 1 kHz / K			
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz			
DAB and T-DMB Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms}=13$ dB)			
Average input power	≤ 3.2 kW			
Tuning instruction	AS6137	AS6149		
Insertion loss & Mask filtering (alternative tuning on request)	f_0	≤ 0.75 dB	f_0	≤ 0.65 dB
	$f_0 \pm 0.77$ MHz	≤ 1.6 dB	$f_0 \pm 0.77$ MHz	≤ 0.90 dB
	$f_0 \pm 0.97$ MHz	≥ 15 dB	$f_0 \pm 0.97$ MHz	n.d.
	$f_0 \pm 1.75$ MHz	≥ 45 dB	$f_0 \pm 1.75$ MHz	≥ 15 dB
	$f_0 \pm 2.2$ MHz	≥ 58 dB	$f_0 \pm 2.2$ MHz	≥ 40 dB
	$f_0 \pm 3.0$ MHz	≥ 52 dB	$f_0 \pm 3.0$ MHz	≥ 50 dB
Group delay variation	$\Delta\tau \leq 1000$ ns	$\Delta\tau \leq 400$ ns		
Wide band input	1 5/8" EIA	3 1/8" EIA male		
Average input power	≤ 14 kW	≤ 30 kW		
Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input			
Insertion loss	no			
	≤ 0.1 dB (non adjacent)			
Output	1 5/8" EIA	3 1/8" EIA male		
Peak output voltage	≤ 7.7 kV	≤ 12.7 kV		
Isolation between inputs	≥ 35 dB			
VSWR	≤ 1.1			
Dimensions (L x W x H) mm	800 x 390 x 1420			
Weight	≈ 120 kg	≈ 130 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

BAND 3 DAB CIB COMBINERS

- **CCS** compact design
- for 1.54 MHz block width
- integrated mask filters for DAB and T-DMB
- adjacent block operation
- temperature compensated
- filters with cross coupling (notch function)



BN 57 49 19





BN 57 49 25

Part number	BN 57 49 19	BN 57 49 25
Frequency range	170 - 240 MHz	
Block spacing	≥ 0	
Narrow band input	1 5/8" EIA	
Filter type integrated cavities/size	8/150 ≡ BN 61 71 83	
Temperature stability	≤ 1 kHz / K	
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz	
DAB and T-DMB Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms}=13$ dB)	
Average input power	≤ 3.2 kW	
Tuning instruction	AS8027	
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 1.3 dB $f_0 \pm 0.77$ MHz ≤ 2.2 dB $f_0 \pm 0.97$ MHz ≥ 15 dB $f_0 \pm 1.75$ MHz ≥ 45 dB $f_0 \pm 2.2$ MHz ≥ 65 dB $f_0 \pm 3.0$ MHz ≥ 80 dB	
Group delay variation	$\Delta\tau \leq 1000$ ns	
Wide band input	1 5/8" EIA	3 1/8" EIA male
Average input power	≤ 14 kW	≤ 30 kW
Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input	
Insertion loss	no	
	≤ 0.1 dB (non adjacent)	
Output	1 5/8" EIA	3 1/8" EIA male
Peak output voltage	≤ 7.7 kV	≤ 12.7 kV
Isolation between inputs	≥ 35 dB	
VSWR	≤ 1.1	
Dimensions (L x W x H) mm	1000 x 390 x 1420	
Weight	≈ 150 kg	≈ 170 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

BAND 3 DAB CIB COMBINERS



- **CCS** compact design
- for 1.54 MHz block width
- integrated mask filters for DAB and T-DMB
- adjacent block operation
- temperature compensated
- filters without cross coupling (notch function)




Part number	BN 57 49 90
Frequency range	170 - 240 MHz
Block spacing	≥ 0
Narrow band input	1 5/8" EIA
Filter type integrated cavities/size	6/200 ≡ BN 61 71 11
Temperature stability	≤ 2 kHz / K
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz
DAB and T-DMB Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power	≤ 6 kW
Tuning instruction	AS6029
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.75$ dB $f_0 \pm 0.77$ MHz ≤ 1.20 dB $f_0 \pm 0.97$ MHz ≥ 8 dB $f_0 \pm 1.15$ MHz ≥ 16 dB $f_0 \pm 1.75$ MHz ≥ 43 dB $f_0 \pm 2.2$ MHz ≥ 53 dB $f_0 \pm 3.0$ MHz ≥ 73 dB
Group delay variation	$\Delta\tau \leq 800$ ns
Wide band input	3 1/8" EIA male
Average input power	≤ 30 kW Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input
Mask filtering	no
Insertion loss	≤ 0.1 dB (non adjacent)
Output	3 1/8" EIA male
Peak output voltage	≤ 12.7 kV
Isolation between inputs	≥ 35 dB
VSWR	≤ 1.1
Dimensions (L x W x H) mm	925 x 520 x 1420
Weight	≈ 200 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“

BAND 3 DAB CIB COMBINERS

- CCS compact design
- for 1.54 MHz block width
- integrated mask filters for DAB and T-DMB
- adjacent block operation
- temperature compensated
- filters with cross coupling (notch function)
- liquid cooled filter

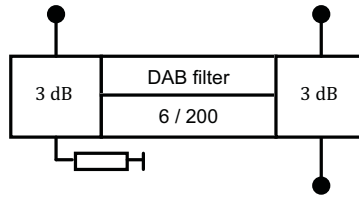

BN 57 49 92





BN 57 46 90


Part number	BN 57 49 92 natural cooling	BN 57 46 91 liquid cooling	BN 57 46 90 natural cooling
Frequency range	170 - 240 MHz		
Block spacing	≥ 0		
Narrow band input	1 5/8" EIA		
Filter type integrated cavities/size	6/200 ≡ BN 617108		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz		
DAB and T-DMB Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms}=13$ dB)		
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 6 kW	≤ 10.2 kW @ 0 - 500 m ≤ 9.0 kW @ 1400 m ≤ 8.0 kW @ 2100 m ≤ 7.0 kW @ 2800 m ≤ 6.0 kW @ 3600 m	≤ 6 kW
Tuning instruction	AS6019		AS6087
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 0.65 dB $f_0 \pm 0.77$ MHz ≤ 1.30 dB $f_0 \pm 0.97$ MHz ≥ 12 dB $f_0 \pm 1.15$ MHz ≥ 30 dB $f_0 \pm 1.75$ MHz ≥ 40 dB $f_0 \pm 2.20$ MHz ≥ 55 dB $f_0 \pm 3.00$ MHz ≥ 55 dB	f_0 ≤ 0.6 dB $f_0 \pm 0.77$ MHz ≤ 1.4 dB $f_0 \pm 0.97$ MHz ≥ 15 dB $f_0 \pm 1.15$ MHz n.d. $f_0 \pm 1.75$ MHz ≥ 45 dB $f_0 \pm 2.20$ MHz ≥ 50 dB $f_0 \pm 3.00$ MHz ≥ 50 dB	
Group delay variation	$\Delta\tau$ ≤ 1000 ns		$\Delta\tau$ ≤ 1200 ns
Wide band input	1 5/8" EIA		3 1/8" EIA male
Average input power	≤ 14 kW		≤ 30 kW
Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	no		
Insertion loss	≤ 0.1 dB (non adjacent)		
Output	1 5/8" EIA		3 1/8" EIA male
Peak output voltage	≤ 7.7 kV		≤ 12.7 kV
Isolation between inputs	≥ 35 dB		
VSWR	≤ 1.1		
Dimensions (L x W x H) mm	≈ 925 x 520 x 1420		
Weight	≈ 200 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

BAND 3 DAB CIB COMBINERS

- **CCS** compact design
- for 1.54 MHz block width
- integrated mask filters for DAB and T-DMB
- adjacent block operation
- temperature compensated
- filters with cross coupling (notch function)
- liquid cooled filter

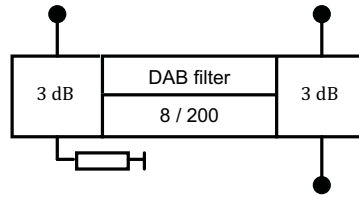

BN 57 49 07





BN 57 46 48

Part number	BN 57 49 07 natural cooling	BN 57 46 97 liquid cooling	BN 57 46 48 natural cooling
Frequency range	170 - 240 MHz		
Block spacing	≥ 0		
Narrow band input	1 5/8" EIA		
Filter type integrated cavities/size	8/200 ≡ BN 617113		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz		
DAB and T-DMB Mask filtering	DAB / T-DMB @ 1.54 MHz (\dot{U}/U_{rms} =13 dB)		
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 6 kW	≤ 10.2 kW @ 0 - 500 m ≤ 9.0 kW @ 1400 m ≤ 8.0 kW @ 2100 m ≤ 7.0 kW @ 2800 m ≤ 6.0 kW @ 3600 m	≤ 6 kW
Tuning instruction	AS8042		AS8075
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 0.7 dB $f_0 \pm 0.77$ MHz ≤ 1.3 dB $f_0 \pm 0.97$ MHz ≥ 15 dB $f_0 \pm 1.15$ MHz ≥ 30 dB $f_0 \pm 1.75$ MHz ≥ 50 dB $f_0 \pm 2.20$ MHz ≥ 65 dB $f_0 \pm 3.00$ MHz ≥ 65 dB	f_0 ≤ 0.75 dB $f_0 \pm 0.77$ MHz ≤ 1.55 dB $f_0 \pm 0.97$ MHz ≥ 28 dB $f_0 \pm 1.15$ MHz n.d. $f_0 \pm 1.75$ MHz ≥ 61 dB $f_0 \pm 2.20$ MHz ≥ 67 dB $f_0 \pm 3.00$ MHz ≥ 70 dB	
Group delay variation	$\Delta\tau$ ≤ 1200 ns		$\Delta\tau$ ≤ 1300 ns
Wide band input	1 5/8" EIA		3 1/8" EIA male
Average input power	≤ 14 kW		≤ 30 kW
Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	no		
	≤ 0.1 dB (non adjacent)		
Output	1 5/8" EIA		3 1/8" EIA male
Peak output voltage	≤ 7.7 kV		≤ 12.7 kV
Isolation between inputs	≥ 35 dB		
VSWR	≤ 1.1		
Dimensions (L x W x H) mm	≈ 1200 x 520 x 1420		
Weight	≈ 240 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

BAND 3 DTV STARPOINT COMBINERS

- compact design as 19" slide-in unit
- for 6, 7 and 8 MHz channel bandwidth
- integrated mask filters for DTV
- temperature compensated
- filters with cross coupling (notch function)
- tuneable within the whole band 3





Typical design

Part number	BN 57 46 69		
Frequency range	174 - 230 MHz		
Block spacing	≥ 1		
Narrow band inputs	7-16 female		
Filter type integrated cavities/size	6/100 ≡ BN 61 71 90		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz		
Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)
Average input power	≤ 1.1 kW	≤ 1.0 kW	≤ 900 W
Tuning instruction	AS6164	AS6162	AS6161
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.35$ dB $f_0 \pm 3.805 \leq 0.75$ dB $f_0 \pm 4.200 \geq 4.0$ dB $f_0 \pm 6.000 \geq 20$ dB $f_0 \pm 12.00 \geq 55$ dB	$f_0 \leq 0.35$ dB $f_0 \pm 3.35 \leq 0.80$ dB $f_0 \pm 3.50 \geq 1.2$ dB $f_0 \pm 3.65 \geq 4.0$ dB $f_0 \pm 5.00 \geq 20$ dB $f_0 \pm 12.0 \geq 55$ dB	$f_0 \leq 0.40$ dB $f_0 \pm 2.69 \leq 0.60$ dB $f_0 \pm 3.00 \geq 1.2$ dB $f_0 \pm 3.50 \geq 8.0$ dB $f_0 \pm 4.00 \geq 15$ dB $f_0 \pm 6.00 \geq 30$ dB $f_0 \pm 9.00 \geq 64$ dB
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 220$ ns
Output	7-16 female		
Isolation between inputs	≥ 35 dB		
VSWR	≤ 1.2		
Dimensions (L x W x H) mm	689 x 448 x 510		
Weight	≈ 55 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

BAND 3 DTV CIB COMBINERS

- compact design
- for 6, 7 and 8 MHz channel bandwidth
- integrated mask filters for DTV
- adjacent channel operation
- temperature compensated
- filters with cross coupling (notch function)
- tuneable within the whole band 3


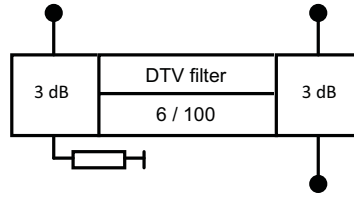


Part number	BN 57 46 68		
Frequency range	174 - 230 MHz		
Block spacing	≥ 0		
Narrow band input	7-16 female		
Filter type integrated cavities/size	6/100 ≡ BN 61 71 90		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz		
Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)
Average input power	≤ 2.2 kW	≤ 2.0 kW	≤ 1.8 kW
Tuning instruction	AS6164	AS6162	AS6161
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 0.35 dB $f_0 \pm 3.805$ ≤ 0.75 dB $f_0 \pm 4.200$ ≥ 4.0 dB $f_0 \pm 6.000$ ≥ 20 dB $f_0 \pm 12.00$ ≥ 55 dB	f_0 ≤ 0.35 dB $f_0 \pm 3.35$ ≤ 0.80 dB $f_0 \pm 3.50$ ≥ 1.3 dB $f_0 \pm 3.65$ ≥ 4.0 dB $f_0 \pm 5.00$ ≥ 20 dB $f_0 \pm 12.0$ ≥ 55 dB	f_0 ≤ 0.40 dB $f_0 \pm 2.69$ ≤ 0.60 dB $f_0 \pm 3.00$ ≥ 1.2 dB $f_0 \pm 3.50$ ≥ 8.0 dB $f_0 \pm 4.00$ ≥ 15 dB $f_0 \pm 6.00$ ≥ 30 dB $f_0 \pm 9.00$ ≥ 64 dB
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 220$ ns
Wide band input	7-16 female		
Average input power	≤ 3 kW Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
DTV Mask filtering	no		
Insertion loss	≤ 0.1 dB (non adjacent)		
Output	7-16 female		
Peak output voltage	≤ 3.2 kV		
Isolation between inputs	≥ 35 dB		
VSWR	≤ 1.1		
Dimensions (L x W x H) mm	≈ 690 x 460 x 560		
Weight	≈ 64 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		


Mehrsenderweichen
 Multi-Channel Combiners

BAND 3 DTV CIB COMBINERS

- compact design
- for 6, 7 and 8 MHz channel bandwidth
- integrated mask filters for DTV
- adjacent channel operation
- temperature compensated
- filters with cross coupling (notch function)
- tuneable within the whole band 3

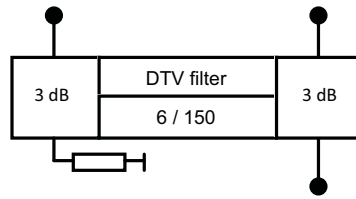

BN 57 49 36





BN 57 49 38


Part number	BN 57 49 36	BN 57 49 38
Frequency range	174 - 230 MHz	
Block spacing	≥ 0	
Narrow band input	1 5/8" EIA	
Filter type integrated cavities/size	6/150 ≡ BN 617126	
Temperature stability	≤ 2 kHz / K	
Mask filtering	DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)
Average input power	≤ 8 kW	≤ 7.2 kW
Tuning instruction	AS6044	AS6079
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 0.40 dB $f_0 \pm 3.35$ MHz ≤ 0.70 dB $f_0 \pm 3.50$ MHz ≥ 0.80 dB $f_0 \pm 3.65$ MHz ≥ 2.0 dB $f_0 \pm 5.00$ MHz ≥ 35 dB $f_0 \pm 12.0$ MHz ≥ 55 dB	f_0 ≤ 0.45 dB $f_0 \pm 2.69$ MHz ≤ 0.70 dB $f_0 \pm 3.00$ MHz ≥ 1.4 dB $f_0 \pm 3.50$ MHz ≥ 5.0 dB $f_0 \pm 4.00$ MHz ≥ 11 dB $f_0 \pm 6.00$ MHz ≥ 30 dB $f_0 \pm 9.00$ MHz ≥ 65 dB
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 200$ ns
Wide band input	1 5/8" EIA	3 1/8" EIA male
Average input power	≤ 14 kW	≤ 30 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input	
Insertion loss	no	
Insertion loss	≤ 0.1 dB (non adjacent)	
Output	1 5/8" EIA	3 1/8" EIA male
Peak output voltage	≤ 7.7 kV	≤ 12.7 kV
Isolation between inputs	≥ 35 dB	
VSWR	≤ 1.1	
Dimensions (L x W x H) mm	≈ 852 x 390 x 1420	≈ 852 x 390 x 1420
Weight	≈ 120 kg	≈ 130 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

BAND 3 DTV CIB COMBINERS

- compact design
- for 6, 7 and 8 MHz channel bandwidth
- integrated mask filters for DTV
- adjacent channel operation
- temperature compensated
- filters with cross coupling (notch function)
- tuneable within the whole band 3

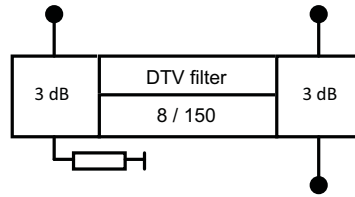

BN 57 46 86





BN 57 46 87

Part number	BN 57 46 86	BN 57 46 87
Frequency range	174 - 230 MHz	
Block spacing	≥ 0	
Narrow band input	1 5/8" EIA	
Filter type integrated cavities/size	8/150 ≡ BN 617191	
Temperature stability	≤ 2 kHz / K	
Mask filtering	DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)	
Average input power	≤ 7 kW	
Tuning instruction	AS8049	
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 0.45 dB $f_0 \pm 3.35$ MHz ≤ 0.95 dB $f_0 \pm 3.70$ MHz ≥ 15 dB $f_0 \pm 5.25$ MHz ≥ 30 dB $f_0 \pm 10.50$ MHz ≥ 50 dB $f_0 \pm 11.75$ MHz ≥ 55 dB	
Group delay variation	$\Delta\tau \leq 600$ ns	
Wide band input	1 5/8" EIA	3 1/8" EIA male
Average input power	≤ 14 kW	≤ 30 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input	
Insertion loss	no	
	≤ 0.1 dB (non adjacent)	
Output	1 5/8" EIA	3 1/8" EIA male
Peak output voltage	≤ 7.7 kV	≤ 12.7 kV
Isolation between inputs	≥ 35 dB	
VSWR	≤ 1.1	
Dimensions (L x W x H) mm	≈ 1000 x 390 x 1420	
Weight	≈ 155 kg	≈ 160 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

CCS UHF STRETCH LINE COMBINERS

- **CCS** compact design
- suitable for analogue and digital TV
- for 6, 7 and 8 MHz channel bandwidth





Typical design

Part number	BN 57 49 31	BN 57 46 34	BN 57 46 35	BN 57 46 36	BN 57 46 37
Frequency range	470 - 860 MHz				
Channel spacing	≥ 3				
Narrow band inputs	7-16 female	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male	4 1/2" EIA
Average input power	≤ 0.8 kW	≤ 7 kW	≤ 17.5 kW	≤ 23 kW	≤ 37 kW
DTV Mask filtering	no				
Insertion loss Channel spacing ≥ 3	typ. ≤ 0.7dB		typ. ≤ 0.5 dB		
Insertion loss Channel spacing ≥ 5	typ. ≤ 0.3 dB		typ. ≤ 0.1 dB		
Output Peak output voltage	7-16 female ≤ 2 kV	3 1/8" EIA male ≤ 12.5 kV	4 1/2" EIA ≤ 18 kV	6 1/8" EIA ≤ 22 kV	6 1/8" EIA ≤ 34 kV
Isolation between inputs	≥ 34 dB				
VSWR	≤ 1.06				
Dimensions (L x W x H) mm	600 x 483 x 90	900 x 390 x 1980		900 x 480 x 1980	
Weight	≈ 12 kg	≈ 62 kg	≈ 115 kg	≈ 170 kg	≈ 200 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“				

UHF STARPOINT COMBINERS

- compact design as 19" slide-in unit
- integrated mask filters for DTV
- applicable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- wall mount available

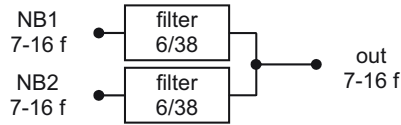


Typical design

Part number Front plate design	BN 57 46 55 C0002 ports at rear side								
Frequency range	470 - 860 MHz								
Channel spacing	≥ 1								
Narrow band inputs	7-16 female								
Filter type integrated cavities/size	6/38 ≡ BN 616501								
Temperature stability	≤ 3 kHz / K								
Harmonics attenuation	≥ 60 dB for f ≤ 1340 MHz								
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)		ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)		ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)				
Average input power	≤ 100 W		≤ 100 W		≤ 100 W				
Tuning instruction	AS6214		AS6180		AS6074				
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz		860 MHz		470 MHz 803 MHz				
	f_0	≤ 0.8 dB	≤ 1.0 dB	f_0	≤ 0.9 dB	≤ 1.4 dB	f_0	≤ 1.0 dB	≤ 1.2 dB
	$f_0 \pm 3.805$	≤ 1.8 dB	≤ 2.3 dB	$f_0 \pm 2.79$	≤ 1.8 dB	≤ 3.5 dB	$f_0 \pm 2.69$	≤ 1.7 dB	≤ 2.0 dB
	$f_0 \pm 3.885$	≤ 2.1 dB	≤ 2.6 dB	$f_0 \pm 3.00$	≥ 2 dB		$f_0 \pm 3.0$	≤ 2.9 dB	≤ 3.1 dB
	$f_0 \pm 4.2$	≥ 5 dB		$f_0 \pm 3.15$	≥ 5 dB		$f_0 \pm 3.5$	≥ 10 dB	
	$f_0 \pm 6.0$	≥ 17 dB		$f_0 \pm 4.5$	≥ 17 dB		$f_0 \pm 4.0$	≥ 15 dB	
	$f_0 \pm 12.0$	≥ 38 dB		$f_0 \pm 9.0$	≥ 38 dB		$f_0 \pm 6.0$	≥ 26 dB	
			$f_0 \pm 15.0$	≥ 48 dB		$f_0 \pm 9.0$	≥ 38 dB		
Group delay variation	$\Delta\tau \leq 300$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 200$ ns				
Output	7-16 female								
Isolation between inputs	≥ 35 dB								
VSWR	≤ 1.2								
Dimensions (L x W x H) mm	400 x 483 x 90 (2RU)								
Weight	≈ 9 kg								
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								



Mehrsenderweichen
Multi-Channel Combiners

CCS UHF STARPOINT COMBINERS

- **CCS** compact design
- integrated mask filters for DTV
- applicable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated




Typical design

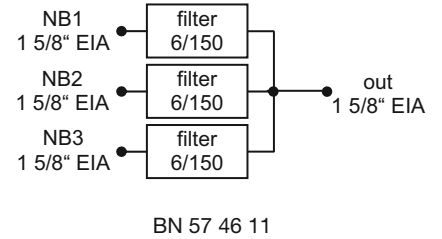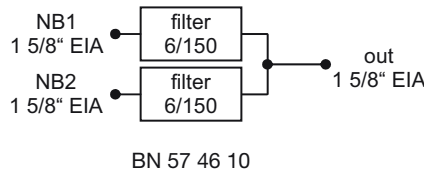


Part number	BN 57 46 10				BN 57 46 11				
Number of inputs	2-way				3-way				
Frequency range	470 - 860 MHz								
Channel spacing	≥ 1								
Narrow band inputs	1 5/8" EIA								
Filter type integrated cavities/size	6/150 ≡ BN 616518								
Temperature stability	≤ 2 kHz / K								
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz								
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)		ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)		DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)				
Average input power	≤ 2.5 kW		≤ 2.0 kW		≤ 2.25 kW				
Tuning instruction	AS6193		AS6184		AS6289				
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	820 MHz			
	f_0	≤ 0.4 dB	≤ 0.55 dB	f_0	≤ 0.5 dB	≤ 0.7 dB	f_0	≤ 0.45 dB	≤ 0.60 dB
	$f_0 \pm 3.805$	≤ 0.85 dB	≤ 1.3 dB	$f_0 \pm 2.79$	≤ 1.2 dB	≤ 1.6 dB	$f_0 \pm 3.2$	≤ 0.65 dB	≤ 0.95 dB
	$f_0 \pm 3.885$	≤ 1.05 dB	≤ 1.5 dB	$f_0 \pm 3.00$	≥ 3.5 dB		$f_0 \pm 4.2$	≥ 13 dB	
	$f_0 \pm 4.2$	≥ 4 dB		$f_0 \pm 3.15$	≥ 8 dB		$f_0 \pm 10.5$	≥ 38 dB	
	$f_0 \pm 6.0$	≥ 20 dB		$f_0 \pm 4.5$	≥ 23 dB				
	$f_0 \pm 12.0$	≥ 40 dB		$f_0 \pm 9.0$	≥ 48 dB				
			$f_0 \pm 15.0$	≥ 50 dB					
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 150$ ns				
Output	1 5/8" EIA male								
Isolation between inputs	≥ 35 dB								
VSWR	≤ 1.2								
Dimensions (L x W x H) mm	900 x 390 x 1200				900 x 780 x 1200				
Weight	≈ 80 kg				≈ 130 kg				
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								

CCS UHF STARPOINT COMBINERS


- **CCS** compact design
- for 6, 7 and 8 MHz channel bandwidth
- applicable within the whole UHF range
- integrated mask filters for DTV
- temperature compensated



Typical design

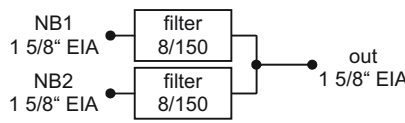

BN 57 46 12

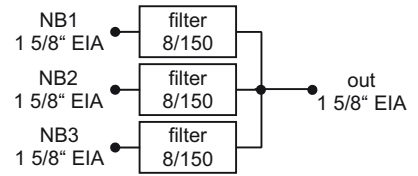


BN 57 46 13

Part number	BN 57 46 12		BN 57 46 13						
Number of inputs	2-way		3-way						
Frequency range	470 - 860 MHz								
Channel spacing	≥ 1								
Narrow band inputs	1 5/8" EIA								
Filter type integrated cavities/size	8/150 ≡ BN 616542								
Temperature stability	≤ 2 kHz / K								
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz								
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)						
Average input power	≤ 2.0 kW		≤ 1.6 kW	≤ 1.6 kW					
Tuning instruction	AS8071		AS8096	AS8094					
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz			
	f_0	≤ 0.5 dB	≤ 0.75 dB	f_0	≤ 0.6 dB	≤ 0.80 dB	f_0	≤ 0.8 dB	≤ 1.0 dB
	$f_0 \pm 3.805$	≤ 1.6 dB	≤ 2.2 dB	$f_0 \pm 2.79$	≤ 1.4 dB	≤ 1.85 dB	$f_0 \pm 2.69$	≤ 1.6 dB	≤ 1.7 dB
	$f_0 \pm 3.885$	≤ 1.8 dB	≤ 2.5 dB	$f_0 \pm 3.15$	≥ 15 dB		$f_0 \pm 3.00$	≤ 4.0 dB	
	$f_0 \pm 4.2$	≥ 15 dB		$f_0 \pm 4.5$	≥ 30 dB		$f_0 \pm 3.25$	≥ 18 dB	
	$f_0 \pm 6.0$	≥ 40 dB		$f_0 \pm 9.0$	≥ 55 dB		$f_0 \pm 9.00$	≥ 64 dB	
	$f_0 \pm 12.0$	≥ 55 dB							
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 400$ ns				
Output	1 5/8" EIA male								
Isolation between inputs	≥ 35 dB								
VSWR	≤ 1.2								
Dimensions (L x W x H) mm	900 x 390 x 1200		900 x 780 x 1200						
Weight	≈ 120 kg		≈ 175 kg						
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								


Mehrsenderweichen
Multi-Channel Combiners

UHF LOW POWER MANIFOLD COMBINERS

- 4 RU compact design as 19" slide-in unit
- suitable for analogue and digital TV
- applicable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated




Typical design

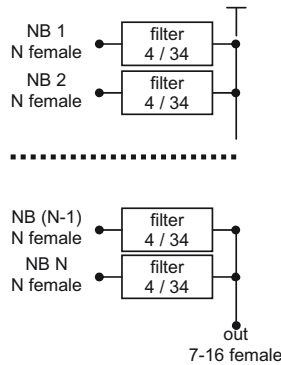


Part number	BN 57 45 82		BN 57 45 83		BN 57 45 84		BN 57 45 89	
Frequency range	470 - 860 MHz							
Channel spacing	≥ 2 (1 channel available on request)							
Narrow band inputs	N female							
Filter type integrated cavities/size	4/34 ≡ BN 616507							
Temperature stability	≤ 10 kHz / K							
Harmonics attenuation	≥ 50 dB for f ≤ 1500 MHz							
DTV Mask filtering	no							
Average input power / channel width	50 W per input / 8 MHz 45 W per input / 7 MHz 40 W per input / 6 MHz							
Number of inputs	2		3		4		5	
Insertion loss (varying with sequence) AS4054 for 8 MHz (Û/U _{rms} =13 dB)	f ₀	0.7 - 0.85 dB	f ₀	0.7 - 0.9 dB	f ₀	0.7 - 1.0 dB	f ₀	0.7 - 1.1 dB
	f ₀ ± 3.885	0.8 - 0.95 dB	f ₀ ± 3.885	0.8 - 1.0 dB	f ₀ ± 3.885	0.8 - 1.1 dB	f ₀ ± 3.885	0.8 - 1.2 dB
	f ₀ ± 12.0	≥ 17 dB	f ₀ ± 12.0	≥ 17 dB	f ₀ ± 12.0	≥ 17 dB	f ₀ ± 12.0	≥ 17 dB
Group delay variation	Δτ ≤ 100 ns							
Insertion loss (varying with sequence) AS4046 for 7 MHz (Û/U _{rms} =13 dB)	f ₀	0.75 - 0.9 dB	f ₀	0.75 - 0.95 dB	f ₀	0.75 - 1.05 dB	f ₀	0.75 - 1.15 dB
	f ₀ ± 3.325	0.85 - 1.0 dB	f ₀ ± 3.325	0.85 - 1.05 dB	f ₀ ± 3.325	0.85 - 1.15 dB	f ₀ ± 3.325	0.85 - 1.25 dB
	f ₀ ± 10.5	≥ 20 dB	f ₀ ± 10.5	≥ 20 dB	f ₀ ± 10.5	≥ 20 dB	f ₀ ± 10.5	≥ 20 dB
Group delay variation	Δτ ≤ 65 ns							
Insertion loss (varying with sequence) AS4029 for 6 MHz (Û/U _{rms} =11 dB)	f ₀	0.8 - 0.95 dB	f ₀	0.8 - 1.0 dB	f ₀	0.8 - 1.1 dB	f ₀	0.8 - 1.2 dB
	f ₀ ± 2.885	0.9 - 1.05 dB	f ₀ ± 2.885	0.9 - 1.1 dB	f ₀ ± 2.885	0.9 - 1.2 dB	f ₀ ± 2.885	0.9 - 1.3 dB
	f ₀ ± 9.0	≥ 25 dB	f ₀ ± 9.0	≥ 25 dB	f ₀ ± 9.0	≥ 25 dB	f ₀ ± 9.0	≥ 25 dB
Group delay variation	Δτ ≤ 30 ns							
Output	7-16 female							
Peak output voltage	≤ 2 kV							
Isolation between inputs	≥ 25 dB							
VSWR (one WB channel)	≤ 1.2							
Dimensions (L x W x H) mm	340 x 483 x 177 (4RU)							
Weight	≈ 5 kg		≈ 8 kg		≈ 9 kg		≈ 10 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“							

UHF LOW POWER MANIFOLD COMBINERS

- 4 RU compact design as 19" slide-in unit
- suitable for analogue and digital TV
- applicable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated




Typical design

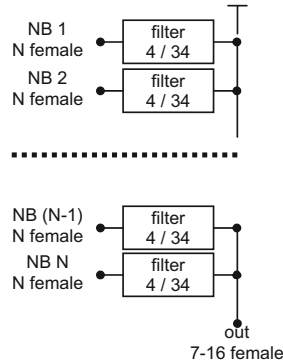


Part number	BN 57 45 86		BN 57 45 87		BN 57 45 88		BN 57 45 89	
Frequency range	470 - 860 MHz							
Channel spacing	≥ 2 (1 channel available on request)							
Narrow band inputs	N female							
Filter type integrated cavities/size	4/34 ≡ BN 616507							
Temperature stability	≤ 10 kHz / K							
Harmonics attenuation	≥ 50 dB for f ≤ 1500 MHz							
DTV Mask filtering	no							
Average input power / channel width	50 W per input / 8 MHz 45 W per input / 7 MHz 40 W per input / 6 MHz							
Number of inputs	6		7		8		9	
Insertion loss (varying with sequence) AS4054 for 8 MHz (Û/U _{rms} =13 dB)	f ₀	0.7 - 1.15 dB	f ₀	0.7 - 1.2 dB	f ₀	0.7 - 1.3 dB	f ₀	0.7 - 1.4 dB
	f ₀ ± 3.885	0.8 - 1.25 dB	f ₀ ± 3.885	0.8 - 1.3 dB	f ₀ ± 3.885	0.8 - 1.4 dB	f ₀ ± 3.885	0.8 - 1.5 dB
	f ₀ ± 12.0	≥ 17 dB	f ₀ ± 12.0	≥ 17 dB	f ₀ ± 12.0	≥ 17 dB	f ₀ ± 12.0	≥ 17 dB
Group delay variation	Δτ ≤ 100 ns							
Insertion loss (varying with sequence) AS4046 for 7 MHz (Û/U _{rms} =13 dB)	f ₀	0.75 - 1.2 dB	f ₀	0.75 - 1.25 dB	f ₀	0.75 - 1.35 dB	f ₀	0.75 - 1.45 dB
	f ₀ ± 3.325	0.85 - 1.3 dB	f ₀ ± 3.325	0.85 - 1.35 dB	f ₀ ± 3.325	0.85 - 1.45 dB	f ₀ ± 3.325	0.85 - 1.45 dB
	f ₀ ± 10.5	≥ 20 dB	f ₀ ± 10.5	≥ 20 dB	f ₀ ± 10.5	≥ 20 dB	f ₀ ± 10.5	≥ 20 dB
Group delay variation	Δτ ≤ 65 ns							
Insertion loss (varying with sequence) AS4029 for 6 MHz (Û/U _{rms} =11 dB)	f ₀	0.8 - 1.25 dB	f ₀	0.8 - 1.3 dB	f ₀	0.8 - 1.4 dB	f ₀	0.8 - 1.5 dB
	f ₀ ± 2.885	0.9 - 1.35 dB	f ₀ ± 2.885	0.9 - 1.4 dB	f ₀ ± 2.885	0.9 - 1.5 dB	f ₀ ± 2.885	0.9 - 1.6 dB
	f ₀ ± 9.0	≥ 25 dB	f ₀ ± 9.0	≥ 25 dB	f ₀ ± 9.0	≥ 25 dB	f ₀ ± 9.0	≥ 25 dB
Group delay variation	Δτ ≤ 30 ns							
Output	7-16 female							
Average output power	≤ 450 W							
Peak output voltage	≤ 2 kV							
Isolation between inputs	≥ 25 dB							
VSWR (one WB channel)	≤ 1.2							
Dimensions (L x W x H) mm	340 x 483 x 177 (4RU)							
Weight	≈ 12 kg		≈ 13 kg		≈ 15 kg		≈ 18 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“							

UHF MANIFOLD COMBINERS


- compact design as 19" slide-in unit
- integrated mask filters for DTV
- applicable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated



Typical design




Typical design




Part number	BN 57 55 62		BN 57 55 63		BN 57 55 64		BN 57 55 65	
Frequency range	470 - 860 MHz							
Channel spacing	≥ 1							
Narrow band inputs	N female							
Filter type integrated cavities/size	6/40 ≡ BN 616660							
Temperature stability	≤ 2 kHz / K							
Harmonics attenuation	≥ 50 dB for f ≤ 1400 MHz							
Average input power / channel width	130 W per input / 8 MHz 100 W per input / 6 MHz							
Number of inputs	2		3		4		5	
DVB-T @ 8 MHz (U/U _{rms} = 13 dB)	f ₀	0.8 - 1.0 dB	f ₀	0.9 - 1.1 dB	f ₀	0.9 - 1.2 dB	f ₀	0.9 - 1.3 dB
	f ₀ ± 3.805	2.0 - 2.5 dB	f ₀ ± 3.805	2.0 - 2.6 dB	f ₀ ± 3.805	2.0 - 2.7 dB	f ₀ ± 3.805	2.0 - 2.8 dB
	f ₀ ± 3.885	2.3 - 2.8 dB	f ₀ ± 3.885	2.3 - 2.9 dB	f ₀ ± 3.885	2.3 - 3.0 dB	f ₀ ± 3.885	2.3 - 3.1 dB
AS6361	f ₀ ± 4.2	≥ 4 dB	f ₀ ± 4.2	≥ 4 dB	f ₀ ± 4.2	≥ 4 dB	f ₀ ± 4.2	≥ 4 dB
Insertion loss & Mask filtering	f ₀ ± 6	≥ 20 dB	f ₀ ± 6	≥ 20 dB	f ₀ ± 6	≥ 20 dB	f ₀ ± 6	≥ 20 dB
	f ₀ ± 12	≥ 40 dB	f ₀ ± 12	≥ 40 dB	f ₀ ± 12	≥ 40 dB	f ₀ ± 12	≥ 40 dB
Group delay variation	Δτ ≤ 350 ns							
ISDB-T @ 6 MHz (U/U _{rms} = 13 dB)	f ₀	1.1 - 1.4 dB	f ₀	1.1 - 1.5 dB	f ₀	1.1 - 1.6 dB	f ₀	1.1 - 1.7 dB
	f ₀ ± 2.79	2.7 - 3.3 dB	f ₀ ± 2.79	2.7 - 3.4 dB	f ₀ ± 2.79	2.7 - 3.5 dB	f ₀ ± 2.79	2.7 - 3.6 dB
	f ₀ ± 3	≥ 4 dB	f ₀ ± 3	≥ 4 dB	f ₀ ± 3	≥ 4 dB	f ₀ ± 3	≥ 4 dB
AS6368	f ₀ ± 3.15	≥ 8 dB	f ₀ ± 3.15	≥ 8 dB	f ₀ ± 3.15	≥ 8 dB	f ₀ ± 3.15	≥ 8 dB
Insertion loss & Mask filtering	f ₀ ± 4.5	≥ 22 dB	f ₀ ± 4.5	≥ 22 dB	f ₀ ± 4.5	≥ 22 dB	f ₀ ± 4.5	≥ 22 dB
	f ₀ ± 9	≥ 50 dB	f ₀ ± 9	≥ 50 dB	f ₀ ± 9	≥ 50 dB	f ₀ ± 9	≥ 50 dB
	f ₀ ± 15	≥ 50 dB	f ₀ ± 15	≥ 50 dB	f ₀ ± 15	≥ 50 dB	f ₀ ± 15	≥ 50 dB
Group delay variation	Δτ ≤ 350 ns							
ATSC @ 6 MHz (U/U _{rms} = 11 dB)	f ₀	1.3 - 1.8 dB	f ₀	1.3 - 1.9 dB	f ₀	1.3 - 2.0 dB	f ₀	1.3 - 2.1 dB
	f ₀ ± 2.69	2.3 - 2.8 dB	f ₀ ± 2.69	2.3 - 2.8 dB	f ₀ ± 2.69	2.3 - 2.9 dB	f ₀ ± 2.69	2.3 - 3.0 dB
	f ₀ ± 3.25	≥ 4 dB	f ₀ ± 3.25	≥ 4 dB	f ₀ ± 3.25	≥ 4 dB	f ₀ ± 3.25	≥ 4 dB
AS6362	f ₀ ± 3.5	≥ 8 dB	f ₀ ± 3.5	≥ 8 dB	f ₀ ± 3.5	≥ 8 dB	f ₀ ± 3.5	≥ 8 dB
Insertion loss & Mask filtering	f ₀ ± 4	≥ 15 dB	f ₀ ± 4	≥ 15 dB	f ₀ ± 4	≥ 15 dB	f ₀ ± 4	≥ 15 dB
	f ₀ ± 6	≥ 40 dB	f ₀ ± 6	≥ 40 dB	f ₀ ± 6	≥ 40 dB	f ₀ ± 6	≥ 40 dB
	f ₀ ± 9	≥ 65 dB	f ₀ ± 9	≥ 65 dB	f ₀ ± 9	≥ 65 dB	f ₀ ± 9	≥ 65 dB
Group delay variation	Δτ ≤ 200 ns							
Output	7-16 female							
Average output power	≤ 600 W							
Peak output voltage	≤ 2 kV							
Isolation between inputs	≥ 35 dB							
VSWR	≤ 1.2							
Dimensions (L x W x H) mm	300 x 483 x 177 (4RU)						300 x 483 x 355 (8RU)	
Weight	≈ 9 kg		≈ 13 kg		≈ 17 kg		≈ 21 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“							

UHF MANIFOLD COMBINERS


- compact design as 19" slide-in unit
- integrated mask filters for DTV
- applicable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated



Typical design



Typical design




Mehrsenderweichen
 Multi-Channel Combiners


Part number	BN 57 55 66		BN 57 55 67		BN 57 55 68	
Frequency range	470 - 860 MHz					
Channel spacing	≥ 1					
Narrow band inputs	N female					
Filter type integrated cavities/size	6/40 ≡ BN 616660					
Temperature stability	≤ 2 kHz / K					
Harmonics attenuation	≥ 50 dB for f ≤ 1400 MHz					
Average input power / channel width	130 W per input / 8 MHz 100 W per input / 6 MHz					
Number of inputs	6		7		8	
DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)	f_0	0.8 - 1.3 dB	f_0	0.9 - 1.4 dB	f_0	0.9 - 1.5 dB
	$f_0 \pm 3.805$	2.0 - 2.8 dB	$f_0 \pm 3.805$	2.0 - 2.9 dB	$f_0 \pm 3.805$	2.0 - 3.0 dB
AS6361	$f_0 \pm 3.885$	2.3 - 3.1 dB	$f_0 \pm 3.885$	2.3 - 3.2 dB	$f_0 \pm 3.885$	2.3 - 3.3 dB
Insertion loss & Mask filtering	$f_0 \pm 4.2$	≥ 4 dB	$f_0 \pm 4.2$	≥ 4 dB	$f_0 \pm 4.2$	≥ 4 dB
	$f_0 \pm 6$	≥ 20 dB	$f_0 \pm 6$	≥ 20 dB	$f_0 \pm 6$	≥ 20 dB
	$f_0 \pm 12$	≥ 40 dB	$f_0 \pm 12$	≥ 40 dB	$f_0 \pm 12$	≥ 40 dB
Group delay variation	$\Delta\tau \leq 350$ ns					
ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)	f_0	1.1 - 1.7 dB	f_0	1.1 - 1.8 dB	f_0	1.1 - 1.9 dB
	$f_0 \pm 2.79$	2.7 - 3.6 dB	$f_0 \pm 2.79$	2.7 - 3.7 dB	$f_0 \pm 2.79$	2.7 - 3.8 dB
	$f_0 \pm 3$	≥ 4 dB	$f_0 \pm 3$	≥ 4 dB	$f_0 \pm 3$	≥ 4 dB
AS6368	$f_0 \pm 3.15$	≥ 8 dB	$f_0 \pm 3.15$	≥ 8 dB	$f_0 \pm 3.15$	≥ 8 dB
Insertion loss & Mask filtering	$f_0 \pm 4.5$	≥ 22 dB	$f_0 \pm 4.5$	≥ 22 dB	$f_0 \pm 4.5$	≥ 22 dB
	$f_0 \pm 9$	≥ 50 dB	$f_0 \pm 9$	≥ 50 dB	$f_0 \pm 9$	≥ 50 dB
	$f_0 \pm 15$	≥ 50 dB	$f_0 \pm 15$	≥ 50 dB	$f_0 \pm 15$	≥ 50 dB
Group delay variation	$\Delta\tau \leq 350$ ns					
ATSC @ 6 MHz ($\dot{U}/U_{rms} = 11$ dB)	f_0	1.3 - 2.1 dB	f_0	1.3 - 2.2 dB	f_0	1.3 - 2.3 dB
	$f_0 \pm 2.69$	2.3 - 3.0 dB	$f_0 \pm 2.69$	2.3 - 3.1 dB	$f_0 \pm 2.69$	2.3 - 3.2 dB
	$f_0 \pm 3.25$	≥ 4 dB	$f_0 \pm 3.25$	≥ 4 dB	$f_0 \pm 3.25$	≥ 4 dB
AS6362	$f_0 \pm 3.5$	≥ 8 dB	$f_0 \pm 3.5$	≥ 8 dB	$f_0 \pm 3.5$	≥ 8 dB
Insertion loss & Mask filtering	$f_0 \pm 4$	≥ 15 dB	$f_0 \pm 4$	≥ 15 dB	$f_0 \pm 4$	≥ 15 dB
	$f_0 \pm 6$	≥ 40 dB	$f_0 \pm 6$	≥ 40 dB	$f_0 \pm 6$	≥ 40 dB
	$f_0 \pm 9$	≥ 65 dB	$f_0 \pm 9$	≥ 65 dB	$f_0 \pm 9$	≥ 65 dB
Group delay variation	$\Delta\tau \leq 200$ ns					
Output	7-16 female					
Average output power	≤ 600 W					
Peak output voltage	≤ 2 kV					
Isolation between inputs	≥ 35 dB					
VSWR	≤ 1.2					
Dimensions (L x W x H) mm	300 x 483 x 355 (8RU)					
Weight	≈ 25 kg		≈ 29 kg		≈ 32 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

UHF MANIFOLD COMBINERS

- compact design as 19" slide-in unit
- integrated mask filters for DTV
- applicable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated




Typical design




Part number	BN 57 49 12 C0003	BN 57 49 13 C0003	BN 57 49 14 C0003	BN 57 49 11 C0003
Frequency range	470 - 860 MHz			
Channel spacing	≥ 1			
Narrow band inputs	7-16 female			
Filter type integrated cavities/size	6/84 ≡ BN 616402			
Temperature stability	≤ 2 kHz / K			
Harmonics attenuation	≥ 50 dB for f ≤ 950 MHz			
Average input power / channel width	750 W per input / 8 MHz 675 W per input / 7 MHz 600 W per input / 6 MHz			
Number of inputs	2	3	4	5
DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)	f_0 ≤ 0.5 - 0.6 dB $f_0 \pm 3.805$ ≤ 1.2 - 1.5 dB $f_0 \pm 3.885$ ≤ 1.3 - 1.6 dB	f_0 0.5 - 0.8 dB $f_0 \pm 3.805$ 1.3 - 1.6 dB $f_0 \pm 3.885$ 1.4 - 1.7 dB	f_0 0.5 - 1.0 dB $f_0 \pm 3.805$ 1.3 - 1.9 dB $f_0 \pm 3.885$ 1.4 - 2.0 dB	f_0 0.5 - 1.1 dB $f_0 \pm 3.805$ 1.3 - 2.0 dB $f_0 \pm 3.885$ 1.4 - 2.1 dB
AS6186 Insertion loss & Mask filtering	$f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6$ ≥ 20 dB $f_0 \pm 12$ ≥ 40 dB	$f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6$ ≥ 20 dB $f_0 \pm 12$ ≥ 40 dB	$f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6$ ≥ 20 dB $f_0 \pm 12$ ≥ 40 dB	$f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6$ ≥ 20 dB $f_0 \pm 12$ ≥ 40 dB
Group delay variation	$\Delta\tau \leq 300$ ns			
ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)	f_0 0.6 - 0.8 dB $f_0 \pm 2.79$ 1.6 - 2.2 dB $f_0 \pm 3$ ≥ 4 dB $f_0 \pm 3.15$ ≥ 8 dB $f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	f_0 0.6 - 0.9 dB $f_0 \pm 2.79$ 1.7 - 2.3 dB $f_0 \pm 3$ ≥ 4 dB $f_0 \pm 3.15$ ≥ 8 dB $f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	f_0 0.6 - 1.1 dB $f_0 \pm 2.79$ 1.7 - 2.5 dB $f_0 \pm 3$ ≥ 4 dB $f_0 \pm 3.15$ ≥ 8 dB $f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	f_0 0.6 - 1.2 dB $f_0 \pm 2.79$ 1.7 - 2.6 dB $f_0 \pm 3$ ≥ 4 dB $f_0 \pm 3.15$ ≥ 8 dB $f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB
AS6182 Insertion loss & Mask filtering	$f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	$f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	$f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	$f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB
Group delay variation	$\Delta\tau \leq 500$ ns			
ATSC @ 6 MHz ($\dot{U}/U_{rms} = 11$ dB)	f_0 ≤ 0.7 - 0.9 dB $f_0 \pm 2.69$ ≤ 1.1 - 1.55 dB $f_0 \pm 3$ ≤ 1.9 - 2.45 dB $f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 3.5$ ≥ 8 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB	f_0 ≤ 0.7 - 1.0 dB $f_0 \pm 2.69$ ≤ 1.2 - 1.7 dB $f_0 \pm 3$ ≤ 1.9 - 2.6 dB $f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 3.5$ ≥ 8 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB	f_0 ≤ 0.7 - 1.2 dB $f_0 \pm 2.69$ ≤ 1.2 - 1.8 dB $f_0 \pm 3$ ≤ 1.9 - 2.7 dB $f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 3.5$ ≥ 8 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB	f_0 ≤ 0.7 - 1.3 dB $f_0 \pm 2.69$ ≤ 1.2 - 1.9 dB $f_0 \pm 3$ ≤ 1.9 - 2.8 dB $f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 3.5$ ≥ 8 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB
AS6156 Insertion loss & Mask filtering	$f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 3.5$ ≥ 8 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB	$f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 3.5$ ≥ 8 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB	$f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 3.5$ ≥ 8 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB	$f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 3.5$ ≥ 8 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB
Group delay variation	$\Delta\tau \leq 200$ ns			
Output	1 5/8" EIA			
Isolation between inputs	≥ 35 dB			
VSWR	≤ 1.17			
Dimensions (L x W x H) mm	640 x 483 x 354 (8RU)	640 x 483 x 532 (12RU)	640 x 483 x 809 (16RU)	640 x 483 x 888 (20RU)
Weight	≈ 26 kg	≈ 38 kg	≈ 51 kg	≈ 64 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

UHF MANIFOLD COMBINERS

- compact design as 19" slide-in unit
- integrated mask filters for DTV
- applicable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated





Typical design




Part number	BN 57 49 22 C0003	BN 57 49 23 C0003	BN 57 49 24 C0003	BN 57 49 21 C0003
Frequency range	470 - 860 MHz			
Channel spacing	≥ 1			
Narrow band inputs	7-16 female			
Filter type integrated cavities/size	8/84 ≡ BN 616403			
Temperature stability	≤ 2 kHz / K			
Harmonics attenuation	≥ 50 dB for f ≤ 950 MHz			
Average input power / channel width	750 W per input / 8 MHz 675 W per input / 7 MHz 600 W per input / 6 MHz			
Number of inputs	2	3	4	5
DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)	$f_0 \leq 0.6 - 0.75$ dB $f_0 \pm 3.805 \leq 1.8 - 2.2$ dB $f_0 \pm 3.885 \leq 2.1 - 2.6$ dB	$f_0 \leq 0.6 - 0.9$ dB $f_0 \pm 3.805 \leq 1.8 - 2.3$ dB $f_0 \pm 3.885 \leq 2.1 - 2.7$ dB	$f_0 \leq 0.6 - 1.0$ dB $f_0 \pm 3.805 \leq 1.8 - 2.4$ dB $f_0 \pm 3.885 \leq 2.1 - 2.8$ dB	$f_0 \leq 0.6 - 1.1$ dB $f_0 \pm 3.805 \leq 1.8 - 2.5$ dB $f_0 \pm 3.885 \leq 2.1 - 2.9$ dB
AS8068 Insertion loss & Mask filtering	$f_0 \pm 4.2 \geq 15$ dB $f_0 \pm 6 \geq 40$ dB $f_0 \pm 12 \geq 55$ dB	$f_0 \pm 4.2 \geq 15$ dB $f_0 \pm 6 \geq 40$ dB $f_0 \pm 12 \geq 55$ dB	$f_0 \pm 4.2 \geq 15$ dB $f_0 \pm 6 \geq 40$ dB $f_0 \pm 12 \geq 55$ dB	$f_0 \pm 4.2 \geq 15$ dB $f_0 \pm 6 \geq 40$ dB $f_0 \pm 12 \geq 55$ dB
Group delay variation	$\Delta\tau \leq 600$ ns			
ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)	$f_0 0.7 - 1.3$ dB $f_0 \pm 2.79 1.8 - 3.1$ dB $f_0 \pm 3.15 \geq 15$ dB $f_0 \pm 4.5 \geq 30$ dB $f_0 \pm 9 \geq 55$ dB	$f_0 0.7 - 1.4$ dB $f_0 \pm 2.79 1.8 - 3.2$ dB $f_0 \pm 3.15 \geq 15$ dB $f_0 \pm 4.5 \geq 30$ dB $f_0 \pm 9 \geq 55$ dB	$f_0 0.7 - 1.5$ dB $f_0 \pm 2.79 1.8 - 3.3$ dB $f_0 \pm 3.15 \geq 15$ dB $f_0 \pm 4.5 \geq 30$ dB $f_0 \pm 9 \geq 55$ dB	$f_0 0.7 - 1.6$ dB $f_0 \pm 2.79 1.8 - 3.4$ dB $f_0 \pm 3.15 \geq 15$ dB $f_0 \pm 4.5 \geq 30$ dB $f_0 \pm 9 \geq 55$ dB
AS8091 Insertion loss & Mask filtering	$f_0 \pm 4.5 \geq 30$ dB $f_0 \pm 9 \geq 55$ dB	$f_0 \pm 4.5 \geq 30$ dB $f_0 \pm 9 \geq 55$ dB	$f_0 \pm 4.5 \geq 30$ dB $f_0 \pm 9 \geq 55$ dB	$f_0 \pm 4.5 \geq 30$ dB $f_0 \pm 9 \geq 55$ dB
Group delay variation	$\Delta\tau \leq 500$ ns			
ATSC @ 6 MHz ($\dot{U}/U_{rms} = 11$ dB)	$f_0 \leq 0.9 - 1.3$ dB $f_0 \pm 2.69 \leq 1.9 - 2.7$ dB $f_0 \pm 3 \geq 3$ dB $f_0 \pm 3.25 \geq 18$ dB $f_0 \pm 9 \geq 64$ dB	$f_0 \leq 0.9 - 1.4$ dB $f_0 \pm 2.69 \leq 1.9 - 2.8$ dB $f_0 \pm 3 \geq 3$ dB $f_0 \pm 3.25 \geq 18$ dB $f_0 \pm 9 \geq 64$ dB	$f_0 \leq 0.9 - 1.5$ dB $f_0 \pm 2.69 \leq 1.9 - 2.9$ dB $f_0 \pm 3 \geq 3$ dB $f_0 \pm 3.25 \geq 18$ dB $f_0 \pm 9 \geq 64$ dB	$f_0 \leq 0.9 - 1.6$ dB $f_0 \pm 2.69 \leq 1.9 - 3.0$ dB $f_0 \pm 3 \geq 3$ dB $f_0 \pm 3.25 \geq 18$ dB $f_0 \pm 9 \geq 64$ dB
AS8051 Insertion loss & Mask filtering	$f_0 \pm 3 \geq 3$ dB $f_0 \pm 3.25 \geq 18$ dB $f_0 \pm 9 \geq 64$ dB	$f_0 \pm 3 \geq 3$ dB $f_0 \pm 3.25 \geq 18$ dB $f_0 \pm 9 \geq 64$ dB	$f_0 \pm 3 \geq 3$ dB $f_0 \pm 3.25 \geq 18$ dB $f_0 \pm 9 \geq 64$ dB	$f_0 \pm 3 \geq 3$ dB $f_0 \pm 3.25 \geq 18$ dB $f_0 \pm 9 \geq 64$ dB
Group delay variation	$\Delta\tau \leq 400$ ns			
Output	1 5/8" EIA			
Isolation between inputs	≥ 35 dB			
VSWR	≤ 1.17			
Dimensions (L x W x H) mm	720 x 483 x 354 (8RU)	720 x 483 x 532 (12RU)	720 x 483 x 809 (16RU)	720 x 483 x 888 (20RU)
Weight	≈ 34 kg	≈ 51 kg	≈ 68 kg	≈ 85 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

UHF CIB COMBINERS


- 1 RU compact design as 19" slide-in unit
- suitable for analogue and digital TV
- tuneable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- wall mount available



BN 57 46 05

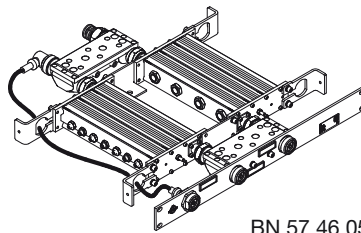

BN 57 46 05 C0001


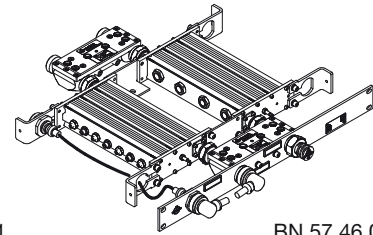


BN 57 46 05 C0002


Part number	BN 57 46 05		BN 57 46 05 C0001		BN 57 46 05 C0002	
Front plate design	without front plate		ports at front side		ports at rear side	
Frequency range	470 - 860 MHz					
Channel spacing	≥ 1					
Narrow band input	7-16 female					
Filter type integrated cavities/size	4/34 ≡ BN 616507					
Temperature stability	≤ 10 kHz / K					
Harmonics attenuation	≥ 50 dB for f ≤ 1500 MHz					
DTV mask filtering	no					
Channel width	8 MHz (Û/U _{rms} =13 dB)		7 MHz (Û/U _{rms} =13 dB)		6 MHz (Û/U _{rms} =11 dB)	
Average input power	≤ 100 W		≤ 90 W		≤ 80 W	
Tuning instruction	AS4054		AS4046		AS4029	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz
	f ₀ ≤ 0.8 dB	≤ 0.7 dB	f ₀ ≤ 0.85 dB	≤ 0.75 dB	f ₀ ≤ 0.9dB	≤ 0.8 dB
	f ₀ ± 3.805 ≤ 0.9 dB	≤ 0.8 dB	f ₀ ± 3.2 ≤ 0.95 dB	≤ 0.85 dB	f ₀ ± 2.885 ≤ 1.0 dB	≤ 0.9 dB
	f ₀ ± 3.885 ≤ 0.9 dB	≤ 0.8 dB	f ₀ ± 10.5 ≥ 20 dB		f ₀ ± 9 ≤ 25 dB	
	f ₀ ± 12 ≥ 17 dB					
Group delay variation	Δτ ≤ 100 ns		Δτ ≤ 65 ns		Δτ ≤ 30 ns	
Wide band input	7-16 female					
Average input power	600 W Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input					
DTV Mask filtering	no					
Insertion loss	≤ 0.1 dB (non adjacent)					
Output	7-16 female					
Peak output voltage	1.6 kV					
Isolation between inputs	≥ 35 dB					
VSWR (one WB channel)	≤ 1.1					
Dimensions (L x W x H) mm	471 x 483 x 45 (1RU)					
Weight	≈ 5.5 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

UHF CIB COMBINERS


- 2-3 RU compact design as 19" slide-in unit
- adjacent channel operation
- integrated mask filters for DTV
- tuneable within the whole UHF range
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- wall mount available




BN 57 46 06



BN 57 46 06 C0001



BN 57 46 06 C0002

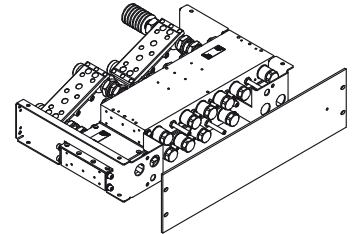



BN 57 49 06 C0002

Part number height / Front plate design	BN 57 46 06 2 RU without front plate		BN 57 46 06 C0001 2 RU with ports at front side		BN 57 46 06 C0002 2 RU ports at rear side	
	BN 57 49 06 3 RU without front plate		BN 57 49 06 C0001 3 RU with ports at front side		BN 57 49 06 C0002 3 RU ports at rear side	
Frequency range	470 - 860 MHz					
Channel spacing	≥ 0					
Narrow band input	7-16 female					
Filter type integrated cavities/size	6/38 ≡ BN616501					
Temperature stability	≤ 3 kHz / K					
Harmonics attenuation	≥ 60 dB for f ≤ 1340 MHz					
DTV Mask filtering	DVB-T @ 8 MHz (Ü/U _{rms} =13 dB)		ISDB-T @ 6 MHz (Ü/U _{rms} =13 dB)		ATSC @ 6 MHz (Ü/U _{rms} =11 dB)	
Average input power	≤ 150 W BN 574606 ≤ 200 W BN 574906		≤ 150 W BN 574606 ≤ 200 W BN 574906		≤ 150 W BN 574606 ≤ 200 W BN 574906	
Tuning instruction	AS6214		AS6180		AS6074	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz		470 MHz 803 MHz		470 MHz 803 MHz	
	f ₀	≤ 0.8 dB ≤ 1.0 dB	f ₀	≤ 0.9 dB ≤ 1.4 dB	f ₀	≤ 1.0 dB ≤ 1.2 dB
	f ₀ ± 3.805	≤ 1.8 dB ≤ 2.3 dB	f ₀ ± 2.79	≤ 1.8 dB ≤ 3.5 dB	f ₀ ± 2.69	≤ 1.7 dB ≤ 2.0 dB
	f ₀ ± 3.885	≤ 2.1 dB ≤ 2.6 dB	f ₀ ± 3.0	≥ 2 dB	f ₀ ± 3	≤ 2.9 dB ≤ 3.1 dB
	f ₀ ± 4.2	≥ 5 dB	f ₀ ± 3.15	≥ 5 dB	f ₀ ± 3.5	≥ 10 dB
	f ₀ ± 6	≥ 17 dB	f ₀ ± 4.5	≥ 17 dB	f ₀ ± 4	≥ 15 dB
f ₀ ± 12	≥ 38 dB	f ₀ ± 9	≥ 38 dB	f ₀ ± 6	≥ 26 dB	
		f ₀ ± 15	≥ 48 dB	f ₀ ± 9	≥ 38 dB	
Group delay variation	Δτ ≤ 300 ns		Δτ ≤ 500 ns		Δτ ≤ 200 ns	
Wide band input	7-16 female					
Average input power	1 kW					
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input					
Insertion loss	≤ 0.1 dB (non adjacent)					
Output	7-16 female					
Peak output voltage	≤ 1.6 kV					
Isolation between inputs	≥ 35 dB					
VSWR (one WB channel)	≤ 1.1					
Dimensions (L x W x H) mm			363 x 483 x 90 (2RU) 363 x 483 x 133 (3RU)		BN 57 46 06 BN 57 49 06	
Weight	≈ 10 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					


Mehrsenderweichen
Multi-Channel Combiners

UHF CIB COMBINERS

- compact design as 19" slide-in unit
- for 6, 7 and 8 MHz channel bandwidth
- integrated mask filters for DTV
- adjacent channel operation
- temperature compensated
- tuneable within the whole UHF range



BN 57 55 01


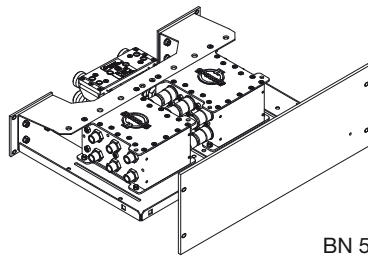


BN 57 55 01 C0002


Part number	BN 57 55 01		BN 57 55 01 C0002	
Front plate design	without front plate		with front plate and rear side ports	
Frequency range	470 - 860 MHz			
Channel spacing	≥ 0			
Narrow band input	7-16 female			
Filter type integrated cavities/size	6/40 ≡ BN616660			
Temperature stability	≤ 2 kHz / K			
Harmonics attenuation	≥ 50 dB for f ≤ 1300 MHz			
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)	
Average input power	≤ 260 W	≤ 200 W	≤ 200 W	
Tuning instruction	AS6361	AS6368	AS6362	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz	470 MHz 803 MHz	470 MHz	803 MHz
	f_0 ≤ 0.8 dB ≤ 1.0 dB	f_0 ≤ 1.1 dB ≤ 1.4 dB	f_0 ≤ 1.3 dB	≤ 1.8 dB
	$f_0 \pm 3.805$ ≤ 2.0 dB ≤ 2.5 dB	$f_0 \pm 2.79$ ≤ 2.7 dB ≤ 3.3 dB	$f_0 \pm 2.69$ ≤ 2.3 dB	≤ 2.7 dB
	$f_0 \pm 3.885$ ≤ 2.3 dB ≤ 2.8 dB	$f_0 \pm 3.0$ ≥ 4 dB	$f_0 \pm 3.25$ ≥ 4 dB	
	$f_0 \pm 4.2$ ≥ 4 dB	$f_0 \pm 3.15$ ≥ 8 dB	$f_0 \pm 3.5$ ≥ 8 dB	
	$f_0 \pm 6$ ≥ 20 dB	$f_0 \pm 4.5$ ≥ 22 dB	$f_0 \pm 4$ ≥ 15 dB	
	$f_0 \pm 12$ ≥ 40 dB	$f_0 \pm 9$ ≥ 50 dB	$f_0 \pm 6$ ≥ 40 dB	
		$f_0 \pm 15$ ≥ 50 dB	$f_0 \pm 9$ ≥ 65 dB	
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 200$ ns	
Wide band input	7-16 female			
Average input power	1 kW			
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input			
Insertion loss	no			
	≤ 0.1 dB (non adjacent)			
Output	7-16 female			
Peak output voltage	≤ 2.8 kV			
Isolation between inputs	≥ 35 dB			
VSWR (one WB channel)	≤ 1.06			
Dimensions (L x W x H) mm	355 x 483 x 133 (3RU)			
Weight	≈ 12 kg			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

UHF CIB COMBINERS

- compact design as 19" slide-in unit
- for 6, 7 and 8 MHz channel bandwidth
- integrated mask filters for DTV
- adjacent channel operation
- temperature compensated
- tuneable within the whole UHF range



BN 57 55 06

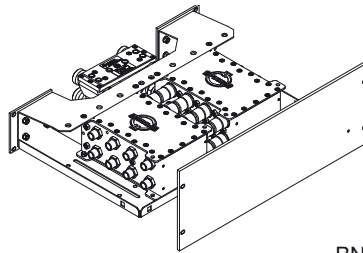



BN 57 55 06 C0002

Part number	BN 57 55 06		BN 57 55 06 C0002	
Front plate design	without front plate		with front plate and rear side ports	
Frequency range	470 - 860 MHz			
Channel spacing	≥ 0			
Narrow band input	7-16 female			
Filter type integrated cavities/size	8/40 ≡ BN616661			
Temperature stability	≤ 2 kHz / K			
Harmonics attenuation	≥ 60 dB for f ≤ 1340 MHz			
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)	
Average input power	≤ 240 W	≤ 200 W	≤ 200 W	
Tuning instruction	AS8131	AS8133	AS8132	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz	470 MHz 803 MHz	470 MHz	803 MHz
	f_0 ≤ 1.2 dB ≤ 1.6 dB	f_0 ≤ 1.5 dB ≤ 1.85 dB	f_0 ≤ 1.6 dB	≤ 2.0 dB
	$f_0 \pm 3.805$ ≤ 3.7 dB ≤ 5.3 dB	$f_0 \pm 2.79$ ≤ 4.5 dB ≤ 5.1 dB	$f_0 \pm 2.69$ ≤ 3.9 dB	≤ 4.5 dB
	$f_0 \pm 3.885$ ≤ 4.5 dB ≤ 5.9 dB	$f_0 \pm 3.15$ ≥ 15 dB	$f_0 \pm 3$	≥ 5 dB
	$f_0 \pm 4.2$ ≥ 15 dB	$f_0 \pm 4.5$ ≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB
	$f_0 \pm 6$ ≥ 40 dB	$f_0 \pm 9$ ≥ 55 dB	$f_0 \pm 9$	≥ 64 dB
	$f_0 \pm 12$ ≥ 55 dB	$f_0 \pm 15$ ≥ 65 dB		
Group delay variation	$\Delta\tau$ ≤ 600 ns	$\Delta\tau$ ≤ 500 ns	$\Delta\tau$ ≤ 400 ns	
Wide band input	7-16 female			
Average input power	1 kW			
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input			
Insertion loss	≤ 0.1 dB (non adjacent)			
Output	7-16 female			
Peak output voltage	≤ 2.8 kV			
Isolation between inputs	≥ 35 dB			
VSWR (one WB channel)	≤ 1.06			
Dimensions (L x W x H) mm	355 x 483 x 133 (3RU)			
Weight	≈ 14 kg			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			


Mehrsenderweichen
Multi-Channel Combiners

UHF CIB COMBINERS


- compact design as 19" slide-in unit
- for 6, 7 and 8 MHz channel bandwidth
- integrated mask filters for DTV
- adjacent channel operation
- temperature compensated
- tuneable within the whole UHF range



BN 57 49 48



BN 57 49 49


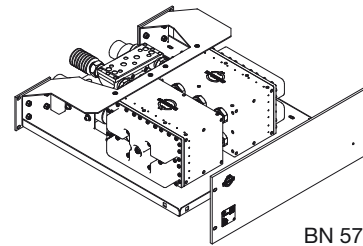


BN 57 49 49 C0002


Part number Front plate design	BN 57 49 48 without front plate	BN 57 49 49 without front plate	
	BN 57 49 48 C0002 with front plate and rear side ports	BN 57 49 49 C0002 with front plate and rear side ports	
Frequency range	470 - 860 MHz		
Channel spacing	≥ 0		
Narrow band input	7-16 female		
Filter type integrated cavities/size	6/60 ≡ BN616566		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 1200 MHz		
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)
Average input power	≤ 750 W	≤ 600 W	≤ 600 W
Tuning instruction	AS6201	AS6192	AS6257
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz f_0 ≤ 0.55 dB ≤ 0.65 dB $f_0 \pm 3.805$ ≤ 1.35 dB ≤ 1.85 dB $f_0 \pm 3.885$ ≤ 1.55 dB ≤ 2.1 dB $f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6$ ≥ 20 dB $f_0 \pm 12$ ≥ 40 dB	470 MHz 803 MHz f_0 ≤ 0.7 dB ≤ 0.85 dB $f_0 \pm 2.79$ ≤ 1.7 dB ≤ 2.30 dB $f_0 \pm 3.0$ ≥ 4 dB $f_0 \pm 3.15$ ≥ 8 dB $f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	470 MHz 803 MHz f_0 ≤ 0.8 dB ≤ 1.1 dB $f_0 \pm 2.69$ ≤ 1.5 dB ≤ 1.8 dB $f_0 \pm 3.0$ ≤ 2.7 dB ≤ 2.8 dB $f_0 \pm 3.25$ ≥ 4 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB
Group delay variation	$\Delta\tau$ ≤ 350 ns	$\Delta\tau$ ≤ 350 ns	$\Delta\tau$ ≤ 200 ns
Wide band input	7-16 female	1 5/8" SMS unflanged	
Average input power	≤ 1 kW	≤ 4 kW	
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	≤ 0.1 dB (non adjacent)		
Output	7-16 female	1 5/8" SMS unflanged	
Peak output voltage	≤ 1.6 kV	≤ 6 kV	
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	482 x 483 x 177 (4RU)	510 x 483 x 177 (4RU)	
Weight	≈ 17 kg	≈ 20 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

UHF CIB COMBINERS


- compact design as 19" slide-in unit
- for 6, 7 and 8 MHz channel bandwidth
- integrated mask filters for DTV
- adjacent channel operation
- temperature compensated
- tuneable within the whole UHF range



BN 57 49 50

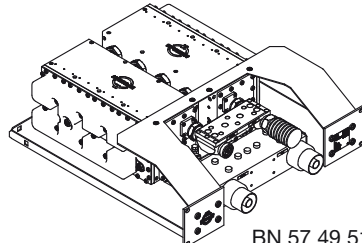

BN 57 49 51

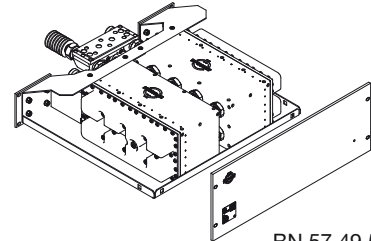



BN 57 49 50 C0002

Part number Front plate design	BN 57 49 50 without front plate	BN 57 49 51 without front plate	
	BN 57 49 50 C0002 with front plate and rear side ports	BN 57 49 51 C0002 with front plate and rear side ports	BN 57 49 51 C0002 with front plate and rear side ports
Frequency range	470 - 860 MHz		
Channel spacing	≥ 0		
Narrow band input	7-16 female		
Filter type integrated cavities/size	8/60 ≡ BN 616568		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 1200 MHz		
DTV Mask filtering	DVB-T @ 8 MHz (Ü/U _{rms} =13 dB)	ISDB-T @ 6 MHz (Ü/U _{rms} =13 dB)	ATSC @ 6 MHz (Ü/U _{rms} =11 dB)
Average input power	≤ 750 W	≤ 600 W	≤ 600 W
Tuning instruction	AS8087	AS8095	AS8084
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz f ₀ ≤ 0.75 dB ≤ 1.00 dB f ₀ ± 3.805 ≤ 2.35 dB ≤ 3.15 dB f ₀ ± 3.885 ≤ 3.05 dB ≤ 3.85 dB f ₀ ± 4.2 ≥ 15 dB f ₀ ± 6 ≥ 40 dB f ₀ ± 12 ≥ 55 dB	470 MHz 803 MHz f ₀ ≤ 0.85 dB ≤ 1.15 dB f ₀ ± 2.79 ≤ 2.25 dB ≤ 3.10 dB f ₀ ± 3.15 ≥ 15 dB f ₀ ± 4.5 ≥ 30 dB f ₀ ± 9 ≥ 55 dB	470 MHz 803 MHz f ₀ ≤ 1.10 dB ≤ 1.30 dB f ₀ ± 2.69 ≤ 2.35 dB ≤ 2.85 dB f ₀ ± 3.0 ≥ 4 dB f ₀ ± 3.25 ≥ 18 dB f ₀ ± 9 ≥ 64 dB
Group delay variation	Δτ ≤ 660 ns	Δτ ≤ 500 ns	Δτ ≤ 420 ns
Wide band input	7-16 female	1 5/8" SMS unflanged	
Average input power	≤ 1 kW	≤ 4 kW	
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	no		
	≤ 0.1 dB (non adjacent)		
Output	7-16 female	1 5/8" SMS unflanged	
Peak output voltage	≤ 1.6 kV	≤ 6 kV	
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	482 x 483 x 177 (4RU)		510 x 483 x 177 (4RU)
Weight	≈ 20 kg		≈ 22 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		


Mehrsenderweichen
Multi-Channel Combiners

UHF CIB COMBINERS

- compact design as 19" slide-in unit
- suitable for analogue and digital TV
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 46 03 C0001





BN 57 49 01 C0002


Part number Front plate design	BN 57 46 03 C0001 with ports at front plate	BN 57 49 01 C0001 with ports at front plate																											
	BN 57 46 03 C0002 with ports at rear side	BN 57 49 01 C0002 with ports at rear side																											
Frequency range	470 - 860 MHz																												
Channel spacing	≥ 1																												
Narrow band input	7-16 female																												
Filter type integrated cavities/size	4/84 ≡ BN616400																												
Temperature stability	≤ 2 kHz / K																												
Harmonics attenuation	≥ 45 dB for f ≤ 950 MHz																												
DTV Mask filtering	no																												
Channel width	8 MHz ($\dot{U}/U_{rms}=13$ dB)	6 MHz ($\dot{U}/U_{rms}=13$ dB)																											
Average input power	≤ 1.5 kW																												
Tuning instruction	AS4055	AS4038																											
Insertion loss (alternative tuning on request)	<table border="0"> <tr> <td></td> <td>470 MHz</td> <td>860 MHz</td> </tr> <tr> <td>f_0</td> <td>≤ 0.4 dB</td> <td>≤ 0.45 dB</td> </tr> <tr> <td>$f_0 \pm 3.805$</td> <td>≤ 0.5 dB</td> <td>≤ 0.6 dB</td> </tr> <tr> <td>$f_0 \pm 3.885$</td> <td>≤ 0.5 dB</td> <td>≤ 0.6 dB</td> </tr> <tr> <td>$f_0 \pm 12$</td> <td colspan="2">≥ 28 dB</td> </tr> </table>		470 MHz	860 MHz	f_0	≤ 0.4 dB	≤ 0.45 dB	$f_0 \pm 3.805$	≤ 0.5 dB	≤ 0.6 dB	$f_0 \pm 3.885$	≤ 0.5 dB	≤ 0.6 dB	$f_0 \pm 12$	≥ 28 dB		<table border="0"> <tr> <td></td> <td>470 MHz</td> <td>860 MHz</td> </tr> <tr> <td>f_0</td> <td>≤ 0.45 dB</td> <td>≤ 0.55 dB</td> </tr> <tr> <td>$f_0 \pm 3$</td> <td>≤ 0.60 dB</td> <td>≤ 0.75 dB</td> </tr> <tr> <td>$f_0 \pm 9$</td> <td colspan="2">≥ 30 dB</td> </tr> </table>		470 MHz	860 MHz	f_0	≤ 0.45 dB	≤ 0.55 dB	$f_0 \pm 3$	≤ 0.60 dB	≤ 0.75 dB	$f_0 \pm 9$	≥ 30 dB	
	470 MHz	860 MHz																											
f_0	≤ 0.4 dB	≤ 0.45 dB																											
$f_0 \pm 3.805$	≤ 0.5 dB	≤ 0.6 dB																											
$f_0 \pm 3.885$	≤ 0.5 dB	≤ 0.6 dB																											
$f_0 \pm 12$	≥ 28 dB																												
	470 MHz	860 MHz																											
f_0	≤ 0.45 dB	≤ 0.55 dB																											
$f_0 \pm 3$	≤ 0.60 dB	≤ 0.75 dB																											
$f_0 \pm 9$	≥ 30 dB																												
Group delay variation	$\Delta\tau \leq 90$ ns																												
Wide band input	7-16 female	1 5/8" SMS unflanged																											
Average input power	≤ 1 kW	≤ 7 kW																											
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input																												
Insertion loss	no																												
	≤ 0.1 dB (non adjacent)																												
Output	7-16 female	1 5/8" SMS unflanged																											
Average output power	-	≤ 7 kW																											
Peak output voltage	≤ 1.6 kV	≤ 8.5 kV																											
Isolation between inputs	≥ 35 dB																												
VSWR (one WB channel)	≤ 1.06																												
Dimensions (L x W x H) mm	503 x 483 x 355 (8RU)	560 x 483 x 355 (8RU)																											
Weight	≈ 25 kg	≈ 28 kg																											
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“																												

CCS UHF CIB COMBINERS

- **CCS** compact design
- suitable for analogue and digital TV
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 46 73 C0002





BN 57 46 74 inside switching rack


Part number	BN 57 46 73 C0002	BN 57 46 74 C0002
Frequency range	470 - 860 MHz	
Channel spacing	≥ 1	
Narrow band input	7-16 female	1 5/8" SMS unflanged
Filter type integrated cavities/size	4/84 ≡ BN616400	
Temperature stability	≤ 2 kHz / K	
Harmonics attenuation	≥ 45 dB for f ≤ 950 MHz	
DTV Mask filtering	no	
Channel width	8 MHz ($\dot{U}/U_{rms}=13$ dB)	6 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power	≤ 1.5 kW BN 5746 73 C0002 ≤ 2.5 kW BN 5746 74 C0002	≤ 1.5 kW BN 5746 73 C0002 ≤ 2.5 kW BN 5746 74 C0002
Tuning instruction	AS4055	AS4038
Insertion loss (alternative tuning on request)	470 MHz 860 MHz	470 MHz 860 MHz
	f_0 ≤ 0.4 dB ≤ 0.45 dB	f_0 ≤ 0.45 dB ≤ 0.55 dB
	$f_0 \pm 3.805$ ≤ 0.5 dB ≤ 0.6 dB	$f_0 \pm 3$ ≤ 0.60 dB ≤ 0.75 dB
	$f_0 \pm 3.885$ ≤ 0.5 dB ≤ 0.6 dB	$f_0 \pm 9$ ≥ 30 dB
	$f_0 \pm 12$ ≥ 28 dB	
Group delay variation	$\Delta\tau \leq 90$ ns	$\Delta\tau \leq 100$ ns
Wide band input	1 5/8" SMS unflanged	
Average input power	≤ 7 kW	
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input	
Insertion loss	no	
	≤ 0.1 dB (non adjacent)	
Output	1 5/8" SMS unflanged	
Average output power	≤ 7 kW	
Peak output voltage	≤ 8.5 kV	
Isolation between inputs	≥ 35 dB	
VSWR (one WB channel)	≤ 1.06	
Dimensions (L x W x H) mm	900 x 226 x 660	900 x 226 x 965
Weight	≈ 30 kg	≈ 40 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

UHF CIB COMBINERS

- compact design as 19" slide-in unit
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 46 41 C0001





BN 57 49 42 C0001


Part number Front plate design	BN 57 46 41 C0001 with ports at front plate		BN 57 49 42 C0001 with ports at front plate			
	BN 57 46 41 C0002 with ports at rear side		BN 57 49 42 C0002 with ports at rear side			
Frequency range	470 - 860 MHz					
Channel spacing	≥ 0					
Narrow band input	7-16 female					
Filter type integrated cavities/size	6/84 ≡ BN616402					
Temperature stability	≤ 2 kHz / K					
Harmonics attenuation	≥ 50 dB for f ≤ 950 MHz					
DTV Mask filtering	DVB-T @ 8 MHz ($\hat{U}/U_{ms}=13$ dB)	ISDB-T @ 6 MHz ($\hat{U}/U_{ms}=13$ dB)	ATSC @ 6 MHz ($\hat{U}/U_{ms}=11$ dB)			
Average input power	≤ 1.5 kW		≤ 1.2 kW			
Tuning instruction	AS6186		AS6182			
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz
	f_0	≤ 0.5 dB ≤ 0.6 dB	f_0	≤ 0.6 dB ≤ 0.8 dB	f_0	≤ 0.7 dB ≤ 0.9 dB
	$f_0 \pm 3.805$	≤ 1.2 dB ≤ 1.5 dB	$f_0 \pm 2.79$	≤ 1.6 dB ≤ 2.2 dB	$f_0 \pm 2.69$	≤ 1.1 dB ≤ 1.55 dB
	$f_0 \pm 3.885$	≤ 1.3 dB ≤ 1.6 dB	$f_0 \pm 3.0$	≥ 4 dB	$f_0 \pm 3.0$	≤ 1.9 dB ≤ 2.45 dB
	$f_0 \pm 4.2$	≥ 4 dB	$f_0 \pm 3.15$	≥ 8 dB	$f_0 \pm 3.25$	≥ 4 dB
	$f_0 \pm 6$	≥ 20 dB	$f_0 \pm 4.5$	≥ 23 dB	$f_0 \pm 3.5$	≥ 8 dB
	$f_0 \pm 12$	≥ 40 dB	$f_0 \pm 9$	≥ 48 dB	$f_0 \pm 4$	≥ 15 dB
		$f_0 \pm 15$	≥ 50 dB	$f_0 \pm 6$	≥ 40 dB	
				$f_0 \pm 9$	≥ 65 dB	
Group delay variation	$\Delta\tau \leq 330$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 200$ ns	
Wide band input	7-16 female		1 5/8" SMS unflanged			
Average input power	≤ 1 kW		≤ 7 kW			
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input					
Insertion loss	≤ 0.1 dB (non adjacent)					
Output	7-16 female		1 5/8" SMS unflanged			
Average output power	-		≤ 7 kW			
Peak output voltage	≤ 1.6 kV		≤ 8.5 kV			
Isolation between inputs	≥ 35 dB					
VSWR (one WB channel)	≤ 1.06					
Dimensions (L x W x H) mm	586 x 483 x 355 (8RU)			643 x 483 x 355 (8RU)		
Weight	≈ 30 kg			≈ 32 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

CCS UHF CIB COMBINERS

- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 46 76 C0002





BN 57 46 76 inside switching rack


Part number	BN 57 46 75 C0005		BN 57 46 76 C0002						
Frequency range	470 - 860 MHz								
Channel spacing	≥ 0								
Narrow band input	7-16 female		1 5/8" SMS unflanged						
Filter type integrated cavities/size	6/84 ≡ BN616402								
Temperature stability	≤ 2 kHz / K								
Harmonics attenuation	≥ 50 dB for f ≤ 950 MHz								
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)						
Average input power	≤ 1.5 kW		≤ 1.2 kW						
Tuning instruction	AS6186		AS6182						
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz			
	f_0	≤ 0.5 dB	≤ 0.6 dB	f_0	≤ 0.6 dB	≤ 0.8 dB	f_0	≤ 0.7 dB	≤ 0.9 dB
	$f_0 \pm 3.805$	≤ 1.2 dB	≤ 1.5 dB	$f_0 \pm 2.79$	≤ 1.6 dB	≤ 2.2 dB	$f_0 \pm 2.69$	≤ 1.1 dB	≤ 1.55 dB
	$f_0 \pm 3.885$	≤ 1.3 dB	≤ 1.6 dB	$f_0 \pm 3.0$	≥ 4 dB		$f_0 \pm 3.0$	≤ 1.9 dB	≤ 2.45 dB
	$f_0 \pm 4.2$	≥ 4 dB		$f_0 \pm 3.15$	≥ 8 dB		$f_0 \pm 3.25$	≥ 4 dB	
	$f_0 \pm 6$	≥ 20 dB		$f_0 \pm 4.5$	≥ 23 dB		$f_0 \pm 3.5$	≥ 8 dB	
	$f_0 \pm 12$	≥ 40 dB		$f_0 \pm 9$	≥ 48 dB		$f_0 \pm 4$	≥ 15 dB	
				$f_0 \pm 15$	≥ 50 dB		$f_0 \pm 6$	≥ 40 dB	
						$f_0 \pm 9$	≥ 65 dB		
Group delay variation	$\Delta\tau \leq 330$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 200$ ns				
Wide band input	1 5/8" SMS unflanged								
Average input power	≤ 7 kW								
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input no								
Insertion loss	≤ 0.1 dB (non adjacent)								
Output	1 5/8" SMS unflanged								
Average output power	≤ 7 kW								
Peak output voltage	≤ 8.5 kV								
Isolation between inputs	≥ 35 dB								
VSWR (one WB channel)	≤ 1.06								
Dimensions (L x W x H) mm	900 x 226 x 665		900 x 226 x 965						
Weight	≈ 30 kg		≈ 40 kg						
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								

UHF CIB COMBINERS

- compact design as 19" slide-in unit
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 46 43 C0002





BN 57 49 44 C0002


Part number Front plate design	BN 57 46 43 C0001 with ports at front plate		BN 57 49 44 C0001 with ports at front plate			
	BN 57 46 43 C0002 with ports at rear side		BN 57 49 44 C0002 with ports at rear side			
Frequency range	470 - 860 MHz					
Channel spacing	≥ 0					
Narrow band input	7-16 female					
Filter type integrated cavities/size	8/84 ≡ BN616403					
Temperature stability	≤ 2 kHz / K					
Harmonics attenuation	≥ 50 dB for f ≤ 950 MHz					
DTV Mask filtering	DVB-T @ 8 MHz ($\hat{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\hat{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\hat{U}/U_{rms}=11$ dB)			
Average input power	≤ 1.5 kW		≤ 1.2 kW			
Tuning instruction	AS8068		AS8091	AS8051		
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz
	f_0	≤ 0.6 dB ≤ 0.75 dB	f_0	≤ 0.7 dB ≤ 1.3 dB	f_0	≤ 0.9 dB ≤ 1.3 dB
	$f_0 \pm 3.805$	≤ 1.8 dB ≤ 2.2 dB	$f_0 \pm 2.79$	≤ 1.8 dB ≤ 3.1 dB	$f_0 \pm 2.69$	≤ 1.9 dB ≤ 2.7 dB
	$f_0 \pm 3.885$	≤ 2.1 dB ≤ 2.6 dB	$f_0 \pm 3.15$	≥ 15 dB	$f_0 \pm 3.0$	≤ 3 dB
	$f_0 \pm 4.2$	≥ 15 dB	$f_0 \pm 4.5$	≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB
	$f_0 \pm 6$	≥ 40 dB	$f_0 \pm 9$	≥ 55 dB	$f_0 \pm 9$	≥ 64 dB
$f_0 \pm 12$	≥ 55 dB					
Group delay variation	$\Delta\tau \leq 600$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 400$ ns	
Wide band input	7-16 female		1 5/8" SMS unflanged			
Average input power	≤ 1 kW		≤ 7 kW			
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input					
Insertion loss	no					
	≤ 0.1 dB (non adjacent)					
Output	7-16 female		1 5/8" SMS unflanged			
Average output power	-		≤ 7 kW			
Peak output voltage	≤ 1.6 kV		≤ 8.5 kV			
Isolation between inputs	≥ 35 dB					
VSWR (one WB channel)	≤ 1.06					
Dimensions (L x W x H) mm	726 x 483 x 355 (8RU)					
Weight	≈ 35 kg		≈ 38 kg			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

CCS UHF CIB COMBINERS

- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 46 78 C0002





BN 57 46 77 inside switching rack


Part number	BN 57 46 77 C0005		BN 57 46 78 C0002			
Frequency range	470 - 860 MHz					
Channel spacing	≥ 0					
Narrow band input	7-16 female		1 5/8" SMS unflanged			
Filter type integrated cavities/size	8/84 ≡ BN616403					
Temperature stability	≤ 2 kHz / K					
Harmonics attenuation	≥ 50 dB for f ≤ 950 MHz					
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)			
Average input power	≤ 1.5 kW		≤ 1.2 kW			
Tuning instruction	AS8068		AS8091 AS8051			
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz
	f_0	≤ 0.6 dB ≤ 0.75 dB	f_0	≤ 0.7 dB ≤ 1.3 dB	f_0	≤ 0.9 dB ≤ 1.3 dB
	$f_0 \pm 3.805$	≤ 1.8 dB ≤ 2.2 dB	$f_0 \pm 2.79$	≤ 1.8 dB ≤ 3.1 dB	$f_0 \pm 2.69$	≤ 1.9 dB ≤ 2.7 dB
	$f_0 \pm 3.885$	≤ 2.1 dB ≤ 2.6 dB	$f_0 \pm 3.15$	≥ 15 dB	$f_0 \pm 3.0$	≤ 3 dB
	$f_0 \pm 4.2$	≥ 15 dB	$f_0 \pm 4.5$	≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB
	$f_0 \pm 6$	≥ 40 dB	$f_0 \pm 9$	≥ 55 dB	$f_0 \pm 9$	≥ 64 dB
	$f_0 \pm 12$	≥ 55 dB				
Group delay variation	$\Delta\tau \leq 600$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 400$ ns	
Wide band input	1 5/8" SMS unflanged					
Average input power	≤ 7 kW					
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input					
Insertion loss	≤ 0.1 dB (non adjacent)					
Output	1 5/8" SMS unflanged					
Average output power	≤ 7 kW					
Peak output voltage	≤ 8.5 kV					
Isolation between inputs	≥ 35 dB					
VSWR (one WB channel)	≤ 1.06					
Dimensions (L x W x H) mm	900 x 226 x 665		900 x 226 x 965			
Weight	≈ 35 kg		≈ 45 kg			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 55 11 A0070



BN 57 55 12 A0040





BN 57 55 13 A0040


Part number / Size	BN 57 55 11 A0070 448	BN 57 55 12 A0030 700 BN 57 55 12 A0040 900	BN 57 55 13 A0030 700 BN 57 55 13 A0040 900
Frequency range	470 - 860 MHz		
Channel spacing	≥ 0		
Narrow band input	1 5/8" EIA		
Filter type integrated cavities/size	6/120 ≡ BN 616663		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 1100 MHz		
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)
Average input power	≤ 3.2 kW	≤ 2.6 kW	≤ 2.6 kW
Tuning instruction	AS6224	AS6229	AS6228
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz f_0 ≤ 0.4 dB ≤ 0.5 dB $f_0 \pm 3.805$ ≤ 0.9 dB ≤ 1.2 dB $f_0 \pm 3.885$ ≤ 1.0 dB ≤ 1.4 dB $f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6$ ≥ 20 dB $f_0 \pm 12$ ≥ 40 dB	470 MHz 803 MHz f_0 ≤ 0.45 dB ≤ 0.6 dB $f_0 \pm 2.79$ ≤ 1.20 dB ≤ 1.5 dB $f_0 \pm 3.0$ ≥ 3 dB $f_0 \pm 3.15$ ≥ 5 dB $f_0 \pm 4.5$ ≥ 17 dB $f_0 \pm 9$ ≥ 38 dB $f_0 \pm 15$ ≥ 48 dB	470 MHz 803 MHz f_0 ≤ 0.50 dB ≤ 0.65 dB $f_0 \pm 2.69$ ≤ 0.65 dB ≤ 1.40 dB $f_0 \pm 3.5$ ≥ 3 dB $f_0 \pm 4$ ≥ 8 dB $f_0 \pm 6$ ≥ 30 dB $f_0 \pm 9$ ≥ 65 dB
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 450$ ns	$\Delta\tau \leq 250$ ns
Wide band input	1 5/8" EIA		3 1/8" EIA male
Average input power	≤ 7 kW Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		≤ 17.5 kW
DTV Mask filtering	no		
Insertion loss	≤ 0.1 dB (non adjacent)		
Output	1 5/8" EIA		3 1/8" EIA male
Peak output voltage	≤ 8.5 kV		≤ 12.5 kV
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	800 x 448 x 617	700 x 315 x 1200 BN 57 55 12 A0030 900 x 315 x 1200 BN 57 55 12 A0040	700 x 315 x 1200 BN 57 55 13 A0030 900 x 315 x 1200 BN 57 55 13 A0040
Weight	≈ 70 kg		≈ 80 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 55 15 A0070



BN 57 55 16 A0040





BN 57 55 17 A0040


Part number / Size	BN 57 55 15 A0070 448	BN 57 55 16 A0030 700 BN 57 55 16 A0040 900	BN 57 55 17 A0030 700 BN 57 55 17 A0040 900
Frequency range	470 - 860 MHz		
Channel spacing	≥ 0		
Narrow band input	1 5/8" EIA		
Filter type integrated cavities/size	8/120 ≡ BN 616664		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 1100 MHz		
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)
Average input power	≤ 3.2 kW	≤ 2.6 kW	≤ 2.6 kW
Tuning instruction	AS8112	AS8117	AS8115
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz	470 MHz 803 MHz	470 MHz 803 MHz
	f_0 ≤ 0.5 dB ≤ 0.6 dB	f_0 ≤ 0.55 dB ≤ 0.7 dB	f_0 ≤ 0.6 dB ≤ 0.7 dB
	$f_0 \pm 3.805$ ≤ 1.5 dB ≤ 1.8 dB	$f_0 \pm 2.79$ ≤ 1.30 dB ≤ 1.8 dB	$f_0 \pm 2.69$ ≤ 1.3 dB ≤ 1.6 dB
	$f_0 \pm 3.885$ ≤ 1.6 dB ≤ 2.0 dB	$f_0 \pm 3.15$ ≥ 15 dB	$f_0 \pm 3$ ≥ 4 dB
	$f_0 \pm 4.2$ ≥ 15 dB	$f_0 \pm 4.5$ ≥ 30 dB	$f_0 \pm 3.25$ ≥ 18 dB
	$f_0 \pm 6$ ≥ 40 dB	$f_0 \pm 9$ ≥ 55 dB	$f_0 \pm 9$ ≥ 64 dB
	$f_0 \pm 12$ ≥ 55 dB		
Group delay variation	$\Delta\tau \leq 550$ ns	$\Delta\tau \leq 600$ ns	$\Delta\tau \leq 400$ ns
Wide band input	1 5/8" EIA		3 1/8" EIA male
Average input power	≤ 7 kW		≤ 17.5 kW
	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
DTV Mask filtering	no		
Insertion loss	≤ 0.1 dB (non adjacent)		
Output	1 5/8" EIA		3 1/8" EIA male
Peak output voltage	≤ 8.5 kV		≤ 12.5 kV
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	800 x 448 x 617	700 x 315 x 1200 BN 57 55 16 A0030 900 x 315 x 1200 BN 57 55 16 A0040	700 x 315 x 1200 BN 57 55 17 A0030 900 x 315 x 1200 BN 57 55 17 A0040
Weight	≈ 75 kg	≈ 80 kg	≈ 90 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS


- **CCS** compact design
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 49 02 A0000



BN 57 49 32 A0010





BN 57 49 33 A0010


Part number	BN 57 49 02 A0000	BN 57 49 32 A0010	BN 57 49 33 A0010
Frequency range	470 - 860 MHz		
Channel spacing	≥ 1		
Narrow band input	1 5/8" EIA		
Filter type integrated cavities/size	4/150 ≡ BN 6164 04		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 40 dB for f ≤ 860 MHz		
DTV mask filtering	no		
Channel width	8 MHz ($\dot{U}/U_{rms}=13$ dB)		6 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power	≤ 7 kW ATV ≤ 5 kW DTV		≤ 7 kW ATV ≤ 5 kW DTV
Tuning instruction	AS4005		AS4034
Insertion loss (alternative tuning on request)	470 MHz 860 MHz f_0 ≤ 0.30 dB ≤ 0.35 dB $f_0 \pm 3.885$ ≤ 0.35 dB ≤ 0.40 dB $f_0 \pm 12$ ≥ 12 dB		470 MHz 803 MHz f_0 ≤ 0.35 dB ≤ 0.45 dB $f_0 \pm 3.0$ ≤ 0.45 dB ≤ 0.50 dB
Group delay variation	$\Delta\tau \leq 30$ ns		$\Delta\tau \leq 40$ ns
Wide band input	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male
Average input power	≤ 7 kW	≤ 17.5 kW	≤ 33 kW
	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
DTV Mask filtering	no		
Insertion loss	≤ 0.1 dB (non adjacent)		
Output	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male
Peak output voltage	≤ 8.5 kV	≤ 12.5 kV	≤ 15.5 kV
Average output power	≤ 7 kW	-	-
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	900 x 390 x 1200	900 x 480 x 1200	900 x 480 x 1200
Weight	≈ 80 kg	≈ 90 kg	≈ 100 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS

- CCS compact design
- integrated mask filters for ATSC
- for 6 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 46 72 A0070





BN 57 46 62 A0000

Part number	BN 57 46 72 A0010	BN 57 46 62 A0000	
Frequency range	470 - 860 MHz		
Channel spacing	≥ 1		
Narrow band input	1 5/8" EIA		
Filter type integrated cavities/size	6/150 ≡ BN 616572		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz		
DTV mask filtering	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)		
Average input power	≤ 4.5 kW		
Tuning instruction	AS6081		
Insertion loss & Mask filtering (alternative tuning on request)	470	860	
	f_0	≤ 0.5 dB	≤ 0.6dB
	$f_0 \pm 3.805$	≤ 1.5 dB	≤ 1.8 dB
	$f_0 \pm 3.885$	≤ 1.6 dB	≤ 2.0 dB
	$f_0 \pm 4.2$	≥ 15 dB	
	$f_0 \pm 6$	≥ 40 dB	
	$f_0 \pm 12$	≥ 55 dB	
Group delay variation	$\Delta\tau \leq 200$ ns		
Wide band input	1 5/8" EIA	3 1/8" EIA male	
Average input power	≤ 7 kW	≤ 17.5 kW	
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	no		
	≤ 0.1 dB (non adjacent)		
Output	1 5/8" EIA	3 1/8" EIA male	
Peak output voltage	≤ 8.5 kV	≤ 12.5 kV	
Average output power	≤ 7 kW	-	
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 390 x 1200	
Weight	≈ 95 kg	≈ 105 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		


Mehrsenderweichen
 Multi-Channel Combiners

CCS UHF CIB COMBINERS


- CCS compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range




BN 57 49 47 A0000



BN 57 49 34 A0000



BN 57 49 35 A0000





BN 57 49 35 A0010


Part number / Width	BN 57 49 47 A0000 390 BN 57 49 47 A0010 480	BN 57 49 34 A0000 390 BN 57 49 34 A0010 480	BN 57 49 35 A0000 390 BN 57 49 35 A0010 480
Frequency range	470 - 860 MHz		
Channel spacing	≥ 0		
Narrow band input	1 5/8" EIA		
Filter type integrated cavities/size	6/150 ≡ BN 616518		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz		
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power	≤ 5 kW	≤ 4 kW	≤ 4.5 kW
Tuning instruction	AS6193	AS6184	AS6289
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz	470 MHz 803 MHz	470 MHz 820 MHz
	f_0 ≤ 0.40 dB ≤ 0.55 dB	f_0 ≤ 0.5 dB ≤ 0.7 dB	f_0 ≤ 0.45 dB ≤ 0.6 dB
	$f_0 \pm 3.805$ ≤ 0.85 dB ≤ 1.3 dB	$f_0 \pm 2.79$ ≤ 1.2 dB ≤ 1.6 dB	$f_0 \pm 3.2$ ≤ 0.65 dB ≤ 0.95 dB
	$f_0 \pm 3.885$ ≤ 1.05 dB ≤ 1.5 dB	$f_0 \pm 3.0$ ≥ 3.5 dB	$f_0 \pm 4.2$ ≥ 13 dB
	$f_0 \pm 4.2$ ≥ 4 dB	$f_0 \pm 3.15$ ≥ 8 dB	$f_0 \pm 10.5$ ≥ 38 dB
	$f_0 \pm 6$ ≥ 20 dB	$f_0 \pm 4.5$ ≥ 23 dB	
	$f_0 \pm 12$ ≥ 40 dB	$f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	
Group delay variation	$\Delta\tau$ ≤ 350 ns	$\Delta\tau$ ≤ 500 ns	$\Delta\tau$ ≤ 150 ns
Wide band input	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male
Average input power	≤ 7 kW	≤ 17.5 kW	≤ 33 kW
DTV Mask filtering		Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input no	
Insertion loss		≤ 0.1 dB (non adjacent)	
Output	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male
Peak output voltage	≤ 8.5 kV	≤ 12.5 kV	≤ 15.5 kV
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	900 x 390 x 1200 BN 57 49 47 A0000	900 x 390 x 1200 BN 57 49 34 A0000	900 x 390 x 1200 BN 57 49 35 A0000
	900 x 480 x 1200 BN 57 49 47 A0010	900 x 480 x 1200 BN 57 49 34 A0010	900 x 480 x 1200 BN 57 49 35 A0010
Weight	≈ 90 kg	≈ 100 kg	≈ 115 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range




BN 57 49 62 A0000



BN 57 49 61 A0000



BN 57 49 61 A0010





BN 57 49 63 A0000


Part number / Width	BN 57 49 62 A0000		BN 57 49 61 A0000		BN 57 49 63 A0000				
	390	480	390	480	390	480			
Frequency range	470 - 860 MHz								
Channel spacing	≥ 0								
Narrow band input	1 5/8" EIA								
Filter type integrated cavities/size	8/150 ≡ BN 616542								
Temperature stability	≤ 2 kHz / K								
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz								
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)		ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)		ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)				
Average input power	≤ 4 kW		≤ 3.2 kW		≤ 3.2 kW				
Tuning instruction	AS8071		AS8096		AS8094				
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz		470 MHz		470 MHz				
	860 MHz		803 MHz		806 MHz				
	f_0	≤ 0.5 dB	≤ 0.75 dB	f_0	≤ 0.6 dB	≤ 0.80 dB	f_0	≤ 0.8 dB	≤ 1.0 dB
	$f_0 \pm 3.805$	≤ 1.6 dB	≤ 2.2 dB	$f_0 \pm 2.79$	≤ 1.4 dB	≤ 1.85 dB	$f_0 \pm 2.69$	≤ 1.6 dB	≤ 1.7 dB
	$f_0 \pm 3.885$	≤ 1.8 dB	≤ 2.5 dB	$f_0 \pm 3.15$	≥ 15 dB		$f_0 \pm 3.00$	≥ 4 dB	
	$f_0 \pm 4.2$	≥ 15 dB		$f_0 \pm 4.5$	≥ 30 dB		$f_0 \pm 3.25$	≥ 18 dB	
	$f_0 \pm 6$	≥ 40 dB		$f_0 \pm 9$	≥ 55 dB		$f_0 \pm 9$	≥ 64 dB	
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 400$ ns				
Wide band input	1 5/8" EIA		3 1/8" EIA male		4 1/2" EIA male				
Average input power	≤ 7 kW		≤ 17.5 kW		≤ 33 kW				
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input no								
Insertion loss	≤ 0.1 dB (non adjacent)								
Output	1 5/8" EIA		3 1/8" EIA male		4 1/2" EIA male				
Peak output voltage	≤ 8.5 kV		≤ 12.5 kV		≤ 15.5 kV				
Isolation between inputs	≥ 35 dB								
VSWR (one WB channel)	≤ 1.06								
Dimensions (L x W x H) mm	900 x 390 x 1200 BN 57 49 62 A0000		900 x 390 x 1200 BN 57 49 61 A0000		900 x 390 x 1200 BN 57 49 63 A0000				
	900 x 480 x 1200 BN 57 49 62 A0010		900 x 480 x 1200 BN 57 49 61 A0010		900 x 480 x 1200 BN 57 49 63 A0010				
Weight	≈ 105 kg		≈ 120 kg		≈ 135kg				
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								

CCS UHF CIB COMBINERS


- CCS compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range




BN 57 55 20 A0060



BN 57 55 21 A0060



BN 57 55 22 A0060





BN 57 55 23 A0020


Part number / Width	BN 57 55 20 A0010 480 BN 57 55 20 A0060 415	BN 57 55 21 A0010 480 BN 57 55 21 A0060 415	BN 57 55 22 A0010 480 BN 57 55 22 A0060 415	BN 57 55 23 A0020 520
Frequency range	470 - 860 MHz			
Channel spacing	≥ 0			
Narrow band input	1 5/8" EIA			
Filter type integrated cavities/size	6/170 ≡ BN 616665			
Temperature stability	≤ 2 kHz / K			
Harmonics attenuation	≥ 50 dB for f ≤ 1000 MHz			
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)	
Average input power	≤ 7 kW	≤ 6 kW	≤ 6 kW	
Tuning instruction	AS6217	AS6222	AS6221	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz	470 MHz 803 MHz	470 MHz 803 MHz	
	f_0 ≤ 0.35 dB ≤ 0.45 dB	f_0 ≤ 0.50 dB ≤ 0.60 dB	f_0 ≤ 0.45 dB ≤ 0.6 dB	
	$f_0 \pm 3.805$ ≤ 0.85 dB ≤ 1.0 dB	$f_0 \pm 2.79$ ≤ 1.15 dB ≤ 1.35 dB	$f_0 \pm 2.69$ ≤ 0.65 dB ≤ 0.8 dB	
	$f_0 \pm 3.885$ ≤ 1.00 dB ≤ 1.1 dB	$f_0 \pm 3.0$ ≥ 3 dB	$f_0 \pm 3.5$ ≥ 3 dB	
	$f_0 \pm 4.2$ ≥ 4 dB	$f_0 \pm 3.15$ ≥ 5 dB	$f_0 \pm 4$ ≥ 8 dB	
	$f_0 \pm 6$ ≥ 20 dB	$f_0 \pm 4.5$ ≥ 17 dB	$f_0 \pm 6$ ≥ 30 dB	
	$f_0 \pm 12$ ≥ 40 dB	$f_0 \pm 9$ ≥ 38 dB $f_0 \pm 15$ ≥ 48 dB	$f_0 \pm 9$ ≥ 65 dB	
Group delay variation	$\Delta\tau$ ≤ 350 ns	$\Delta\tau$ ≤ 400 ns	$\Delta\tau$ ≤ 150 ns	
Wide band input	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Average input power	≤ 7 kW	≤ 17.5 kW	≤ 33 kW	≤ 60 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input			
Insertion loss	no			
	≤ 0.1 dB (non adjacent)			
Output	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Peak output voltage	≤ 8.5 kV	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV
Isolation between inputs	≥ 35 dB			
VSWR (one WB channel)	≤ 1.06			
Dimensions (L x W x H) mm	900 x 480 x 1200 BN 57 55 20 A0010, BN 57 55 21 A0010, BN 57 55 22 A0010			900 x 520 x 1400
	900 x 415 x 1200 BN 57 55 20 A0060, BN 57 55 21 A0060, BN 57 55 22 A0060			
Weight	≈ 105 kg	≈ 115 kg	≈ 135 kg	≈ 180 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range




BN 57 55 25 A0060



BN 57 55 26 A0060



BN 57 55 27 A0060





BN 57 55 28 A0020


Part number / Width	BN 57 55 25 A0010 480 BN 57 55 25 A0060 415	BN 57 55 26 A0010 480 BN 57 55 26 A0060 415	BN 57 55 27 A0010 480 BN 57 55 27 A0060 415	BN 57 55 28 A0020 520					
Frequency range	470 - 860 MHz								
Channel spacing	≥ 0								
Narrow band input	1 5/8" EIA								
Filter type integrated cavities/size	8/170 ≡ BN 616666								
Temperature stability	≤ 2 kHz / K								
Harmonics attenuation	≥ 50 dB for f ≤ 1000 MHz								
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)						
Average input power	≤ 7 kW	≤ 6 kW	≤ 6 kW						
Tuning instruction	AS8100	AS8104	AS8103						
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz					
	f_0	≤ 0.45 dB	≤ 0.55 dB	f_0	≤ 0.50 dB	≤ 0.6 dB	f_0	≤ 0.55 dB	≤ 0.65 dB
	$f_0 \pm 3.805$	≤ 1.20 dB	≤ 1.9 dB	$f_0 \pm 2.79$	≤ 1.40 dB	≤ 1.8 dB	$f_0 \pm 2.69$	≤ 1.15 dB	≤ 1.50 dB
	$f_0 \pm 3.885$	≤ 1.50 dB	≤ 2.1 dB	$f_0 \pm 3.15$	≥ 12 dB		$f_0 \pm 3$	≥ 4 dB	
	$f_0 \pm 4.2$	≥ 15 dB		$f_0 \pm 4.5$	≥ 28 dB		$f_0 \pm 3.25$	≥ 18 dB	
	$f_0 \pm 6$	≥ 40 dB		$f_0 \pm 9$	≥ 54 dB		$f_0 \pm 9$	≥ 64 dB	
$f_0 \pm 12$	≥ 55 dB								
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 650$ ns						
Wide band input	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male					
Average input power	≤ 7 kW	≤ 17.5 kW	≤ 33 kW	≤ 60 kW					
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input								
Insertion loss	no								
	≤ 0.1 dB (non adjacent)								
Output	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male					
Peak output voltage	≤ 8.5 kV	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV					
Isolation between inputs	≥ 35 dB								
VSWR (one WB channel)	≤ 1.06								
Dimensions (L x W x H) mm	900 x 480 x 1200 BN 57 55 25 A0010, BN 57 55 26 A0010, BN 57 55 27 A0010			900 x 520 x 1400					
	900 x 415 x 1200 BN 57 55 25 A0060, BN 57 55 26 A0060, BN 57 55 27 A0060								
Weight	≈ 125 kg	≈ 135 kg	≈ 150 kg	≈ 195 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								

CCS UHF CIB COMBINERS


- **CCS** compact design
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 42 30 A0010



BN 57 42 29 A0010





BN 57 42 26 A0010


Part number	BN 57 42 30 A0010	BN 57 42 29 A0010	BN 57 42 26 A0010
Frequency range	470 - 860 MHz		
Channel spacing	≥ 2		
Narrow band input	1 5/8" EIA		
Filter type integrated cavities/size	3/200 ≡ BN 616434		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 25 dB for f ≤ 860 MHz		
DTV mask filtering	no		
Channel width	8 MHz ($\dot{U}/U_{rms}=13$ dB)		6 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power	≤ 7 kW		≤ 7 kW
Tuning instruction	AS3002		AS3004
Insertion loss (alternative tuning on request)	470 MHz f_0 ≤ 0.15 dB $f_0 \pm 3.885$ ≤ 0.20 dB $f_0 \pm 20$ ≥ 17 dB	860 MHz ≤ 0.20 dB ≤ 0.25 dB	470 MHz f_0 ≤ 0.20 dB 803 MHz ≤ 0.25 dB $f_0 \pm 3.0$ ≤ 0.20 dB $f_0 \pm 15$ ≥ 17 dB
Group delay variation	$\Delta\tau \leq 10$ ns		$\Delta\tau \leq 10$ ns
Wide band input	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male
Average input power	≤ 7 kW	≤ 17.5 kW	≤ 33 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	no		
	≤ 0.1 dB (non adjacent)		
Output	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male
Peak output voltage	≤ 8.5 kV	≤ 12.5 kV	≤ 15.5 kV
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 480 x 1200
Weight	≈ 80 kg	≈ 90 kg	≈ 100 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS


- **CCS** compact design
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 42 83 A0010



BN 57 42 81 A0010





BN 57 42 86 A0020


Part number	BN 57 42 83 A0010	BN 57 42 81 A0010	BN 57 42 86 A0020
Frequency range	470 - 860 MHz		
Channel spacing	≥ 2		
Narrow band input	3 1/8" EIA male		
Filter type integrated cavities/size	3/200 ≡ BN 616434		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 25 dB for f ≤ 860 MHz		
DTV mask filtering	no		
Channel width	8 MHz ($\dot{U}/U_{rms}=13$ dB)		6 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power	≤ 20 kW		≤ 20 kW
Tuning instruction	AS3002		AS3004
Insertion loss (alternative tuning on request)	470 MHz 860 MHz f ₀ ≤ 0.15 dB ≤ 0.20 dB f ₀ ± 3.885 ≤ 0.20 dB ≤ 0.25 dB f ₀ ± 20 ≥ 17 dB		470 MHz 803 MHz f ₀ ≤ 0.20 dB ≤ 0.25 dB f ₀ ± 3.0 ≤ 0.20 dB ≤ 0.25 dB f ₀ ± 15 ≥ 17 dB
Group delay variation	Δτ ≤ 10 ns		Δτ ≤ 10 ns
Wide band input	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Average input power	≤ 17 kW	≤ 33 kW	≤ 60 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	no		
Output	≤ 0.1 dB (non adjacent)		
Peak output voltage	3 1/8" EIA male ≤ 12.5 kV	4 1/2" EIA male ≤ 15.5 kV	52-120 BT male ≤ 19.5 kV
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 480 x 1200
Weight	≈ 95 kg	≈ 115 kg	≈ 155 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS


- CCS compact design
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range




BN 57 49 76 A0010



BN 57 49 73 A0010



BN 57 49 75 A0010





BN 57 49 85 A0020


Part number	BN 57 49 76 A0010	BN 57 49 73 A0010	BN 57 49 75 A0010	BN 57 49 85 A0020
Frequency range	470 - 860 MHz			
Channel spacing	≥ 1			
Narrow band input	1 5/8" EIA	3 1/8" EIA male		
Filter type integrated cavities/size	4/200 ≡ BN 616409			
Temperature stability	≤ 2 kHz / K			
Harmonics attenuation	≥ 40 dB for f ≤ 800 MHz			
DTV Mask filtering	no			
Channel width	8 MHz ($\hat{U}/U_{rms}=13$ dB)		6 MHz ($\hat{U}/U_{rms}=13$ dB)	
Average input power	≤ 7 kW BN 57 49 76 A0010 ≤ 15 kW BN 57 49 73 A0010 ≤ 15 kW BN 57 49 75 A0010 ≤ 15 kW BN 57 49 85 A0020	≤ 7 kW BN 57 49 76 A0010 ≤ 15 kW BN 57 49 73 A0010 ≤ 15 kW BN 57 49 75 A0010 ≤ 15 kW BN 57 49 85 A0020		
Tuning instruction	AS4056		AS4057	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz f_0 ≤ 0.25 dB ≤ 0.3 dB $f_0 \pm 3.885$ ≤ 0.25 dB ≤ 0.3 dB $f_0 \pm 12$ ≥ 30 dB		470 MHz 803 MHz f_0 ≤ 0.3 dB ≤ 0.35 dB $f_0 \pm 2.79$ ≤ 0.3 dB ≤ 0.35 dB $f_0 \pm 9$ ≥ 30 dB	
Group delay variation	$\Delta\tau \leq 40$ ns		$\Delta\tau \leq 40$ ns	
Wide band input	4 1/2" EIA male	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Average input power	≤ 33 kW	≤ 17.5 kW	≤ 33 kW	≤ 60 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input			
Insertion loss	no			
	≤ 0.1 dB (non adjacent)			
Output	4 1/2" EIA male	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Peak output voltage	≤ 15.5 kV	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV
Average output power	-	≤ 23.0 kW	-	-
Isolation between inputs	≥ 35 dB			
VSWR (one WB channel)	≤ 1.06			
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 480 x 1200	900 x 520 x 1400
Weight	≈ 120 kg	≈ 115 kg	≈ 125 kg	≈ 180 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for ATSC
- for 6 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range
- liquid cooled filter



BN 57 49 70 A0010



BN 57 46 71 A0010





BN 57 46 70 A0010


Part number Cooling	BN 57 49 70 A0010 natural cooling	BN 57 46 71 A0010 natural cooling	BN 57 46 70 A0010 liquid cooling
Frequency range	470 - 860 MHz		
Channel spacing	≥ 1		
Narrow band input	1 5/8" EIA	3 1/8" EIA male	3 1/8" EIA male
Filter type integrated cavities/size	6/200 ≡ BN 616571		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz		
DTV Mask filtering	ATSC @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)		
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 7 kW	≤ 9 kW	≤ 20 kW @ 0 - 600m ≤ 18 kW @ 1200 m ≤ 16 kW @ 2000 m ≤ 14 kW @ 2800 m ≤ 12 kW @ 3400 m ≤ 10 kW @ 4000 m
Tuning instruction	AS6082		
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz f_0 ≤ 0.5 dB ≤ 0.70 dB $f_0 \pm 2.69$ ≤ 0.7 dB ≤ 0.90 dB $f_0 \pm 3$ ≤ 1.5 dB ≤ 1.85 dB $f_0 \pm 4$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 9$ ≥ 65 dB		
Group delay variation	$\Delta\tau \leq 200$ ns		
Wide band input	3 1/8" EIA male		
Average input power	≤ 17.5 kW Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
DTV Mask filtering	no		
Insertion loss	≤ 0.1 dB (non adjacent)		
Output	3 1/8" EIA male		
Peak output voltage	≤ 12.5 kV		
Average output power	≤ 23.0 kW		
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 480 x 1200
Weight	≈ 135 kg	≈ 150 kg	≈ 150 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS


- CCS compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range




BN 57 46 93 A0010



BN 57 46 94 A0010



BN 57 46 95 A0010





BN 57 46 96 A0020


Part number	BN 57 46 93 A0010	BN 57 46 94 A0010	BN 57 46 95 A0010	BN 57 46 96 A0020					
Frequency range	470 - 860 MHz								
Channel spacing	≥ 0								
Narrow band input	1 5/8" EIA								
Filter type integrated cavities/size	6/200 ≡ BN 616540								
Temperature stability	≤ 2 kHz / K								
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz								
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)		DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)					
Average input power	≤ 7 kW	≤ 7 kW	≤ 7 kW	≤ 7 kW					
Tuning instruction	AS6194	AS6185		AS6290					
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	820 MHz			
	f_0	≤ 0.30 dB	≤ 0.45 dB	f_0	≤ 0.4 dB	≤ 0.55 dB	f_0	≤ 0.30 dB	≤ 0.40 dB
	$f_0 \pm 3.805$	≤ 0.70 dB	≤ 1.00 dB	$f_0 \pm 2.79$	≤ 1.0 dB	≤ 1.40 dB	$f_0 \pm 3.2$	≤ 0.45 dB	≤ 0.55 dB
	$f_0 \pm 3.885$	≤ 0.85 dB	≤ 1.15 dB	$f_0 \pm 3.0$	≥ 4 dB		$f_0 \pm 4.2$	≥ 13 dB	
	$f_0 \pm 4.2$	≥ 4 dB		$f_0 \pm 3.15$	≥ 8 dB		$f_0 \pm 10.5$	≥ 38 dB	
	$f_0 \pm 6$	≥ 20 dB		$f_0 \pm 4.5$	≥ 23 dB				
$f_0 \pm 12$	≥ 40 dB		$f_0 \pm 9$	≥ 48 dB					
		$f_0 \pm 15$	≥ 50 dB						
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 150$ ns				
Wide band input	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male					
Average input power	≤ 7 kW	≤ 17.5 kW	≤ 33 kW	≤ 60 kW	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input				
DTV Mask filtering					no				
Insertion loss					≤ 0.1 dB (non adjacent)				
Output	1 5/8" EIA	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male					
Peak output voltage	≤ 8.5 kV	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV					
Average output power	≤ 7 kW	-	-	-					
Isolation between inputs					≥ 35 dB				
VSWR (one WB channel)					≤ 1.06				
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 480 x 1200	900 x 520 x 1400					
Weight	≈ 130 kg	≈ 140 kg	≈ 155 kg	≈ 200 kg					
Environmental conditions					for limitations see „Environmental Conditions for Broadcast Products“				

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 49 28 A0010



BN 57 49 67 A0010





BN 57 49 00 A0020


Part number	BN 57 49 28 A0010	BN 57 49 67 A0010	BN 57 49 00 A0020
Frequency range	470 - 860 MHz		
Channel spacing	≥ 0		
Narrow band input	3 1/8" EIA male		
Filter type integrated cavities/size	6/200 ≡ BN 616540		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz		
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power	≤ 10 kW	≤ 8 kW	≤ 9 kW
Tuning instruction	AS6194	AS6185	AS6290
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz f_0 ≤ 0.30 dB ≤ 0.45 dB $f_0 \pm 3.805$ ≤ 0.70 dB ≤ 1.00 dB $f_0 \pm 3.885$ ≤ 0.85 dB ≤ 1.15 dB $f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6$ ≥ 20 dB $f_0 \pm 12$ ≥ 40 dB	470 MHz 803 MHz f_0 ≤ 0.4 dB ≤ 0.55 dB $f_0 \pm 2.79$ ≤ 1.0 dB ≤ 1.40 dB $f_0 \pm 3.0$ ≥ 4 dB $f_0 \pm 3.15$ ≥ 8 dB $f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	470 MHz 820 MHz f_0 ≤ 0.30 dB ≤ 0.40 dB $f_0 \pm 3.2$ ≤ 0.45 dB ≤ 0.55 dB $f_0 \pm 4.2$ ≥ 13 dB $f_0 \pm 10.5$ ≥ 38 dB
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 500$ ns	$\Delta\tau \leq 150$ ns
Wide band input	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Average input power	≤ 17.5 kW	≤ 33 kW	≤ 60 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	no		
Output	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Peak output voltage	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 520 x 1400
Weight	≈ 140 kg	≈ 160 kg	≈ 205 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range
- liquid cooled filter



BN 57 46 98 A0010



BN 57 49 71 A0010





BN 57 49 74 A0020


Part number Cooling	BN 57 46 98 A0010 liquid cooling	BN 57 49 71 A0010 liquid cooling	BN 57 49 74 A0020 liquid cooling
Frequency range		470 - 860 MHz	
Channel spacing		≥ 0	
Narrow band input		3 1/8" EIA male	
Filter type integrated cavities/size		6/200 ≡ BN 616540	
Temperature stability		≤ 2 kHz / K	
Harmonics attenuation		≥ 50 dB for f ≤ 860 MHz	
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	DVB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 23 kW @ 0 - 1000 m ≤ 20 kW @ 2000 m ≤ 18 kW @ 2600 m ≤ 16 kW @ 3200 m ≤ 14 kW @ 3800 m ≤ 12 kW @ 4400 m	≤ 20 kW @ 0 - 500 m ≤ 18 kW @ 1200 m ≤ 16 kW @ 2000 m ≤ 14 kW @ 2800 m ≤ 12 kW @ 3400 m ≤ 10 kW @ 4200 m	≤ 22 kW @ 0 - 600 m ≤ 20 kW @ 1400 m ≤ 18 kW @ 2000 m ≤ 16 kW @ 2600 m ≤ 14 kW @ 3300 m ≤ 12 kW @ 4000 m
Tuning instruction	AS6194	AS6185	AS6290
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz f_0 ≤ 0.30 dB ≤ 0.45 dB $f_0 \pm 3.805$ ≤ 0.70 dB ≤ 1.00 dB $f_0 \pm 3.885$ ≤ 0.85 dB ≤ 1.15 dB $f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6$ ≥ 20 dB $f_0 \pm 12$ ≥ 40 dB	470 MHz 803 MHz f_0 ≤ 0.4 dB ≤ 0.55 dB $f_0 \pm 2.79$ ≤ 1.0 dB ≤ 1.40 dB $f_0 \pm 3.0$ ≥ 4 dB $f_0 \pm 3.15$ ≥ 8 dB $f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9$ ≥ 48 dB $f_0 \pm 15$ ≥ 50 dB	470 MHz 820 MHz f_0 ≤ 0.30 dB ≤ 0.40 dB $f_0 \pm 3.2$ ≤ 0.45 dB ≤ 0.55 dB $f_0 \pm 4.2$ ≥ 13 dB $f_0 \pm 10.5$ ≥ 38 dB
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 500$ ns	$\Delta\tau \leq 150$ ns
Wide band input	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Average input power	≤ 17.5 kW	≤ 33 kW	≤ 60 kW
DTV Mask filtering		Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input	
Insertion loss		no	
		≤ 0.1 dB (non adjacent)	
Output	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Peak output voltage	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV
Average output power	≤ 23.0 kW	-	-
Isolation between inputs		≥ 35 dB	
VSWR (one WB channel)		≤ 1.06	
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 520 x 1400
Weight	≈ 145 kg	≈ 165 kg	≈ 210 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range




BN 57 49 40 A0010



BN 57 49 39 A0010



BN 57 49 37 A0010





BN 57 49 88 A0020


Part number	BN 57 49 40 A0010		BN 57 49 39 A0010		BN 57 49 37 A0010		BN 57 49 88 A0020	
Frequency range	470 - 860 MHz							
Channel spacing	≥ 0							
Narrow band input	1 5/8" EIA							
Filter type integrated cavities/size	8/200 ≡ BN 616544							
Temperature stability	≤ 2 kHz / K							
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz							
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)		ISDB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)				ATSC @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	
Average input power	≤ 7 kW		≤ 6.4 kW				≤ 6.4 kW	
Tuning instruction	AS8067		AS8074				AS8066	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz		470 MHz 803 MHz		470 MHz 820 MHz			
	f_0	≤ 0.4 dB ≤ 0.5 dB	f_0	≤ 0.45 dB ≤ 0.5 dB	f_0	≤ 0.5 dB ≤ 0.55 dB		
	$f_0 \pm 3.805$	≤ 1.0 dB ≤ 1.4 dB	$f_0 \pm 2.79$	≤ 1.20 dB ≤ 1.5 dB	$f_0 \pm 2.69$	≤ 1.0 dB ≤ 1.30 dB		
	$f_0 \pm 3.885$	≤ 1.5 dB ≤ 1.7 dB	$f_0 \pm 3.15$	≥ 15 dB	$f_0 \pm 3.0$	≥ 4 dB		
	$f_0 \pm 4.2$	≥ 15 dB	$f_0 \pm 4.5$	≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB		
	$f_0 \pm 6$	≥ 40 dB	$f_0 \pm 9$	≥ 55 dB	$f_0 \pm 9$	≥ 64 dB		
	$f_0 \pm 12$	≥ 55 dB						
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 500$ ns				$\Delta\tau \leq 400$ ns	
Wide band input	1 5/8" EIA		3 1/8" EIA male		4 1/2" EIA male		52-120 BT male	
Average input power	≤ 7 kW		≤ 17.5 kW		≤ 33 kW		≤ 60 kW	
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input							
Insertion loss	no							
	≤ 0.1 dB (non adjacent)							
Output	1 5/8" EIA		3 1/8" EIA male		4 1/2" EIA male		52-120 BT male	
Peak output voltage	≤ 8.5 kV		≤ 12.5 kV		≤ 15.5 kV		≤ 19.5 kV	
Average output power	≤ 7 kW		-		-		-	
Isolation between inputs	≥ 35 dB							
VSWR (one WB channel)	≤ 1.06							
Dimensions (L x W x H) mm	900 x 480 x 1200		900 x 480 x 1200		900 x 480 x 1200		900 x 520 x 1400	
Weight	≈ 160 kg		≈ 170 kg		≈ 185 kg		≈ 230 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“							

CCS UHF CIB COMBINERS


- CCS compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range



BN 57 49 65 A0010



BN 57 49 66 A0010





BN 57 49 91 A0020


Part number	BN 57 49 65 A0010	BN 57 49 66 A0010	BN 57 49 91 A0020				
Frequency range	470 - 860 MHz						
Channel spacing	≥ 0						
Narrow band input	3 1/8" EIA male						
Filter type integrated cavities/size	8/200 ≡ BN 616544						
Temperature stability	≤ 2 kHz / K						
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz						
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 7 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)				
Average input power	≤ 8 kW	≤ 6.4 kW	≤ 6.4 kW				
Tuning instruction	AS8067	AS8074	AS8066				
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	820 MHz			
	f_0	≤ 0.4 dB	≤ 0.5 dB	f_0	≤ 0.5 dB	≤ 0.55 dB	
	$f_0 \pm 3.805$	≤ 1.0 dB	≤ 1.4 dB	$f_0 \pm 2.79$	≤ 1.20 dB	≤ 1.5 dB	
	$f_0 \pm 3.885$	≤ 1.5 dB	≤ 1.7 dB	$f_0 \pm 3.15$	≥ 15 dB	$f_0 \pm 3.0$	≥ 4 dB
	$f_0 \pm 4.2$	≥ 15 dB		$f_0 \pm 4.5$	≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB
	$f_0 \pm 6$	≥ 40 dB		$f_0 \pm 9$	≥ 55 dB	$f_0 \pm 9$	≥ 64 dB
	$f_0 \pm 12$	≥ 55 dB					
Group delay variation	$\Delta\tau \leq 700$ ns	$\Delta\tau \leq 500$ ns	$\Delta\tau \leq 400$ ns				
Wide band input	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male				
Average input power	≤ 17.5 kW	≤ 33 kW	≤ 60 kW				
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input						
Insertion loss	no						
	≤ 0.1 dB (non adjacent)						
Output	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male				
Peak output voltage	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV				
Isolation between inputs	≥ 35 dB						
VSWR (one WB channel)	≤ 1.06						
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 520 x 1400				
Weight	≈ 175 kg	≈ 190 kg	≈ 240 kg				
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“						

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range
- liquid cooled filter



BN 57 49 64 A0010



BN 57 49 89 A0010





BN 57 49 79 A0020

Part number Cooling	BN 57 49 64 A0010 liquid cooling	BN 57 49 89 A0010 liquid cooling	BN 57 49 79 A0020 liquid cooling
Frequency range	470 - 860 MHz		
Channel spacing	≥ 0		
Narrow band input	3 1/8" EIA male		
Filter type integrated cavities/size	8/200 ≡ BN 616544		
Temperature stability	≤ 2 kHz / K		
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz		
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 23 kW @ 0 - 1000 m ≤ 20 kW @ 2000 m ≤ 18 kW @ 2600 m ≤ 16 kW @ 3200 m ≤ 14 kW @ 3800 m ≤ 12 kW @ 4400 m	≤ 20 kW @ 0 - 500 m ≤ 18 kW @ 1200 m ≤ 16 kW @ 2000 m ≤ 14 kW @ 2800 m ≤ 12 kW @ 3400 m ≤ 10 kW @ 4200 m	≤ 22 kW @ 0 - 600 m ≤ 20 kW @ 1400 m ≤ 18 kW @ 2000 m ≤ 16 kW @ 2600 m ≤ 14 kW @ 3300 m ≤ 12 kW @ 4000 m
Tuning instruction	AS8067	AS8074	AS8066
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz f_0 ≤ 0.4 dB ≤ 0.5 dB $f_0 \pm 3.805$ ≤ 1.0 dB ≤ 1.4 dB $f_0 \pm 3.885$ ≤ 1.5 dB ≤ 1.7 dB $f_0 \pm 4.2$ ≥ 15 dB $f_0 \pm 6$ ≥ 40 dB $f_0 \pm 12$ ≥ 55 dB	470 MHz 803 MHz f_0 ≤ 0.45 dB ≤ 0.5 dB $f_0 \pm 2.79$ ≤ 1.20 dB ≤ 1.5 dB $f_0 \pm 3.15$ ≥ 15 dB $f_0 \pm 4.5$ ≥ 30 dB $f_0 \pm 9$ ≥ 55 dB	470 MHz 820 MHz f_0 ≤ 0.5 dB ≤ 0.55 dB $f_0 \pm 2.69$ ≤ 1.0 dB ≤ 1.30 dB $f_0 \pm 3.0$ ≥ 4 dB $f_0 \pm 3.25$ ≥ 18 dB $f_0 \pm 9$ ≥ 64 dB
Group delay variation	$\Delta\tau \leq 700$ ns	$\Delta\tau \leq 500$ ns	$\Delta\tau \leq 400$ ns
Wide band input	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Average input power	≤ 17.5 kW	≤ 33 kW	≤ 60 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input		
Insertion loss	no		
Output	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male
Peak output voltage	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV
Isolation between inputs	≥ 35 dB		
VSWR (one WB channel)	≤ 1.06		
Dimensions (L x W x H) mm	900 x 480 x 1200	900 x 480 x 1200	900 x 520 x 1400
Weight	≈ 170 kg	≈ 180 kg	≈ 235 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

CCS UHF CIB COMBINERS



- CCS compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range

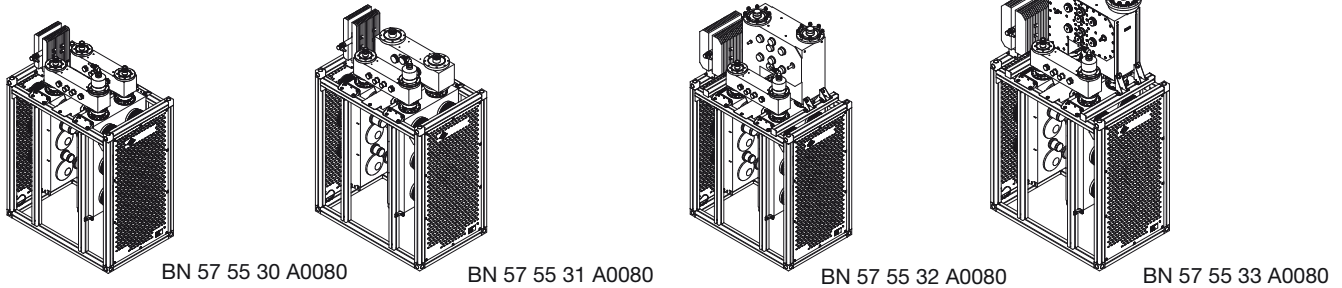


Part number	BN 57 55 30 A0080		BN 57 55 31 A0080	BN 57 55 32 A0080		BN 57 55 33 A0080	
Frequency range	470 - 800 MHz						
Channel spacing	≥ 0						
Narrow band input	3 1/8" EIA male						
Filter type integrated cavities/size	6/230 ≡ BN 616669						
Temperature stability	≤ 2 kHz / K						
Harmonics attenuation	≥ 50 dB for f ≤ 800 MHz						
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)		ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)		ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)		
Average input power	≤ 17 kW		≤ 13.5 kW		≤ 13.5 kW		
Tuning instruction	AS6303		AS6365		AS6308		
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 786 MHz		470 MHz 785 MHz		470 MHz 785 MHz		
	f_0	≤ 0.30 dB ≤ 0.4 dB	f_0	≤ 0.4 dB ≤ 0.55 dB	f_0	≤ 0.45 dB ≤ 0.5 dB	
	$f_0 \pm 3.805$	≤ 0.75 dB ≤ 0.9 dB	$f_0 \pm 2.79$	≤ 0.85 dB ≤ 1.0 dB	$f_0 \pm 2.69$	≤ 0.80 dB ≤ 0.8 dB	
	$f_0 \pm 3.885$	≤ 0.85 dB ≤ 1.0 dB	$f_0 \pm 3.0$	≥ 2 dB	$f_0 \pm 3.5$	≥ 3 dB	
	$f_0 \pm 4.2$	≥ 4 dB	$f_0 \pm 3.15$	≥ 8 dB	$f_0 \pm 4$	≥ 8 dB	
	$f_0 \pm 6$	≥ 20 dB	$f_0 \pm 4.5$	≥ 23 dB	$f_0 \pm 6$	≥ 30 dB	
	$f_0 \pm 12$	≥ 40 dB	$f_0 \pm 9$	≥ 48 dB	$f_0 \pm 9$	≥ 65 dB	
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 200$ ns		
Wide band input	3 1/8" EIA male		4 1/2" EIA male		52-120 BT male		6 1/8" EIA male
Average input power	≤ 17.5 kW		≤ 33 kW		≤ 60 kW		≤ 60 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input						
Insertion loss	no						
	≤ 0.1 dB (non adjacent)						
Output	3 1/8" EIA male		4 1/2" EIA male		52-120 BT male		6 1/8" EIA male
Peak output voltage	≤ 12.5 kV		≤ 15.5 kV		≤ 19.5 kV		≤ 24 kV
Isolation between inputs	≥ 35 dB						
VSWR (one WB channel)	≤ 1.06						
Dimensions (L x W x H) mm	900 x 570 x 1400		900 x 570 x 1400		900 x 570 x 1600		900 x 570 x 1650
Weight	≈ 160 kg		≈ 170 kg		≈ 220 kg		≈ 245 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“						

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range
- liquid cooled filters and couplers




BN 57 55 40 A0080



BN 57 55 41 A0080



BN 57 55 42 A0080





BN 57 55 43 A0080


Part number Cooling	BN 57 55 40 A0080 liquid cooling	BN 57 55 41 A0080 liquid cooling	BN 57 55 42 A0080 liquid cooling	BN 57 55 43 A0080 liquid cooling
Frequency range	470 - 800 MHz			
Channel spacing	≥ 0			
Narrow band input	3 1/8" EIA male			
Filter type integrated cavities/size	6/230 ≡ BN 616669			
Temperature stability	≤ 2 kHz / K			
Harmonics attenuation	≥ 50 dB for f ≤ 800 MHz			
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)	
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 23 kW @ 0 - 3200 m ≤ 20 kW @ 3800 m ≤ 18 kW @ 4200 m	≤ 23 kW @ 0 - 2200 m ≤ 20 kW @ 3000 m ≤ 18 kW @ 3400 m ≤ 16 kW @ 4000 m	≤ 23 kW @ 0 - 3200 m ≤ 20 kW @ 3800 m ≤ 18 kW @ 4200 m	
Tuning instruction	AS6303		AS6365	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	786 MHz	470 MHz	785 MHz
	f_0	≤ 0.30 dB ≤ 0.4 dB	f_0	≤ 0.4 dB ≤ 0.45 dB
	$f_0 \pm 3.805$	≤ 0.75 dB ≤ 0.9 dB	$f_0 \pm 2.79$	≤ 0.85 dB ≤ 1.00 dB
	$f_0 \pm 3.885$	≤ 0.85 dB ≤ 1.0 dB	$f_0 \pm 3.0$	≥ 2 dB
	$f_0 \pm 4.2$	≥ 4 dB	$f_0 \pm 3.15$	≥ 8 dB
	$f_0 \pm 6$	≥ 20 dB	$f_0 \pm 4.5$	≥ 23 dB
	$f_0 \pm 12$	≥ 40 dB	$f_0 \pm 9$	≥ 48 dB
			$f_0 \pm 15$	≥ 50 dB
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 500$ ns	
Wide band input	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male	6 1/8" EIA male
Average input power	≤ 17.5 kW	≤ 33 kW	≤ 60 kW	≤ 80 kW
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input			
Insertion loss	no			
	≤ 0.1 dB (non adjacent)			
Output	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male	6 1/8" EIA male
Peak output voltage	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV	≤ 24 kV
Isolation between inputs	≥ 35 dB			
VSWR (one WB channel)	≤ 1.06			
Dimensions (L x W x H) mm	900 x 570 x 1400	900 x 570 x 1400	900 x 570 x 1600	900 x 570 x 1650
Weight	≈ 160 kg	≈ 170 kg	≈ 220 kg	≈ 245 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

CCS UHF CIB COMBINERS


- CCS compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range




BN 57 55 35 A0080



BN 57 55 36 A0080



BN 57 55 37 A0080





BN 57 55 38 A0080


Part number	BN 57 55 35 A0080		BN 57 55 36 A0080		BN 57 55 37 A0080		BN 57 55 38 A0080	
Frequency range	470 - 800 MHz							
Channel spacing	≥ 0							
Narrow band input	3 1/8" EIA male							
Filter type integrated cavities/size	8/230 ≡ BN 616670							
Temperature stability	≤ 2 kHz / K							
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz							
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)		ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)				ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)	
Average input power	≤ 17 kW		≤ 13.5 kW				≤ 13.5 kW	
Tuning instruction	AS8124		AS8128				AS8127	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 790 MHz		470 MHz 790 MHz		470 MHz 790 MHz		470 MHz 790 MHz	
	f_0	≤ 0.4 dB ≤ 0.45 dB	f_0	≤ 0.45 dB ≤ 0.50 dB	f_0	≤ 0.45 dB ≤ 0.50 dB	f_0	≤ 0.45 dB ≤ 0.50 dB
	$f_0 \pm 3.805$	≤ 1.05 dB ≤ 1.10 dB	$f_0 \pm 2.79$	≤ 1.15 dB ≤ 1.20 dB	$f_0 \pm 2.69$	≤ 1.00 dB ≤ 1.10 dB	$f_0 \pm 2.69$	≤ 1.00 dB ≤ 1.10 dB
	$f_0 \pm 3.885$	≤ 1.25 dB ≤ 1.35 dB	$f_0 \pm 3.15$	≥ 15 dB	$f_0 \pm 3$	≥ 4 dB	$f_0 \pm 3$	≥ 4 dB
	$f_0 \pm 4.2$	≥ 15 dB	$f_0 \pm 4.5$	≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB	$f_0 \pm 3.25$	≥ 18 dB
	$f_0 \pm 6$	≥ 40 dB	$f_0 \pm 9$	≥ 55 dB	$f_0 \pm 9$	≥ 64 dB	$f_0 \pm 9$	≥ 64 dB
$f_0 \pm 12$	≥ 55 dB	$f_0 \pm 15$	≥ 65 dB	$f_0 \pm 15$	≥ 65 dB			
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 550$ ns				$\Delta\tau \leq 450$ ns	
Wide band input	3 1/8" EIA male		4 1/2" EIA male		52-120 BT male		6 1/8" EIA male	
Average input power	≤ 17.5 kW		≤ 33 kW		≤ 60 kW		≤ 60 kW	
DTV Mask filtering	Attention: The power at the wide band input must be reduced by 50 % of the power fed into the narrow band input							
Insertion loss	no							
	≤ 0.1 dB (non adjacent)							
Output	3 1/8" EIA male		4 1/2" EIA male		52-120 BT male		6 1/8" EIA male	
Peak output voltage	≤ 12.5 kV		≤ 15.5 kV		≤ 19.5 kV		≤ 24 kV	
Isolation between inputs	≥ 35 dB							
VSWR (one WB channel)	≤ 1.06							
Dimensions (L x W x H) mm	900 x 570 x 1400		900 x 570 x 1400		900 x 570 x 1600		900 x 570 x 1650	
Weight	≈ 200 kg		≈ 210 kg		≈ 260 kg		≈ 285 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“							

CCS UHF CIB COMBINERS


- **CCS** compact design
- integrated mask filters for DTV
- adjacent channel operation
- for 6, 7 and 8 MHz channel bandwidth
- temperature compensated
- tuneable within the whole UHF range
- liquid cooled filters and couplers




BN 57 55 45 A0080



BN 57 55 46 A0080



BN 57 55 47 A0080



BN 57 55 48 A0080

Part number Cooling	BN 57 55 45 A0080 liquid cooling	BN 57 55 46 A0080 liquid cooling	BN 57 55 47 A0080 liquid cooling	BN 57 55 48 A0080 liquid cooling			
Frequency range	470 - 800 MHz						
Channel spacing	≥ 0						
Narrow band input	3 1/8" EIA male						
Filter type integrated cavities/size	8/230 ≡ BN 616670						
Temperature stability	≤ 2 kHz / K						
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz						
DTV Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms}=13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms}=13$ dB)		ATSC @ 6 MHz ($\dot{U}/U_{rms}=11$ dB)			
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 23 kW @ 0 - 2700 m ≤ 22 kW @ 3000 m ≤ 20 kW @ 3400 m ≤ 18 kW @ 3800 m ≤ 16 kW @ 4200 m	≤ 23 kW @ 0 - 1600 m ≤ 22 kW @ 1800 m ≤ 20 kW @ 2400 m ≤ 18 kW @ 3000 m ≤ 16 kW @ 3400 m ≤ 14 kW @ 4000 m		≤ 23 kW @ 0 - 1600 m ≤ 22 kW @ 1800 m ≤ 20 kW @ 2400 m ≤ 18 kW @ 3000 m ≤ 16 kW @ 3400 m ≤ 14 kW @ 4000 m			
Tuning instruction	AS8124		AS8128				
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	790 MHz	470 MHz	790 MHz			
	f_0	≤ 0.4 dB	≤ 0.45 dB	f_0	≤ 0.45 dB	≤ 0.5 dB	
	$f_0 \pm 3.805$	≤ 1.05 dB	≤ 1.10 dB	$f_0 \pm 2.79$	≤ 1.15 dB	≤ 1.20 dB	
	$f_0 \pm 3.885$	≤ 1.25 dB	≤ 1.35 dB	$f_0 \pm 3.15$	≥ 15 dB	$f_0 \pm 3.0$	≥ 4 dB
	$f_0 \pm 4.2$	≥ 15 dB		$f_0 \pm 4.5$	≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB
	$f_0 \pm 6$	≥ 40 dB		$f_0 \pm 9$	≥ 55 dB	$f_0 \pm 9$	≥ 64 dB
$f_0 \pm 12$	≥ 55 dB		$f_0 \pm 15$	≥ 65 dB			
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 550$ ns				
Wide band input	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male	6 1/8" EIA male			
Average input power	≤ 17.5 kW	≤ 33 kW	≤ 60 kW	≤ 80 kW			
DTV Mask filtering	no						
Insertion loss	≤ 0.1 dB (non adjacent)						
Output	3 1/8" EIA male	4 1/2" EIA male	52-120 BT male	6 1/8" EIA male			
Peak output voltage	≤ 12.5 kV	≤ 15.5 kV	≤ 19.5 kV	≤ 24 kV			
Isolation between inputs	≥ 35 dB						
VSWR (one WB channel)	≤ 1.06						
Dimensions (L x W x H) mm	900 x 570 x 1400	900 x 570 x 1400	900 x 570 x 1600	900 x 570 x 1650			
Weight	≈ 200 kg	≈ 210 kg	≈ 260 kg	≈ 285 kg			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“						



BANDPASS FILTERS

Bandpass and low pass filters are applied between the output of a broadcast transmitter and the antenna to suppress spurious emissions.

For analogue “combined” transmitters the filters must suppress the harmonics of vision and sound carrier.

For DTV transmitters the filters are used to limit the out-of-channel emissions according to the various mask specifications (ATSC, DAB, DVB-T and ISDB-T).

SPINNER offers coaxial filters, dual-mode wave guide filters, dielectric filters and low pass filters for the frequency ranges band 3, UHF and band L for the following applications:

- 8 MHz DVB-T and DVB-T2 extended
- 8 MHz analog TV
- 7 MHz DVB-T and DVB-T2
- 7 MHz analog TV
- 6 MHz DVB-T, DVB-T2, ISDB-T and ATSC
- 6 MHz analogue TV
- 1.54 MHz DAB and T-DMB

In the catalog you can find filter data for the most common applications. However, alternative filter tunings can be made for other mask requirements, applications and bandwidths. Please do not hesitate to contact us.

The filter tuning (pass band and stop band insertion loss, matching and variation of group delay time) is fixed in a tuning specification (e.g. AS6121).

It is mandatory to specify in every order this tuning specification together with the frequency to assure that the filter is tuned in the factory as agreed.

All bandpass filters can be integrated into multi-channel combiners where they simultaneously provide the isolation between transmitters and mask filtering (please see the chapter multi-channel combiners).


The „Environmental Conditions for Broadcast Products“ listed in the annex must be obeyed during operation, transport and storage.

The maximum rating of the filter depends on the environmental conditions like temperature, cooling and height above sea level. The majority of filters can be operated up to 2300 m above sea level with the power specified in the data sheet. For stations at higher altitude the power has to be reduced as shown in the „Environmental Conditions for Broadcast Products“.

For some filters with liquid cooling the derating has to be applied above 500 m as shown in the data sheets.

The input and output ports of all bandpass filters end inside the resonators with an open or a short. So these filters block DC and low frequencies.

Most bandpass filters are equipped with cross couplings to achieve steeper slopes for mask filtering. Inside multi-channel combiners the cross couplings are used to enable adjacent channels operation.

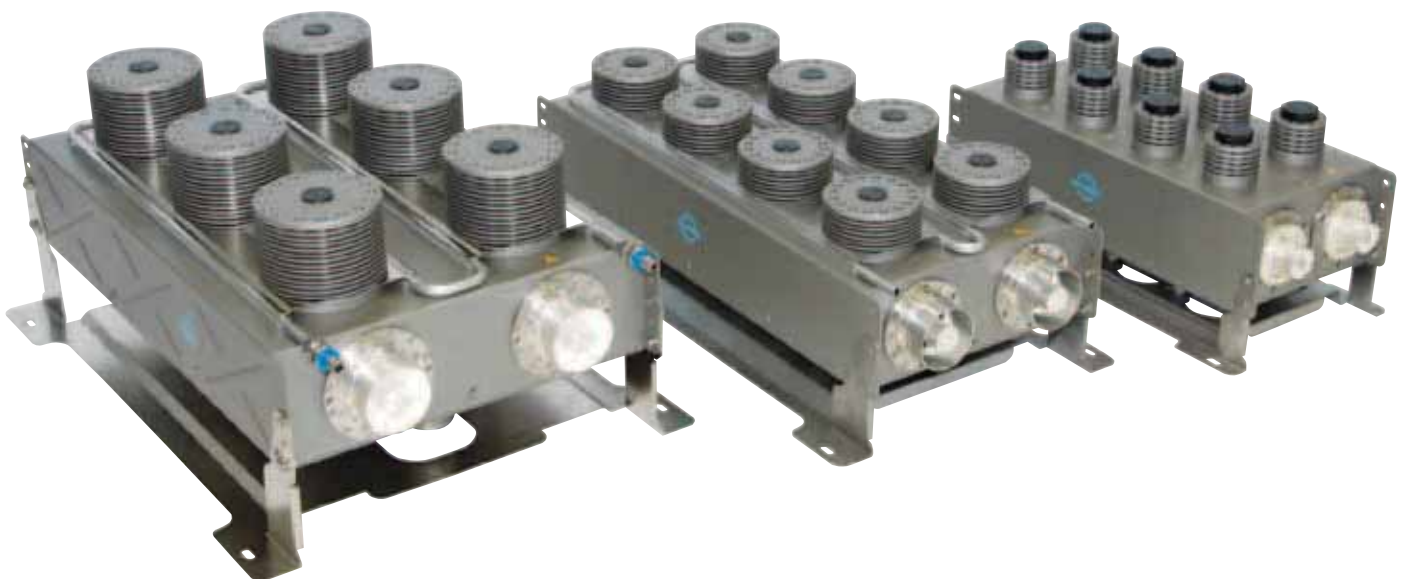

VHF / BAND 3, COAXIAL BANDPASS FILTER

Part number	Frequency in MHz	Average input power	Typ. application	Number / Size of cavities
BN 61 63 65	167 - 254	≤ 2.7 kW	ATV	4/150
BN 61 63 64	167 - 254	≤ 7.1 kW	ATV	4/150
BN 61 71 15	223 - 240	≤ 300 W	DAB/T-DMB	6/170
BN 61 71 16	174 - 240	≤ 500 W	DAB/T-DMB	6/100
BN 61 71 71	170 - 240	≤ 1.5 kW	DAB/T-DMB	6/150
BN 61 71 44	170 - 240	≤ 1.6 kW	DAB/T-DMB	6/150
BN 61 71 45	215 - 240	≤ 1.6 kW	DAB/T-DMB	6/150
BN 61 71 83	170 - 240	≤ 1.6 kW	DAB/T-DMB	8/150
BN 61 71 11	170 - 240	≤ 3.0 kW	DAB/T-DMB	6/200
BN 61 71 10	170 - 240	≤ 5.1 kW	DAB/T-DMB	6/200
BN 61 71 08	170 - 240	≤ 3.0 kW	DAB/T-DMB	6/200
BN 61 71 09	170 - 240	≤ 5.1 kW	DAB/T-DMB	6/200
BN 61 71 13	170 - 240	≤ 3.1 kW	DAB/T-DMB	8/200
BN 61 71 12	170 - 240	≤ 5.1 kW	DAB/T-DMB	8/200
BN 61 71 90	174 - 230	≤ 1.1 kW	DTV	6/100
BN 61 71 26	174 - 230	≤ 4.0 kW	DTV	6/150
BN 61 71 91	174 - 230	≤ 3.5 kW	DTV	8/150
BN 61 71 93	174 - 230	≤ 3.5 kW	DTV	10/150

UHF COAXIAL BANDPASS FILTER

Part number	Frequency in MHz	Average input power		Typ. application	Number / Size of cavities
		6 MHz	8 MHz		
BN 61 65 07	470 - 860	≤ 40 W	≤ 50 W	DTV/ATV	4/34
BN 61 65 01	470 - 860	≤ 100 W	≤ 100 W	DTV	6/38
BN 61 66 60	470 - 860	≤ 100 W	≤ 130 W	DTV	6/40
BN 61 66 61	470 - 860	≤ 100 W	≤ 130 W	DTV	8/40
BN 61 65 66	470 - 860	≤ 300 W	≤ 375 W	DTV	6/60
BN 61 65 68	470 - 860	≤ 300 W	≤ 375 W	DTV	8/60
BN 61 64 02	470 - 860	≤ 600 W	≤ 750 W	DTV	6/84
BN 61 64 03	470 - 860	≤ 600 W	≤ 750 W	DTV	8/84
BN 61 66 63	470 - 860	≤ 1.3 kW	≤ 1.6 kW	DTV	6/120
BN 61 66 64	470 - 860	≤ 1.3 kW	≤ 1.6 kW	DTV	8/120
BN 61 64 04	470 - 860	≤ 5.0 kW	≤ 5.0 kW	ATV	4/150
BN 61 65 72	470 - 803	≤ 2.25 kW	–	ATSC	6/150
BN 61 65 18	470 - 860	≤ 2.0 kW	≤ 2.5 kW	DTV	6/150
BN 61 65 42	470 - 860	≤ 1.6 kW	≤ 2.0 kW	DTV	8/150
BN 61 66 65	470 - 860	≤ 3.0 kW	≤ 3.75 kW	DTV	6/170
BN 61 66 65	470 - 860	≤ 6.0 kW	≤ 7.5 kW	DTV	6/170

UHF COAXIAL BANDPASS FILTER

Part number	Frequency in MHz	Average input power		Typ. application	Number / Size of cavities
		6 MHz	8 MHz		
BN 61 66 66	470 - 860	≤ 3.0 kW	≤ 3.75 kW	DTV	8/170
BN 61 66 66	470 - 860	≤ 5.0 kW	≤ 6.25 kW	DTV	8/170
BN 61 64 09	470 - 860	≤ 6.0 kW	≤ 7.5 kW	ATV	4/200
BN 61 64 09	470 - 860	≤ 11.2 kW	≤ 14 kW	ATV	4/200
BN 61 65 71	470 - 803	≤ 4.5 kW	–	ATSC	6/200
BN 61 65 70	470 - 803	≤ 10.0 kW	–	ATSC	6/200
BN 61 65 40	470 - 860	≤ 4.0 kW	≤ 5.0 kW	DTV	6/200
BN 61 65 50	470 - 860	≤ 10.0 kW	≤ 12.5 kW	DTV	6/200
BN 61 65 44	470 - 860	≤ 3.2 kW	≤ 4.0 kW	DTV	8/200
BN 61 65 54	470 - 860	≤ 10.0 kW	≤ 12.5 kW	DTV	8/200
BN 61 66 69	470 - 790	≤ 6.75 kW	≤ 18.0 kW	DTV	6/230
BN 61 66 70	470 - 790	≤ 6.75 kW	≤ 16.5 kW	DTV	8/230

BAND L BANDPASS FILTERS WITH DUAL MODE WAVE GUIDE RESONATORS

Part number	Frequency in MHz	Average input power	Typ. application	Number / Size of cavities
BN 61 65 11 BN 61 65 12	1452 - 1468 1468 - 1492	≤ 1.2 kW	DAB / T-DMB	4/DM
BN 61 65 13 BN 61 65 14	1452 - 1468 1468 - 1492	≤ 1.6 kW	DAB / T-DMB	4/DM

BAND L BANDPASS FILTERS WITH DIELECTRIC RESONATORS

Part number	Frequency in MHz	Average input power	Typ. application	Number / Size of cavities
BN 61 65 16	1452 - 1492	≤ 400 W	DAB / T-DMB	4/DE

UHF LOW-PASS FILTERS



Part number	Frequency in MHz	Average input power	Typ. application	Design
BN 61 63 95	330 - 960	≤ 1.0 kW	DTV / ATV	coaxial
BN 61 64 52	470 - 862	≤ 2.0 kW	DTV / ATV	SWS

ANNEX


Accessories for Liquid Cooling	
--------------------------------	--

2.7 KW - 7.1 KW BAND 3 ATV BANDPASS FILTER

- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within band 3
- temperature compensated
- DC block
- installation horizontally or vertically

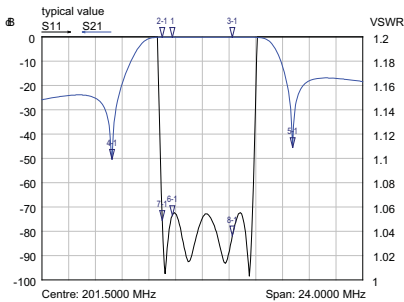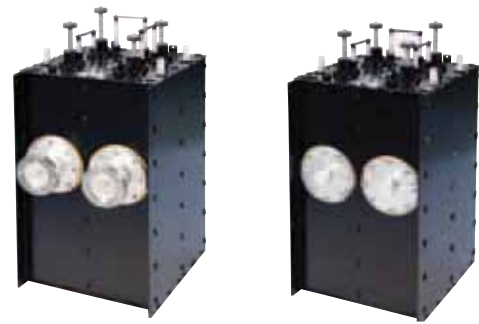

Typical diagram AS4013

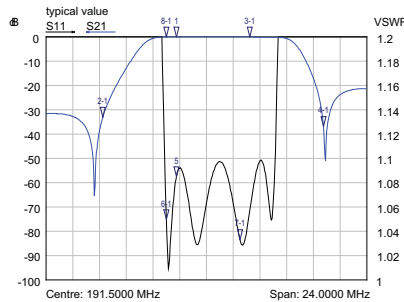


Typical diagram AS4010


Part number	BN 61 63 65	BN 61 63 64
Connectors	7-16 female	1 5/8" EIA
Frequency range	167 - 254 MHz	
Number / Size of cavities	4 / 150	
Mask filtering	ATV	ATV
Average input power	≤ 2.7 kW ≡ 3.5/0.35 kW BN 61 63 65 ≤ 7.1 kW ≡ 10.0/1.0 kW BN 61 63 64	≤ 2.7 kW ≡ 3.5/0.35 kW BN 61 63 65 ≤ 7.1 kW ≡ 10.0/1.0 kW BN 61 63 64
Tuning instruction	Standard D: AS4027 Standard I: AS4019	Standard M: AS4013 Standard B: AS4010
Insertion loss & Mask filtering (alternative tuning on request)	$f_{(V)} - \Delta > 30.0 \text{ dB}$ $f_{(V)} - 0.75 \text{ MHz} \leq 0.20 \text{ dB}$ $f_{(V)} \leq 0.20 \text{ dB}$ $f_{(S)} = f_{(V)} + \Delta \leq 0.20 \text{ dB}$ $f_{(V)} + 2\Delta > 30.0 \text{ dB}$	$f_{(V)} - \Delta > 30.0 \text{ dB}$ $f_{(V)} - 0.75 \text{ MHz} \leq 0.25 \text{ dB}$ $f_{(V)} \leq 0.25 \text{ dB}$ $f_{(S)} = f_{(V)} + \Delta \leq 0.25 \text{ dB}$ $f_{(V)} + 2\Delta > 30.0 \text{ dB}$
VSWR (pass band range)	$f_{(V)} - 0.75 \text{ MHz} \leq 1.15$ $f_{(V)} \leq 1.10$ $f_{(S)} = f_{(V)} + \Delta \leq 1.10$	$f_{(V)} - 0.75 \text{ MHz} \leq 1.15$ $f_{(V)} \leq 1.10$ $f_{(S)} = f_{(V)} + \Delta \leq 1.10$
Group delay variation	$\Delta\tau \leq 30 \text{ ns}$	$\Delta\tau \leq 30 \text{ ns}$
Temperature stability	$\leq 2 \text{ kHz / K}$	
Connectors	7-16 female	1 5/8" EIA
Dimensions (L x W x H) mm	323 x 295 x 745	408 x 347 x 762
Weight	ca. 38 kg	ca. 38 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

300 W - 500 W BAND 3 DAB / T-DMB BANDPASS FILTER

- mask filter for DAB and T-DMB
- for 1.54 MHz block bandwidth
- with cross coupling (notch function)
- tuneable within band 3 (BN 617115 with tuning kits)
- temperature compensated
- DC block
- installation horizontally or vertically




BN 61 71 15 C1015




BN 61 71 16 C1025

Bandpassfilter
Bandpass Filters

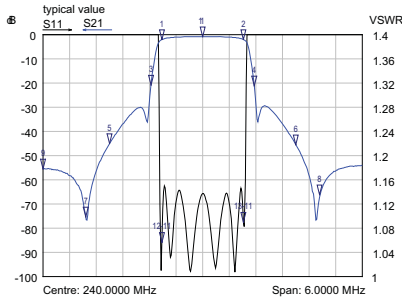

Typical diagram AS6353

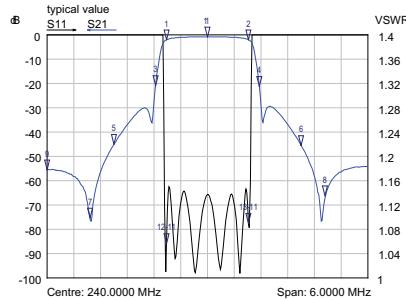


Typical diagram AS6033


Part number	BN 61 71 15 C1015	BN 61 71 16 C1025
Frequency range	223 - 240 MHz	174 - 240 MHz
Number / Size of cavities	6 / 170	6 / 100
Harmonics attenuation	≥ 60 dB for $f \leq 720$ MHz	≥ 50 dB for $f \leq 500$ MHz
Mask filtering	DAB / T-DMB @1.54 MHz ($\dot{U}/U_{rms} = 13$ dB)	
Average input power	≤ 300 W	≤ 600 W
Tuning instruction	AS6353	AS6033
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.9$ dB $f_0 \pm 0.77 \leq 2.2$ dB $f_0 \pm 0.97 \geq 15$ dB $f_0 \pm 1.75 \geq 45$ dB $f_0 \pm 2.20 \geq 50$ dB $f_0 \pm 3.00 \geq 50$ dB	$f_0 \leq 0.9$ dB $f_0 \pm 0.77 \leq 2.2$ dB $f_0 \pm 0.97 \geq 15$ dB $f_0 \pm 1.75 \geq 45$ dB $f_0 \pm 2.20 \geq 53$ dB $f_0 \pm 3.00 \geq 53$ dB
VSWR (pass band range)	≤ 1.15	≤ 1.15
Group delay variation	$\Delta\tau \leq 1200$ ns	$\Delta\tau \leq 1200$ ns
Temperature stability	≤ 1 kHz / K	≤ 1 kHz / K
Connectors	N female	7-16 female
Dimensions (L x W x H) mm	581 x 378 x 178	416 x 214 x 442
Weight	ca. 25 kg	ca. 25 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

1.5 KW - 1.6 KW BAND 3 DAB / T-DMB BANDPASS FILTER


- mask filter for DAB and T-DMB
- for 1.54 MHz block bandwidth
- tuneable within band 3
- temperature compensated
- DC block
- installation standing

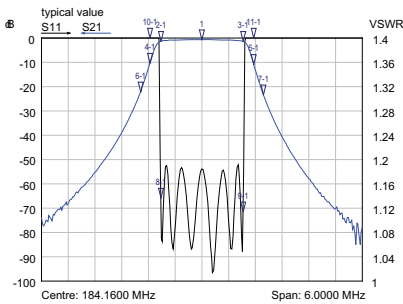

Typical diagram AS6010

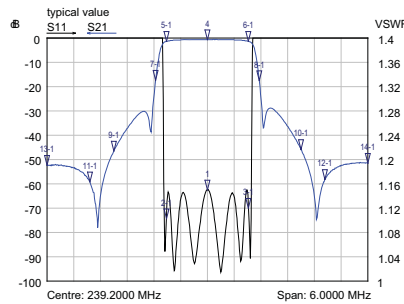

Typical diagram AS6137

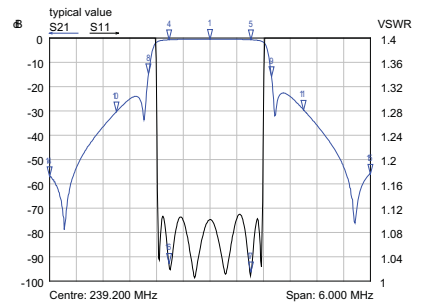


Typical diagram AS6149


Part number Filter design	BN 61 71 71 without cross coupling	BN 61 71 44 with cross coupling	BN 61 71 45 with cross coupling
Frequency range	170 - 240 MHz		215 - 240 MHz
Number / Size of cavities	6 / 150		
Harmonics attenuation	≥ 50 dB for $f \leq 500$ MHz		
Mask filtering	DAB / T-DMB @1.54 MHz ($\dot{U}/U_{rms} = 13$ dB)		
Average input power	≤ 1.5 kW	≤ 1.6 kW	≤ 1.6 kW
Tuning instruction	AS6010	AS6137	AS 6149
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.9$ dB $f_0 \pm 0.77 \leq 1.5$ dB $f_0 \pm 0.97 \geq 8.0$ dB $f_0 \pm 1.75 \geq 43.0$ dB $f_0 \pm 2.20 \geq 53.0$ dB $f_0 \pm 3.00 \geq 73.0$ dB	$f_0 \leq 0.65$ dB $f_0 \pm 0.77 \leq 1.50$ dB $f_0 \pm 0.97 \geq 15.0$ dB $f_0 \pm 1.75 \geq 45.0$ dB $f_0 \pm 2.20 \geq 58.0$ dB $f_0 \pm 3.00 \geq 50.0$ dB	$f_0 \leq 0.55$ dB $f_0 \pm 0.77 \leq 0.80$ dB $f_0 \pm 0.97$ n.d. $f_0 \pm 1.75 \geq 15.0$ dB $f_0 \pm 2.20 \geq 40.0$ dB $f_0 \pm 3.00 \geq 50.0$ dB
VSWR (pass band range)	≤ 1.22	≤ 1.15	≤ 1.15
Group delay variation	$\Delta\tau \leq 700$ ns	$\Delta\tau \leq 1000$ ns	$\Delta\tau \leq 400$ ns
Temperature stability	≤ 1 kHz / K		
Connectors	7-16 female		
Dimensions (L x W x H) mm	465 x 326 x 680	461 x 326 x 680	495 x 325 x 476
Weight	ca. 40 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

1.6 KW BAND 3 DAB / T-DMB BANDPASS FILTERS

- mask filter for DAB and T-DMB
- for 1.54 MHz block bandwidth
- with cross coupling (notch function)
- tuneable within band 3
- temperature compensated
- DC block
- installation standing

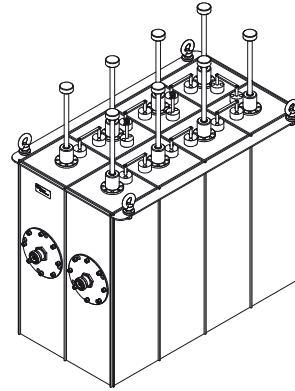

Bandpassfilter
Bandpass Filters


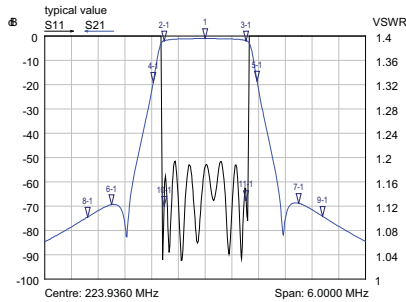


Typical diagram AS8027

Part number	BN 61 71 83
Frequency range	170 - 240 MHz
Number / Size of cavities	8 / 150
Harmonics attenuation	≥ 50 dB for $f \leq 500$ MHz
Mask filtering	DAB / T-DMB @1.54 MHz ($\dot{U}/U_{rms} = 13$ dB)
Average input power	≤ 1.6 kW
Tuning instruction	AS8027
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 1.20$ dB $f_0 \pm 0.77 \leq 2.10$ dB $f_0 \pm 0.97 \geq 15.0$ dB $f_0 \pm 1.75 \geq 45.0$ dB $f_0 \pm 2.20 \geq 65.0$ dB $f_0 \pm 3.00 \geq 80.0$ dB
VSWR (pass band range)	≤ 1.2
Group delay variation	$\Delta\tau \leq 1000$ ns
Temperature stability	≤ 1 kHz / K
Connectors	7-16 female
Dimensions (L x W x H) mm	615 x 347 x 680
Weight	ca. 60 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“

3 KW - 5.1 KW BAND 3 DAB / T-DMB BANDPASS FILTERS

- mask filter for DAB and T-DMB
- for 1.54 MHz block bandwidth
- without cross coupling (notch function)
- tuneable within band 3
- temperature compensated
- DC block
- installation standing
- natural or liquid cooling

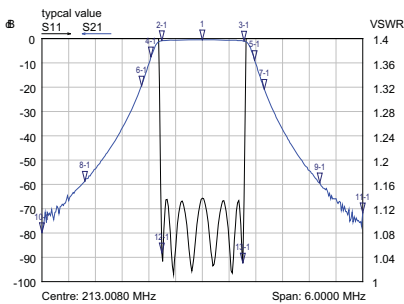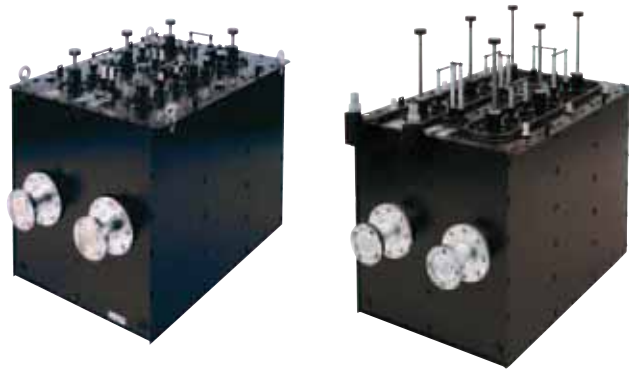

Typical diagram AS6029


Part number Cooling	BN 61 71 11 natural cooling	BN 61 71 10 liquid cooling
Frequency range	170 - 240 MHz	
Number / Size of cavities	6 / 200	
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz	
Mask filtering	DAB / T-DMB @1.54 MHz ($\hat{U}/U_{rms} = 13$ dB)	
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 3.0 kW	≤ 5.1 kW @ 0 - 500 m ≤ 4.5 kW @ 1400 m ≤ 4.0 kW @ 2100 m ≤ 3.5 kW @ 2800 m ≤ 3.0 kW @ 3600 m
Tuning instruction	AS6029	
Insertion loss & Mask filtering (alternative tuning on request)	f ₀ ≤ 0.65 dB f ₀ ± 0.77 ≤ 1.10 dB f ₀ ± 0.97 ≥ 8.00 dB f ₀ ± 1.15 ≥ 16.0 dB f ₀ ± 1.75 ≥ 43.0 dB f ₀ ± 2.20 ≥ 53.0 dB f ₀ ± 3.00 ≥ 73.0 dB	
VSWR (pass band range)	≤ 1.15	
Group delay variation	Δτ ≤ 800 ns	
Temperature stability	≤ 2 kHz / K	
Connectors	1 5/8" EIA	
Dimensions (L x W x H) mm	710 x 450 x 680	
Weight	ca. 82 kg	
Coolant / Flow rate	–	mix: glycol and water BN 15 45 67 / ≥ 3 l/min
Temperature of the coolant	–	20 °C - 60 °C
Cooling interface	–	for hose with inner width 3/4"
Material of cooling	–	stainless steel
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

3 KW - 5.1 KW BAND 3 DAB / T-DMB BANDPASS FILTERS


- mask filter for DAB and T-DMB
- for 1.54 MHz block bandwidth
- with cross coupling (notch function)
- tuneable within band 3
- temperature compensated
- DC block
- installation standing
- natural or liquid cooling



Bandpassfilter
Bandpass Filters

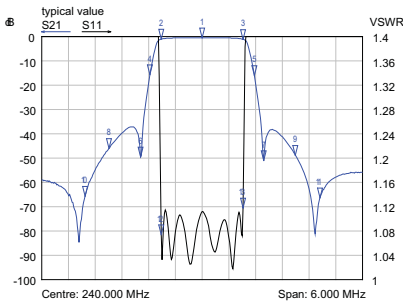

Typical diagram AS6019


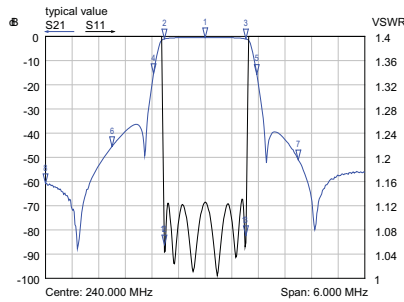


Typical diagram AS6087


Part number Cooling	BN 61 71 08 natural cooling	BN 61 71 09 liquid cooling
Frequency range	170 - 240 MHz	
Number / Size of cavities	6 / 200	
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz	
Mask filtering	DAB / T-DMB @1.54 MHz ($\dot{U}/U_{rms} = 13$ dB)	
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 3.0 kW	≤ 5.1 kW @ 0 - 500 m ≤ 4.5 kW @ 1400 m ≤ 4.0 kW @ 2100 m ≤ 3.5 kW @ 2800 m ≤ 3.0 kW @ 3600 m
Tuning instruction	AS6019	AS6087
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.55$ dB $f_0 \pm 0.77 \leq 1.20$ dB $f_0 \pm 0.97 \geq 12.0$ dB $f_0 \pm 1.15 \geq 30.0$ dB $f_0 \pm 1.75 \geq 40.0$ dB $f_0 \pm 2.20 \geq 55.0$ dB $f_0 \pm 3.00 \geq 55.0$ dB	$f_0 \leq 0.50$ dB $f_0 \pm 0.77 \leq 1.30$ dB $f_0 \pm 0.97 \geq 15.0$ dB $f_0 \pm 1.15$ n.d. $f_0 \pm 1.75 \geq 45.0$ dB $f_0 \pm 2.20 \geq 50.0$ dB $f_0 \pm 3.00 \geq 50.0$ dB
VSWR (pass band range)	≤ 1.15	≤ 1.15
Group delay variation	$\Delta\tau \leq 1000$ ns	$\Delta\tau \leq 1200$ ns
Temperature stability	≤ 2 kHz / K	
Connectors	1 5/8" EIA	
Dimensions (L x W x H) mm	710 x 450 x 680	
Weight	ca. 82 kg	
Coolant / Flow rate	-	mix: glycol and water BN 15 45 67 / ≥ 3 l/min
Temperature of the coolant	-	20 °C - 60 °C
Cooling interface	-	for hose with inner width 3/4"
Material of cooling	-	stainless steel
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

3 KW - 5.1 KW BAND 3 DAB / T-DMB BANDPASS FILTERS

- mask filter for DAB and T-DMB
- for 1.54 MHz block bandwidth
- with cross coupling (notch function)
- tuneable within band 3
- temperature compensated
- DC block
- installation standing
- natural or liquid cooling

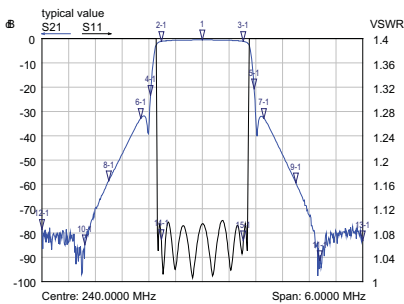

Typical diagram AS8042

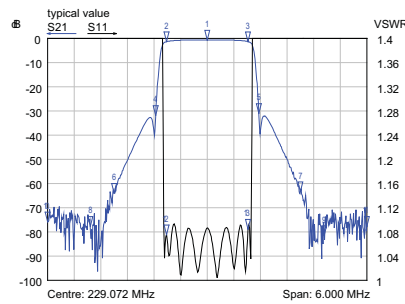

Typical diagram AS8075


Part number Cooling	BN 61 71 13 natural cooling	BN 61 71 12 liquid cooling
Frequency range	170 - 240 MHz	
Number / Size of cavities	8 / 200	
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz	
Mask filtering	DAB / T-DMB @1.54 MHz ($\dot{U}/U_{rms} = 13$ dB)	
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 3.1 kW	≤ 5.1 kW @ 0 - 500 m ≤ 4.5 kW @ 1400 m ≤ 4.0 kW @ 2100 m ≤ 3.5 kW @ 2800 m ≤ 3.0 kW @ 3600 m
Tuning instruction	AS8042	AS8075
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.60$ dB $f_0 \pm 0.77 \leq 1.20$ dB $f_0 \pm 0.97 \geq 15.0$ dB $f_0 \pm 1.15 \geq 30.0$ dB $f_0 \pm 1.75 \geq 50.0$ dB $f_0 \pm 2.20 \geq 65.0$ dB $f_0 \pm 3.00 \geq 65.0$ dB	$f_0 \leq 0.65$ dB $f_0 \pm 0.77 \leq 1.45$ dB $f_0 \pm 0.97 \geq 28.0$ dB $f_0 \pm 1.15$ n.d. $f_0 \pm 1.75 \geq 61.0$ dB $f_0 \pm 2.20 \geq 67.0$ dB $f_0 \pm 3.00 \geq 70.0$ dB
VSWR (pass band range)	≤ 1.10	≤ 1.10
Group delay variation	$\Delta\tau \leq 1200$ ns	$\Delta\tau \leq 1300$ ns
Temperature stability	≤ 2 kHz / K	
Connectors	1 5/8" EIA	
Dimensions (L x W x H) mm	882 x 450 x 678	
Weight	ca. 105 kg	
Coolant / Flow rate	–	mix: glycol and water BN 15 45 67 / ≥ 3 l/min
Temperature of the coolant	–	20 °C - 60 °C
Cooling interface	–	for hose with inner width 3/4"
Material of cooling	–	stainless steel
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

900 W - 1100 W BAND 3 DTV BANDPASS FILTER


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within band 3
- temperature compensated
- DC block
- installation standing




Bandpassfilter
Bandpass Filters

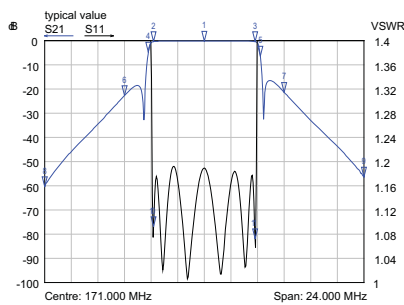

Typical diagram AS6164

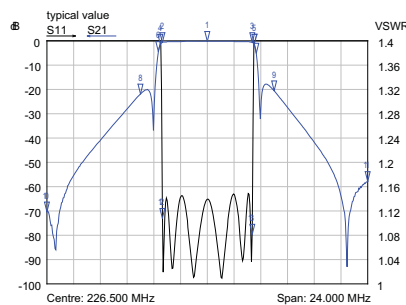

Typical diagram AS6162


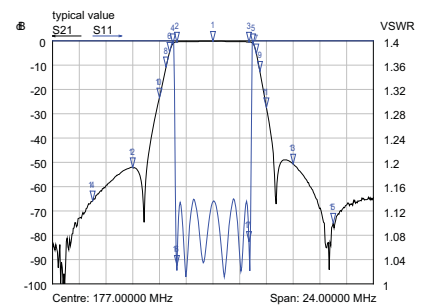


Typical diagram AS6161


Part number	BN 61 71 90 C0010		
Frequency range	174 - 230 MHz		
Number / Size of cavities	6 / 100		
Harmonics attenuation	≥ 50 dB for f ≤ 500 MHz		
Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)	DVB-T @ 7 MHz ($\dot{U}/U_{rms} = 13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms} = 11$ dB)
Average input power	≤ 1.1 kW	≤ 1.0 kW	≤ 900 W
Tuning instruction	AS6164	AS6162	AS6161
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.25$ dB $f_0 \pm 0.3805 \leq 0.65$ dB $f_0 \pm 4.20 \geq 4.00$ dB $f_0 \pm 6.00 \geq 20.0$ dB $f_0 \pm 12.0 \geq 55.0$ dB	$f_0 \leq 0.25$ dB $f_0 \pm 3.35 \leq 0.70$ dB $f_0 \pm 3.50 \geq 1.20$ dB $f_0 \pm 3.65 \geq 4.00$ dB $f_0 \pm 5.00 \geq 20.0$ dB $f_0 \pm 12.0 \geq 55.0$ dB	$f_0 \leq 0.30$ dB $f_0 \pm 2.69 \leq 0.50$ dB $f_0 \pm 3.00 \geq 1.10$ dB $f_0 \pm 3.50 \geq 8.00$ dB $f_0 \pm 4.00 \geq 15.0$ dB $f_0 \pm 6.00 \geq 30.0$ dB $f_0 \pm 9.00 \geq 64.0$ dB
VSWR (pass band range)	≤ 1.22	≤ 1.17	≤ 1.15
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 220$ ns
Temperature stability	≤ 2 kHz / K		
Connectors	7-16 female		
Dimensions (L x W x H) mm	382 x 244 x 590		
Weight	ca. 25 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

2.5 KW - 4 KW BAND 3 DTV BANDPASS FILTERS

- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within band 3
- temperature compensated
- DC block
- installation standing

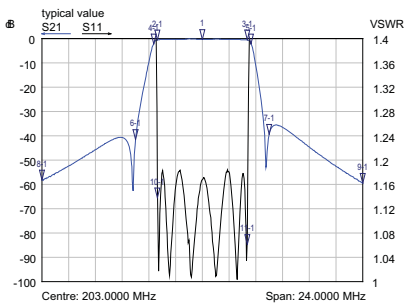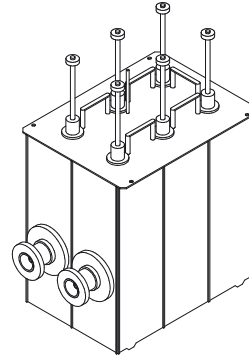

Typical diagram AS6044

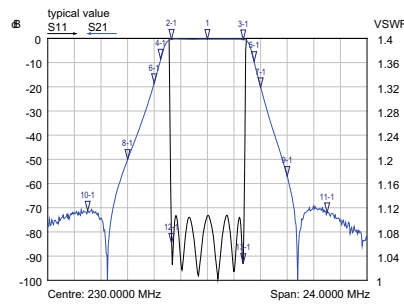


Typical diagram AS6079


Part number	BN 61 71 26	BN 61 71 26 C0010
Connectors	7-16 female	1 5/8" EIA
Frequency range	174 - 230 MHz	
Number / Size of cavities	6 / 150	
Mask filtering	DVB-T @7 MHz ($\dot{U}/U_{rms} = 13$ dB)	ATSC @6 MHz ($\dot{U}/U_{rms} = 11$ dB)
Average input power	≤ 2.5 kW BN 61 71 26 ≤ 4.0 kW BN 61 71 26 C0010	≤ 2.5 kW BN 61 71 26 ≤ 3.6 kW BN 61 71 26 C0010
Tuning instruction	AS6044	AS6079
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.30$ dB $f_0 \pm 3.35 \leq 0.60$ dB $f_0 \pm 3.50 \geq 0.70$ dB $f_0 \pm 3.65 \geq 2.00$ dB $f_0 \pm 5.00 \geq 35.0$ dB $f_0 \pm 12.0 \geq 55.0$ dB	$f_0 \leq 0.35$ dB $f_0 \pm 2.69 \leq 0.60$ dB $f_0 \pm 3.00 \geq 1.30$ dB $f_0 \pm 3.50 \geq 5.00$ dB $f_0 \pm 4.00 \geq 11.0$ dB $f_0 \pm 6.00 \geq 30.0$ dB $f_0 \pm 9.00 \geq 65.0$ dB
VSWR (pass band range)	≤ 1.20	≤ 1.15
Group delay variation	$\Delta\tau \leq 300$ ns	$\Delta\tau \leq 200$ ns
Temperature stability	≤ 2 kHz / K	
Connectors	7-16 female	1 5/8" EIA
Dimensions (L x W x H) mm	461 x 326 x 681	512 x 326 x 684
Weight	ca. 42 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

3.5 KW BAND 3 DTV BANDPASS FILTERS


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within band 3
- temperature compensated
- DC block
- installation standing

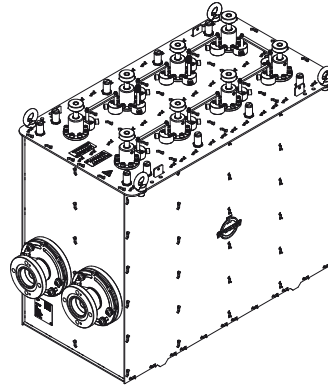

Bandpassfilter
Bandpass Filters

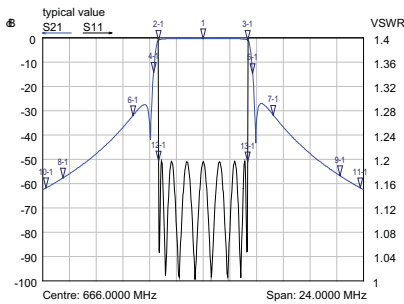

Typical diagram AS8049

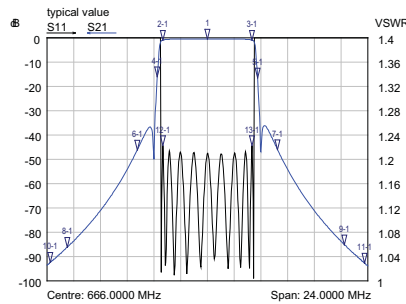


Typical diagram AS1001


Part number Cavities	BN 61 71 91 8 cavities	BN 61 71 93 10 cavities
Frequency range	174 - 230 MHz	
Number / Size of cavities	8 / 150	10 / 150
Mask filtering	DVB-T @7 MHz ($\dot{U}/U_{rms} = 13$ dB)	DVB-T @7 MHz ($\dot{U}/U_{rms} = 13$ dB)
Average input power	≤ 3.5 kW	≤ 3.5 kW
Tuning instruction	AS8049	AS1001
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.35$ dB $f_0 \pm 3.35 \leq 0.85$ dB $f_0 \pm 3.70 \geq 15.0$ dB $f_0 \pm 5.25 \geq 30.0$ dB $f_0 \pm 10.50 \geq 50.0$ dB $f_0 \pm 11.75 \geq 55.0$ dB	$f_0 \leq 0.50$ dB $f_0 \pm 3.35 \leq 1.60$ dB $f_0 \pm 3.70 \geq 15.0$ dB $f_0 \pm 5.25 \geq 40.0$ dB $f_0 \pm 10.50 \geq 65.0$ dB $f_0 \pm 11.75 \geq 70.0$ dB
VSWR (pass band range)	≤ 1.20	≤ 1.22
Group delay variation	$\Delta\tau \leq 600$ ns	$\Delta\tau \leq 800$ ns
Temperature stability	≤ 2 kHz / K	
Connectors	1 5/8" EIA	
Dimensions (L x W x H) mm	650 x 326 x 680	804 x 348 x 683
Weight	ca. 68 kg	ca. 89 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

40 W - 50 W UHF DTV BANDPASS FILTERS

- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- without cross coupling
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically

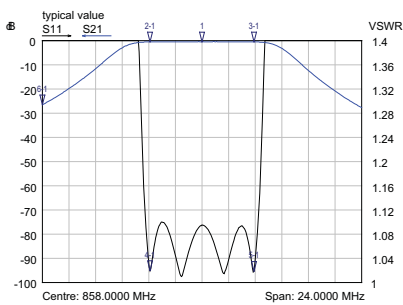

Typical diagram AS4054

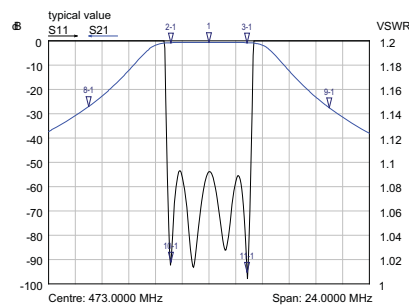

Typical diagram AS4029


Part number	BN 61 65 07					
Frequency range	470 - 860 MHz					
Number / Size of cavities	4 / 34					
Harmonics attenuation	≥ 50 dB for $f \leq 1500$ MHz					
TV standard	DVB-T or ATV @8 MHz ($\dot{U}/U_{rms} = 13$ dB)		DVB-T or ATV @6 MHz ($\dot{U}/U_{rms} = 13$ dB)			
Average input power	≤ 50 W		≤ 40 W			
Tuning instruction	AS4054		AS4029			
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz		
	f_0	≤ 0.7 dB	≤ 0.6 dB	f_0	≤ 0.8 dB	≤ 0.7 dB
	$f_0 \pm 3.805$	≤ 0.8 dB	≤ 0.7 dB	$f_0 \pm 2.855$	≤ 0.9 dB	≤ 0.8 dB
	$f_0 \pm 3.885$	≤ 0.8 dB	≤ 0.7 dB	$f_0 \pm 9.0$	≥ 25 dB	
	$f_0 \pm 12.0$	≥ 17 dB				
VSWR (pass band range)	≤ 1.10		≤ 1.10			
Group delay variation	$\Delta\tau \leq 100$ ns		$\Delta\tau \leq 30$ ns			
Temperature stability	≤ 10 kHz / K					
Connectors	N female					
Dimensions (L x W x H) mm	277 x 44 x 135					
Weight	ca. 2 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

100 W UHF DTV BANDPASS FILTERS


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically




Bandpassfilter
Bandpass Filters

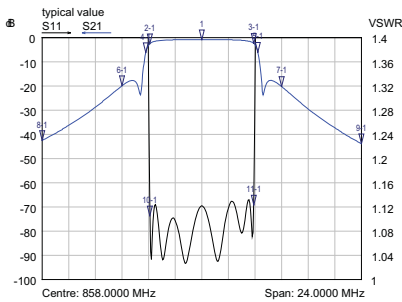

Typical diagram AS6214

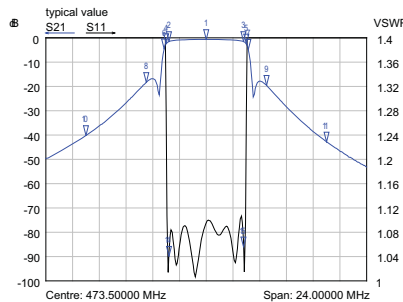

Typical diagram AS6180

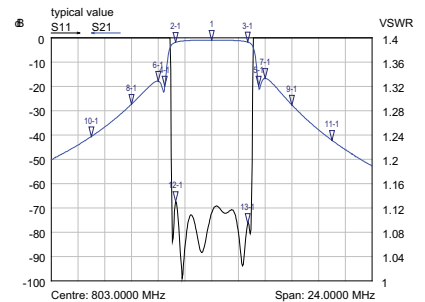


Typical diagram AS6074


Part number Connector	BN 61 65 01 7-16 female		BN 61 65 01 C0004 N female	
Frequency range	470 - 860 MHz			
Number / Size of cavities	6 / 38			
Harmonics attenuation	≥ 60 dB for f ≤ 1340 MHz			
TV standard	DVB-T @8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @6 MHz ($\dot{U}/U_{rms} = 13$ dB)	
Average input power	≤ 100 W		≤ 100 W	
Tuning instruction	AS6214		AS6180	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz		470 MHz 803 MHz	
	f_0	≤ 0.7 dB ≤ 0.9 dB	f_0	≤ 0.8 dB ≤ 1.3 dB
	$f_0 \pm 3.805$	≤ 1.7 dB ≤ 2.2 dB	$f_0 \pm 2.79$	≤ 1.7 dB ≤ 3.4 dB
	$f_0 \pm 3.885$	≤ 2.0 dB ≤ 2.5 dB	$f_0 \pm 3.00$	≥ 2 dB
	$f_0 \pm 4.2$	≥ 5 dB	$f_0 \pm 3.15$	≥ 5 dB
	$f_0 \pm 6.0$	≥ 17 dB	$f_0 \pm 4.5$	≥ 17 dB
	$f_0 \pm 12.0$	≥ 38 dB	$f_0 \pm 9.0$	≥ 38 dB
VSWR (pass band range)	≤ 1.15		≤ 1.15	
Group delay variation	$\Delta\tau \leq 300$ ns		$\Delta\tau \leq 500$ ns	
Temperature stability	≤ 3 kHz / K			
Connectors	7-16 female		N female	
Dimensions (L x W x H) mm	340 x 185 x 44			
Weight	ca. 3 kg			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

100 W - 130 W UHF DTV BANDPASS FILTERS


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design

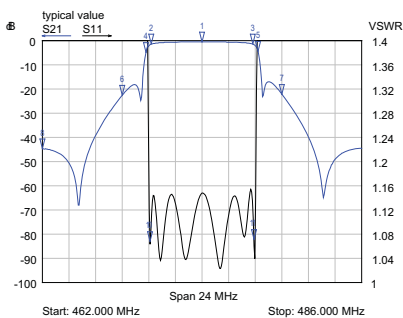

Typical diagram AS6361

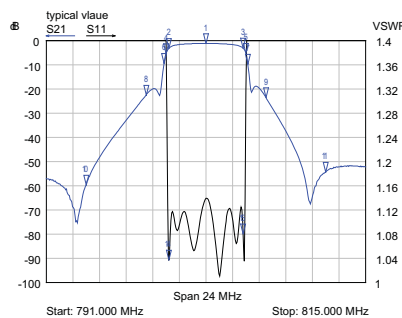

Typical diagram AS6368

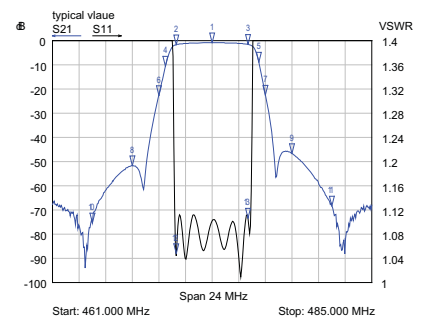

Typical diagram AS6362


Part number	BN 61 66 60 C1025								
Connector	7-16 female								
Frequency range	470 - 860 MHz								
Number / Size of cavities	6 / 40								
Harmonics attenuation	≥ 50 dB for f ≤ 1400 MHz								
TV standard	DVB-T @8 MHz ($\hat{U}/U_{rms} = 13$ dB)		ISDB-T @6 MHz ($\hat{U}/U_{rms} = 13$ dB)		ATSC @6 MHz ($\hat{U}/U_{rms} = 11$ dB)				
Average input power	≤ 130 W		≤ 100 W		≤ 100 W				
Tuning instruction	AS6361		AS6368		AS6362				
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz		803 MHz		470 MHz		803 MHz		
	f_0	≤ 0.7 dB	≤ 0.9 dB	f_0	≤ 1.0 dB	≤ 1.3 dB	f_0	≤ 1.2 dB	≤ 1.7 dB
	$f_0 \pm 3.805$	≤ 1.9 dB	≤ 2.4 dB	$f_0 \pm 2.79$	≤ 2.6 dB	≤ 3.2 dB	$f_0 \pm 2.69$	≤ 2.2 dB	≤ 2.6 dB
	$f_0 \pm 3.885$	≤ 2.2 dB	≤ 2.7 dB	$f_0 \pm 3.00$	≥ 4 dB		$f_0 \pm 3.25$	≥ 4 dB	
	$f_0 \pm 4.2$	≥ 4 dB		$f_0 \pm 3.15$	≥ 8 dB		$f_0 \pm 3.50$	≥ 8 dB	
	$f_0 \pm 6.0$	≥ 20 dB		$f_0 \pm 4.50$	≥ 22 dB		$f_0 \pm 4.0$	≥ 15 dB	
	$f_0 \pm 12.0$	≥ 40 dB		$f_0 \pm 9.00$	≥ 50 dB		$f_0 \pm 6.0$	≥ 40 dB	
			$f_0 \pm 15.0$	≥ 50 dB		$f_0 \pm 9.0$	≥ 65 dB		
VSWR (pass band range)	≤ 1.15		≤ 1.15		≤ 1.15				
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 200$ ns				
Temperature stability	≤ 2 kHz / K								
Connectors	7-16 female								
Dimensions (L x W x H) mm	185 x 170 x 94								
Weight	ca. 2.8 kg								
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								

100 W - 120 W UHF DTV BANDPASS FILTERS


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design




Bandpassfilter
Bandpass Filters

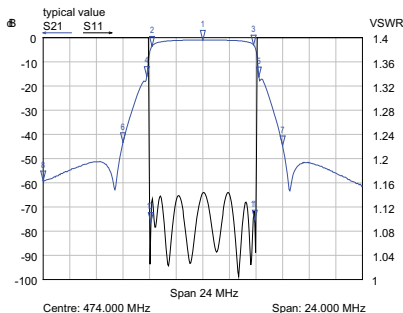

Typical diagram AS8131

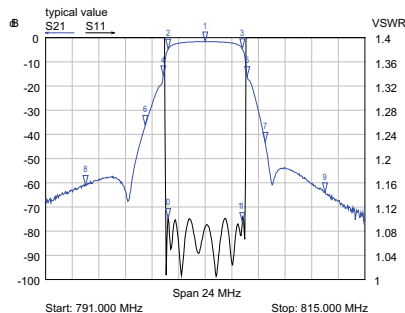

Typical diagram AS8133

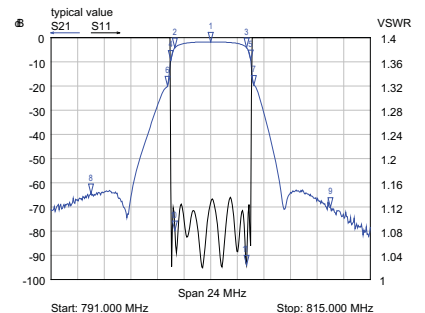


Typical diagram AS8132


Part number	BN 61 66 61 C1025								
Connector	7-16 female								
Frequency range	470 - 860 MHz								
Number / Size of cavities	8 / 40								
Harmonics attenuation	≥ 50 dB for f ≤ 1400 MHz								
TV standard	DVB-T @8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @6 MHz ($\dot{U}/U_{rms} = 13$ dB)		ATSC @6 MHz ($\dot{U}/U_{rms} = 11$ dB)				
Average input power	≤ 120 W		≤ 100 W		≤ 100 W				
Tuning instruction	AS8131		AS8133		AS8132				
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz			
	f_0	≤ 1.1 dB	≤ 1.5 dB	f_0	≤ 1.4 dB	≤ 1.75 dB	f_0	≤ 1.5 dB	≤ 1.9 dB
	$f_0 \pm 3.805$	≤ 3.6 dB	≤ 5.2 dB	$f_0 \pm 2.79$	≤ 4.4 dB	≤ 5.00 dB	$f_0 \pm 2.69$	≤ 3.8 dB	≤ 4.4 dB
	$f_0 \pm 3.885$	≤ 4.4 dB	≤ 5.8 dB	$f_0 \pm 3.15$	≥ 15 dB		$f_0 \pm 3.25$	≥ 5 dB	
	$f_0 \pm 4.2$	≥ 15 dB		$f_0 \pm 4.50$	≥ 30 dB		$f_0 \pm 3.50$	≥ 18 dB	
	$f_0 \pm 6.0$	≥ 40 dB		$f_0 \pm 9.00$	≥ 55 dB		$f_0 \pm 9.0$	≥ 64 dB	
	$f_0 \pm 12.0$	≥ 55 dB		$f_0 \pm 15.0$	≥ 65 dB				
VSWR (pass band range)	≤ 1.15		≤ 1.11		≤ 1.15				
Group delay variation	$\Delta\tau \leq 600$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 400$ ns				
Temperature stability	≤ 2 kHz / K								
Connectors	7-16 female								
Dimensions (L x W x H) mm	230 x 170 x 94								
Weight	ca. 3.5 kg								
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								

300 W - 375 W UHF DTV BANDPASS FILTERS


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design

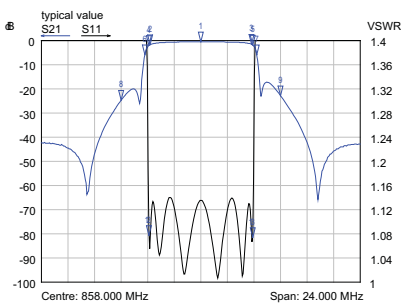

Typical diagram AS6201

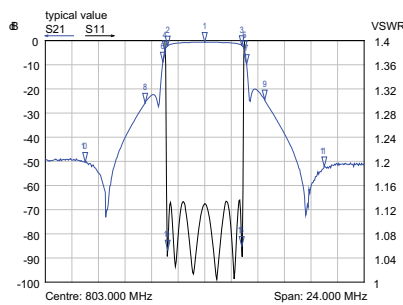

Typical diagram AS6192

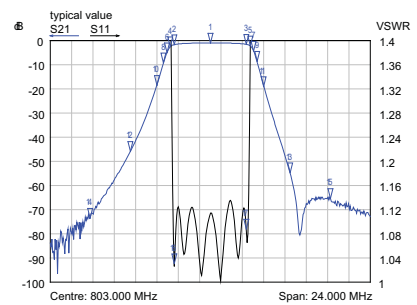

Typical diagram AS6257


Part number	BN 61 65 66 C1025					
Frequency range	470 - 860 MHz					
Number / Size of cavities	6 / 60					
Harmonics attenuation	≥ 50 dB for f ≤ 1200 MHz					
TV standard	DVB-T @8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @6 MHz ($\dot{U}/U_{rms} = 13$ dB)		ATSC @6 MHz ($\dot{U}/U_{rms} = 11$ dB)	
Average input power	≤ 375 W		≤ 300 W		≤ 300 W	
Tuning instruction	AS6201		AS6192		AS6257	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz
	f_0	≤ 0.45 dB ≤ 0.55 dB	f_0	≤ 0.6 dB ≤ 0.75 dB	f_0	≤ 0.7 dB ≤ 1.0 dB
	$f_0 \pm 3.805$	≤ 1.25 dB ≤ 1.75 dB	$f_0 \pm 2.79$	≤ 1.6 dB ≤ 2.20 dB	$f_0 \pm 2.69$	≤ 1.4 dB ≤ 1.7 dB
	$f_0 \pm 3.885$	≤ 1.45 dB ≤ 2.00 dB	$f_0 \pm 3.00$	≥ 4 dB	$f_0 \pm 3.0$	≤ 2.6 dB ≤ 2.7 dB
	$f_0 \pm 4.2$	≥ 4 dB	$f_0 \pm 3.15$	≥ 8 dB	$f_0 \pm 3.25$	≥ 4 dB
	$f_0 \pm 6.0$	≥ 20 dB	$f_0 \pm 4.50$	≥ 23 dB	$f_0 \pm 3.5$	≥ 8 dB
	$f_0 \pm 12.0$	≥ 40 dB	$f_0 \pm 9.00$	≥ 48 dB	$f_0 \pm 4.0$	≥ 15 dB
			$f_0 \pm 15.0$	≥ 50 dB	$f_0 \pm 6.0$	≥ 40 dB
					$f_0 \pm 9.0$	≥ 65 dB
VSWR (pass band range)	≤ 1.15		≤ 1.15		≤ 1.15	
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 200$ ns	
Temperature stability	≤ 2 kHz / K					
Connectors	7-16 female					
Dimensions (L x W x H) mm	260 x 129 x 175					
Weight	ca. 6 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

300 W - 375 W UHF DTV BANDPASS FILTERS


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design




Bandpassfilter
Bandpass Filters

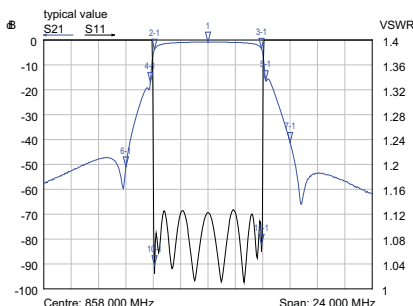

Typical diagram AS8087

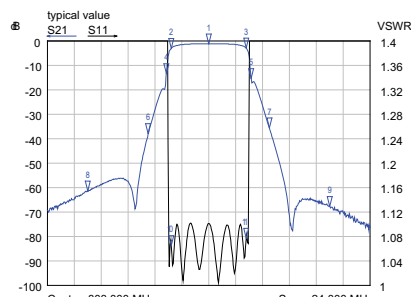

Typical diagram AS8095

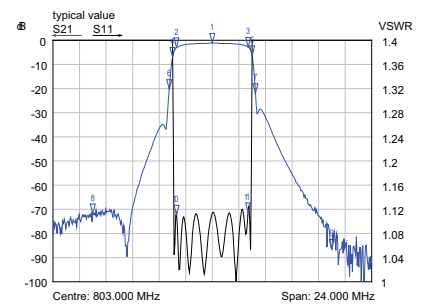


Typical diagram AS8084


Part number	BN 61 65 68 C1025		
Frequency range	470 - 860 MHz		
Number / Size of cavities	8 / 60		
Harmonics attenuation	≥ 50 dB for f ≤ 1200 MHz		
TV standard	DVB-T @8 MHz ($\dot{U}/U_{rms} = 13$ dB)	ISDB-T @6 MHz ($\dot{U}/U_{rms} = 13$ dB)	ATSC @6 MHz ($\dot{U}/U_{rms} = 11$ dB)
Average input power	≤ 375 W	≤ 300 W	≤ 300 W
Tuning instruction	AS8087	AS8095	AS8084
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz	470 MHz 803 MHz	470 MHz 803 MHz
f_0	≤ 0.65 dB ≤ 0.90 dB	≤ 0.75 dB ≤ 1.05 dB	≤ 0.9 dB ≤ 1.2 dB
$f_0 \pm 3.805$	≤ 2.25 dB ≤ 3.05 dB	≤ 2.15 dB ≤ 3.00 dB	≤ 2.25 dB ≤ 2.75 dB
$f_0 \pm 3.885$	≤ 2.95 dB ≤ 3.75 dB	$f_0 \pm 3.15$	$f_0 \pm 3.0$
$f_0 \pm 4.2$	≥ 15 dB	$f_0 \pm 4.5$	≥ 4 dB
$f_0 \pm 6.0$	≥ 40 dB	$f_0 \pm 9.0$	≥ 18 dB
$f_0 \pm 12.0$	≥ 55 dB		≥ 64 dB
VSWR (pass band range)	≤ 1.15	≤ 1.11	≤ 1.15
Group delay variation	$\Delta\tau \leq 660$ ns	$\Delta\tau \leq 500$ ns	$\Delta\tau \leq 420$ ns
Temperature stability	≤ 2 kHz / K		
Connectors	7-16 female		
Dimensions (L x W x H) mm	322 x 129 x 175		
Weight	ca. 7.6 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

600 W - 750 W UHF DTV BANDPASS FILTERS


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design

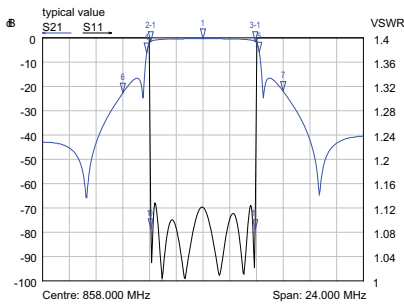

Typical diagram AS6186

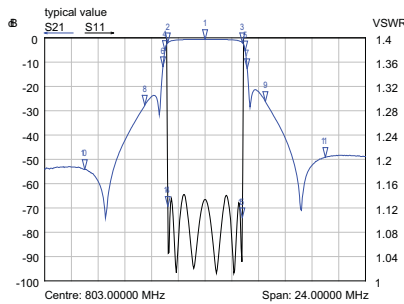

Typical diagram AS6182

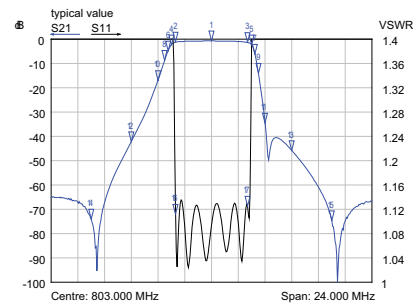


Typical diagram AS6156


Part number	BN 61 64 02					
Frequency range	470 - 860 MHz					
Number / Size of cavities	6 / 84					
Harmonics attenuation	≥ 50 dB for f ≤ 950 MHz					
TV standard	DVB-T @8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @6 MHz ($\dot{U}/U_{rms} = 13$ dB)		ATSC @6 MHz ($\dot{U}/U_{rms} = 11$ dB)	
Average input power	≤ 750 W		≤ 600 W		≤ 600 W	
Tuning instruction	AS6186		AS6182		AS6156	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz		803 MHz		470 MHz	
	860 MHz		803 MHz		803 MHz	
	f_0	≤ 0.4 dB	≤ 0.5 dB	f_0	≤ 0.5 dB	≤ 0.7 dB
	$f_0 \pm 3.805$	≤ 1.1 dB	≤ 1.4 dB	$f_0 \pm 2.79$	≤ 1.5 dB	≤ 2.1 dB
	$f_0 \pm 3.885$	≤ 1.2 dB	≤ 1.5 dB	$f_0 \pm 3.00$	≥ 4 dB	$f_0 \pm 3.0$
	$f_0 \pm 4.2$	≥ 4 dB		$f_0 \pm 3.15$	≥ 8 dB	$f_0 \pm 3.25$
	$f_0 \pm 6.0$	≥ 20 dB		$f_0 \pm 4.5$	≥ 23 dB	$f_0 \pm 3.5$
	$f_0 \pm 12.0$	≥ 40 dB		$f_0 \pm 9.0$	≥ 48 dB	$f_0 \pm 4.0$
			$f_0 \pm 15.0$	≥ 50 dB	$f_0 \pm 6.0$	
					$f_0 \pm 9.0$	
f_0	≤ 0.6 dB		≤ 0.80 dB			
$f_0 \pm 2.69$	≤ 1.0 dB		≤ 1.45 dB			
$f_0 \pm 3.0$	≤ 1.8 dB		≤ 2.35 dB			
$f_0 \pm 3.25$	≥ 4 dB					
$f_0 \pm 3.5$	≥ 8 dB					
$f_0 \pm 4.0$	≥ 15 dB					
$f_0 \pm 6.0$	≥ 40 dB					
$f_0 \pm 9.0$	≥ 65 dB					
VSWR (pass band range)	≤ 1.15		≤ 1.15		≤ 1.15	
Group delay variation	$\Delta\tau \leq 330$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 200$ ns	
Temperature stability	≤ 2 kHz / K					
Connectors	7-16 female					
Dimensions (L x W x H) mm	328 x 174 x 377					
Weight	ca. 11 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

600 W - 750 W UHF DTV BANDPASS FILTERS


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design

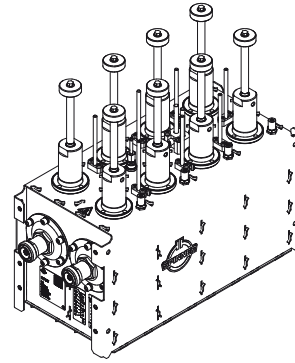


Bandpassfilter
Bandpass Filters

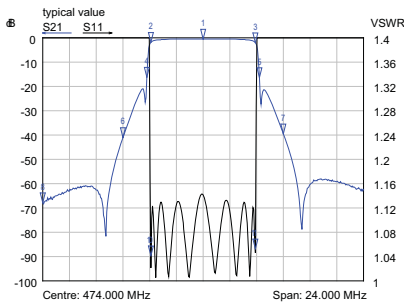

Typical diagram AS8068

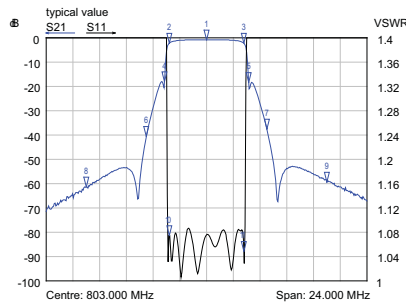

Typical diagram AS8091

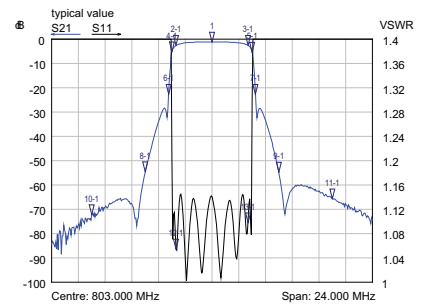


Typical diagram AS8051


Part number	BN 61 64 03								
Frequency range	470 - 860 MHz								
Number / Size of cavities	8 / 84								
Harmonics attenuation	≥ 50 dB for f ≤ 950 MHz								
TV standard	DVB-T @8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @6 MHz ($\dot{U}/U_{rms} = 13$ dB)		ATSC @6 MHz ($\dot{U}/U_{rms} = 11$ dB)				
Average input power	≤ 750 W		≤ 600 W		≤ 600 W				
Tuning instruction	AS8068		AS8091		AS8051				
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz			
	f_0	≤ 0.5 dB	≤ 0.65 dB	f_0	≤ 0.6 dB	≤ 1.2 dB	f_0	≤ 0.8 dB	≤ 1.2 dB
	$f_0 \pm 3.805$	≤ 1.7 dB	≤ 2.10 dB	$f_0 \pm 2.79$	≤ 1.7 dB	≤ 3.0 dB	$f_0 \pm 2.69$	≤ 1.8 dB	≤ 2.6 dB
	$f_0 \pm 3.885$	≤ 2.0 dB	≤ 2.50 dB	$f_0 \pm 3.15$	≥ 15 dB		$f_0 \pm 3.00$	≥ 3 dB	
	$f_0 \pm 4.20$	≥ 15 dB		$f_0 \pm 4.50$	≥ 30 dB		$f_0 \pm 3.25$	≥ 18 dB	
	$f_0 \pm 6.00$	≥ 40 dB		$f_0 \pm 9.00$	≥ 55 dB		$f_0 \pm 9.00$	≥ 64 dB	
	$f_0 \pm 12.0$	≥ 55 dB							
VSWR (pass band range)	≤ 1.15		≤ 1.11		≤ 1.15				
Group delay variation	$\Delta\tau \leq 600$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 400$ ns				
Temperature stability	≤ 2 kHz / K								
Connectors	7-16 female								
Dimensions (L x W x H) mm	411 x 174 x 377								
Weight	ca. 14 kg								
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“								

1.3 KW - 1.6 KW UHF DTV BANDPASS FILTER


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design

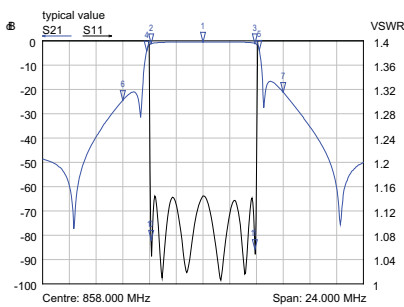

Typical diagram AS6224

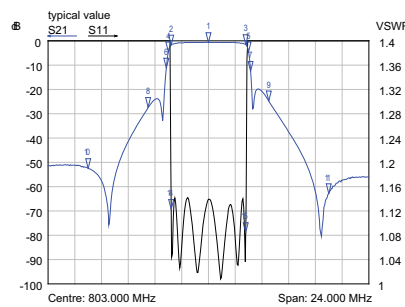

Typical diagram AS6229

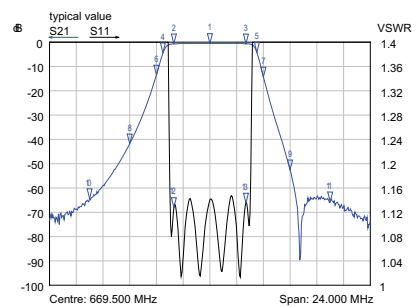

Typical diagram AS6228


Part number	BN 61 66 63 C1031		BN 61 66 63 C1033	
Connectors	1 5/8" SMS unflanged		1 5/8" EIA	
Frequency range	470 - 860 MHz			
Number / Size of cavities	6 / 120			
Harmonics attenuation	≥ 50 dB for f ≤ 1100 MHz			
TV standard	DVB-T @8 MHz ($\hat{U}/U_{rms} = 13$ dB)		ISDB-T @6 MHz ($\hat{U}/U_{rms} = 13$ dB)	ATSC @6 MHz ($\hat{U}/U_{rms} = 11$ dB)
Average input power	≤ 1.6 kW		≤ 1.3 kW	≤ 1.3 kW
Tuning instruction	AS6224		AS6229	AS6228
Insertion loss & Mask filtering (alternative tuning on request)	f_0	470 MHz ≤ 0.3 dB 860 MHz ≤ 0.4 dB	470 MHz ≤ 0.35 dB 803 MHz ≤ 0.5 dB	470 MHz ≤ 0.40 dB 803 MHz ≤ 0.55 dB
	$f_0 \pm 3.805$	≤ 0.8 dB ≤ 1.1 dB	$f_0 \pm 2.79$ ≤ 1.10 dB ≤ 1.4 dB	$f_0 \pm 2.69$ ≤ 0.55 dB ≤ 1.30 dB
	$f_0 \pm 3.885$	≤ 0.9 dB ≤ 1.3 dB	$f_0 \pm 3.00$ ≥ 3 dB	$f_0 \pm 3.5$ ≥ 3 dB
	$f_0 \pm 4.2$	≥ 4 dB	$f_0 \pm 3.15$ ≥ 5 dB	$f_0 \pm 4.0$ ≥ 8 dB
	$f_0 \pm 6.0$	≥ 20 dB	$f_0 \pm 4.50$ ≥ 17 dB	$f_0 \pm 6.0$ ≥ 30 dB
	$f_0 \pm 12.0$	≥ 40 dB	$f_0 \pm 9.00$ ≥ 38 dB	$f_0 \pm 9.0$ ≥ 65 dB
			$f_0 \pm 15.0$ ≥ 48 dB	
VSWR (pass band range)	≤ 1.15		≤ 1.15	≤ 1.15
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 450$ ns	$\Delta\tau \leq 250$ ns
Temperature stability	≤ 2 kHz / K			
Connectors	1 5/8" SMS unflanged		1 5/8" EIA	
Dimensions (L x W x H) mm	463 x 300 x 277		480 x 300 x 277	
Weight	ca. 20 kg			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

1.3 KW - 1.6 KW UHF DTV BANDPASS FILTER


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design




Bandpassfilter
Bandpass Filters

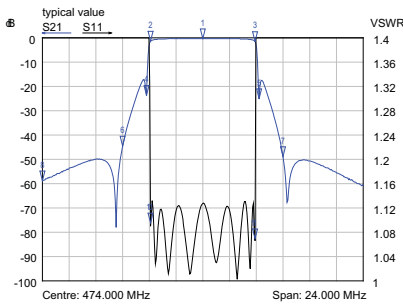

Typical diagram AS8112

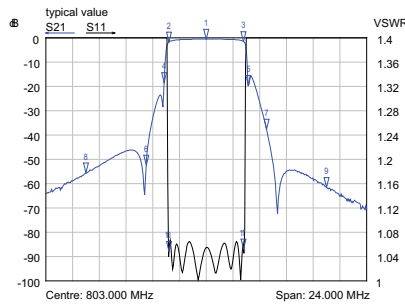

Typical diagram AS8117


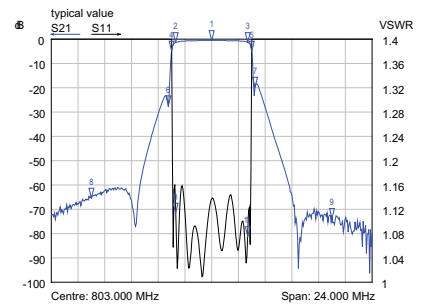


Typical diagram AS8115


Part number Connectors	BN 61 66 64 C1031 1 5/8" SMS unflanged		BN 61 66 64 C1033 1 5/8" EIA			
	Frequency range	470 - 860 MHz				
Number / Size of cavities	8 / 120					
Harmonics attenuation	≥ 50 dB for f ≤ 1100 MHz					
TV standard	DVB-T @8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @6 MHz ($\dot{U}/U_{rms} = 13$ dB)			
Average input power	≤ 1.6 kW		≤ 1.3 kW			
Tuning instruction	AS8112		AS8117			
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz		470 MHz 803 MHz		470 MHz 803 MHz	
	f_0	≤ 0.4 dB ≤ 0.5 dB	f_0	≤ 0.45 dB ≤ 0.6 dB	f_0	≤ 0.5 dB ≤ 0.6 dB
	$f_0 \pm 3.805$	≤ 1.4 dB ≤ 1.9 dB	$f_0 \pm 2.79$	≤ 1.20 dB ≤ 1.7 dB	$f_0 \pm 2.69$	≤ 1.2 dB ≤ 1.5 dB
	$f_0 \pm 3.885$	≤ 1.5 dB ≤ 2.3 dB	$f_0 \pm 3.15$	≥ 15 dB	$f_0 \pm 3.00$	≥ 4 dB
	$f_0 \pm 4.2$	≥ 15 dB	$f_0 \pm 4.5$	≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB
	$f_0 \pm 6.0$	≥ 40 dB	$f_0 \pm 9.0$	≥ 55 dB	$f_0 \pm 9.0$	≥ 64 dB
VSWR (pass band range)	≤ 1.15		≤ 1.09		≤ 1.15	
Group delay variation	$\Delta\tau \leq 550$ ns		$\Delta\tau \leq 600$ ns		$\Delta\tau \leq 400$ ns	
Temperature stability	≤ 2 kHz / K					
Connectors	1 5/8" SMS unflanged		1 5/8" EIA			
Dimensions (L x W x H) mm	584 x 300 x 277		600 x 300 x 277			
Weight	ca. 22 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

5 KW UHF ATV BANDPASS FILTER


- mask filter for ATV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically

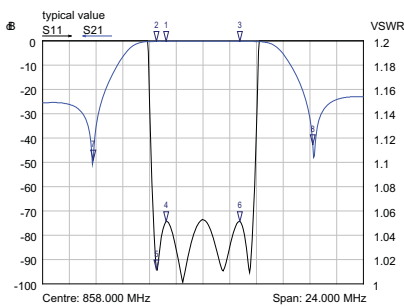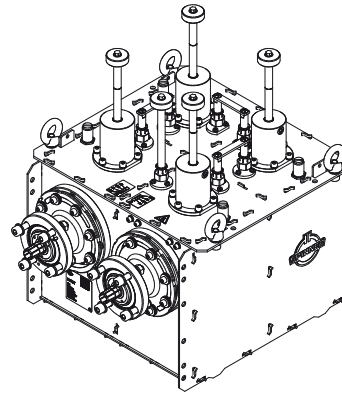

Typical diagram AS4025

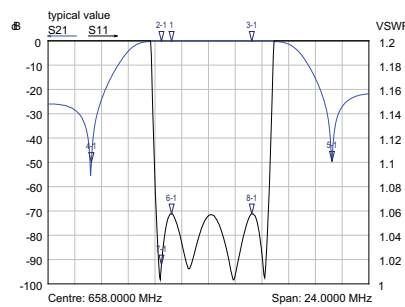

Typical diagram AS4017

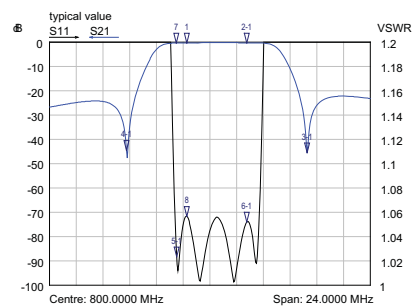

Typical diagram AS4024


Part number	BN 61 64 04		
Frequency range	470 - 860 MHz		
Number / Size of cavities	4 / 150		
Harmonics attenuation	≥ 40 dB for f ≤ 860 MHz		
Mask filtering	ATV 8 MHz	ATV 8 MHz	ATV 6 MHz
Average input power	≤ 5 kW ≙ 7/0.7 kW	≤ 5 kW ≙ 7/0.7 kW	≤ 5 kW ≙ 7/0.7 kW
Tuning instruction	Standard G: AS4025 Standard K: AS4015	Standard I: AS4017	Standard M, N: AS4024
Insertion loss & Mask filtering (alternative tuning on request)	$f_{(V)} - \Delta > 30.0 \text{ dB}$ $f_{(V)} - 0.75 \text{ MHz} \leq 0.35 \text{ dB}$ $f_{(V)} \leq 0.25 \text{ dB}$ $f_{(S)} = f_{(V)} + \Delta \leq 0.25 \text{ dB}$ $f_{(V)} + 2\Delta > 30.0 \text{ dB}$	$f_{(V)} - \Delta > 30.0 \text{ dB}$ $f_{(V)} - 0.75 \text{ MHz} \leq 0.35 \text{ dB}$ $f_{(V)} \leq 0.30 \text{ dB}$ $f_{(S)} = f_{(V)} + \Delta \leq 0.30 \text{ dB}$ $f_{(V)} + 2\Delta > 30.0 \text{ dB}$	$f_{(V)} - \Delta > 40.0 \text{ dB}$ $f_{(V)} - 0.75 \text{ MHz} \leq 0.35 \text{ dB}$ $f_{(V)} \leq 0.30 \text{ dB}$ $f_{(S)} = f_{(V)} + \Delta \leq 0.30 \text{ dB}$ $f_{(V)} + 2\Delta > 40.0 \text{ dB}$
VSWR (pass band range)	$f_{(V)} - 0.75 \text{ MHz} \leq 1.10$ $f_{(V)} \leq 1.06$ $f_{(S)} = f_{(V)} + \Delta \leq 1.06$		
Group delay variation	$\Delta\tau \leq 50 \text{ ns}$		
Temperature stability	≤ 2 kHz / K		
Connectors	1 5/8" EIA male		
Dimensions (L x W x H) mm	387 x 326 x 412		
Weight	ca. 22 kg		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

2.25 KW UHF DTV BANDPASS FILTER

- mask filter for ATSC
- for 6, 7 and 8 MHz channel bandwidth
- without cross coupling
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically



Bandpassfilter
Bandpass Filters

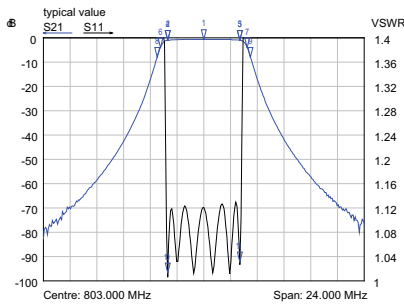


Typical diagram AS6081


Part number	BN 61 65 72	
Frequency range	470 - 860 MHz	
Number / Size of cavities	6 / 150	
Harmonics attenuation	≥ 50 dB for $f \leq 860$ MHz	
TV standard	ATSC @6 MHz ($\dot{U}/U_{rms} = 11$ dB)	
Average input power	≤ 2.25 kW	
Tuning instruction	AS6081	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	803 MHz
	f_0	≤ 0.55 dB ≤ 0.75 dB
	$f_0 \pm 2.69$	≤ 0.80 dB ≤ 1.00 dB
	$f_0 \pm 3.00$	≤ 2.00 dB ≤ 2.30 dB
	$f_0 \pm 3.25$	≥ 3 dB
	$f_0 \pm 3.50$	≥ 8 dB
	$f_0 \pm 4.00$	≥ 15 dB
	$f_0 \pm 6.00$	≥ 40 dB
	$f_0 \pm 9.00$	≥ 65 dB
VSWR (pass band range)	≤ 1.15	
Group delay variation	$\Delta\tau \leq 200$ ns	
Temperature stability	≤ 2 kHz / K	
Connectors	1 5/8" EIA male	
Dimensions (L x W x H) mm	528 x 326 x 411	
Weight	ca. 29 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

2.0 KW - 2.5 KW UHF DTV BANDPASS FILTER


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically

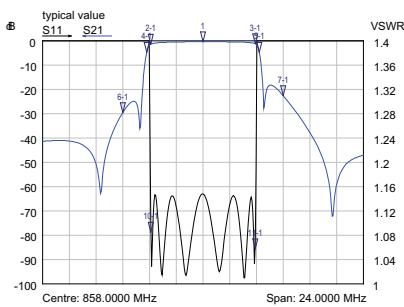

Typical diagram AS6193

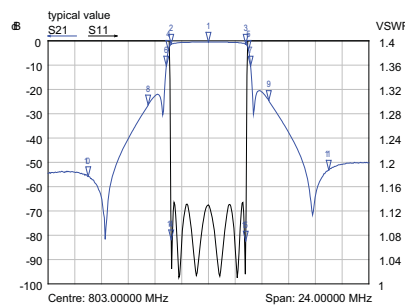

Typical diagram AS6184

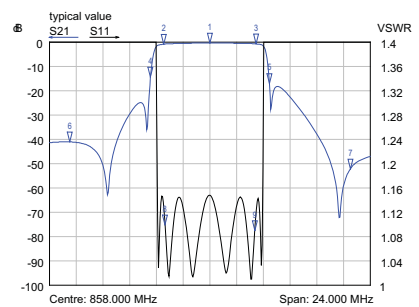

Typical diagram AS6289


Part number	BN 61 65 18 C0010					
Frequency range	470 - 860 MHz					
Number / Size of cavities	6 / 150					
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz					
TV standard	DVB-T @8 MHz (Ü/U _{rms} = 13 dB)		ISDB-T @6 MHz (Ü/U _{rms} = 13 dB)		DVB-T @7 MHz (Ü/U _{rms} = 13 dB)	
Average input power	≤ 2.5 kW		≤ 2 kW		≤ 2.25 kW	
Tuning instruction	AS6193		AS6184		AS6289	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz	860 MHz	470 MHz	803 MHz	470 MHz	803 MHz
	f ₀	≤ 0.30 dB ≤ 0.45 dB	f ₀	≤ 0.4 dB ≤ 0.6 dB	f ₀	≤ 0.35 dB ≤ 0.50 dB
	f ₀ ± 3.805	≤ 0.75 dB ≤ 1.20 dB	f ₀ ± 2.79	≤ 1.1 dB ≤ 1.5 dB	f ₀ ± 3.2	≤ 0.55 dB ≤ 0.85 dB
	f ₀ ± 3.885	≤ 0.95 dB ≤ 1.40 dB	f ₀ ± 3.00	≥ 3.5 dB	f ₀ ± 4.2	≥ 13 dB
	f ₀ ± 4.2	≥ 4 dB	f ₀ ± 3.15	≥ 8.0 dB	f ₀ ± 10.5	≥ 38 dB
	f ₀ ± 6.0	≥ 20 dB	f ₀ ± 4.5	≥ 23 dB		
	f ₀ ± 12.0	≥ 40 dB	f ₀ ± 9.0	≥ 48 dB		
			f ₀ ± 15.0	≥ 50 dB		
VSWR (pass band range)	≤ 1.15		≤ 1.15		≤ 1.15	
Group delay variation	Δτ ≤ 350 ns		Δτ ≤ 500 ns		Δτ ≤ 150 ns	
Temperature stability	≤ 2 kHz / K					
Connectors	1 5/8" EIA					
Dimensions (L x W x H) mm	497 x 326 x 411					
Weight	ca. 28 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

1.6 KW - 2.0 KW UHF DTV BANDPASS FILTER


- mask filter for ATV and DTV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically




Bandpassfilter
Bandpass Filters

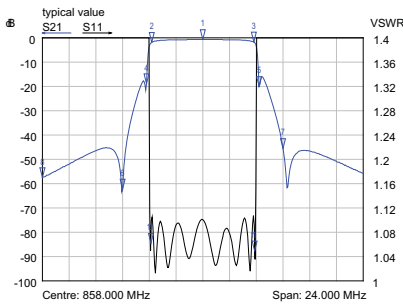

Typical diagram AS8071

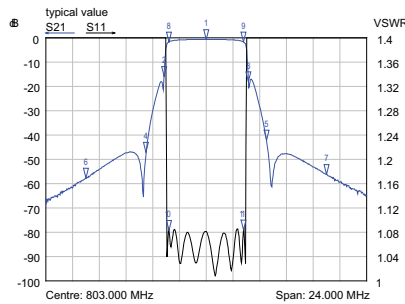

Typical diagram AS8096

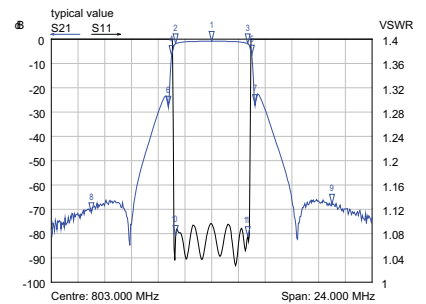


Typical diagram AS8094


Part number Connector	BN 61 65 42 C0010 1 5/8" EIA		BN 61 65 42 C0011 7-16 female			
	Frequency range	470 - 860 MHz				
Number / Size of cavities	8 / 150					
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz					
TV standard	DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)			
Average input power	≤ 2 kW		≤ 1.6 kW			
Tuning instruction	AS8071		AS8096			
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz		470 MHz 803 MHz		470 MHz 803 MHz	
	f_0	≤ 0.4 dB ≤ 0.65 dB	f_0	≤ 0.50 dB ≤ 0.70 dB	f_0	≤ 0.70 dB ≤ 0.90 dB
	$f_0 \pm 3.805$	≤ 1.5 dB ≤ 2.10 dB	$f_0 \pm 2.79$	≤ 1.30 dB ≤ 1.75 dB	$f_0 \pm 2.69$	≤ 1.50 dB ≤ 2.00 dB
	$f_0 \pm 3.885$	≤ 1.7 dB ≤ 2.40 dB	$f_0 \pm 3.15$	≥ 15 dB	$f_0 \pm 3.00$	≥ 4 dB
	$f_0 \pm 4.2$	≥ 15 dB	$f_0 \pm 4.5$	≥ 30 dB	$f_0 \pm 3.25$	≥ 18 dB
	$f_0 \pm 6.0$	≥ 40 dB	$f_0 \pm 9.0$	≥ 55 dB	$f_0 \pm 9.0$	≥ 64 dB
VSWR (pass band range)	≤ 1.15		≤ 1.11		≤ 1.10	
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 500$ ns		$\Delta\tau \leq 400$ ns	
Temperature stability	≤ 2 kHz / K					
Connectors	1 5/8" EIA		7-16 female			
Dimensions (L x W x H) mm	639 x 326 x 411		675 x 326 x 411			
Weight	ca. 36 kg					
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

3 KW - 7.5 KW UHF DTV BANDPASS FILTER


- mask filter for DTV and ATV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within the whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design
- natural or liquid cooling

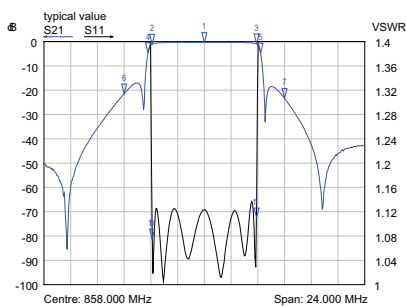

Typical diagram AS6217

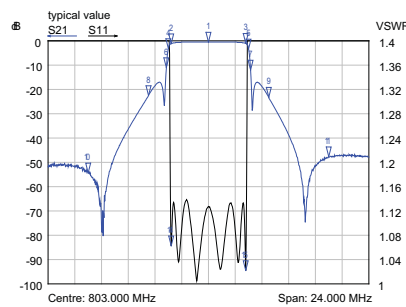

Typical diagram AS6222

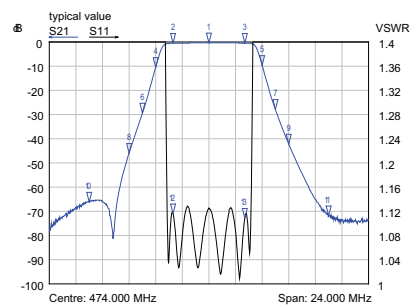

Typical diagram AS6221


Part number / Connectors	BN 61 66 65 C1031 1 5/8" SMS unflanged BN 61 66 65 C1033 1 5/8" EIA		BN 61 66 65 C2041 3 1/8" SMS unflanged BN 61 66 65 C2043 3 1/8" EIA	
Cooling	natural cooling		liquid cooling	
Frequency range	470 - 860 MHz			
Number / Size of cavities	6 / 170			
Harmonics attenuation	≥ 50 dB for f ≤ 1000 MHz			
Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)	
Average input power	≤ 3.75 kW natural cooling ≤ 7.50 kW liquid cooling		≤ 3.0 kW natural cooling ≤ 6.0 kW liquid cooling	
Tuning instruction	AS6217		AS6222	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz		470 MHz 803 MHz	
	f_0	≤ 0.25 dB ≤ 0.35 dB	f_0	≤ 0.40 dB ≤ 0.50 dB
	$f_0 \pm 3.805$	≤ 0.75 dB ≤ 0.90 dB	$f_0 \pm 2.79$	≤ 1.05 dB ≤ 1.25 dB
	$f_0 \pm 3.885$	≤ 0.90 dB ≤ 1.00 dB	$f_0 \pm 3.00$	≥ 3dB
	$f_0 \pm 4.2$	≥ 4 dB	$f_0 \pm 3.15$	≥ 5 dB
	$f_0 \pm 6.0$	≥ 20 dB	$f_0 \pm 4.5$	≥ 17 dB
	$f_0 \pm 12.0$	≥ 40 dB	$f_0 \pm 9.0$	≥ 38 dB
			$f_0 \pm 15.0$	≥ 48 dB
VSWR (pass band range)	≤ 1.15		≤ 1.15	
Group delay variation	$\Delta\tau \leq 350$ ns		$\Delta\tau \leq 400$ ns	
Temperature stability	≤ 2 kHz / K			
Dimensions (L x W x H) mm	602 x 448 x 271	BN 61 66 65 C1031	606 x 448 x 271	BN 61 66 65 C2041
	617 x 448 x 271	BN 61 66 65 C1033	630 x 448 x 271	BN 61 66 65 C2043
Weight	ca. 36 kg			
Coolant / Flow rate	-		mix: glycol and water BN 15 45 67 / ≥ 3 l/min	
Temperature of the coolant	-		10 °C - 55 °C	
Cooling interface	-		aluminium tube 12 mm x 1 mm unflanged	
Cooling accessories	-		see appendix	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

3 KW - 6.25 KW UHF DTV BANDPASS FILTER


- mask filter for DTV and ATV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within the whole UHF range
- temperature compensated
- DC block
- installation horizontally or vertically
- low profile design
- natural or liquid cooling




Bandpassfilter
Bandpass Filters

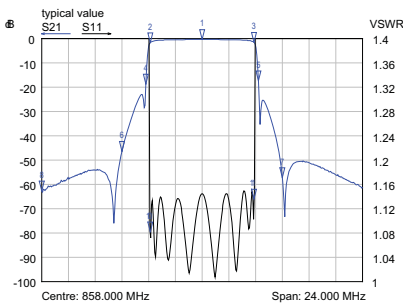

Typical diagram AS8100

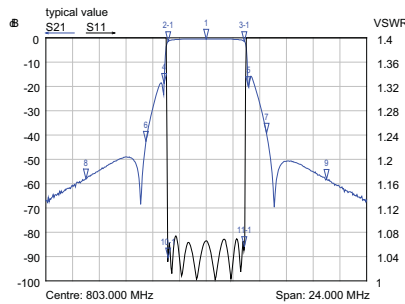

Typical diagram AS8104


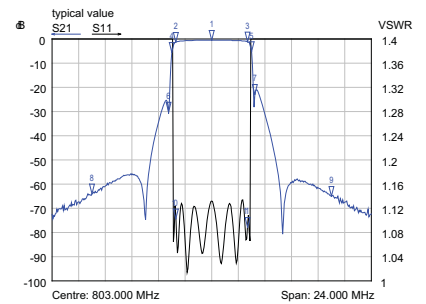


Typical diagram AS8103


Part number / Connectors	BN 61 66 66 C1031 1 5/8" SMS unflanged BN 61 66 66 C1033 1 5/8" EIA		BN 61 66 66 C2041 3 1/8" SMS unflanged BN 61 66 66 C2043 3 1/8" EIA	
Cooling	natural cooling		liquid cooling	
Frequency range	470 - 860 MHz			
Number / Size of cavities	8 / 170			
Harmonics attenuation	≥ 50 dB for f ≤ 1000 MHz			
Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)		ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)	
Average input power	≤ 3.75 kW natural cooling ≤ 6.25 kW liquid cooling		≤ 3.0 kW natural cooling ≤ 5.0 kW liquid cooling	
Tuning instruction	AS8100		AS8104	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz		470 MHz 803 MHz	
	f_0	≤ 0.35 dB ≤ 0.45 dB	f_0	≤ 0.4 dB ≤ 0.5 dB
	$f_0 \pm 3.805$	≤ 1.10 dB ≤ 1.80 dB	$f_0 \pm 2.79$	≤ 1.3 dB ≤ 1.7 dB
	$f_0 \pm 3.885$	≤ 1.40 dB ≤ 2.00 dB	$f_0 \pm 3.15$	≥ 12 dB
	$f_0 \pm 4.2$	≥ 15 dB	$f_0 \pm 4.5$	≥ 28 dB
	$f_0 \pm 6.0$	≥ 40 dB	$f_0 \pm 9.0$	≥ 54 dB
	$f_0 \pm 12.0$	≥ 55 dB		
VSWR (pass band range)	≤ 1.15		≤ 1.09	
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 650$ ns	
Temperature stability	≤ 2 kHz / K			
Dimensions (L x W x H) mm	773 x 448 x 271	BN 61 66 66 C1031	778 x 448 x 271	BN 61 66 66 C2041
	789 x 448 x 271	BN 61 66 66 C1033	801 x 448 x 271	BN 61 66 66 C2043
Weight	ca. 46 kg			
Coolant / Flow rate	-		mix: glycol and water BN 15 45 67 / ≥ 3 l/min	
Temperature of the coolant	-		10 °C - 55 °C	
Cooling interface	-		aluminium tube 12 mm x 1 mm unflanged	
Cooling accessories	-		see appendix	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

6 KW - 14 KW UHF ATV BANDPASS FILTER


- mask filter for ATV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within the whole UHF range
- temperature compensated
- installation horizontally or vertically
- DC block
- natural or liquid cooling

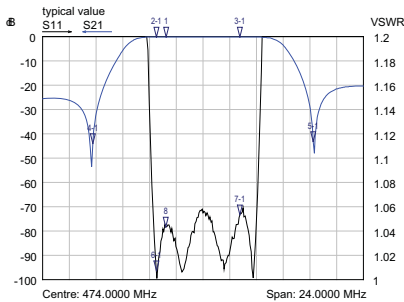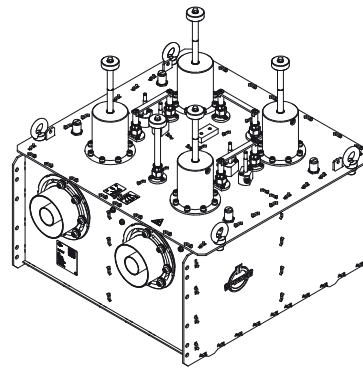

Typical diagram AS4009

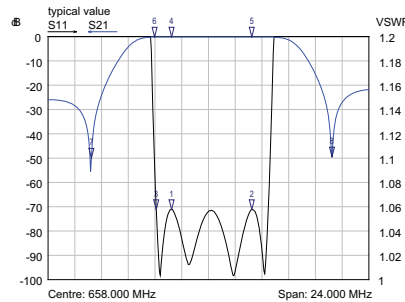

Typical diagram AS4018

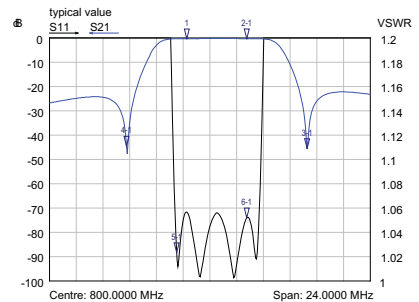


Typical diagram AS4033


Part number / Connectors	BN 61 64 09 3 1/8" SMS unflanged	BN 61 64 09 C0020 3 1/8" SMS unflanged
Cooling	BN 61 64 09 C0002 3 1/8" EIA natural cooling	BN 61 64 09 C0022 3 1/8" EIA liquid cooling
Frequency range	470 - 860 MHz	
Number / Size of cavities	4 / 200	
Harmonics attenuation	≥ 40 dB for f ≤ 800 MHz	
Mask filtering	ATV 8 MHz	ATV 8 MHz ATV 6 MHz
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	natural cooling ≤ 7.5 kW liquid cooling ≤ 14 kW @ 0 - 500 m ≤ 12 kW @ 1600 m ≤ 10 kW @ 2600 m ≤ 8 kW @ 3800 m	natural cooling ≤ 7.5 kW liquid cooling ≤ 14 kW @ 0 - 500 m ≤ 12 kW @ 1600 m ≤ 10 kW @ 2600 m ≤ 8 kW @ 3800 m natural cooling ≤ 6 kW liquid cooling ≤ 11.2 kW @ 0 - 600 m ≤ 10 kW @ 1300 m ≤ 8 kW @ 2600 m ≤ 6 kW @ 4000 m
Tuning instruction (alternative tuning on request)	Standard G: AS4009	Standard I: AS4018 Standard K: AS4014 Standard M: AS4033
	470 MHz 860 MHz	470 MHz 860 MHz 470 MHz 860 MHz
$f_{(M)} - \Delta$	> 40.0 dB > 40.0 dB	$f_{(M)} - \Delta$ > 40.0 dB > 40.0 dB $f_{(M)} - \Delta$ > 40.0 dB > 40.0 dB
$f_{(M)} - 0.75 \text{ MHz}$	≤ 0.15 dB ≤ 0.20 dB	$f_{(M)} - 0.75 \text{ MHz}$ ≤ 0.20 dB ≤ 0.20 dB $f_{(M)} - 0.75 \text{ MHz}$ ≤ 0.25 dB ≤ 0.25 dB
$f_{(M)}$	≤ 0.15 dB ≤ 0.20 dB	$f_{(M)}$ ≤ 0.20 dB ≤ 0.20 dB $f_{(M)}$ ≤ 0.25 dB ≤ 0.25 dB
$f_{(S)} = f_{(M)} + \Delta$	≤ 0.15 dB ≤ 0.20 dB	$f_{(S)} = f_{(M)} + \Delta$ ≤ 0.20 dB ≤ 0.20 dB $f_{(S)} = f_{(M)} + \Delta$ ≤ 0.25 dB ≤ 0.25 dB
$f_{(M)} + 2\Delta$	> 40.0 dB > 40.0 dB	$f_{(M)} + 2\Delta$ > 40.0 dB > 40.0 dB $f_{(M)} + 2\Delta$ > 40.0 dB > 40.0 dB
VSWR (pass band range)		$f_{(M)} - 0.75 \text{ MHz}$ ≤ 1.06 $f_{(M)}$ ≤ 1.06 $f_{(S)} = f_{(M)} + \Delta$ ≤ 1.06
Group delay variation	$\Delta\tau \leq 50 \text{ ns}$	
Temperature stability	≤ 2 kHz / K	
Dimensions (L x W x H) mm	463 x 450 x 442 BN 61 64 09 487 x 450 x 442 BN 61 64 09 C0002	463 x 450 x 442 BN 61 64 09 C0020 487 x 450 x 442 BN 61 64 09 C0022
Weight	ca. 35 kg	
Coolant / Flow rate	–	mix: glycol and water BN 15 45 67 / ≥ 3 l/min
Temperature of the coolant	–	20 °C - 60 °C
Cooling interface	–	for hose with inner width 3/4"
Material of cooling	–	stainless steel pipe
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

4.5 KW - 10 KW UHF DTV BANDPASS FILTER

- mask filter for ATSC
- for 6, 7 and 8 MHz channel bandwidth
- without cross coupling (notch function)
- tuneable within the whole UHF range
- temperature compensated
- installation horizontally or vertically
- DC block
- natural or liquid cooling

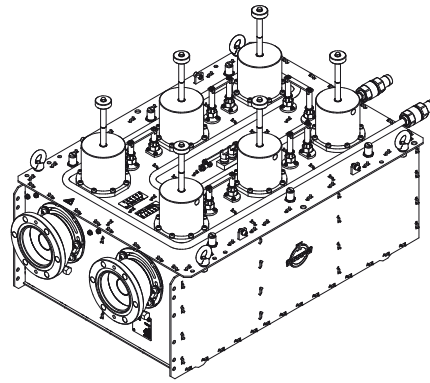

Bandpassfilter
Bandpass Filters

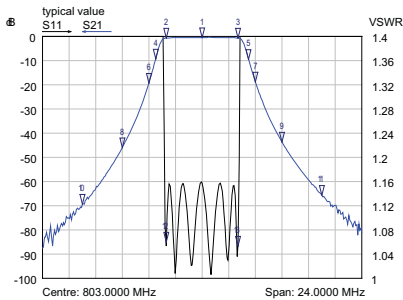


Typical diagram AS6082


Part number / Connectors Cooling	BN 61 65 71 1 5/8" EIA male natural cooling	BN 61 65 70 3 1/8" EIA liquid cooling
Frequency range	470 - 810 MHz	
Number / Size of cavities	6 / 200	
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz	
Mask filtering	ATSC @ 6 MHz (Ü/Urms=11 dB)	
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	≤ 4.5 kW	≤ 10 kW @ 0 - 600 m ≤ 8 kW @ 2000 m ≤ 6 kW @ 3400 m
Tuning instruction	AS6082	
Insertion loss & Mask filtering (alternative tuning on request)	473 MHz 803 MHz f ₀ ≤ 0.4 dB ≤ 0.60 dB f ₀ ± 2.69 ≤ 0.6 dB ≤ 0.80 dB f ₀ ± 3.00 ≤ 1.5 dB ≤ 1.75 dB f ₀ ± 4.00 ≥ 15 dB f ₀ ± 6.00 ≥ 40 dB f ₀ ± 9.00 ≥ 65 dB	
VSWR (pass band range)	≤ 1.17	
Group delay variation	Δτ ≤ 200 ns	
Temperature stability	≤ 2 kHz / K	
Dimensions (L x W x H) mm	702 x 450 x 450	772 x 450 x 450
Weight	ca. 48 kg	ca. 48 kg
Coolant / Flow rate	-	mix: glycol and water BN 15 45 67 / ≥ 3 l/min
Temperature of the coolant	-	20 °C - 60 °C
Cooling interface	-	for hose with inner width 3/4"
Material of cooling	-	stainless steel pipe
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

4 KW - 12.5 KW UHF DTV BANDPASS FILTER


- mask filter for DTV and ATV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within the whole UHF range
- temperature compensated
- installation horizontally or vertically
- DC block
- natural or liquid cooling

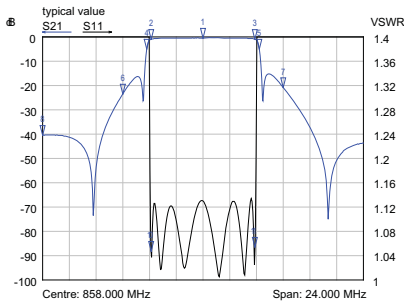

Typical diagram AS6194

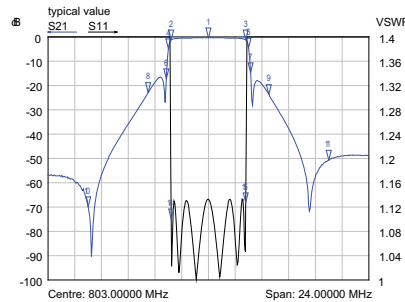

Typical diagram AS6185

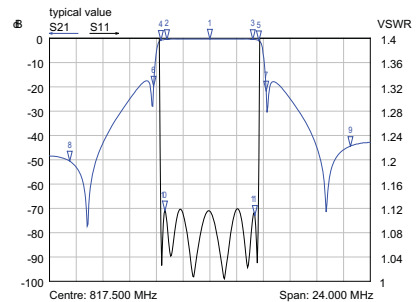

Typical diagram AS6290


Part number / Connectors	BN 61 65 40 C0010 1 5/8" EIA	BN 61 65 50 C0020 3 1/8" SMS unflanged BN 61 65 50 C0021 1 5/8" EIA BN 61 65 50 C0022 3 1/8" EIA male
Cooling	natural cooling	liquid cooling
Frequency range	470 - 860 MHz	
Number / Size of cavities	6 / 200	
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz	
Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	natural cooling ≤ 5 kW liquid cooling 1 5/8" input ≤ 7 kW liquid cooling 3 1/8" input ≤ 12.5 kW @ 0 - 500 m ≤ 10 kW @ 2000 m ≤ 8 kW @ 3200 m	natural cooling ≤ 4 kW liquid cooling 1 5/8" input ≤ 7 kW liquid cooling 3 1/8" input ≤ 10 kW @ 0 - 500 m ≤ 8 kW @ 2000 m ≤ 6 kW @ 3400 m
Tuning instruction	AS6194 470 MHz 860 MHz	AS6185 470 MHz 803 MHz
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 0.20 dB ≤ 0.35 dB $f_0 \pm 3.805$ ≤ 0.60 dB ≤ 0.90 dB $f_0 \pm 3.885$ ≤ 0.75 dB ≤ 1.05 dB $f_0 \pm 4.2$ ≥ 4 dB $f_0 \pm 6.0$ ≥ 20 dB $f_0 \pm 12.0$ ≥ 40 dB	f_0 ≤ 0.3 dB ≤ 0.45 dB $f_0 \pm 2.79$ ≤ 0.9 dB ≤ 1.30 dB $f_0 \pm 3.00$ ≥ 4 dB $f_0 \pm 3.15$ ≥ 8 dB $f_0 \pm 4.5$ ≥ 23 dB $f_0 \pm 9.0$ ≥ 48 dB $f_0 \pm 15.0$ ≥ 50 dB
VSWR (pass band range)	≤ 1.15	≤ 1.15
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 500$ ns
Temperature stability	≤ 2 kHz / K	
Dimensions (L x W x H) mm	671 x 450 x 440	666 x 450 x 440 BN 61 65 50 C0020 671 x 450 x 440 BN 61 65 50 C0021 690 x 450 x 440 BN 61 65 50 C0022
Weight	ca. 47 kg	ca. 56 kg
Coolant / Flow rate	-	mix: glycol and water BN 15 45 67 / ≥ 3 l/min
Temperature of the coolant	-	20 °C - 60 °C
Cooling interface	-	for hose with inner width 3/4"
Material of cooling	-	stainless steel pipe
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

3.2 KW - 12.5 KW UHF DTV BANDPASS FILTER


- mask filter for DTV and ATV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within the whole UHF range
- temperature compensated
- installation horizontally or vertically
- DC block
- natural or liquid cooling




Bandpassfilter
Bandpass Filters

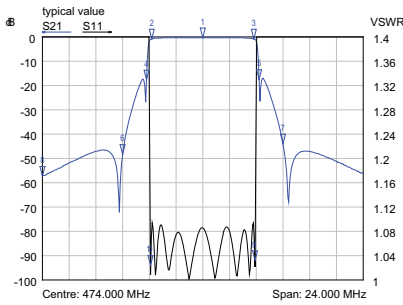

Typical diagram AS8067

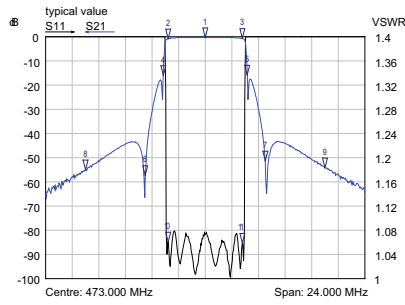

Typical diagram AS8074

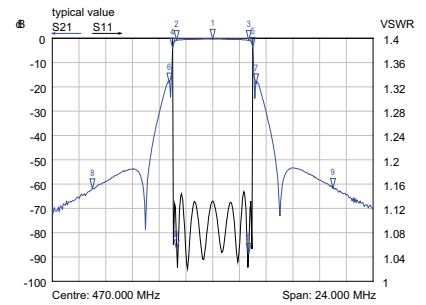


Typical diagram AS8066


Part number / Connectors	BN 61 65 44 C0010 1 5/8" EIA	BN 61 65 54 C0020 3 1/8" SMS unflanged	BN 61 65 54 C0021 1 5/8" EIA	BN 61 65 54 C0022 3 1/8" EIA male
Cooling	natural cooling			
Frequency range	470 - 860 MHz			
Number / Size of cavities	8 / 200			
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz			
Mask filtering	DVB-T @ 8 MHz (\dot{U}/U_{rms} = 13 dB)	ISDB-T @ 6 MHz (\dot{U}/U_{rms} = 13 dB)	ATSC @ 6 MHz (\dot{U}/U_{rms} = 11 dB)	
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	natural cooling ≤ 4 kW liquid cooling 1 5/8" input ≤ 7 kW liquid cooling 3 1/8" input ≤ 12.5 kW @ 0 - 500 m ≤ 10 kW @ 2000 m ≤ 8 kW @ 3200 m	natural cooling ≤ 3.2 kW liquid cooling 1 5/8" input ≤ 7 kW liquid cooling 3 1/8" input ≤ 10 kW @ 0 - 500 m ≤ 8 kW @ 2000 m ≤ 6 kW @ 3400 m	natural cooling ≤ 3.2 kW liquid cooling 1 5/8" input ≤ 7 kW liquid cooling 3 1/8" input ≤ 10 kW @ 0 - 500 m ≤ 8 kW @ 2000 m ≤ 6 kW @ 3400 m	
Tuning instruction	AS8067		AS8066	
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 860 MHz	470 MHz 803 MHz	470 MHz 820 MHz	
	f_0 ≤ 0.3 dB ≤ 0.4 dB	f_0 ≤ 0.35 dB ≤ 0.4 dB	f_0 ≤ 0.4 dB ≤ 0.45 dB	
	$f_0 \pm 3.805$ ≤ 0.9 dB ≤ 1.3 dB	$f_0 \pm 2.79$ ≤ 1.10 dB ≤ 1.4 dB	$f_0 \pm 2.69$ ≤ 0.9 dB ≤ 1.20 dB	
	$f_0 \pm 3.885$ ≤ 1.4 dB ≤ 1.6 dB	$f_0 \pm 3.15$ ≥ 15 dB	$f_0 \pm 3.00$ ≥ 4 dB	
	$f_0 \pm 4.2$ ≥ 15 dB	$f_0 \pm 4.5$ ≥ 30 dB	$f_0 \pm 3.25$ ≥ 18 dB	
	$f_0 \pm 6.0$ ≥ 40 dB	$f_0 \pm 9.0$ ≥ 55 dB	$f_0 \pm 9.00$ ≥ 64 dB	
	$f_0 \pm 12.0$ ≥ 55 dB			
VSWR (pass band range)	≤ 1.10		≤ 1.10	
Group delay variation	$\Delta\tau \leq 700$ ns		$\Delta\tau \leq 400$ ns	
Temperature stability	≤ 2 kHz / K			
Dimensions (L x W x H) mm	874 x 450 x 440		869 x 450 x 440 BN 61 65 54 C0020 874 x 450 x 440 BN 61 65 54 C0021 943 x 450 x 440 BN 61 65 54 C0022	
Weight	ca. 59 kg		ca. 64 kg	
Coolant / Flow rate	-		mix: glycol and water BN 15 45 67 / ≥ 3 l/min	
Temperature of the coolant	-		20 °C - 60 °C	
Cooling interface	-		for hose with inner width 3/4"	
Material of cooling	-		stainless steel pipe	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

6.75 KW - 18 KW UHF DTV BANDPASS FILTER


- mask filter for DTV and ATV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within the whole UHF range
- temperature compensated
- installation horizontally or vertically
- DC block
- natural or liquid cooling

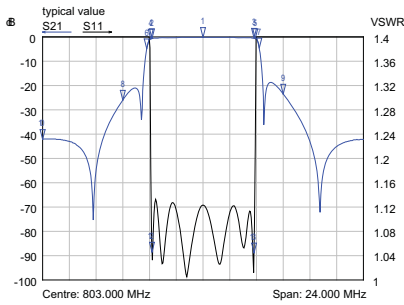

Typical diagram AS6303

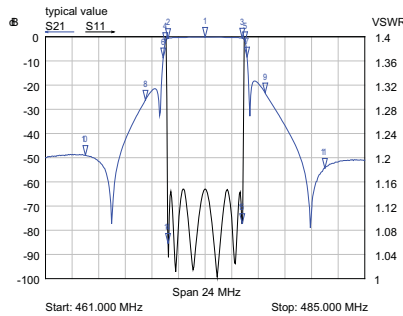

Typical diagram AS6365

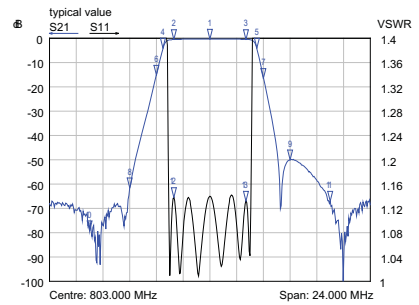

Typical diagram AS6308


Part number / Connectors	BN 61 66 69 C1041 3 1/8" SMS unflanged BN 61 66 69 C1043 3 1/8" EIA	BN 61 66 69 C2041 3 1/8" SMS unflanged BN 61 66 69 C2043 3 1/8" EIA	
Cooling	natural cooling	liquid cooling	
Frequency range	470 - 790 MHz		
Number / Size of cavities	6 / 230		
Harmonics attenuation	≥ 50 dB for f ≤ 800 MHz		
Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms} = 11$ dB)
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	natural cooling ≤ 8.5 kW liquid cooling ≤ 18 kW @ 0 - 500 m ≤ 16 kW @ 1400 m ≤ 14 kW @ 2200 m ≤ 12 kW @ 3000 m ≤ 10 kW @ 3800 m	natural cooling ≤ 6.75 kW liquid cooling ≤ 15 kW @ 0 - 500 m ≤ 14 kW @ 1000 m ≤ 12 kW @ 2000 m ≤ 10 kW @ 3000 m ≤ 8 kW @ 4000 m	natural cooling ≤ 6.75 kW liquid cooling ≤ 18 kW @ 0 - 500 m ≤ 16 kW @ 1400 m ≤ 14 kW @ 2200 m ≤ 12 kW @ 3000 m ≤ 10 kW @ 3800 m
Tuning instruction	AS6303	AS6365	AS6308
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 790 MHz $f_0 \leq 0.20$ dB ≤ 0.30 dB $f_0 \pm 3.805 \leq 0.65$ dB ≤ 0.80 dB $f_0 \pm 3.885 \leq 0.75$ dB ≤ 0.90 dB $f_0 \pm 4.20 \geq 4$ dB $f_0 \pm 6.00 \geq 20$ dB $f_0 \pm 12.0 \geq 40$ dB	470 MHz 790 MHz $f_0 \leq 0.30$ dB ≤ 0.35 dB $f_0 \pm 2.79 \leq 0.75$ dB ≤ 0.90 dB $f_0 \pm 3.00 \geq 2$ dB $f_0 \pm 3.15 \geq 8$ dB $f_0 \pm 4.50 \geq 23$ dB $f_0 \pm 9.00 \geq 48$ dB $f_0 \pm 15.0 \geq 50$ dB	470 MHz 790 MHz $f_0 \leq 0.35$ dB ≤ 0.40 dB $f_0 \pm 2.69 \leq 0.70$ dB ≤ 0.70 dB $f_0 \pm 3.50 \geq 3$ dB $f_0 \pm 4.00 \geq 8$ dB $f_0 \pm 6.00 \geq 30$ dB $f_0 \pm 9.00 \geq 65$ dB
VSWR (pass band range)	≤ 1.15	≤ 1.15	≤ 1.15
Group delay variation	$\Delta\tau \leq 350$ ns	$\Delta\tau \leq 500$ ns	$\Delta\tau \leq 200$ ns
Temperature stability	≤ 2 kHz / K		
Dimensions (L x W x H) mm	775 x 570 x 352 BN 61 66 69 C1041 798 x 570 x 352 BN 61 66 69 C1043	781 x 570 x 352 BN 61 66 69 C2041 804 x 570 x 352 BN 61 66 69 C2043	
Weight	ca. 55 kg		
Coolant / Flow rate	-	mix: glycol and water BN 15 45 67 / ≥ 3 l/min	
Temperature of the coolant	-	10 °C - 55 °C	
Cooling interface	-	stainless steel tube 12 mm x 1 mm unflanged	
Cooling accessories	-	see page annex	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

8.5 KW - 16.5 KW UHF DTV BANDPASS FILTER


- mask filter for DTV and ATV
- for 6, 7 and 8 MHz channel bandwidth
- with cross coupling (notch function)
- tuneable within the whole UHF range
- temperature compensated
- installation horizontally or vertically
- DC block
- natural or liquid cooling




Bandpassfilter
Bandpass Filters

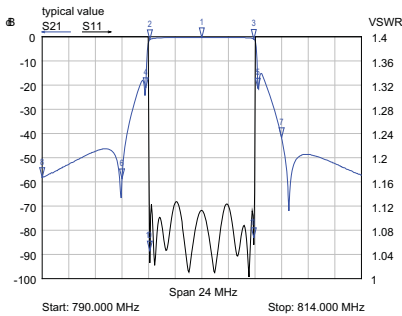

Typical diagram AS8124

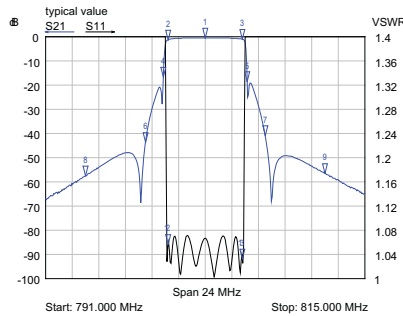

Typical diagram AS8128

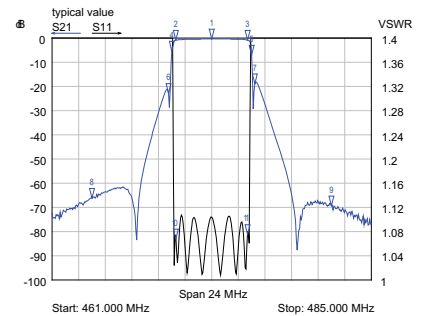


Typical diagram AS8127


Part number / Connectors	BN 61 66 70 C1041 3 1/8" SMS unflanged BN 61 66 70 C1043 3 1/8" EIA	BN 61 66 70 C2041 3 1/8" SMS unflanged BN 61 66 70 C2043 3 1/8" EIA	
Cooling	natural cooling	liquid cooling	
Frequency range	470 - 790 MHz		
Number / Size of cavities	8 / 230		
Harmonics attenuation	≥ 50 dB for f ≤ 860 MHz		
Mask filtering	DVB-T @ 8 MHz ($\dot{U}/U_{rms} = 13$ dB)	ISDB-T @ 6 MHz ($\dot{U}/U_{rms} = 13$ dB)	ATSC @ 6 MHz ($\dot{U}/U_{rms} = 11$ dB)
Average input power The input power of liquid cooled filters must be reduced if installed more than 500 m above sea level.	natural cooling ≤ 8.5 kW liquid cooling ≤ 16.5 kW @ 0 - 500 m ≤ 14 kW @ 1600 m ≤ 12 kW @ 2400 m ≤ 10 kW @ 3400 m ≤ 8 kW @ 4200 m	natural cooling ≤ 6.75 kW liquid cooling ≤ 13.5 kW @ 0 - 500 m ≤ 12 kW @ 1200 m ≤ 10 kW @ 2400 m ≤ 8 kW @ 3400 m ≤ 6 kW @ 4600 m	natural cooling ≤ 6.75 kW liquid cooling ≤ 16.5 kW @ 0 - 500 m ≤ 14 kW @ 1600 m ≤ 12 kW @ 2400 m ≤ 10 kW @ 3400 m ≤ 8 kW @ 4200 m
Tuning instruction	AS8124	AS8128	AS8127
Insertion loss & Mask filtering (alternative tuning on request)	470 MHz 790 MHz f_0 ≤ 0.30 dB ≤ 0.30 dB $f_0 \pm 3.805$ ≤ 0.95 dB ≤ 1.00 dB $f_0 \pm 3.885$ ≤ 1.15 dB ≤ 1.25 dB $f_0 \pm 4.20$ ≥ 15 dB $f_0 \pm 6.00$ ≥ 40 dB $f_0 \pm 12.0$ ≥ 55 dB	470 MHz 790 MHz f_0 ≤ 0.35 dB ≤ 0.40 dB $f_0 \pm 2.79$ ≤ 1.05 dB ≤ 1.10 dB $f_0 \pm 3.15$ ≥ 15 dB $f_0 \pm 4.50$ ≥ 30 dB $f_0 \pm 9.00$ ≥ 55 dB $f_0 \pm 15.0$ ≥ 65 dB	470 MHz 790 MHz f_0 ≤ 0.35 dB ≤ 0.40 dB $f_0 \pm 2.69$ ≤ 0.90 dB ≤ 1.00 dB $f_0 \pm 3.00$ ≥ 4 dB $f_0 \pm 3.25$ ≥ 18 dB $f_0 \pm 9.00$ ≥ 64 dB
VSWR (pass band range)	≤ 1.15	≤ 1.085	≤ 1.15
Group delay variation	$\Delta\tau \leq 700$ ns	$\Delta\tau \leq 550$ ns	$\Delta\tau \leq 450$ ns
Temperature stability	≤ 2 kHz / K		
Dimensions (L x W x H) mm	1006 x 570 x 352 BN 61 66 70 C1041 1030 x 570 x 352 BN 61 66 70 C1043	1006 x 570 x 352 BN 61 66 70 C2041 1030 x 570 x 352 BN 61 66 70 C2043	
Weight	ca. 72 kg		
Coolant / Flow rate	–	mix: glycol and water BN 15 45 67 / ≥ 3 l/min	
Temperature of the coolant	–	10 °C - 55 °C	
Cooling interface	–	stainless steel tube 12 mm x 1 mm unflanged	
Cooling accessories	–	see page annex	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		

1.2 KW - 1.6 KW BAND L DAB/T-DMB BANDPASS FILTER


- mask filter for DAB and T-DMB
- for 1,54 MHz block bandwidth
- with cross coupling (notch function)
- temperature compensated
- dual mode technique
- mounted in 19" drawer
- DC block

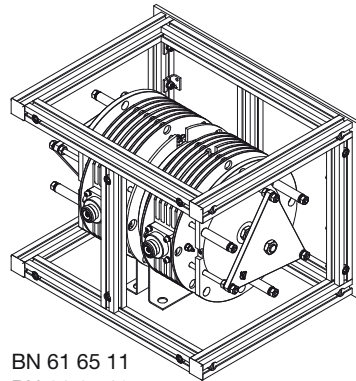

BN 61 65 11
BN 61 65 12

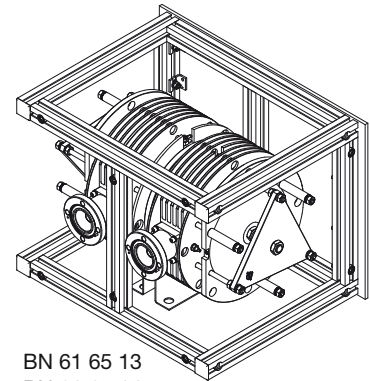

BN 61 65 13
BN 61 65 14

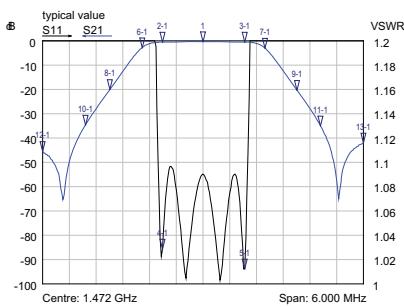

Typical diagram AS4040


Part number	BN 61 65 11	BN 61 65 13	BN 61 65 12	BN 61 65 14
Connectors	7-16 female	1 5/8" EIA	7-16 female	1 5/8" EIA
Frequency range	1452 - 1468 MHz		1468 - 1492 MHz	
Number / Size of cavities	4 / DM			
Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms}=13$ dB)			
Average input power	≤ 1.2 kW 7-16 female ≤ 1.6 kW 1 5/8" EIA			
Tuning instruction	AS4040			
Insertion loss & Mask filtering (alternative tuning on request)	f_0 ≤ 0.50 dB $f_0 \pm 0.77$ ≤ 0.65 dB $f_0 \pm 0.97$ ≥ 0.80 dB $f_0 \pm 1.15$ ≥ 1.5 dB $f_0 \pm 1.75$ ≥ 12 dB $f_0 \pm 2.20$ ≥ 26 dB $f_0 \pm 3.00$ ≥ 40 dB			
VSWR (pass band range)	≤ 1.10			
Group delay variation	$\Delta\tau \leq 110$ ns			
Temperature stability	≤ 1.5 kHz / K			
Dimensions (L x W x H) mm	483 x 355 x 360			
Weight	ca. 25 kg		ca. 30 kg	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			

400 W BAND L DAB/T-DMB BANDPASS FILTER

- mask filter for DAB and T-DMB
- for 1.54 MHz block bandwidth
- with cross coupling (notch function)
- temperature compensated
- dielectric resonators
- installation vertically or horizontally
- DC block



Bandpassfilter
Bandpass Filters

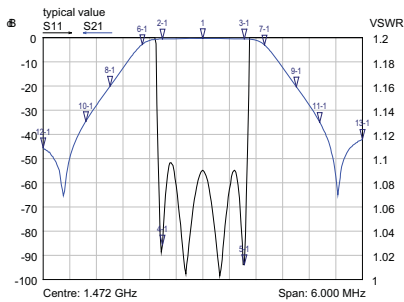

Typical diagram AS4039

Part number	BN 61 65 16
Frequency range	1452 - 1492 MHz
Number / Size of cavities	4 / DE
Mask filtering	DAB / T-DMB @ 1.54 MHz ($\dot{U}/U_{rms} = 13$ dB)
Average input power	≤ 300 W ≤ 400 W with forced air cooling
Tuning instruction	AS4039
Insertion loss & Mask filtering (alternative tuning on request)	$f_0 \leq 0.45$ dB $f_0 \pm 0.77 \leq 0.55$ dB $f_0 \pm 0.97 \geq 0.70$ dB $f_0 \pm 1.15 \geq 1.50$ dB $f_0 \pm 1.75 \geq 12.0$ dB $f_0 \pm 2.20 \geq 26.0$ dB $f_0 \pm 3.00 \geq 40.0$ dB
VSWR (pass band range)	≤ 1.10
Group delay variation	$\Delta\tau \leq 150$ ns
Temperature stability	≤ 3 kHz / K
Connectors	7-16 female
Dimensions (L x W x H) mm	198 x 183 x 95
Weight	ca. 5 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“

1.2 KW - 2 KW LOW PASS FILTER


- low-pass filter for suppression of harmonics
- compact design
- low attenuation in pass band




BN 61 63 95



BN 61 64 52 C0011

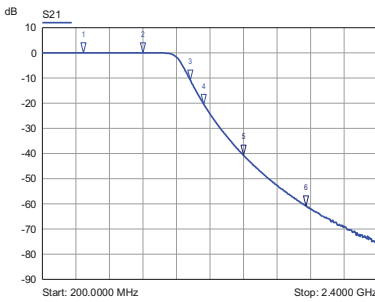

Typical diagram

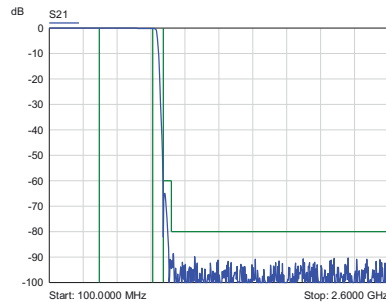

Typical diagram

Part number	BN 61 63 95	BN 61 64 52 C0011
Pass band	330 - 960 MHz	470 - 860 MHz
Average input power	≤ 1 kW	≤ 2 kW
Pass band insertion loss	390 - 960 MHz ≤ 0.1 dB	470 - 800 MHz ≤ 0.10 dB 800 - 860 MHz ≤ 0.18 dB
Stop band attenuation	1.170 GHz ≥ 10 dB 1.260 GHz ≥ 20 dB 1.520 GHz ≥ 30 dB 1.930 GHz ≥ 40 dB	0.94 - 1.0 GHz ≥ 60 dB 1.00 - 2.6 GHz ≥ 80 dB
VSWR (pass band range)	≤ 1.2	470 - 800 MHz ≤ 1.06 800 - 860 MHz ≤ 1.10
Group delay variation	Δτ ≤ 1 ns	Δτ ≤ 20 ns
Proof voltage	3.5 kV	470 - 800 MHz 3.5 kV 800 - 860 MHz 1.6 kV
Connectors	7-16 female / 7-16 male	7-16 female
Dimensions (L x W x H) mm	174 x 32 x 32	406 x 80 x 80
Weight	ca. 0.6 kg	ca. 2.0 kg
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	

ACCESSORIES FOR LIQUID COOLED FILTERS

SPINNER offers many options for the implementation of liquid cooled filters to either existing cooling systems or independent combiner cooling systems with heat sinks:

- various interfaces for cooling pipes
- temperature switch for alarm or switch-off
- cooler unit with heat sinks



Pump unit and UHF combiner with liquid cooled filter



Pump unit and indoor cooler

Cutting ring fittings to interface the cooling tube	Part number
Tube fitting hose barb connector 1/2"	BN A7 29 55
Tube fitting gauge connector 3/8" female straight	BN A7 42 62
Tube fitting gauge connector 3/8" male straight	BN A7 42 63
Tube fitting gauge connector 3/8" female 90° elbow	BN A7 43 18
Tube fitting gauge connector 3/8" male 90° elbow	BN A7 43 20
Tube fitting gauge connector 1/2" female straight	BN A7 42 60
Tube fitting gauge connector 1/2" male straight	BN A7 42 61
Tube fitting gauge connector 1/2" female 90° elbow	BN A7 43 17
Tube fitting gauge connector 1/2" male 90° elbow	BN A7 43 19
Temperature switch for alarm or switch-off	
Normally closed contact opening at 85°C	BN B1 81 00
Coolant	
25 l can with coolant (mix glycol and water and anti corrosive)	BN 15 45 67
Cooler	
Cooling unit with reservoir, twin pump, water splitter, valves	BN 15 57 29

UMSCHALTFELDER

PATCH PANELS

Umschaltfelder werden eingesetzt, um Sender auf Einzelantennen, Halbantennen, Reserveantennen oder Kunstantennen zu schalten oder zwischengeschaltete Systeme wie z.B. Combiner oder Verteiler zu umgehen.

Die Umschaltung kann manuell mit Bügelsteckern oder mit Motorschaltern erfolgen. Alle Umschaltfelder verfügen über ein Interlock-System zur Senderabschaltung während des Umschaltvorganges.

Alle Anschlüsse (Eingang / Ausgang) enden unmittelbar hinter der Frontplatte horizontal mit EIA Flansch System.

Die am Umschaltfeld angeschlossenen Systeme können mittels Messübergängen einfach, schnell und präzise vermessen werden.

SPINNER liefert Umschaltfelder für alle Frequenzbereiche und Leitungsgrößen (7-16 bis 6 1/8"). Auf Kundenwunsch können Umschaltfelder auch mit 3dB Kopplern als 2-fach Verteiler und mit Messrichtkopplern ausgerüstet werden.

Anmerkung:

Bei Betrieb mit digitalen Signalen wird die übertragbare Leistung entweder durch die Prüfspannung, unter Einbeziehung des Crestfaktors, oder durch die effektive Leistung begrenzt.

Bei Mehrsenderbetrieb ist die Summe der Einzelspannungen zu berücksichtigen. Letzteres gilt auch für Analog-Betrieb. Alle Leistungsangaben gelten bei +40 °C Umgebungstemperatur.

Patch panels are used for routing transmitter signals to single, half, backup antennas, or dummy loads or for bypassing intermediate systems such as combiners or splitters.

The switchover can be carried out with motor switches or manually with U-links. All patch panels have an interlock system that switches off the transmitter during the switchover.

All input / output connectors are ending horizontal with EIA flange system behind the front panel.

The systems connected to the patch panel can be measured easily, quickly and precisely using measuring adapters.

SPINNER delivers patch panels for all frequency ranges and sizes (7-16 through 6 1/8"). Upon customer request the patch panels can also be equipped with 3dB couplers used as power splitters and with measurement couplers.

Note:

For digital signal operation please note that the transmittable power is limited either by the proof voltage, taking the crest factor into account, or by the average power.

For multitransmitter operation please consider the sum of the individual voltages. The same applies to analogue operating mode. All power figures refer to an ambient temperature of +40 °C.

UMSCHALTFELDER

PATCH PANELS

3 PORT UMSCHALTFELD

3 PORT PATCH PANEL

Bestellnummer Part number	Anschlüsse Connectors	Effektive Eingangsleistung Average input power			Frequenzbereich Frequency range
		100 MHz	240 MHz	860 MHz	
BN 54 71 71 BN 54 71 71 C0101	7-16 f	≤ 5 kW	≤ 3.5 kW	≤ 2 kW	0 - 860 MHz
BN 55 31 82 BN 55 31 82 C0101	1 5/8" EIA	≤ 20 kW	≤ 13.5 kW	≤ 7 kW	0 - 860 MHz
BN 55 34 31 BN 55 34 31 C0101	3 1/8" EIA	≤ 51 kW	≤ 34 kW	≤ 17.5 kW	0 - 860 MHz

4 PORT UMSCHALTFELD

4 PORT PATCH PANEL

Bestellnummer Part number	Anschlüsse Connectors	Effektive Eingangsleistung Average input power			Frequenzbereich Frequency range
		100 MHz	240 MHz	860 MHz	
BN 54 71 74 BN 54 71 74 C0101	7-16 f	≤ 5 kW	≤ 3.5 kW	≤ 2 kW	0 - 860 MHz
BN 55 32 26 BN 55 32 26 C0101	1 5/8" EIA	≤ 20 kW	≤ 13.5 kW	≤ 7 kW	0 - 860 MHz
BN 55 35 14 BN 55 35 14 C0101	3 1/8" EIA	≤ 51 kW	≤ 34 kW	≤ 17.5 kW	0 - 860 MHz
BN 55 38 02 BN 55 38 02 C0101	4 1/2" EIA ¹⁾	≤ 98 kW	≤ 67 kW	≤ 35 kW	0 - 860 MHz
BN 55 32 29 C0001	1 5/8" EIA	≤ 20 kW	≤ 13.5 kW	≤ 7 kW	0 - 860 MHz
BN 55 35 67	3 1/8" EIA	≤ 51 kW	≤ 34 kW	≤ 17.5 kW	0 - 860 MHz
BN 55 38 72	4 1/2" EIA ¹⁾	≤ 82 kW	≤ 42 kW	≤ 28 kW	0 - 860 MHz

6 PORT UMSCHALTFELD

6 PORT PATCH PANEL

Bestellnummer Part number	Anschlüsse Connectors	Effektive Eingangsleistung Average input power			Frequenzbereich Frequency range
		100 MHz	240 MHz	860 MHz	
BN 55 32 83 A0200	1 5/8" EIA	≤ 20 kW			87 - 108 MHz
BN 55 34 72 A0200	3 1/8" EIA	≤ 51 kW			87 - 108 MHz
BN 55 38 88 A0200	4 1/2" EIA ¹⁾	≤ 98 kW			87 - 108 MHz
BN 54 06 58 A0200	6 1/8" EIA	≤ 140 kW			87 - 108 MHz
BN 55 32 84	1 5/8" EIA		≤ 13.5 kW		170 - 240 MHz
BN 55 35 78	3 1/8" EIA		≤ 34 kW		170 - 240 MHz
BN 55 32 85 BN 55 32 82	1 5/8" EIA			≤ 7 kW	470 - 860 MHz
BN 55 35 79 BN 55 35 76	3 1/8" EIA			≤ 17.5 kW	470 - 860 MHz
BN 55 38 81 A0200	4 1/2" EIA ¹⁾			≤ 35 kW	470 - 860 MHz
BN 54 06 42 A0200	6 1/8" EIA			≤ 47 kW	470 - 860 MHz
BN 54 06 52 A0200	6 1/8" EIA			≤ 60 kW	470 - 860 MHz
BN 54 06 43 A0200	6 1/8" EIA			≤ 80 kW	470 - 800 MHz


Bügelstecker und Messübergänge
U-Links and measurement adaptors

¹⁾ 339 IEC 50-105

3 PORT UMSCHALTFELDER
3 PORT PATCH PANELS

- 19"-Frontplatte
- Interlock Anschlussleiste frontseitig zugänglich, oder Slim design in reduzierter Höhe, Interlock Anschlussleiste nicht montiert, im Lieferumfang enthalten
- Bügelstecker mit Interlock-System 1 (IL 1-4)
- Messmöglichkeit auf der Frontplatte
- 19" front panel
- access to the interlock terminal strip from the front side, or slim design with reduced high, interlock terminal strip is not installed, included in the package
- U-links with interlock system 1 (IL 1-4)
- measurement at the front possible

Bestellnummer Part number	BN 54 71 71 standard BN 54 71 71 C0101 slim design	BN 55 31 82 C0101 standard BN 55 31 82 slim design	BN 55 34 31 standard BN 55 34 31 C0101 slim design
Frequenzbereich Frequency range	0 - 860 MHz		
Prüfspannung Proof voltage	≤ 2.7 kV	≤ 10 kV	≤ 13 kV
Effektive Leistung Average power	100 MHz 240 MHz 860 MHz	≤ 5.0 kW ≤ 3.5 kW ≤ 2.0 kW	≤ 20.0 kW ≤ 13.5 kW ≤ 7.0 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB		
VSWR	≤ 1.04		
Umschaltgröße Switching port size	7-16 Kuppler 7-16 female	1 5/8" USL-D	29.5-68 USL-D
Anschlüsse Eingang / Ausgang Input / Output connectors	7-16 Kuppler 7-16 female	1 5/8" EIA	3 1/8" EIA
Anzahl der Interlock-Kontakte Number of interlock contacts	4		
Belastbarkeit der Interlock-Kontakte Rating of the interlock contacts	max. Spannung max. Voltage max. Strom max. Current		
Abmessungen (H x B x T) mm Dimensions (H x W x D) mm	BN 54 71 71 266 x 483 x 35 BN 54 71 71 C0101 132 x 483 x 15	BN 55 31 82 C0101 309 x 483 x 65 BN 55 31 82 177 x 483 x 65	BN 55 34 31 444 x 483 x 115 BN 55 34 31 C0101 310 x 483 x 115
Gewicht Weight	ca. 3.6 kg	ca. 6.0 kg	ca. 9.6 kg
Gestell Rack	nein / no		
Zubehör / Accessories			
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		




4 PORT UMSCHALTFELDER 4 PORT PATCH PANELS

- 19"-Frontplatte
- Interlock Anschlussleiste frontseitig zugänglich, oder Slim design in reduzierter Höhe, Interlock Anschlussleiste nicht montiert, im Lieferumfang enthalten
- Bügelstecker mit Interlock-System 1 (IL 1-4)
- Messmöglichkeit auf der Frontplatte
- 19" front panel
- access to the interlock terminal strip from the front side, or slim design with reduced high, interlock terminal strip is not installed, included in the package
- U-links with interlock system 1 (IL 1-4)
- measurement at the front possible

Bestellnummer Part number	BN 54 71 74 standard BN 54 71 74 C0101 slim design	BN 55 32 26 standard BN 55 32 26 C0101 slim design
Frequenzbereich Frequency range	0 - 860 MHz	
Prüfspannung Proof voltage	≤ 2.7 kV	≤ 10 kV
Effektive Leistung Average power	100 MHz 240 MHz 860 MHz	≤ 5.0 kW ≤ 3.5 kW ≤ 2.0 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB	
VSWR	≤ 1.04	
Umschaltgröße Switching port size	7-16 f	1 5/8" USL-D
Anschlüsse Eingang / Ausgang Input / Output connectors	7-16 f	1 5/8" EIA
Anzahl der Interlock-Kontakte Number of interlock contacts	4	
Belastbarkeit der Interlock-Kontakte Rating of the interlock contacts	max. Spannung max. Voltage max. Strom max. Current	
Abmessungen (H x B x T) mm Dimensions (H x W x D) mm	BN 54 71 74 310 x 483 x 35 BN 54 71 74 C0101 221 x 483 x 15	BN 55 32 26 444 x 483 x 65 BN 55 32 26 C0101 310 x 483 x 65
Gewicht Weight	4.6 kg	8.5 kg
Gestell Rack	nein / no	
Zubehör / Accessories		
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	




Umschaltfelder
Patch Panels



4 PORT UMSCHALTFELDER
4 PORT PATCH PANELS

- 19"-Frontplatte
- Interlock Anschlussleiste frontseitig zugänglich, oder Slim design in reduzierter Höhe, Interlock Anschlussleiste nicht montiert, im Lieferumfang enthalten
- Bügelstecker mit Interlock-System 1 (IL 1-4)
- Messmöglichkeit auf der Frontplatte
- 19" front panel
- access to the interlock terminal strip from the front side, or slim design with reduced high, interlock terminal strip is not installed, included in the package
- U-links with interlock system 1 (IL 1-4)
- measurement at the front possible

Bestellnummer Part number	BN 55 35 14 standard BN 55 35 14 C0101 slim design	BN 55 38 02 standard BN 55 38 02 C0101 slim design
Frequenzbereich Frequency range	0 - 860 MHz	
Prüfspannung Proof voltage	≤ 13 kV	≤ 19 kV
Effektive Leistung Average power	100 MHz ≤ 51.0 kW 240 MHz ≤ 34.0 kW 860 MHz ≤ 17.5 kW	≤ 98 kW ≤ 67 kW ≤ 35 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB	
VSWR	≤ 1.04	
Umschaltgröße Switching port size	29.5-68 USL-D	43-98 USL-D
Anschlüsse Eingang / Ausgang Input / Output connectors	3 1/8" EIA	4 1/2" EIA 339 IEC 50-105
Anzahl der Interlock-Kontakte Number of interlock contacts	4	
Belastbarkeit der Interlock-Kontakte Rating of the interlock contacts	max. Spannung max. Voltage ≤ 60.0 V DC ≤ 42.4 V AC _{pk} max. Strom max. Current ≤ 0.75 A	
Abmessungen (H x B x T) mm Dimensions (H x W x D) mm	BN 55 35 14 444 x 483 x 115 BN 55 35 14 C0101 310 x 483 x 115	BN 55 38 02 666 x 483 x 105 BN 55 38 02 C0101 532 x 483 x 105
Gewicht Weight	11 kg	22 kg
Gestell Rack	nein / no	
Zubehör / Accessories		
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	




4 PORT UMSCHALTFELDER 4 PORT PATCH PANELS

- 19"-Frontplatte
- für Motor Aufsteckschalter
- Überbrückungsmöglichkeit mit Bügelsteckern (IL 1-4)
- Messmöglichkeit auf der Frontplatte
- 19" front panel
- for plug-in switch
- bridging with U-links (IL 1-4)
- measurement at the front possible

Bestellnummer Part number	BN 55 32 29 C0001	BN 55 35 67	BN 55 38 72
Frequenzbereich Frequency range	0 - 860 MHz		
Prüfspannung, begrenzt durch Aufsteckschalter Proof voltage, limited by plug-in switch	≤ 7 kV	≤ 8.1 kV	≤ 12.5 kV
Effektive Leistung Average power	100 MHz 240 MHz 860 MHz	≤ 20.0 kW ≤ 13.5 kW ≤ 7.0 kW	≤ 41 kW ≤ 21 kW ≤ 14 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB		
VSWR	≤ 1.04		
Umschaltgröße Switching port size	1 5/8" USL-D	29.5-68 USL-D	43-98 USL-D
Anschlüsse Eingang / Ausgang Input / Output connectors	1 5/8" EIA	3 1/8" EIA	4 1/2" EIA 339 IEC 50-105
Anzahl der Interlock-Kontakte Number of interlock contacts	4		
Belastbarkeit der Interlock-Kontakte Rating of the interlock contacts	max. Spannung max. Voltage $\leq 60.0 \text{ V DC}$ $\leq 42.4 \text{ V AC}_{pk}$ max. Strom max. Current $\leq 0.75 \text{ A}$		
Abmessungen (H x B x T) mm Dimensions (H x W x D) mm	355 x 483 x 65	400 x 483 x 115	533 x 483 x 105
Gewicht Weight	ca. 9.5 kg	ca. 11 kg	ca. 23 kg
Gestell Rack	nein / no		
Zubehör / Accessories			
Aufsteckschalter Plug-in switch	BN 55 30 64 BN 55 30 65	BN 55 33 64 BN 55 33 65	BN 55 36 64 BN 55 36 65
19"-Frontplatte mit 4 Parkbuchsen 19" front panel with 4 parking sockets	BN 55 32 51	BN 55 34 01	BN 55 37 49
Bügelstecker Standard U-link standard	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors		
Bügelstecker mit gleicher elektrischer Länge wie Aufsteckschalter U-link with identical electrical length as plug-in switch	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors		
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors		
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		



Umschaltfelder
Patch Panels




6 PORT UMSCHALTFELDER (FM)

6 PORT PATCH PANELS (FM)

- offenes Rahmengestell
- Interlock Anschlussleiste frontseitig zugänglich
- inklusive symmetrischem 2-fach Verteiler
- Bügelstecker mit Interlock-System 2 (IL 2-10)
- Messmöglichkeit auf der Frontseite

- open rack
- access to the interlock terminal strip from the front side
- symmetrical power splitter included
- U-links with interlock system 2 (IL 2-10)
- measurement at the front possible

Bestellnummer Part number	BN 55 32 83 A0200	BN 55 34 72 A0200	BN 55 38 88 A0200	BN 54 06 58 A0200
Frequenzbereich Frequency range	87 - 108 MHz			
Prüfspannung Proof voltage	≤ 10 kV	≤ 13 kV	≤ 19 kV	≤ 23 kV
Effektive Leistung 100 MHz Average power	≤ 20 kW	≤ 51 kW	≤ 98 kW	≤ 132 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB			
VSWR	≤ 1.06			
Umschaltgröße Switching port size	1 5/8" USL-D	29.5-68 USL-D	43-98 USL-D	52-120 USL
Anschlüsse Eingang / Ausgang Input / Output connectors	1 5/8" EIA	3 1/8" EIA	4 1/2" EIA 339 IEC 50-105	6 1/8" EIA
Anzahl der Interlock-Kontakte Number of interlock contacts	10			
Belastbarkeit der Interlock-Kontakte Rating of the interlock contacts max. Spannung max. Voltage max. Strom max. Current	≤ 60.0 V DC ≤ 42.4 V AC _{pk} ≤ 0.1 A			
Phasengenauigkeit der Ausgänge Phase accuracy of outputs	3°			
Abmessungen (H x B x T) mm Dimensions (H x W x D) mm	1980 x 583 x 600		1980 x 790 x 800	1980 x 990 x 800
Gewicht Weight	ca. 60 kg	ca. 75 kg	ca. 150 kg	ca. 200 kg
Gestell Rack	ja / yes			
Zubehör / Accessories				
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			



6 PORT UMSCHALTFELDER (VHF)

6 PORT PATCH PANELS (VHF)


- 19"-Frontplatte
- Interlock Anschlussleiste frontseitig zugänglich
- kompakter Aufbau
- inklusive symmetrischem 2-fach Verteiler
- Bügelstecker mit Interlock-System 1(IL 1-4)
- Messmöglichkeit auf der Frontplatte

- 19" front panel
- access to the interlock terminal strip from the front side
- compact design
- symmetrical power splitter included
- U-links with interlock system 1 (IL 1-4)
- measurement at the front possible

Bestellnummer Part number	BN 55 32 84	BN 55 35 78
Frequenzbereich Frequency range	170 - 240 MHz	
Prüfspannung Proof voltage	≤ 10 kV	≤ 13 kV
Effektive Leistung Average power	≤ 13.5 kW	≤ 34 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB	
VSWR	≤ 1.05	
Umschaltgröße Switching port size	1 5/8" USL-D	29.5-68 USL-D
Anschlüsse Eingang / Ausgang Input / Output connectors	1 5/8" EIA	3 1/8" EIA
Anzahl der Interlock-Kontakte Number of interlock contacts	4	
Belastbarkeit der Interlock-Kontakte Rating of the interlock contacts	max. Spannung max. Voltage	
	≤ 60.0 V DC ≤ 42.4 V AC _{pk}	
	max. Strom max. Current	
		≤ 0.75 A
Phasengenauigkeit Phase accuracy of outputs	3°	
Abmessungen (H x B x T) mm Dimensions (H x W x D) mm	550 x 483 x 307	550 x 483 x 318
Gewicht Weight	ca. 25 kg	ca. 34 kg
Gestell Rack	nein / no	
Zubehör / Accessories		
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	



Umschaltfelder
Patch Panels




6 PORT UMSCHALTFELDER (UHF)

6 PORT PATCH PANELS (UHF)

- 19"-Frontplatte
- Interlock Anschlussleiste frontseitig zugänglich
- kompakter Aufbau
- inklusive symmetrischem 2-fach Verteiler
- Bügelstecker mit Interlock-System 1 oder 2 (IL 1-4 oder IL 2-10)
- Messmöglichkeit auf der Frontplatte

- 19" front panel
- access to the interlock terminal strip from the front side
- compact design
- symmetrical power splitter included
- U-links with interlock system 1 or 2 (IL 1-4 or 2-10)
- measurement at the front possible

Bestellnummer Part number	BN 55 32 85 IL 1-4 BN 55 32 82 IL 2-10	BN 55 35 79 IL 1-4 BN 55 35 76 IL 2-10
Frequenzbereich Frequency range	470 - 860 MHz	
Prüfspannung Proof voltage	≤ 10 kV	≤ 13 kV
Effektive Leistung Average power	≤ 7 kW	≤ 17.5 kW
Durchgangsdämpfung Insertion loss	≤ 0.15 dB	≤ 0.10 dB
VSWR	≤ 1.05	
Umschaltgröße Switching port size	1 5/8" USL-D	29.5-68 USL-D
Anschlüsse Eingang / Ausgang Input / Output connectors	1 5/8" EIA	3 1/8" EIA
Anzahl der Interlock-Kontakte Number of interlock contacts	4 / 10	
Belastbarkeit der Interlock-Kontakte Rating of the interlock contacts	max. Spannung max. Voltage	
	≤ 60.0 V DC ≤ 42.4 V AC _{pk}	
	max. Strom max. Current	
	≤ 0.75 A / 0.1 A	
Phasengenauigkeit Phase accuracy of outputs	3°	
Abmessungen (H x B x T) mm Dimensions (H x W x D) mm	444 x 483 x 260	488 x 483 x 260
Gewicht Weight	ca. 25 kg	ca. 34 kg
Gestell Rack	nein / no	
Zubehör / Accessories		
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors	
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	



6 PORT UMSCHALTFELDER (UHF)

6 PORT PATCH PANELS (UHF)


- offenes Rahmengestell
- Interlock Anschlussleiste frontseitig zugänglich
- inklusive symmetrischem 2-fach Verteiler
- Bügelstecker mit Interlock-System 2 (IL 2-10)
- Messmöglichkeit auf der Frontseite

- open rack
- access to the interlock terminal strip from the front side
- symmetrical power splitter included
- U-links with interlock system 2 (IL 2-10)
- measurement at the front possible

Bestellnummer Part number	BN 55 38 81 A0200	BN 54 06 42 A0200	BN 54 06 52 A0200	BN 54 06 43 A0200
Frequenzbereich Frequency range	470 - 860 MHz			
Prüfspannung Proof voltage	≤ 19 kV	≤ 23 kV	≤ 25 kV	
Effektive Leistung Average power	≤ 35 kW	≤ 47 kW	≤ 60 kW	≤ 80 kW (800 MHz)
Durchgangsdämpfung Insertion loss	≤ 0.1 dB			≤ 0.05 dB
VSWR	≤ 1.05			
Umschaltgröße Switching port size	43-98 USL-D	52-120 USL		6 1/8" USL
Anschlüsse Eingang / Ausgang Input / Output connectors	4 1/2" EIA 339 IEC 50-105	6 1/8" EIA		
Anzahl der Interlock-Kontakte Number of interlock contacts	10			
Belastbarkeit der Interlock-Kontakte Rating of the interlock contacts max. Spannung max. Voltage max. Strom max. Current	≤ 60.0 V DC ≤ 42.4 V AC _{pk} ≤ 0.1 A			
Phasengenauigkeit Phase accuracy of outputs	3°			
Abmessungen (H x B x T) mm Dimensions (H x W x D) mm	1980 x 790 x 900	1980 x 990 x 900		1980 x 1190 x 900
Gewicht Weight	ca. 145 kg	ca. 180 kg		ca. 215 kg
Gestell Rack	ja / yes			
Zubehör / Accessories				
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors			
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“			



Umschaltfelder
Patch Panels



BÜGELSTECKER UND MESSÜBERGÄNGE U-LINKS AND MEASUREMENT ADAPTORS

- schnelles Umschalten
- 4 oder 10 Interlock-Kontakte IL 1-4 oder IL 2-10
- sofort perfekter HF-Kontakt und Schirmung
- beste Wiederholgenauigkeit
- Messübergänge für genaue Messung von Weichen, Speisekabeln und Antennen von der Frontplatte

- fast switching
- 4 or 10 interlock contacts IL1-4 or IL 2-10
- instant RF-connection and shielding
- best repeat accuracy
- measurement adaptors for accurate measurement of combiners, feeders and antennas from front side



Bügelstecker mit Interlock-System 1 (IL 1-4)
U-link with interlock system 1 (IL 1-4)



Bügelstecker mit Interlock-System 2 (IL 2-10)
U-link with interlock system 2 (IL 2-10)



Messübergang
Measurement adaptors

Bügelstecker mit Interlock-System 1 (IL 1-4) und 2 (IL 2-10) U-link with interlock system 1 (IL 1-4) and 2 (2-10)

Bestellnummer Part number	Interlock 1 Interlock 2	BN 54 01 21 -	BN 55 30 31 BN 55 30 32	BN 55 33 31 BN 55 33 32	BN 55 36 11 BN 55 36 12	- BN 53 96 27	- BN 53 96 13	- BN 53 96 33
Frequenzbereich Frequency range		0 - 860 MHz						0 - 800 MHz
Prüfspannung Proof voltage		≤ 2.7 kV	≤ 10 kV	≤ 13 kV	≤ 19 kV	≤ 23 kV	≤ 25 kV	≤ 34 kV
Effektive Leistung Average power	100 MHz 240 MHz 860 MHz	≤ 5.0 kW ≤ 3.5 kW ≤ 2.0 kW	≤ 20.0 kW ≤ 13.5 kW ≤ 7.0 kW	≤ 51.0 kW ≤ 34.0 kW ≤ 17.5 kW	≤ 98.0 kW ≤ 67.0 kW ≤ 35.0 kW	≤ 132.0 kW ≤ 91.0 kW ≤ 47.0 kW	≤ 169.0 kW ≤ 116.0 kW ≤ 60.0 kW	≤ 225.0 kW ≤ 154.0 kW ≤ 80.0 kW*
Anschlüsse Connectors		7-16	158 USL-D	68 USL-D	98 USL-D	120 USL	120 USL	618 USL
Achsabstand Distance between axles		110 mm	160 mm	160 mm	225 mm	325 mm	325 mm	400 mm
Gewicht Weight		ca. 0.6 kg	ca. 1 kg	ca. 1.7 kg	ca. 4.7 kg	ca. 9.4 kg	ca. 10 kg	ca. 22 kg
Option								
Bügelstecker mit gleicher elektrischer Länge wie Aufsteckschalter U-link with identical electrical length as plug-in switch			BN 55 30 33	BN 55 33 34	-	-	-	-

*) @ 800MHz

Präzisionsmessübergänge auf 7-16 Kuppler Precision measurement adaptors to 7-16 female

Bestellnummer Part number	-	BN 55 30 48	BN 55 33 48	BN 55 36 48	BN 53 96 48	BN 53 96 47*
Anschlüsse Connectors	-	158 USL-D	68 USL-D	98 USL-D	120 USL	618 USL
VSWR	-	≤ 1.02	≤ 1.02	≤ 1.02	≤ 1.02	≤ 1.02
Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“					

*) @ 800MHz



PARALLELSCHALTEINRICHTUNGEN PARALLEL SWITCHING UNITS

Mit Parallelschalteinrichtungen werden zwei Sender gleicher Frequenz und 90° Phasendifferenz zur Leistungsverdopplung zusammengeschaltet. Normalerweise reduziert sich bei Ausfall eines Senders die Ausgangsleistung auf 25 % der ursprünglichen Leistung, da die halbe Leistung des intakten Senders in den Brückenabsorber des 3 dB Kopplers fließt.


Mit einer SPINNER Parallelschalteinrichtung kann innerhalb von Sekunden Sender 1 oder Sender 2 direkt auf die Antenne und Sender 2 oder Sender 1 auf die Kunstantenne geschaltet werden. Somit stehen wieder 50 % der ursprünglichen Leistung zur Verfügung und am freigeschalteten Sender können Wartungs- und Reparaturarbeiten durchgeführt werden. Darüber hinaus lässt sich die Summenleistung beider Sender zum Messen auf die Kunstantenne schalten.

Zur Umschaltung werden fernsteuerbare 2-Wege Motorschalter eingesetzt. Im Notbetrieb können die Motorschalter auch manuell bedient oder durch Bügelstecker ersetzt werden. In allen Fällen stehen Interlock-Kontakte zur Verfügung. SPINNER liefert Parallelschalteinrichtungen für FM, VHF und UHF in verschiedenen Leistungsklassen für analoge und digitale Übertragung.

Parallel switching units are used to double the output power by combining two transmitters operating on the same frequency and with a phase difference of 90 degrees. Usually the failure of one transmitter causes the output power to drop down to 25 % of the original output because half of the power from the working transmitter flows into the balancing load of the 3 dB coupler.

The SPINNER parallel switching unit can route transmitter 1 or transmitter 2 directly to the antenna and transmitter 2 or transmitter 1 to the dummy load within seconds. Thus 50 % of the original output power is available again and the disconnected transmitter is free for repair or maintenance work. Furthermore, the combined output of both transmitters can be routed to the dummy load for measurements.

Switching is done by remotely controlled 2-way motor switches. In emergencies the motor switches can be operated manually or be replaced by U-links. In all cases interlock contacts are available. SPINNER delivers parallel switching units for FM, VHF and UHF in various power ratings for analogue and digital transmission.

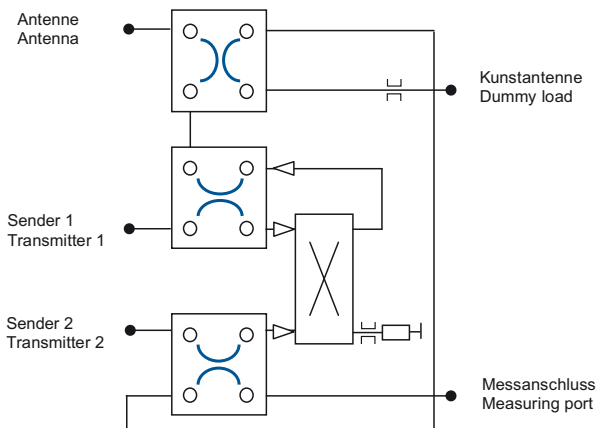

Schaltmöglichkeiten

Standard-Betrieb:

- Sender S1 und S2 auf Antenne
- Messanschluss auf Kunstantenne

Not-Betrieb:

- Sender auf Antenne
- defekter Sender auf Kunstantenne zum Messen bzw. zur Reparatur

Sender Messen:

- Sender S1 und S2 auf Kunstantenne
- Messanschluss auf Antenne

Switching Possibilities

Standard operation:

- transmitters TX1 and TX2 to antenna
- measuring port to dummy load

Emergency operation:

- working transmitter to antenna
- defect transmitter to dummy load for measurement or repair

Measurement purposes:

- transmitters TX1 and TX2 to dummy load
- measuring port to antenna

7 KW PARALLELSCHALTEINRICHTUNGEN 7 KW PARALLEL SWITCHING UNITS

- Schaltung mit Bügelstecker oder Motorschalter (s. Optionen)
- Motorschalter mit Steuerspannung 8-31VDC oder 230VAC verfügbar
- Brückenwiderstand integriert
- Interlock-Kontakte und Signalkontakte
- Messstellen
- operation with U-links or motorized switches (see options)
- motorized switches with control voltage 8-31VDC or 230 VAC are available
- integrated balancing load
- interlock contacts and position signal contacts supplied
- measurement port

Bestellnummer Part number	BN 53 65 80 A0300	BN 53 65 81 A0300
Frequenzbereich Frequency range	470 - 860 MHz	
Effektive Leistung Average power	2 x ≤ 2 kW	2 x ≤ 3.5 kW
Leistung Brückenwiderstand Power balancing load	1 kW	2 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB	
VSWR	≤ 1.08	
Umschaltgröße Switching port size	1 5/8" USL-D	
Anschluss Eingang Input connectors	1 5/8" EIA	
Anschluss Ausgang Output connectors	1 5/8" EIA	
Aufsteckschalter Plug in switch	BN 55 30 64	
Messrichtkoppler Directional coupler	Ausgang Brückenwiderstand und Kunstantenne output at balancing load and dummy load	
Anzahl der Interlock-Kontakte Number of interlocks-contacts	4	
Rating of the interlock contacts max. Spannung max. Voltage	≤ 60.0 V DC ≤ 42.4 V AC _{pk}	
max. Strom max. Current	≤ 0.75 A	
Phasendifferenz zwischen TX1 / TX2 Phase difference between TX1 / TX2	- 90° / 0°	
Bügelstecker mit gleicher elektrischer Länge wie Aufsteckschalter U-link with identical electrical length as plug-in switch	BN 55 30 33	
Abmessungen (L x B x H) mm Dimensions (L x W x D) mm	1980 x 575 x 900	
Gewicht Weight	145 kg	170 kg
Umweltbedingungen Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	
Options based on the selected application		
Motor Aufsteckschalter Motor switch	BN 55 30 65 / BN 64 00 82 / BN 64 00 81	
Bügelstecker, Standard U-link standard	BN 55 30 31	
Dummy Load	BN 53 42 65	BN 54 64 50
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors	



Typical design with plug in switches

Parallelschalteinrichtungen
Parallel Switching Units

17,5 KW PARALLELSCHALTEINRICHTUNGEN
17.5 KW PARALLEL SWITCHING UNITS

- Schaltung mit Bügelstecker oder Motorschalter (s. Optionen)
- Motorschalter mit Steuerspannung 8-31VDC oder 230VAC verfügbar
- Brückenwiderstand integriert
- Interlock-Kontakte und Signalkontakte
- Messstellen
- operation with U-links or motorized switches (see options)
- motorized switches with control voltage 8-31VDC or 230 VAC are available
- integrated balancing load
- interlock contacts and position signal contacts supplied
- measurement port

Bestellnummer Part number	BN 53 65 82 A0300	BN 53 65 83 A0300	BN 53 65 84 A0300
Frequenzbereich Frequency range	470 - 860 MHz		
Effektive Leistung Average power	2 x ≤ 4 kW	2 x ≤ 5 kW	2 x ≤ 8.75 kW *)
Leistung Brückenwiderstand Power balancing load	2 kW	2.5 kW	5 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB		
VSWR	≤ 1.08		
Umschaltgröße Switching port size	29.5-68 USL-D		
Anschluss Eingang Input connectors	1 5/8" EIA	3 1/8" EIA	
Anschluss Ausgang Output connectors	3 1/8" EIA	3 1/8" EIA	
Aufsteckschalter Plug in switch	BN 55 33 64		
Messrichtkoppler Directional coupler	Ausgang Brückenwiderstand und Kunstantenne output at balancing load and dummy load		
Anzahl der Interlock-Kontakte Number of interlocks-contacts	4		
Rating of the interlock contacts max. Spannung max. Voltage	≤ 60.0 V DC ≤ 42.4 V AC _{pk}		
max. Strom max. Current	≤ 0.75 A		
Phasendifferenz zwischen TX1 / TX2 Phase difference between TX1 / TX2	- 90° / 0°		
Bügelstecker mit gleicher elektrischer Länge wie Aufsteckschalter U-link with identical electrical length as plug-in switch	BN 55 33 34		
Abmessungen (L x B x H) mm Dimensions (L x W x D) mm	1980 x 800 x 900		
Gewicht Weight	260 kg	260 kg	270 kg
Umweltbedingungen Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“		
Options based on the selected application			
Motor Aufsteckschalter Motor switch	BN 55 33 65 / BN 94 19 18 / BN 94 19 17		
Bügelstecker, Standard U-link standard	BN 55 33 31		
Dummy Load	BN 54 64 50	BN 54 64 60	
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors		



Typical design with plug in switches

*) Attention: The max power needs to be adjusted, if operated with motorized switch.

30 KW PARALLELSCHALTEINRICHTUNGEN 30 KW PARALLEL SWITCHING UNITS

- Schaltung mit Bügelstecker oder Motorschalter (s. Optionen)
- Motorschalter mit Steuerspannung 8-31VDC oder 230VAC verfügbar
- Brückenwiderstand integriert
- Interlock-Kontakte und Signalkontakte
- Messstellen
- operation with U-links or motorized switches (see options)
- motorized switches with control voltage 8-31VDC or 230 VAC are available
- integrated balancing load
- interlock contacts and position signal contacts supplied
- measurement port

Bestellnummer Part number	BN 53 65 85 A0300	BN 53 65 86 A0300
Frequenzbereich Frequency range	470 - 860 MHz	
Effektive Leistung Average power	2 x ≤ 10 kW	2 x ≤ 15 kW *)
Leistung Brückenwiderstand Power balancing load	5 kW	10 kW
Durchgangsdämpfung Insertion loss	≤ 0.1 dB	
VSWR	≤ 1.08	
Umschaltgröße Switching port size	43-98 USL-D	
Anschluss Eingang Input connectors	3 1/8" EIA	
Anschluss Ausgang Output connectors	4 1/2" EIA 339 IEC 50-105	
Aufsteckschalter Plug in switch	BN 55 36 64	
Messrichtkoppler Directional coupler	Ausgang Brückenwiderstand und Kunstantenne output at balancing load and dummy load	
Anzahl der Interlock-Kontakte Number of interlocks-contacts	4	
Rating of the interlock contacts max. Spannung max. Voltage	≤ 60.0 V DC ≤ 42.4 V AC _{pk}	
max. Strom max. Current	≤ 0.75 A	
Phasendifferenz zwischen TX1 / TX2 Phase difference between TX1 / TX2	- 90° / 0°	
Bügelstecker für Aufsteckschalter Spare U-link for plug-in switch	BN 55 36 11	
Abmessungen (L x B x H) mm Dimensions (L x W x D) mm	1980 x 800 x 900	
Gewicht Weight	340 kg	350 kg
Umweltbedingungen Environmental conditions	for limitations see „Environmental Conditions for Broadcast Products“	
Options based on the selected application		
Motor Aufsteckschalter Motor switch	BN 55 36 65 / BN 94 19 44	
Bügelstecker, Standard U-link standard	BN 55 36 11	
Dummy Load	BN 54 64 60	BN 54 64 70
Messübergänge Measurement adaptors	Siehe Bügelstecker und Messübergänge See U-links and measurement adaptors	



Parallelschalteinrichtungen
Parallel Switching Units

Typical design
with plug in switches

*) Attention: The max power needs to be adjusted, if operated with motorized switch.

UHF 30 KW SWITCHLESS COMBINER

Aktive Reserve ohne Sendeunterbrechung mit Switchless Combiner

Es ist gängige Praxis zwei Sender gleicher Frequenz und Leistung mit einem 3 dB Koppler zusammenzuschalten. Am Ausgang des Kopplers erhält man im Normalbetrieb die Summenleistung der beiden Sender. Sobald ein Sender ausfällt, steht am Kopplerausgang nicht die halbe Leistung (entsprechend einem arbeitendem Sender) sondern nur noch ein Viertel der Summenleistung an.

Deshalb wird der funktionierende Sender auf die Antenne geschaltet und der ausgefallene auf eine Kunstantenne.

Isoliert vom Sendebetrieb kann er repariert und getestet werden. Erfolgt die Umschaltung manuell mit Bügelsteckern muss der Sendebetrieb für wenige Minuten unterbrochen werden. Auch wenn die Umschaltung automatisiert mit Transferschaltern realisiert ist, muss der Sendebetrieb unterbrochen werden, da die Transferschalter nicht unter Last geschaltet werden können. Der Switchless Combiner ermöglicht ein unterbrechungsfreies „Umschalten“ der HF-Pfade während des Sendebetriebs.

SPINNER hat viele Parallelschalteinrichtungen mit Bügelsteckern oder Transferschaltern mit Motorantrieb angefertigt. Als Alternative dazu ist nun ein Switchless Combiner in SPINNER-Qualität verfügbar. Als Entscheidungshilfe für unsere Kunden werden die beiden konkurrierenden Systeme nachfolgend miteinander verglichen.

Wesentliche Eigenschaften von Parallelschalteinheiten mit Bügelsteckern oder automatisierten Transferschaltern:

- kein Schalten unter Last möglich
- hohe Isolation der Sender durch galvanische Trennung der HF-Pfade mittels Schalter oder Bügelstecker
- Umschaltung der HF-Pfade ergibt sich aus der Schalterstellung und ist unabhängig von der Betriebsfrequenz

Wesentliche Eigenschaften eines Switchless Combiners:

- Schalten unter Last problemlos möglich
- Sender werden nicht galvanisch abgetrennt; Isolation der Sender etwa 35 dB, realisiert durch 3 dB Koppler
- das Funktionsprinzip beruht auf einer mittels Phasenverschiebung veränderbaren Interferenz; der Switchless Combiner muss auf den Betriebskanal abgestimmt werden

Der Switchless Combiner von SPINNER besteht aus zwei 3 dB Kopplern, deren Ports je mit einer festen Leitungslänge und mit einem Phasenschieber verbunden sind. Der Phasenschieber ist als motorisch betätigte koaxiale Auszugleitung realisiert. Eine intelligente Steuerung überwacht alle Betriebszustände und macht die Ansteuerung so einfach wie bei einer Parallelschalteinrichtung.

Selbstverständlich kann der Switchless Combiner nicht nur ferngesteuert werden, sondern ebenso vom Frontpanel vor Ort bedient werden.

Switchless Combiner for Active-Reserve Transmitters

It is common practice to combine the power of two transmitters via 3 dB couplers to get double output power for normal operation. To avoid the possibility that power supplied to the antenna drops to one quarter if one transmitter fails, the good transmitter is switched directly to the antenna and the faulty one is isolated for repair. If this switching is performed by manual U-links the transmission must be interrupted for a few minutes.

Even if switching is done via motor-driven switches, transmission must be interrupted because the switches do not allow hot switching. The switchless combiner performs the switching by means of phase shifting and therefore it allows rerouting of the signals without interruption of transmission.

SPINNER has supplied many traditional parallel switching units with U-links or motor-driven switches and is now also offering switchless combiners in “SPINNER Quality” as an alternative.

Before the details of the switchless combiner are explained, we will compare the two principles to assist customers and explain why SPINNER is offering these competing designs in parallel.

Parallel switching units with U-links or motor-driven switches:

- no hot switching
- high isolation of transmitters by galvanic separation of RF paths by means of switches or U-link
- function is defined by switch positions and is independent of operating frequency

Switchless combiner with trombone as phase shifter:

- hot switching
- transmitters are not galvanic separated; isolation of 35 dB provided by 3 dB couplers
- function is defined by the position of the trombone and needs readjustment in case of frequency change

The SPINNER switchless combiner consists of two hybrid couplers which are connected by one fixed transmission line and a motor-driven trombone acting as a mechanical phase shifter. A sophisticated control unit makes the switchless combiner as easy to handle as a parallel switching unit, allowing local and remote control.

UHF 30 KW SWITCHLESS COMBINER

Der Switchless Combiner wird ab Werk auf den gewünschten Kanal im UHF Band abgestimmt. Zur Inbetriebnahme ist der Switchless Combiner nur mit dem Stromnetz und den beiden Sendern zu verbinden. Die Wahl der Betriebsart erfolgt über eine Steuerspannung am jeweiligen Eingang oder über einen Tastendruck am Bedienpanel.

Die Steuereinheit verfährt dann den motorisierten Phasenschieber, bis die gewünschte Betriebsart eingestellt ist. Währenddessen kann unterbrechungsfrei weitergesendet werden. Beide Eingänge sind immer angepasst.

Bei der Entwicklung wurde großer Wert auf Funktions- und Ausfallsicherheit sowie der Möglichkeit eines Notbetriebes von Hand gelegt:

- Der Switchless Combiner behält den Betriebszustand bei, auch wenn die Steuersignale oder die Stromversorgung unterbrochen werden. Kehren sie wieder zurück, nimmt die Steuerung des Switchless Combiners den Betrieb wieder auf.
- Der Switchless Combiner kann ohne Stromversorgung auch von Hand betätigt werden.
- Unabhängig von der Funktion der Steuerung oder einer Netzversorgung kann der Betriebszustand des Switchless Combiners jederzeit über potentialfrei ausgeführte Schaltkontakte abgefragt werden.
- Die Steuerung gibt sowohl vor Ort als auch fernbedient Warnungen und kritische Fehlerzustände aus.

Der Switchless Combiner kann vor Ort auf jeden UHF-Kanal umgestimmt werden, dazu müssen mit einem Netzwerkanalysator die neuen Positionen des Phasenschiebers eingestellt und die 3dB-Koppler optimiert werden.

SPINNER bietet all das Zubehör an, welches bei Installation, Umstimmung und Betrieb notwendig oder nützlich ist:

- Abschlusswiderstände
- Messrichtkoppler
- Messübergänge und Kalibrier Kits

Der Switchless Combiner ist eine Alternative von SPINNER für all die Netzbetreiber, deren Priorität auf völlig unterbrechungsfreien Sendebetrieb liegt.

Anmerkung:

Die HF-Signale der Sender müssen phasengleich an den Eingängen des Switchless Combiners anliegen.

The switchless combiner can be factory tuned to any channel in the UHF band. To start operation the switchless combiner only needs to be connected to the mains supply. Selecting the operating mode is easy: In the remote mode apply a signal to the appropriate input pin in the local mode press the button on the control panel.

Then the control unit will start the motor to move the phase shifter into the predefined position and the RF signal will be rerouted. While the phase shifter is moving, the transmitters can continue without power interruption, the input ports are always matched and the routing of the power is fine.

The SPINNER switchless combiner also features safety and emergency functions:

- retains position, even if control signals or mains supply are interrupted and continues operation if the signals are reinstated
- can be operated manually
- a set of potential-free signalization switches is available independent of the control unit and mains supply, to provide feedback that the switchless combiner has reached the desired operating mode
- the control unit provides warning and error signalisation

The switchless combiner can be readjusted on site to any channel within the UHF band (by finding the new positions of the phase shifter and optimizing the 3 dB couplers) with the help of a network analyzer.

SPINNER offers all accessories which are necessary or useful for installation, retuning and operation the switchless combiner:

- loads
- monitoring couplers
- measurement adaptors and calibration kits

The switchless combiner is an alternative offer from SPINNER for network operators whose priority is to avoid any interruption of transmission.


Remark:

The RF signals from the transmitters must be adjusted to be in phase at the inputs.

UHF 30 KW SWITCHLESS COMBINER

- Schalten unter Last problemlos möglich
- einfache Fernüberwachung aller Funktionen
- Rückmeldung der Betriebsart und Interlock Signale
- geeignet für ATV und DTV
- für 6, 7 und 8 MHz Kanalbandbreite
- durchstimmbare im gesamten UHF Bereich
- CCS Kompaktweiche

- hot switching
- simple remote control of all functions
- feedback of operation mode and interlock signals
- suitable for analogue and digital TV
- for 6, 7 and 8 MHz channel bandwidth
- tuneable within the whole UHF range
- CCS compact design

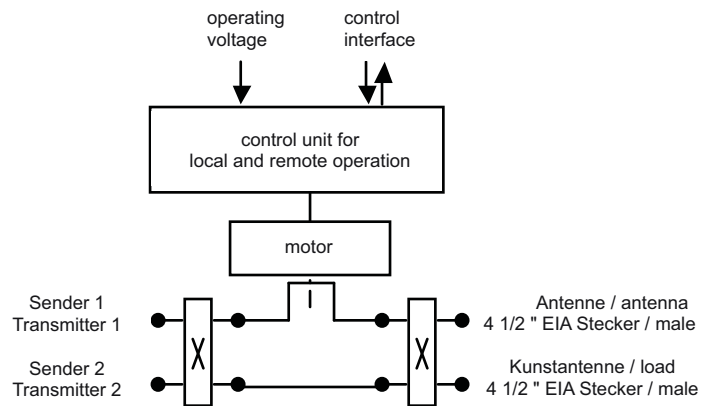

Bestellnummer Part number	BN 53 65 74	
Frequenzbereich Frequency range	470 - 860 MHz	
Eingangsleistung Input power	≤ 15 kW per input	
Prüfspannung Proof voltage	16 kV	
Durchgangsdämpfung Insertion loss	≤ 0.15 dB	
Senderentkopplung Isolation between inputs	≥ 35 dB	
VSWR	≤ 1.1	
Betriebsarten Operation modes	S1+S2 auf Antenne S1 auf Antenne und S2 auf Kunstantenne S2 auf Antenne und S1 auf Kunstantenne S1+S2 auf Kunstantenne	TX1+TX2 to antenna TX1 to antenna and TX2 to load TX2 to antenna and TX1 to load TX1+TX2 to load
Umschaltzeit Switching time	10 - 20 s	
Steuerung Operation control	am Bedienpanel oder per Fernsteuerung local via front panel or remote by control signals	
HF eingang RF input	3 1/8" EIA Stecker/male	
HF Ausgang RF output	4 1/2" EIA Stecker/male 339 IEC 50-105	
Fernsteuerschnittstelle Remote control interface	DC-37-D-sub oder Klemmleiste / or terminal block	
Betriebsspannung Anschluss Operating voltage interface	IEC 60320 C14 Kaltgerätestecker/male	
Betriebsspannung Operating voltage	85 - 250 VAC; 47 - 63 Hz	
Stromaufnahme Operating current	≤ 3 A	
Fernsteuerung Eingang Control signal inputs	8 - 24 VDC	
Fernsteuerung Ausgang Control signal outputs	potentialfreie Kontakte oder Schalter potention-free relay contact or switches; V ≤ 60 VDC; I ≤ 30 A	
Abmessungen (L x B x H) mm Dimensions (L x W x D) mm	900 x 390 x 1420	
Gewicht Weight	ca. 97 kg	
Umweltbedingungen *) Environmental conditions	Max. Höhe über N.N 5000 m (begrenzt durch Netzteil) Max. altitude AMSL 1.600 ft (limited by power supply)	



*) for limitations see „Environmental Conditions for Broadcast Products“

UHF 30 KW SWITCHLESS COMBINER

Zubehör, optional**Recommended Accessories for Operation**

Bauteil Device		Bestellnummer Part number
Doppel-Messrichtkoppler Directional coupler with two probes	4 1/2" EIA N Kuppler/female 339 IEC 50-105	BN 80 03 64
Abschlusswiderstand flüssigkeitsgekühlt Load liquid cooled	10 kW 20 kW 30 kW	BN 54 64 50 BN 54 64 60 BN 54 64 70
Abschlusswiderstand luftgekühlt mit Gebläse, temperaturgesteuert Load with forced air cooling, temperature-controlled	10 kW	BN 53 42 92



KOAXIALE 2-WEGE SCHALTER COAXIAL 2-WAY SWITCHES

Seit mehr als 65 Jahren entwickelt und produziert SPINNER, als innovatives Unternehmen in der Hochfrequenztechnik, optimale Lösungen und Systeme. SPINNER HF-Schalter haben sich von Beginn an als äußerst zuverlässige und robuste Produkte bei bester Performance bewährt.

Das SPINNER Schalter Portfolio umfasst eine große Auswahl an unterschiedlichen Schaltertypen für den Einsatz in der Hochfrequenztechnik. Als herausragende Eckpunkte zählen HF-Leistungen von wenigen Watt bis zu mehreren hundert Kilowatt sowie koaxiale Größen von N bis 6 1/8" für Frequenzen bis zu einigen GHz.

Je nach Antriebskonzept erzielen SPINNER Schalter (Hubmagnet, Impulsdrehmagnet oder Motor) Umschaltzeiten von 25 ms bis zu ca. einer Sekunde. SPINNER Schalter sind bekannt als die kompaktesten und schnellsten HF-Schalter auf dem Markt.

Auf Grund der hohen Betriebssicherheit werden SPINNER Schalter bevorzugt in Anlagen eingesetzt, welche eine hohe Ausfallsicherheit aufweisen müssen. Die 2+1- und 4+1-Schaltssysteme sind eine hervorragende Lösung für Redundanzsysteme in einem kompakten 19" Format mit nur einer Höheneinheit.

As a globally established innovative company, SPINNER has been developing and producing highly sophisticated RF solutions and systems that for more than 65 years. From the very beginning, SPINNER RF switches have proven to be extremely reliable and robust with excellent performance.

The SPINNER portfolio of switches comprises a great variety of different types, for frequencies up to several GHz and sizes ranging from N to 6 1/8" with RF powers from a few watts to several hundreds of kilowatts.

With different drive concepts (lifting magnet, impulse solenoid, motor drive) and precision engineering, SPINNER RF switches achieve very quick switching times from 25 ms to approximately one second, making them known as the fastest and most compact available RF switches on the market.

Due to their high and dependable performance, SPINNER switches are preferably used in systems that require a high level of reliability. The 2+1- and 4+1-switching units developed by SPINNER provide an excellent solution for redundancy systems in an extremely compact 19" one RU format.

KOAXIALE 2-WEGE SCHALTER – TECHNISCHER ANHANG

COAXIAL 2-WAY SWITCHES – TECHNICAL ANNEX

Handbetätigung

Bei Schaltern mit Handbetätigung wird die jeweilige Schaltstellung mit einem Drehknopf am Schalter vom Anwender manuell gewählt. Der Schalter ist in den Endstellungen so verriegelt, dass auch bei Vibrations- und Rotationsbelastungen um die Rotorachse der jeweilige Schaltzustand erhalten bleibt.

Impulsdrehmagnetantrieb

Bei Schaltern mit Impulsdrehmagnetantrieb erzeugt ein drehbar gelagerter Dauermagnet, der von einer stationären Spule umschlossen ist, das Drehmoment für den Rotor. Der Antrieb hat zwei stabile Schaltstellungen und ist in den Endstellungen verriegelt (bistabil). Deshalb genügt ein Steuerungssignal in Impulsform zum Betätigen des Schalters, d.h. nach erfolgreichem Umschalten muss keine Spannung mehr anliegen. Bei Ausfall und Rückkehr der Betriebsspannung bleibt die jeweilige Schaltstellung erhalten.

Hubmagnetantrieb

Ein Magnetanker wird durch elektromagnetische Krafterwirkung von seiner Hubanfangslage in die Hubendlage bewegt. In der Endlage wird der Anker über einen Hilfsmagneten gehalten (bistabil). Nach erneuter Stromzufuhr erfolgt die Rückstellung des Magnetankers in seine Hubanfangslage mit Hilfe einer Feder.

Motorantrieb

Ein Kondensatormotor (230V/50-60Hz) erzeugt über ein von SPINNER entwickeltes Spezialgetriebe (siehe Hypozykloidengetriebe) das notwendige Drehmoment, um den Schalter zu betätigen. Dieses Antriebssystem besitzt einen Drehwinkel von 90° und ist in den Endstellungen verriegelt.

Hypozykloidengetriebe

Der Antrieb und das Schaltergrundteil sind über ein von SPINNER entwickeltes Spezialgetriebe gekuppelt. Dieses Hypozykloidengetriebe bewirkt, dass sich Drehmoment und Winkelgeschwindigkeit über den Drehbereich des Schalters verändern.

Am Beginn des Umschaltvorgangs steht ein sehr hohes Drehmoment zur Verfügung, während die Winkelgeschwindigkeit des Schalter-Rotors sehr gering ist. Mit zunehmendem Drehwinkel steigt nun die Winkelgeschwindigkeit kontinuierlich an, während das Drehmoment abnimmt. Nach Durchfahren der Mittelstellung des Rotors kehrt sich dieses Verhalten um und die Winkelgeschwindigkeit nimmt ab, während das nutzbare Drehmoment zunimmt. Der Antrieb ist in den Endstellungen mechanisch verriegelt.

Manual Operation

For manually operated switches the user selects the desired switch position by means of a knob on the switch. The switch is locked in its end positions so that the selected switch position is kept, even during vibration or rotation around the rotor axis.

Impulse Solenoid Drive

Switches with impulse solenoid drive generate the torque for the rotor with a rotating permanent magnet located in a stationary coil. The drive system has two stable switching positions and is locked in both end positions (latching). Therefore a pulse is sufficient as a control signal (e.g. after switching no voltage is required). In the event of power failure, or after restarting the system, the last switch position is retained.

Lifting Magnet Drive

By application of electromagnetic force a lever is lifted from its resting position to its final position at the end of the stroke. In its end position the lever will be kept by an auxiliary magnet (latching). After an electrical reset the lever will be pushed back and hold by a spring.

Motor Drive

Motor driven switches use a capacitor motor (230V/50-60Hz) with a special gear (see hypocycloidic gear), developed by SPINNER, which generates the torque required to turn the switch. This drive system has a 90° rotation angle and is locked in both end positions.

Hypocycloidic Gear

The drive and the basic switch element (rotor) are connected by a special gear which has been developed by SPINNER. With the hypocycloidic gear it is achieved that the torsional moment and angular velocity changes within the range of rotation.

In the beginning of the changeover procedure there is a high torsional moment whereas the angular velocity of the rotating breaker is very low. With an increasing angle of revolution the angular velocity will increase as well while the torsional moment will decrease. On the mid-position of the rotating breaker this behavior will reverse and the angular velocity is decreasing while the torsional moment increases. The drive system is mechanically locked in both end positions.

KOAXIALE 2-WEGE SCHALTER – TECHNISCHER ANHANG

COAXIAL 2-WAY SWITCHES – TECHNICAL ANNEX

Signal- und Trägersicherheitskontakte

Die Signalkontakte sind potentialfrei als Umschalter ausgeführt und zeigen die jeweilige Endstellung des Schalters an. Die Trägersicherheitskontakte sind mit den HF-Kontakten mechanisch gekoppelt. Bei Auslösen des Schaltvorgangs schalten die Trägersicherheitskontakte vor der Trennung und nach dem Einrasten der HF-Kontakte in der neuen Position.

Beide Kontakte können bis zur maximalen Belastung von 42,4 VACpk / 60 VDC / 0,5 A bzw. 50 VDC, 0,1 A bei den BN 512663 und BN 512665 verwendet werden.

Schutzart

Alle Schalter sind gemäß IP40 (EN60529) nur für Innenraummontage geeignet. Schalter für Außenmontage sind auf Anfrage verfügbar.

Leistungsangaben

Alle Leistungsangaben gelten bei Raumtemperatur (ca. 25 °C), Normaldruck (ca. 1000 hPa), einer relativen Luftfeuchtigkeit von ca. 50 % und HF-Anpassung. Die spezifizierte Leistung (Dauerbelastbarkeit) gilt für die höchste angegebene Frequenz und kann über beide Schalterwege gleichzeitig übertragen werden. Für den Betrieb mit Impulsleistung bitten wir um Anfrage mit detaillierten Pulsdaten.

Abmessungen

Alle Abmessungen sind in mm angegeben.

Anmerkung:

Bei Betrieb mit digitalen Signalen (z.B. DAB, DVB-T, ATSC, ISDB-T,...) wird die effektive übertragbare Leistung durch die Prüfspannung unter der Einbeziehung des Crestfactors begrenzt. Bei Mehrsenderbetrieb ist sowohl bei analogen wie auch bei digitalen Signalen die Summe der Einzelspannungen zu berücksichtigen.

Signalling and Interlock Contacts

The signal contacts are designed as potential-free SPDT contacts and indicate the actual switch position.

The interlock contacts are coupled with the RF contacts allowing the shutdown of RF power before and during switching. While switching the interlock contacts open before the separation of the RF contacts and closes after the RF contacts are in the new position.

The maximum switching load of these contacts is 42.4 VACpk / 60 VDC / 0.5 A DC or 50 VDC, 0.1 A for the BN 512663 and 512665.

Degree of Protection

According to IP40 (EN60529) the switches are only suitable for indoor installation. Switches for outdoor installation are available on request.

Power Ratings

All power ratings refer to room temperature (approx. 25 °C), normal air pressure (approx. 1000hPa), a relative humidity of approx. 50 % and in RF-matched condition. Specified power ratings are valid for the highest given frequency and can be transmitted through both switch paths simultaneously. For operation with pulsed power please send an enquiry with the detailed data of the pulse.

Dimensions

All dimensions are given in mm.

Note:

The maximum average power transmittable of digital signals (e.g. DAB, DVB-T, ATSC, ISDB-T,...) is rated by the RF proof voltage under inclusion of the Crestfactor. For multi transmitter operation with analogue or digital signals the sum of the voltages must be considered.

KOAXIALE 2-WEGE SCHALTER

COAXIAL 2-WAY SWITCHES

2-WEGE SCHALTER (DPDT)

2-WAY SWITCHES (DPDT)

Bestell-Nr. Part number	Anschlüsse Connectors	Effektive Eingangsleistung Average input power			Antriebsart Type of drive
		100 MHz	230 MHz	860 MHz	
BN 75 40 67	N Kuppler N female	≤ 0.75 kW	≤ 0.75 kW	≤ 0.75 kW	Impulsdrehmagnet Impulse solenoid
BN 75 40 30 BN 75 40 98 BN 75 40 66	N Kuppler N female	≤ 0.79 kW	≤ 0.79 kW	≤ 0.79 kW	Impulsdrehmagnet Impulse solenoid
BN 51 26 90	7-16 Kuppler 7-16 female	≤ 5.0 kW	≤ 3.5 kW	≤ 2.0 kW	Impulsdrehmagnet Impulse solenoid
BN 51 26 97 BN 51 26 98	7/8" EIA	≤ 8.0 kW	≤ 5.0 kW	≤ 2.5 kW	Motor
BN 64 00 81 BN 64 00 82	1 5/8" EIA	≤ 20.0 kW	≤ 13.5 kW	≤ 7.0 kW	Motor
BN 94 19 17 BN 94 19 18	3 1/8" EIA	≤ 73.0 kW	≤ 48.0 kW	≤ 25.0 kW	Motor
BN 94 19 44	4 1/2" EIA	≤ 100.0 kW	≤ 70.0 kW	≤ 38.0 kW	Motor
BN 94 19 89	6 1/8" EIA	≤ 170.0 kW	≤ 110.0 kW	≤ 60.0 kW *)	Motor

*) @ 800 MHz

2-WEGE AUFSTECKSCHALTER FÜR FRONTPLATTENMONTAGE (DPDT)

2-WAY PLUG-IN SWITCHES FOR FRONT PANEL INSTALLATION (DPDT)

Best.-Nr. Part number	Anschlüsse Connectors	Effektive Eingangsleistung Average input power			Antriebsart Type of drive
		100 MHz	230 MHz	860 MHz	
BN 55 30 64 BN 55 30 65	1 5/8" USL-D	≤ 20.0 kW	≤ 13.5 kW	≤ 7.0 kW	Motor
BN 55 33 64 BN 55 33 65	29 - 68 USL-D	≤ 41.0 kW	≤ 21.0 kW	≤ 14.0 kW	Motor
BN 55 36 64 BN 55 36 65	43 - 98 USL-D	≤ 82.0 kW	≤ 42.0 kW	≤ 28.0 kW	Motor

N+1 SCHALTSYSTEME


N+1 SWITCHING UNITS

Best.-Nr. Part number	Anschlüsse Connectors	Effektive Eingangsleistung Average input power			Antriebsart Type of drive
		100 MHz	230 MHz	860 MHz	
BN 51 26 63 BN 51 26 65	N Kuppler N female	≤ 280 W	≤ 200 W	≤ 130 W	Hubmagnet Lifting magnet

2-WEGE SCHALTER MIT N ANSCHLÜSSEN, BISTABIL
 2-WAY SWITCHES WITH N CONNECTORS, LATCHING

- Impulsdrehmagnetantrieb
- optische Positionsanzeige
- Handbetätigung
- Endlagen-Signalkontakte
- impulse solenoid drive
- optical position indicator
- manual operation
- end position signal contacts

Bestellnummer Part number	BN 75 40 67	
Anschlüsse Connectors	N Kuppler N female	
Frequenzbereich Frequency range	0 - 2 GHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾	≤ 2.3 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	0 - 1 GHz 1 - 2 GHz	≤ 0.75 kW ≤ 0.50 kW
VSWR	0 - 1 GHz 1 - 2 GHz	≤ 1.04 ≤ 1.15
Übersprechdämpfung Isolation	0 - 1 GHz 1 - 2 GHz	≥ 80 dB ≥ 75 dB
Durchgangsdämpfung Insertion loss	0 - 1 GHz 1 - 2 GHz	≤ 0.05 dB
Betriebsspannung Operating voltage	24 V DC ± 10 %	
Steuerspannung Control voltage	24 V DC ± 10 %	
Stromaufnahme Operating current	≤ 0.8 A	
Umschaltzeit ¹⁾ Switching time ¹⁾	≤ 80 ms	
Lebensdauer (Schaltungen) Mechanical life (cycles)	≥ 250.000	
Umgebungstemperatur Ambient temperature	-10 °C ≤ ϑ ≤ +45 °C	
Gewicht Weight	0.45 kg	

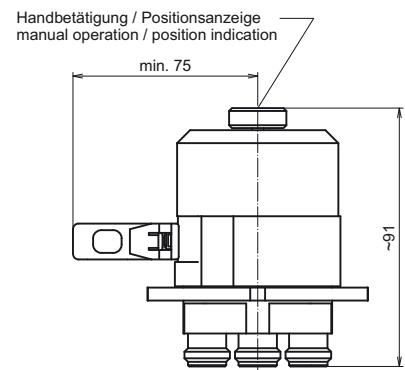


Koaxiale Schalter
Coaxial Switches

¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

2-WEGE SCHALTER MIT N ANSCHLÜSSEN, BISTABIL
 2-WAY SWITCHES WITH N CONNECTORS, LATCHING

- Impulsdrehmagnetantrieb
 - optische Positionsanzeige
 - Handbetätigung
 - Endlagen-Signalkontakte
- impulse solenoid drive
 - optical position indicator
 - manual operation
 - end position signal contacts

Bestellnummer Part number	BN 75 40 98	BN 75 40 30 BN 75 40 66 ²⁾
Anschlüsse Connectors	N Kuppler N female	
Frequenzbereich Frequency range	0 - 5 GHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾	≤ 3.0 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	0 - 1 GHz 1 - 2 GHz 2 - 3 GHz 3 - 5 GHz	≤ 0.79 kW ≤ 0.56 kW ≤ 0.45 kW ≤ 0.35 kW
VSWR	0 - 1 GHz 1 - 3 GHz 3 - 5 GHz	≤ 1.03 ≤ 1.13 ≤ 1.22
Übersprechdämpfung Isolation	0 - 1 GHz 1 - 3 GHz 3 - 5 GHz	≥ 75 dB ≥ 60 dB ≥ 50 dB
Durchgangsdämpfung Insertion loss	0 - 2 GHz 3 - 5 GHz	≤ 0.04 dB ≤ 0.06 dB
Betriebsspannung Operating voltage	12 VDC ± 5 %	25.0 VDC ± 10 % 24.0 VDC ± 10 % ²⁾
Steuerspannung Control voltage	12 VDC ± 5 %	25.0 VDC ± 10 % 24.0 VDC ± 10 % ²⁾
Stromaufnahme Operating current	≤ 0.9 A	≤ 0.6 A ≤ 1.1 A ²⁾
Umschaltzeit ¹⁾ Switching time ¹⁾	≤ 40 ms / ≤ 100 ms ²⁾	
Lebensdauer (Schaltungen) Mechanical life (cycles)	≥ 250.000	
Umgebungstemperatur Ambient temperature	-10 °C ≤ θ ≤ +45 °C	
Gewicht Weight	0.6 kg / 0.8 kg ²⁾	

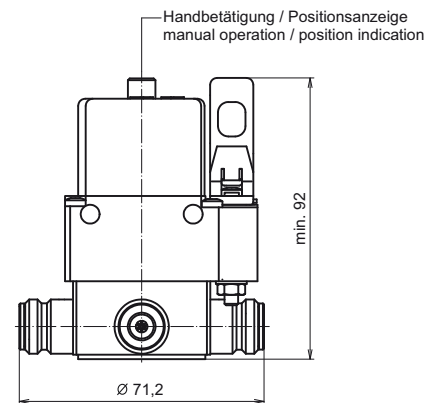


¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143
²⁾ mit Interlockkontakten
 with Interlock contacts

2-WEGE SCHALTER MIT 7-16 ANSCHLÜSSEN, BISTABIL
 2-WAY SWITCHES WITH 7-16 CONNECTORS, LATCHING

- Impulsdrehmagnetantrieb
 - optische Positionsanzeige
 - Handbetätigung
 - voreilende Interlock-Kontakte
 - Endlagen-Signalkontakte
- impulse solenoid drive
 - optical position indicator
 - manual operation
 - advanced interlock contacts
 - end position signal contacts

Bestellnummer Part number	BN 51 26 90	
Anschlüsse Connectors	7-16 Kuppler 7-16 female	
Frequenzbereich Frequency range	0 - 5 GHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾	≤ 4.0 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 860 MHz	≤ 5.0 kW ≤ 3.5 kW ≤ 2.0 kW
VSWR	100 MHz 230 MHz 860 MHz	≤ 1.02 ≤ 1.02 ≤ 1.04
Übersprechdämpfung Isolation	100 MHz 230 MHz 860 MHz	≥ 80 dB
Durchgangsdämpfung Insertion loss	≤ 0.05 dB	
Betriebsspannung Operating voltage	24 VDC ± 10 %	
Steuerspannung Control voltage	24 VDC ± 10 %	
Stromaufnahme Operating current	≤ 1.1 A	
Umschaltzeit ¹⁾ Switching time ¹⁾	≤ 100 ms	
Lebensdauer (Schaltungen) Mechanical life (cycles)	≥ 500.000	
Umgebungstemperatur Ambient temperature	-10 °C ≤ θ ≤ +45 °C	
Gewicht Weight	1.2 kg	

¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

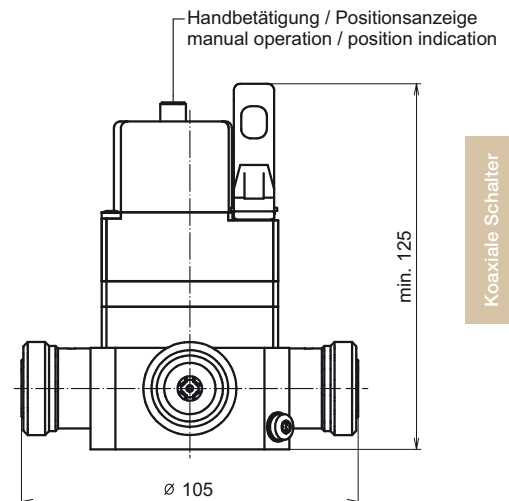


Koaxiale Schalter
Coaxial Switches

2-WEGE SCHALTER MIT 7/8" EIA ANSCHLÜSSEN
 2-WAY SWITCHES WITH 7/8" EIA CONNECTORS

- Motorantrieb
 - optische Positionsanzeige
 - Handbetätigung
 - voreilende Interlock-Kontakte
 - Endlagen-Signalkontakte
- motor drive
 - optical position indicator
 - manual operation
 - advanced interlock contacts
 - end position signal contacts

Bestellnummer Part number		BN 51 26 98	BN 51 26 97
Anschlüsse Connectors		7/8" EIA	
Frequenzbereich Frequency range		0 - 3.5 GHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾		≤ 3.5 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 860 MHz	≤ 8.0 kW ≤ 5.0 kW ≤ 2.5 kW	
VSWR	100 MHz 230 MHz 860 MHz	≤ 1.02 ≤ 1.02 ≤ 1.04	
Übersprechdämpfung Isolation	100 MHz 230 MHz 860 MHz	≥ 80 dB	
Durchgangsdämpfung Insertion loss		≤ 0.03 dB	
Betriebsspannung Operating voltage		230 VAC ± 10 % 50 - 60 Hz	
Steuerspannung Control voltage		8 - 31 VDC	230 VAC ± 10 % 50 - 60 Hz
Stromaufnahme Operating current		≤ 0.5 A	
Umschaltzeit ¹⁾ Switching time ¹⁾		≤ 120 ms	
Lebensdauer (Schaltungen) Mechanical life (cycles)		≥ 250.000	
Umgebungstemperatur Ambient temperature		-10 °C ≤ ϑ ≤ +45 °C	
Gewicht Weight		2.5 kg	

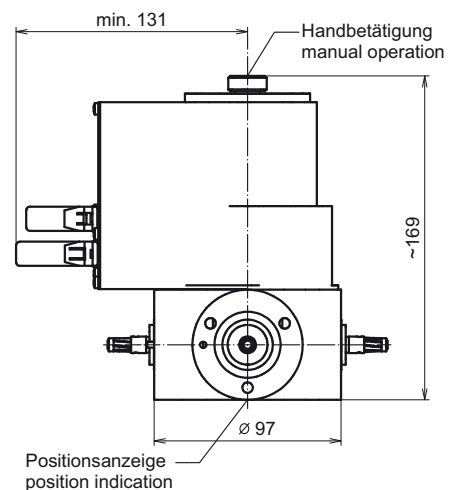


¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

2-WEGE SCHALTER MIT 1 5/8" EIA ANSCHLÜSSEN
 2-WAY SWITCHES WITH 1 5/8" EIA CONNECTORS

- Motorantrieb
- optische Positionsanzeige
- Handbetätigung
- voreilende Interlock-Kontakte
- Endlagen-Signalkontakte

- motor drive
- optical position indicator
- manual operation
- advanced interlock contacts
- end position signal contacts

Bestellnummer Part number	BN 64 00 82	BN 64 00 81
Anschlüsse Connectors	1 5/8" EIA	
Frequenzbereich Frequency range	0 - 2.0 GHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾	≤ 5.1 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 860 MHz	≤ 20.0 kW ≤ 13.5 kW ≤ 7.0 kW
VSWR	100 MHz 230 MHz 860 MHz	≤ 1.03 ≤ 1.03 ≤ 1.05
Übersprechdämpfung Isolation	100 MHz 230 MHz 860 MHz	≥ 80 dB
Durchgangsdämpfung Insertion loss	≤ 0.05 dB	
Betriebsspannung Operating voltage	230 VAC ± 10 % 50 - 60 Hz	
Steuerspannung Control voltage	8 - 31 VDC	230 VAC ± 10 % 50 - 60 Hz
Stromaufnahme Operating current	≤ 0.5 A	
Umschaltzeit ¹⁾ Switching time ¹⁾	≤ 120 ms	
Lebensdauer (Schaltungen) Mechanical life (cycles)	≥ 250.000	
Umgebungstemperatur Ambient temperature	-10 °C ≤ ϑ ≤ +45 °C	
Gewicht Weight	5.0 kg	

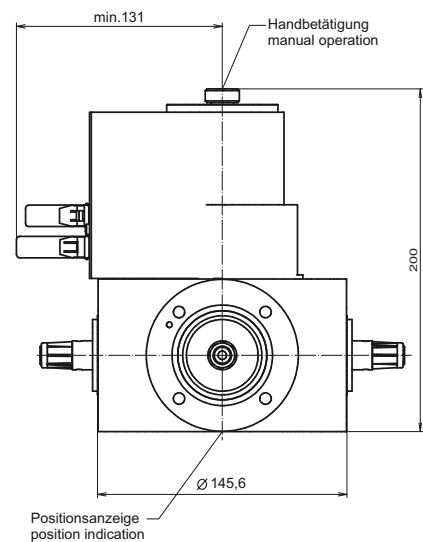


Koaxiale Schalter
Coaxial Switches

¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

2-WEGE SCHALTER MIT 3 1/8" EIA ANSCHLÜSSEN
 2-WAY SWITCHES WITH 3 1/8" EIA CONNECTORS

- Motorantrieb
 - optische Positionsanzeige
 - Handbetätigung
 - voreilende Interlock-Kontakte
 - Endlagen-Signalkontakte
- motor drive
 - optical position indicator
 - manual operation
 - advanced interlock contacts
 - end position signal contacts

Bestellnummer Part number	BN 94 19 18	BN 94 19 17
Anschlüsse Connectors	3 1/8" EIA	
Frequenzbereich Frequency range	0 - 860 MHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾	≤ 13.3 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 860 MHz	≤ 73 kW ≤ 48 kW ≤ 25 kW
VSWR	100 MHz 230 MHz 860 MHz	≤ 1.03 ≤ 1.03 ≤ 1.05
Übersprechdämpfung Isolation	100 MHz 230 MHz 860 MHz	≥ 75 dB
Durchgangsdämpfung Insertion loss	≤ 0.05 dB	
Betriebsspannung Operating voltage	230 VAC ± 10 % 50 - 60 Hz	
Steuerspannung Control voltage	8 - 31 VDC	230 VAC ± 10 % 50 - 60 Hz
Stromaufnahme Operating current	≤ 1.0 A	
Umschaltzeit ¹⁾ Switching time ¹⁾	≤ 200 ms	
Lebensdauer (Schaltungen) Mechanical life (cycles)	≥ 250.000	
Umgebungstemperatur Ambient temperature	-10 °C ≤ ϑ ≤ +45 °C	
Gewicht Weight	10.5 kg	

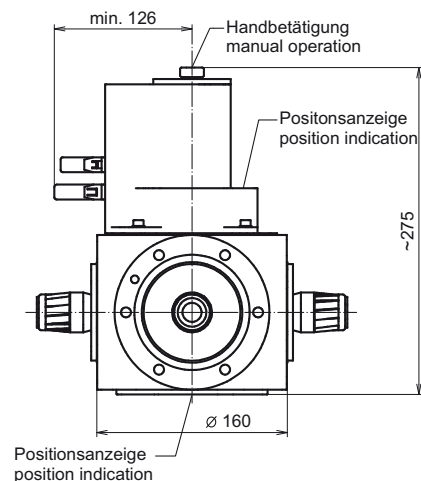


¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

2-WEGE SCHALTER MIT 4 1/2" EIA ANSCHLÜSSEN
 2-WAY SWITCHES WITH 4 1/2" EIA CONNECTORS

- Motorantrieb
- optische Positionsanzeige
- Handbetätigung
- voreilende Interlock-Kontakte
- Endlagen-Signalkontakte

- motor drive
- optical position indicator
- manual operation
- advanced interlock contacts
- end position signal contacts

Bestellnummer Part number	BN 94 19 44	
Anschlüsse Connectors	4 1/2" EIA 339 IEC 50-105	
Frequenzbereich Frequency range	0 - 860 MHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾	≤ 16.0 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 860 MHz	≤ 100 kW ≤ 70 kW ≤ 38 kW
VSWR	100 MHz 230 MHz 860 MHz	≤ 1.04 ≤ 1.04 ≤ 1.06
Übersprechdämpfung Isolation	100 MHz 230 MHz 860 MHz	≥ 80 dB ≥ 80 dB ≥ 70 dB
Durchgangsdämpfung Insertion loss	≤ 0.03 dB	
Betriebsspannung Operating voltage	230 VAC ± 10 % 50 - 60 Hz	
Steuerspannung Control voltage	8 - 31 VDC	
Stromaufnahme Operating current	≤ 1.5 A	
Umschaltzeit ¹⁾ Switching time ¹⁾	≤ 1.0 s	
Lebensdauer (Schaltungen) Mechanical life (cycles)	≥ 250.000	
Umgebungstemperatur Ambient temperature	-10 °C ≤ θ ≤ +45 °C	
Gewicht Weight	26.5 kg	

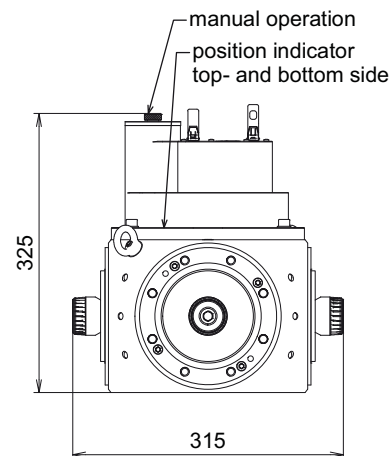

Koaxiale Schalter
Coaxial Switches


¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

2-WEGE SCHALTER MIT 6 1/8" EIA ANSCHLÜSSEN
 2-WAY SWITCHES WITH 6 1/8" EIA CONNECTORS

- Motorantrieb
- optische Positionsanzeige
- Handbetätigung
- voreilende Interlock-Kontakte
- Endlagen-Signalkontakte

- motor drive
- optical position indicator
- manual operation
- advanced interlock contacts
- end position signal contacts

Bestellnummer Part number	BN 94 19 89	
Anschlüsse Connectors	6 1/8" EIA	
Frequenzbereich Frequency range	0 - 800 MHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾	≤ 18.6 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 800 MHz	≤ 170 kW ≤ 110 kW ≤ 60 kW
VSWR	100 MHz 230 MHz 800 MHz	≤ 1.06 ≤ 1.06 ≤ 1.08
Übersprechdämpfung Isolation	100 MHz 230 MHz 800 MHz	≥ 75 dB ≥ 75 dB ≥ 70 dB
Durchgangsdämpfung Insertion loss	≤ 0.03 dB	
Betriebsspannung Operating voltage	230 VAC ± 10 % 50 - 60 Hz	
Steuerspannung Control voltage	8 - 31 VDC	
Stromaufnahme Operating current	≤ 1.5 A	
Umschaltzeit ¹⁾ Switching time ¹⁾	≤ 1.2 s	
Lebensdauer (Schaltungen) Mechanical life (cycles)	≥ 250.000	
Umgebungstemperatur Ambient temperature	-10 °C ≤ ϑ ≤ +45 °C	
Gewicht Weight	38.0 kg	


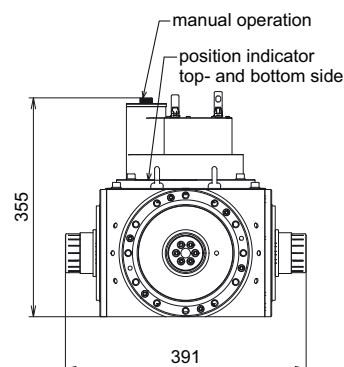


¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 1433

2-WEGE AUFSTECKSCHALTER 1 5/8" USL-D FÜR UMSCHALTFELDER
 2-WAY PLUG-IN SWITCHES 1 5/8" USL-D FOR PATCH PANELS

- Motorantrieb
 - optische Positionsanzeige
 - Handbetätigung
 - voreilende Interlock-Kontakte
 - Interlockschutz bei Entfernen des Schalters
 - Verdrehschutz beim Aufsetzen
 - Endlagen-Signalkontakte
 - alternativer Betrieb mit Bügelsteckern möglich
- motor drive
 - optical position indicator
 - manual operation
 - advanced interlock contacts
 - interlock protection in case of switch removal
 - twist protected on plug-in
 - end position signal contacts
 - alternative operation with U-links possible

Bestellnummer Part number		BN 55 30 64	BN 55 30 65
Anschlüsse Connectors		1 5/8" USL-D	
Frequenzbereich Frequency range		0 - 860 MHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾		≤ 7.0 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz	≤ 20.0 kW	
	230 MHz	≤ 13.5 kW	
	860 MHz	≤ 7.0 kW	
VSWR	100 MHz	≤ 1.04	
	230 MHz		
	860 MHz		
Übersprechdämpfung Isolation	100 MHz	≥ 80 dB	
	230 MHz	≥ 80 dB	
	860 MHz	≥ 70 dB	
Durchgangsdämpfung Insertion loss	860 MHz	≤ 0.1 dB	
Betriebsspannung Operating voltage		230 VAC ± 10 % 50 - 60 Hz	
Steuerspannung Control voltage		8 - 31 VDC	230 VAC ± 10 % 50 - 60 Hz
Stromaufnahme Operating current		≤ 1.0 A	
Umschaltzeit Switching time		≤ 200 ms	
Lebensdauer (Schaltungen) Mechanical life (cycles)		≥ 250.000	
Umgebungstemperatur Ambient temperature		-10 °C ≤ θ ≤ +45 °C	
Gewicht Weight		5.0 kg	

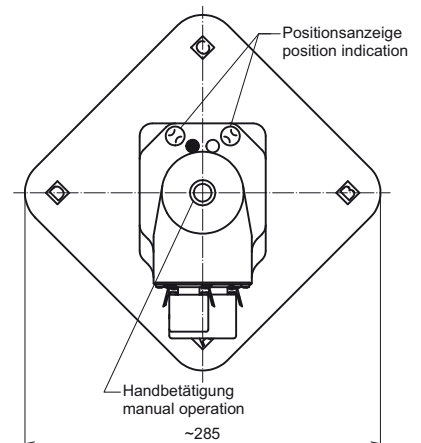



Koaxiale Schalter
Coaxial Switches

¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

2-WEGE AUFSTECKSCHALTER 29,5 - 68 USL-D FÜR UMSCHALTFELDER
 2-WAY PLUG-IN SWITCHES 29.5 - 68 USL-D FOR PATCH PANELS

- Motorantrieb
 - optische Positionsanzeige
 - Handbetätigung
 - voreilende Interlock-Kontakte
 - Interlockschutz bei Entfernen des Schalters
 - Verdrehenschutz beim Aufsetzen
 - Endlagen-Signalkontakte
 - alternativer Betrieb mit Bügelsteckern möglich
- motor drive
 - optical position indicator
 - manual operation
 - advanced interlock contacts
 - interlock protection in case of switch removal
 - twist protected on plug-in
 - end position signal contacts
 - alternative operation with U-links possible

Bestellnummer Part number		BN 55 33 64	BN 55 33 65
Anschlüsse Connectors		29.5 - 68 USL-D	
Frequenzbereich Frequency range		0 - 860 MHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾		≤ 8.1 kV	
Effektive Leistung ¹⁾ Average Power ¹⁾	100 MHz 230 MHz 860 MHz	≤ 41 kW ≤ 21 kW ≤ 14 kW	
VSWR	100 MHz 230 MHz 860 MHz	≤ 1.04	
Übersprechdämpfung Isolation	100 MHz 230 MHz 860 MHz	≥ 80 dB ≥ 80 dB ≥ 70 dB	
Durchgangsdämpfung Insertion loss	860 MHz	≤ 0.1 dB	
Betriebsspannung Operating Voltage		230 VAC ± 10 % 50 - 60 Hz	
Steuerspannung Control voltage		8 - 31 VDC	230 VAC ± 10 % 50 - 60 Hz
Stromaufnahme Operating current		≤ 1.0 A	
Umschaltzeit Switching time		≤ 200 ms	
Lebensdauer (Schaltungen) Mechanical life (cycles)		≥ 250.000	
Umgebungstemperatur Ambient temperature		-10 °C ≤ θ ≤ +45 °C	
Gewicht Weight		9.0 kg	

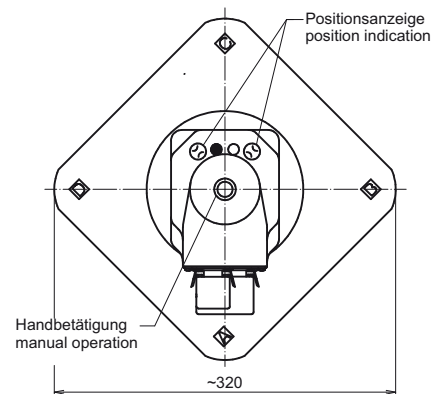


¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

2-WEGE AUFSTECKSCHALTER 43 - 98 USL-D FÜR UMSCHALTFELDER
 2-WAY PLUG-IN SWITCHES 43 - 98 USL-D FOR PATCH PANELS

- | | |
|--|---|
| <ul style="list-style-type: none"> ■ Motorantrieb ■ optische Positionsanzeige ■ Handbetätigung ■ voreilende Interlock-Kontakte ■ Interlockschutz bei Entfernen des Schalters ■ Verdrehschutz beim Aufsetzen ■ Endlagen-Signalkontakte ■ alternativer Betrieb mit Bügelsteckern möglich | <ul style="list-style-type: none"> ■ motor drive ■ optical position indicator ■ manual operation ■ advanced interlock contacts ■ interlock protection in case of switch removal ■ twist protected on plug-in ■ end position signal contacts ■ alternative operation with U-links possible |
|--|---|

Bestellnummer Part number		BN 55 36 64	BN 55 36 65
Anschlüsse Connectors		43 - 98 USL-D	
Frequenzbereich Frequency range		0 - 860 MHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾		≤ 14.5 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz	≤ 82 kW	
	230 MHz	≤ 42 kW	
	860 MHz	≤ 28 kW	
VSWR	100 MHz	≤ 1.04	
	230 MHz		
	860 MHz		
Übersprechdämpfung Isolation	100 MHz	≥ 80 dB	
	230 MHz	≥ 80 dB	
	860 MHz	≥ 60 dB	
Durchgangsdämpfung Insertion loss		≤ 0.1 dB	
Betriebsspannung Operating voltage		230 VAC ± 10 % 50 - 60 Hz	
Steuerspannung Control voltage		8 - 31 VDC	230 VAC ± 10 % 50 - 60 Hz
Stromaufnahme Operating current		≤ 1.0 A	
Umschaltzeit ¹⁾ Switching time ¹⁾		≤ 500 ms	
Lebensdauer (Schaltungen) Mechanical life (cycles)		≥ 250.000	
Umgebungstemperatur Ambient temperature		-10 °C ≤ θ ≤ +45 °C	
Gewicht Weight		22.0 kg	

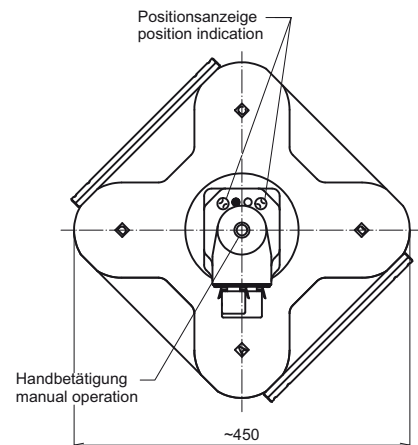




Koaxiale Schalter
Coaxial Switches

¹⁾ Siehe Anmerkungen auf Seite 143
 See notes on page 143

N+1 SCHALTSYSTEME FÜR RESERVESENDERBETRIEB / BISTABIL N+1 SWITCHING UNITS FOR STAND BY TRANSMITTER OPERATION / LATCHING

- Hubmagnetantrieb
 - ersetzt zwei/vier 2-Wege Schalter
 - anschlussfertig verschaltet
 - Schaltzustandsanzeige auf der Frontplatte
 - modular erweiterbar
 - 19" Einschub, 1 HE
 - leichter Einbau mit oder ohne Frontplatte
- lifting magnet drive
 - replaces two/four 2-way switches
 - ready for operation
 - indication of the switching status at the front plate
 - modular expandabel
 - 19" drawer, 1 RU
 - easy installation with or without front plate

Bestellnummer Part number		BN 51 26 63 (2+1) BN 51 26 65 (4+1)
Anschlüsse Connectors		N Kuppler N female
Frequenzbereich Frequency range		0 - 1500 MHz
Prüfspannung ¹⁾ Proof voltage ¹⁾		≤ 1.0 kV
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 860 MHz 1500 MHz	≤ 280 W ≤ 200 W ≤ 130 W ≤ 95 W
VSWR	860 MHz 860 MHz 1500 MHz 1500 MHz	≤ 1.06 shortest path ≤ 1.12 longest path ≤ 1.17 shortest path ≤ 1.22 longest path
Übersprechdämpfung Isolation	860 MHz 1500 MHz	≥ 45 dB ≥ 40 dB
Durchgangsdämpfung Insertion loss	860 MHz 860 MHz 1500 MHz 1500 MHz	≤ 0.25 shortest path ≤ 0.60 longest path ≤ 0.35 shortest path ≤ 0.70 longest path
Betriebsspannung Operating voltage		10.8 - 26.4 VDC
Steuerspannung Control voltage		8 - 28 VDC
Leistungsaufnahme beim Schalten Power consumption while switching		20 W
Umschaltzeit Switching time		≤ 100 ms
Schaltcharakteristik Switching characteristic		bistabil latching
Lebensdauer (Schaltungen) Mechanical life (cycles)		≥ 100.000
Umgebungstemperatur Ambient temperature		-10 °C ≤ ϑ ≤ +45 °C
Gewicht Weight		BN 51 26 63 ca. 3.5 kg BN 51 26 65 ca. 5.0 kg

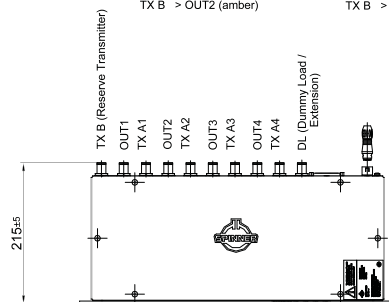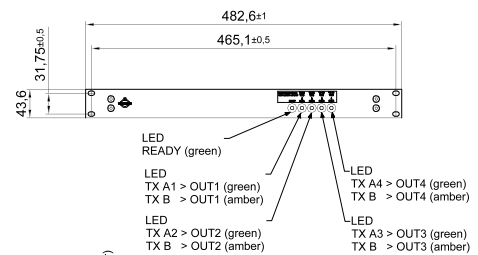

BN 51 26 65

¹⁾ Siehe Anmerkungen auf Seite 143
See notes on page 143



ROHRLEITUNGEN & KABELSTECKER

RIGID LINES & CABLE CONNECTORS

SPINNER bietet verschiedene Rohrleitungssysteme an: das EIA-System, das SMS-System und das Bördeltechnik-System (BT).

Die angegebenen technischen Daten gelten auch für Rohrleitungswinkel, die gegenüber den einschlägigen Normen deutlich bessere Werte aufweisen. Die Prüfspannungen beziehen sich auf Meereshöhe.

Zur Reduzierung der Außenleiter-Temperatur, empfehlen wir bei einer Leistung oberhalb von 80 % der angegebenen maximalen, effektiven Leistung, die Rohrleitung mit einem schwarzen, hitzebeständigen Lack zu versehen.

EIA-System

Diese allgemein unter dem Begriff „EIA-Flansche“ bekannten Flansch-Steckverbinder sind genormt nach EIA STD RS-225, 339 IEC, DIN EN 122150 und MIL-F 24044. Sie benötigen zur Verbindung ein Kupplungselement und sind besonders geeignet für druckdichte Übertragungssysteme und für die Verlegung im Freien.

SMS-System

Das SPINNER Schnellmontagesystem SMS basiert auf den internationalen Rohrleitungsstandards nach EIA STD RS 225 bzw. 339 IEC bzw. DIN EN 122150.


Die einzelnen Bauteile werden durch Kupplungselemente mit Schellenbefestigung verbunden. Der Vorteil des SMS-Systems liegt darin, dass Rohrleitungen auf der Baustelle vom Kunden selbst auf die gewünschte Länge zugeschnitten werden können, ohne dass Bördeln oder Löten erforderlich ist. Dadurch ergibt sich eine äußerst einfache Montage, für die keine Spezialwerkzeuge nötig sind.

Das SPINNER SMS-System ist ausschließlich für Innenraummontage vorgesehen.

Bördeltechnik-System (BT)

Das Außenleiterrohr wird mit einem Werkzeug (SPINNER Bördelgerät) umgebördelt. Die Verbindung der einzelnen Bauteile wird über Kupplungselemente hergestellt. Die Außenleiter-Kontaktierung erfolgt über einen metallischen Haltering, der am Umfang der Isolierstütze des Kupplungselementes montiert ist. Diese äußerst stabile Verbindung garantiert hohe HF-Dichtigkeit und reproduzierbare elektrische Längen. Das 52-120 Bördeltechnik-System ist für Innenraummontage vorgesehen und ist für die maximal übertragbare Leistung bis 860 MHz konzipiert.

Bei der Montage gerader Rohrleitungen ist zu beachten, dass ab einer bestimmten Leitungslänge der Einbau einer oder mehrerer Mittelstützen erforderlich ist, um ein Durchhängen des Innenleiters zu vermeiden.

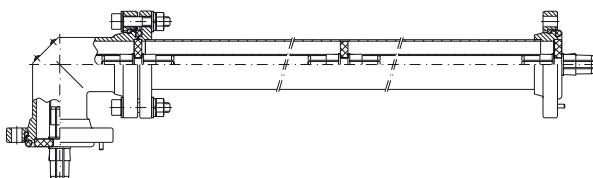

Montagebeispiel EIA / Example of assembly EIA

SPINNER delivers different types of rigid line systems called EIA system, SMS system and flaring technique system (BT).

The indicated technical data are also valid for the rigid line elbows, which have a remarkable better performance related to the values in the relevant international standards. The proof voltage values refer to sea level.

For a RF power more than 80 % of the indicated maximum average power we recommend to paint the rigid line with a black heat resistant varnish to reduce the outer conductor temperature.

EIA system

Coaxial flange connectors, generally known as “EIA flanges”, are connected by a coupling element. The flange connector system is standardized according to EIA STD RS-225, 339 IEC, DIN EN 122150 and MIL-F 24044. The EIA flange connectors are excellently qualified for pressurized systems and for outdoor installation.

SMS system

The SPINNER quick clamp system called SMS is based on the international rigid line standards like EIA STD RS 225, 339 IEC and DIN EN 122150.

The different parts are connected by coupling elements and fixed together with clamps. The advantage of the SMS system is that the customer can easily cut the rigid line to length on site, without flaring or brazing. The assembly is therefore very simple and no special tools are required.


The SMS system is provided solely for indoor installation.

Flaring technique system (BT)

The outer conductor tube is flared by using a SPINNER flaring tool. The different components are connected together with coupling elements. The electrical contact at the outer conductor is done via a metallic ring which is mounted on periphery of the insulation disc of the coupling element. The very stable connection ensures a high RF tightness and repeatable electrical length.

The 52-120 BT flaring technique system is provided for indoor application and is designed to handle the maximum RF power up to 860 MHz.

Please take into consideration that for rigid lines inner supports are necessary depending on the wanted line length. The inner supports prevent the inner conductor from sagging.

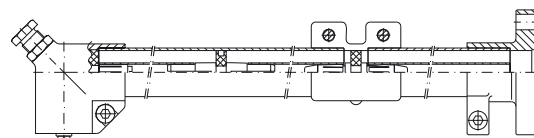

Montagebeispiel SMS / Example of assembly SMS

ROHRLEITUNGEN & KABELSTECKER RIGID LINES & CABLE CONNECTORS

SPINNER liefert je nach Kabelgröße und Kabeltyp **Steckverbinder** in „Cut And Fit“ (CAF®) oder Premium Ausführung. „Cut And Fit“ – Monobloc-Steckverbinder sind einteilige Steckverbinder, die zur Montage auf das Kabel nicht zerlegt werden müssen. Dadurch wird eine einfache und schnelle Montage garantiert.

Premium Steckverbinder haben eine Flanschverbindung zwischen Steckerkopf und Kabelabfangung und ermöglichen eine unkomplizierte Montage, selbst unter schwierigsten Montagebedingungen.

Die Abdichtung der Steckverbinder erfolgt durch Einspritzen des dauerelastischen Dichtungswerkstoffes **Plast 2000®** in die Kabelabfangung. Plast 2000® wurde speziell für die Verwendung in Hochfrequenzarmaturen entwickelt und schließt Störungen mit Sicherheit aus.

Eine Belüftung der HELIFLEX-Kabel mit Gas oder trockener Luft durch den Steckverbinder ist bei Verwendung geeigneter SPINNER **Gasanschlüsse** möglich.

SPINNER delivers **cable connectors** as Cut And Fit (CAF®) or as premium versions, depending on the cable size and connector type.

Cut And Fit monobloc cable connectors are connectors made of one part that need not be dismantled to attach them to the cable. This feature ensures easy and quick assembly. Premium cable connectors have a flange connection between the connector head and the cable clamp that allows easy assembly even under the most unfavorable assembly conditions.

The connectors are sealed by injecting the cable clamp with special permanently elastic sealing material **Plast 2000®**. Plast 2000® has been developed for use in radio frequency components and rules out any faults.

HELIFLEX cables can be ventilated by gas or by dried air through the connector if suitable SPINNER **gas inlets** are used.

Anmerkung:

Bei DVB- oder DAB-Betrieb wird die übertragbare Leistung entweder durch die Prüfspannung, unter Einbeziehung des Crestfaktors, oder durch die effektive Leistung begrenzt. Bei Mehrsenderbetrieb ist die Summe der Einzel-Prüfspannungen zu berücksichtigen. Letzteres gilt auch für Analog-Betrieb.

Note:

For DVB or DAB operation please note that the transmittable power is limited either by the proof voltage, taking the crest factor into account, or by the average power. For multitransmitter operation please note the sum of the individual proof voltages. The same applies to analogue operating mode.

EIA COMPONENTS | SMS/BT COMPONENTS

Größe Size	Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature		
	100 MHz	230 MHz	860 MHz
7/8" EIA	≤ 7.60 kW	≤ 5.0 kW	≤ 2.6 kW
1 5/8" EIA	≤ 20.0 kW	≤ 13.5 kW	≤ 7.0 kW
3 1/8" EIA	≤ 67.0 kW	≤ 44.0 kW	≤ 23.0 kW
4 1/2" EIA (339 IEC 50-105)	≤ 112.0 kW	≤ 74.0 kW	≤ 38.0 kW
6 1/8" EIA	≤ 224.0 kW	≤ 148.0 kW	≤ 78.0 kW (800 MHz)
7/8" SMS	≤ 7.60 kW	≤ 5.0 kW	≤ 2.6 kW
1 5/8" SMS-1	≤ 19.60 kW	≤ 13.0 kW	≤ 7.0 kW
1 5/8" SMS-2	≤ 20.0 kW	≤ 13.5 kW	≤ 7.0 kW
3 1/8" SMS	≤ 63.0 kW	≤ 42.0 kW	≤ 22.0 kW
4 1/2" SMS	≤ 106.0 kW	≤ 70.0 kW	≤ 37.0 kW
52-120 SMS	≤ 140.0 kW	≤ 92.0 kW	≤ 47.0 kW
52-120 BT	≤ 142.0 kW	≤ 93.0 kW	≤ 48.0 kW
6 1/8" SMS	≤ 213.0 kW	≤ 140.0 kW	≤ 72.0 kW/800 MHz

ROHRLEITUNGSKOMPONENTEN 7/8" EIA
RIGID LINE COMPONENTS 7/8" EIA


- sehr stabiles Rohrleitungssystem
- geringe Durchgangsdämpfung
- niedriges VSWR
- PTFE-Isolation
- geeignet für druckdichte Systeme
- für Außenmontage

- very stable rigid line system
- low insertion loss
- low VSWR
- PTFE insulation
- designed for pressure tight systems
- for outdoor application


		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m	0.28 kg	BN A0 24 02
	L = 4 m	0.57 kg	BN K2 02 65
Außenleiterrohr (Kupfer) Outer conductor tube (copper)	L = 2 m	1.35 kg	BN A0 24 03
	L = 4 m	2.70 kg	BN K2 17 51
Mittelstütze Inner support		0.01 kg	BN 54 27 68
Starrer Flansch zum Auflöten Fixed flange for brazing		0.17 kg	BN 00 61 21
Kupplungselement inkl. Schraubensatz Coupling element incl. screw set		0.05 kg	BN 91 17 15
90° Winkel 90° Elbow		0.59 kg	BN 83 71 05

Wellenwiderstand Impedance		50 Ω
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		6.3 GHz
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		3.8 kV
Frequenzbereich Frequency range		0 ≤ f ≤ 5.3 GHz
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz	≤ 7.6 kW
	230 MHz	≤ 5.0 kW
	860 MHz	≤ 2.6 kW
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz	1.21
	230 MHz	1.84
	860 MHz	3.55


ROHRLEITUNGSKOMPONENTEN 7/8" EIA
RIGID LINE COMPONENTS 7/8" EIA

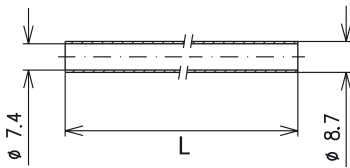


Innenleiterrohr
Inner conductor tube
BN A0 24 02; BN K2 02 65

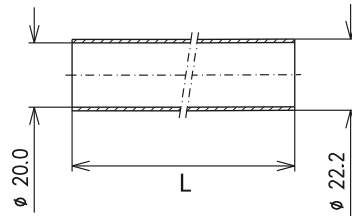


Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 03; BN K2 17 51

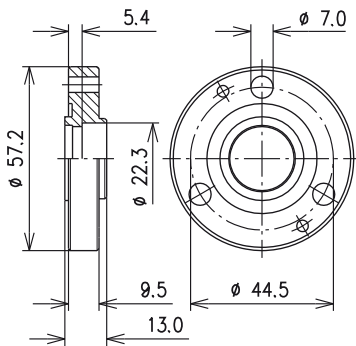


Starrer Flansch zum Auflöten
Fixed flange for brazing
BN 00 61 21

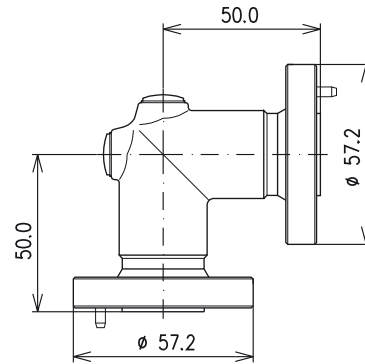

90° Winkel
90° Elbow
BN 83 71 05



Mittelstütze
Inner support
BN 54 27 68



Kupplungselement
Coupling element
BN 91 17 15

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
1.0 m ≤ L ≤ 2.0 m	1
2.0 m < L ≤ 3.0 m	2
3.0 m < L ≤ 4.0 m	3

ROHRLEITUNGSKOMPONENTEN 1 5/8" EIA
RIGID LINE COMPONENTS 1 5/8" EIA


- sehr stabiles Rohrleitungssystem
- geringe Durchgangsdämpfung
- niedriges VSWR
- PTFE-Isolation
- geeignet für druckdichte Systeme
- für Außenmontage

- very stable rigid line system
- low insertion loss
- low VSWR
- PTFE insulation
- designed for pressure tight systems
- for outdoor application


		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m	0.89 kg	BN A0 24 06
	L = 4 m	1.78 kg	BN K1 96 40
Außenleiterrohr (Kupfer) Outer conductor tube (copper)	L = 2 m	2.78 kg	BN A0 24 07
	L = 4 m	5.56 kg	BN K1 96 08
Mittelstütze Inner support		0.04 kg	BN 85 99 06
Starrer Flansch zum Auflöten Fixed flange for brazing		0.42 kg	BN 00 61 11
Kupplungselement inkl. Schraubensatz Coupling element incl. screw set		0.16 kg	BN 91 83 11
90° Winkel 90° Elbow		1.36 kg	BN 93 85 20

Wellenwiderstand Impedance		50 Ω
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		3.2 GHz
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		7.0 kV
Frequenzbereich Frequency range		0 ≤ f ≤ 2.7 GHz
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz	≤ 20.0 kW
	230 MHz	≤ 13.5 kW
	860 MHz	≤ 7.0 kW
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz	0.63
	230 MHz	0.95
	860 MHz	1.83


ROHRLEITUNGSKOMPONENTEN 1 5/8" EIA
RIGID LINE COMPONENTS 1 5/8" EIA




Innenleiterrohr
Inner conductor tube
BN A0 24 06; BN K1 96 40




Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 07; BN K1 96 08

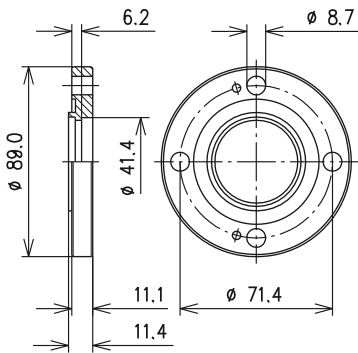


Starrer Flansch zum Auflöten
Fixed flange for brazing
BN 00 61 11

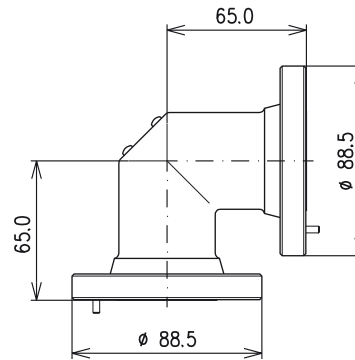

90° Winkel
90° Elbow
BN 93 85 20



Mittelstütze
Inner support
BN 85 99 06



Kupplungselement
Coupling element
BN 91 83 11

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
1.4 m ≤ L ≤ 2.8 m	1
2.8 m < L ≤ 4.0 m	2

ROHRLEITUNGSKOMPONENTEN 3 1/8" EIA
RIGID LINE COMPONENTS 3 1/8" EIA


- sehr stabiles Rohrleitungssystem
- geringe Durchgangsdämpfung
- niedriges VSWR
- PTFE-Isolation
- geeignet für druckdichte Systeme
- für Außenmontage

- very stable rigid line system
- low insertion loss
- low VSWR
- PTFE insulation
- designed for pressure tight systems
- for outdoor application


		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m	1.90 kg	BN A0 24 15
	L = 4 m	3.80 kg	BN K2 27 70
Außenleiterrohr (Kupfer) Outer conductor tube (copper)	L = 2 m	5.90 kg	BN A0 24 16
	L = 4 m	11.80 kg	BN K2 65 69
Mittelstütze Inner support		0.27 kg	BN 87 00 03
Starrer Flansch zum Auflöten Fixed flange for brazing		0.75 kg	BN 00 49 42
Kupplungselement inkl. Schraubensatz Coupling element incl. screw set		0.58 kg	BN 91 87 10
90° Winkel 90° Elbow		3.22 kg	BN 92 19 20

Wellenwiderstand Impedance		50 Ω
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		1.6 GHz
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		14.0 kV
Frequenzbereich Frequency range		0 ≤ f ≤ 1.3 GHz
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz	≤ 67.0 kW
	230 MHz	≤ 44.0 kW
	860 MHz	≤ 23.0 kW
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz	0.32
	230 MHz	0.48
	860 MHz	0.92


ROHRLEITUNGSKOMPONENTEN 3 1/8" EIA
RIGID LINE COMPONENTS 3 1/8" EIA




Innenleiterrohr
Inner conductor tube
BN A0 24 15; BN K2 27 70

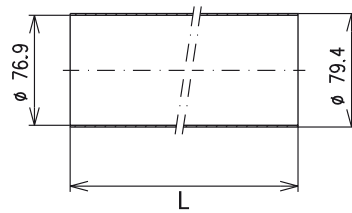


Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 16; BN K2 65 69

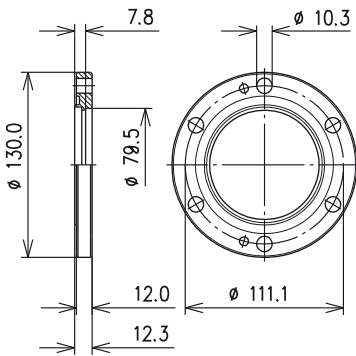


Starrer Flansch zum Auflöten
Fixed flange for brazing
BN 00 49 42



90° Winkel
90° Elbow
BN 92 19 20



Mittelstütze
Inner support
BN 87 00 03



Kupplungselement
Coupling element
BN 91 87 10

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
2.0 m ≤ L ≤ 4.0 m	1

ROHRLEITUNGSKOMPONENTEN 4 1/2" EIA ¹⁾
 RIGID LINE COMPONENTS 4 1/2" EIA ¹⁾

- sehr stabiles Rohrleitungssystem
- geringe Durchgangsdämpfung
- niedriges VSWR
- PTFE-Isolation
- geeignet für druckdichte Systeme
- für Außenmontage


- very stable rigid line system
- low insertion loss
- low VSWR
- PTFE insulation
- designed for pressure tight systems
- for outdoor application

		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m	2.50 kg	BN A0 24 21
	L = 4 m	5.00 kg	BN K2 62 91
Außenleiterrohr (Kupfer) Outer conductor tube (copper)	L = 2 m	8.80 kg	BN A0 24 22
	L = 4 m	17.60 kg	BN K2 08 52
Mittelstütze Inner support		0.60 kg	BN 64 86 02
Starrer Flansch zum Auflöten Fixed flange for brazing		1.29 kg	BN 64 86 01
Kupplungselement inkl. Schraubensatz Coupling element incl. screw set		1.07 kg	BN 82 28 10
90° Winkel 90° Elbow		6.10 kg	BN 70 40 01


Wellenwiderstand Impedance		50 Ω
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		1.2 GHz
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		19.0 kV
Frequenzbereich Frequency range		0 ≤ f ≤ 1.0 GHz
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz	≤ 112.0 kW
	230 MHz	≤ 74.0 kW
	860 MHz	≤ 38.0 kW
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz	0.24
	230 MHz	0.36
	860 MHz	0.69

¹⁾ 339 IEC 50-105


ROHRLEITUNGSKOMPONENTEN 4 1/2" EIA ¹⁾
 RIGID LINE COMPONENTS 4 1/2" EIA ¹⁾

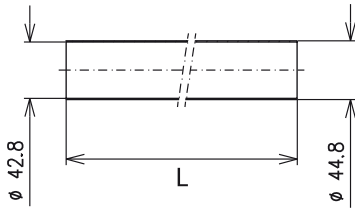


Innenleiterrohr
 Inner conductor tube
BN A0 24 21; BN K2 62 91

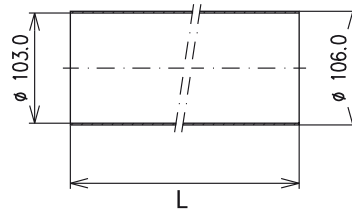


Außenleiterrohr (unlackiert)
 Outer conductor tube (not painted)
BN A0 24 22; BN K2 08 52

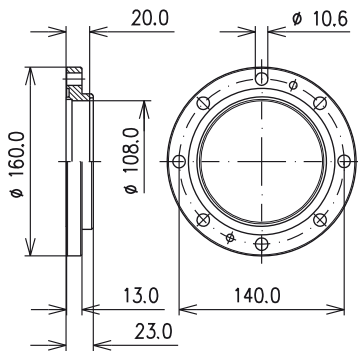


Starrer Flansch zum Auflöten
 Fixed flange for brazing
BN 64 86 01



90° Winkel
 90° Elbow
BN 70 40 01



Mittelstütze
 Inner support
BN 64 86 02



Kupplungselement
 Coupling element
BN 82 28 10

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
2.5 m ≤ L ≤ 4.0 m	1

¹⁾ 339 IEC 50-105

ROHRLEITUNGSKOMPONENTEN 6 1/8" EIA
RIGID LINE COMPONENTS 6 1/8" EIA


- sehr stabiles Rohrleitungssystem
- geringe Durchgangsdämpfung
- niedriges VSWR
- PTFE-Isolation
- geeignet für druckdichte Systeme
- für Außenmontage

- very stable rigid line system
- low insertion loss
- low VSWR
- PTFE insulation
- designed for pressure tight systems
- for outdoor application


		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m L = 4 m	3.52 kg 7.04 kg	BN A0 24 27 BN K2 33 34
Außenleiterrohr (Kupfer) Outer conductor tube (copper)	L = 2 m L = 4 m	15.81 kg 31.62 kg	BN A0 24 28 BN K2 65 68
Mittelstütze Inner support		2.45 kg	BN 53 27 84
Starrer Flansch zum Auflöten Fixed flange for brazing		1.75 kg	BN 00 85 50
Kupplungselement inkl. Schraubensatz Coupling element incl. screw set		2.12 kg	BN 91 93 10
90° Winkel 90° Elbow		6.66 kg	BN 87 32 08

Wellenwiderstand Impedance		50 Ω
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		0.83 GHz
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		28.0 kV
Frequenzbereich Frequency range		0 ≤ f ≤ 800 MHz
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz 230 MHz 800 MHz	≤ 224.0 kW ≤ 148.0 kW ≤ 78.0 kW
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz 230 MHz 800 MHz	0.16 0.24 0.46


ROHRLEITUNGSKOMPONENTEN 6 1/8" EIA
RIGID LINE COMPONENTS 6 1/8" EIA




Innenleiterrohr
Inner conductor tube
BN A0 24 27; BN K2 33 34




Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 28; BN K2 65 68

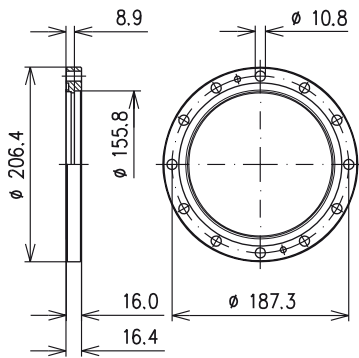


Starrer Flansch zum Auflöten
Fixed flange for brazing
BN 00 85 50

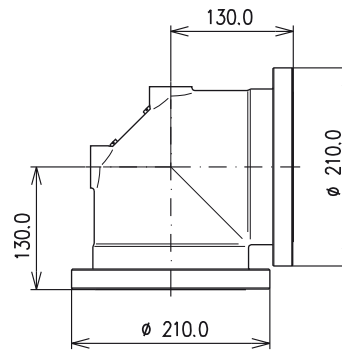

90° Winkel
90° Elbow
BN 87 32 08



Mittelstütze
Inner support
BN 53 27 84



Kupplungselement
Coupling element
BN 91 93 10

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
3.0 m ≤ L ≤ 4.0 m	1


ROHRLEITUNGSKOMPONENTEN 7/8" SMS
RIGID LINE COMPONENTS 7/8" SMS

- Außenleitersystem ohne Kontaktring, in Kupfer/ Kupferlegierung
- einfache und schnelle Montage
- keine Spezialwerkzeuge erforderlich
- PTFE-Isolation
- für Innenraummontage


- outer conductor system without contact ring in copper / copper alloy
- quick and simple assembly
- no special tools required
- PTFE insulation
- for indoor application

		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m L = 4 m	0.28 kg 0.57 kg	BN A0 24 02 BN K2 02 65
Außenleiterrohr (Kupfer) Outer conductor tube (copper)	L = 2 m L = 4 m	1.35 kg 2.70 kg	BN A0 24 03 BN K2 17 51
Mittelstütze Inner support		0.01 kg	BN 54 27 68
Übergang SMS Schelle auf 7/8" EIA Adaptor SMS clamp to 7/8" EIA		0.23 kg	BN 54 27 67
Übergang SMS Schelle auf 7-16 Kuppler Adaptor SMS clamp to 7-16 female		0.15 kg	BN 54 27 79
Kupplungselement für 7/8" EIA inkl. Schraubensatz Coupling element for 7/8" EIA incl. screw set		0.05 kg	BN 91 17 15
Rohrleitungsverbinder Rigid line splice		0.11 kg	BN 54 27 69
90° Winkel 90° Elbow		0.16 kg	BN 54 27 62
Wellenwiderstand Impedance		50 Ω	
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		6.3 GHz	
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		3.8 kV	
Frequenzbereich Frequency range		0 ≤ f ≤ 5.3 GHz	
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz 230 MHz 860 MHz	≤ 7.6 kW ≤ 5.0 kW ≤ 2.6 kW	
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz 230 MHz 860 MHz	1.21 1.84 3.55	
Montageanleitung Installation instruction		M 36123	


ROHRLEITUNGSKOMPONENTEN 7/8" SMS
RIGID LINE COMPONENTS 7/8" SMS

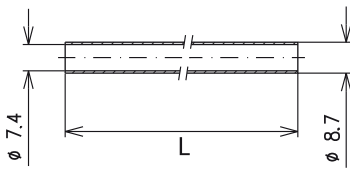


Innenleiterrohr
Inner conductor tube
BN A0 24 02; BN K2 02 65

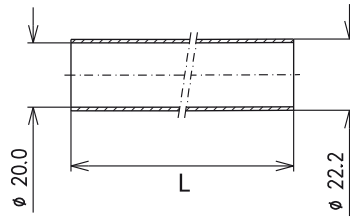


Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 03; BN K2 17 51




Übergang SMS Schelle auf 7/8" EIA
Adaptor SMS clamp to 7/8" EIA
BN 54 27 67

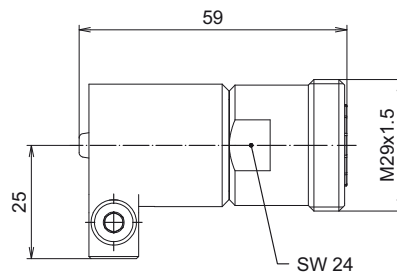


Übergang SMS Schelle auf 7-16 Kuppler
Adaptor SMS clamp to 7-16 female
BN 54 27 79

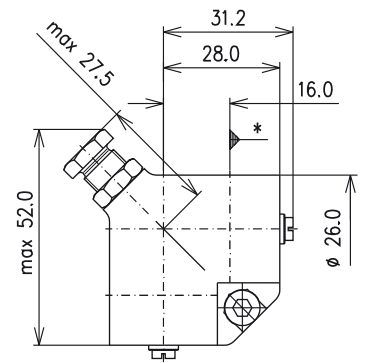

90° Winkel mit Abgleichschraube
90° Elbow with adjustment screw
BN 54 27 62



Mittelstütze
Inner support
BN 54 27 68



Rohrleitungsverbinder
Rigid line splice
BN 54 27 69

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
1.0 m ≤ L ≤ 2.0 m	1
2.0 m < L ≤ 3.0 m	2
3.0 m < L ≤ 4.0 m	3

* Bezugsebene
Reference plane


ROHRLEITUNGSKOMPONENTEN 1 5/8" SMS-1
RIGID LINE COMPONENTS 1 5/8" SMS-1

- Außenleitersystem Aluminium / Aluminiumlegierung
- einfache und schnelle Montage
- keine Spezialwerkzeuge erforderlich
- PTFE-Isolation
- für Innenraummontage


- outer conductor system aluminium / aluminium alloy
- quick and simple assembly
- no special tools required
- PTFE insulation
- for indoor application

		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m	0.89 kg	BN A0 24 06
	L = 4 m	1.78 kg	BN K1 96 40
Außenleiterrohr (Aluminium) Outer conductor tube (aluminium)	L = 2 m	0.86 kg	BN A0 24 09
	L = 4 m	1.72 kg	BN K2 02 01
Mittelstütze Inner support		0.04 kg	BN 85 99 06
Übergang SMS-1 Schelle auf 1 5/8" EIA Adaptor SMS-1 clamp to 1 5/8" EIA		0.21 kg	BN B1 34 87 C1000
Kupplungselement für 1 5/8" EIA inkl. Schraubensatz Coupling element for 1 5/8" EIA incl. screw set		0.16 kg	BN 91 83 11
Rohrleitungsverbinder Rigid line splice		0.29 kg	BN 53 27 04
90° Winkel 90° Elbow		0.29 kg	BN 53 27 02
Wellenwiderstand Impedance		50 Ω	
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		3.2 GHz	
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		7.0 kV	
Frequenzbereich Frequency range		0 ≤ f ≤ 2.7 GHz	
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz	≤ 19.6 kW	
	230 MHz	≤ 13.0 kW	
	860 MHz	≤ 7.0 kW	
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz	0.75	
	230 MHz	1.13	
	860 MHz	2.19	
Montageanleitung Installation instruction		M 36124	


ROHRLEITUNGSKOMPONENTEN 1 5/8" SMS-1
RIGID LINE COMPONENTS 1 5/8" SMS-1




Innenleiterrohr
Inner conductor tube
BN A0 24 06; BN K1 96 40




Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 09; BN K2 02 01

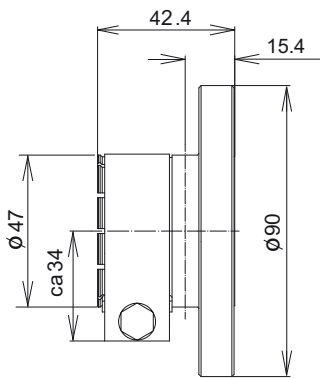


Übergang SMS-1 Schelle auf 1 5/8" EIA
Adaptor SMS-1 clamp to 1 5/8" EIA
BN B1 34 87 C1000

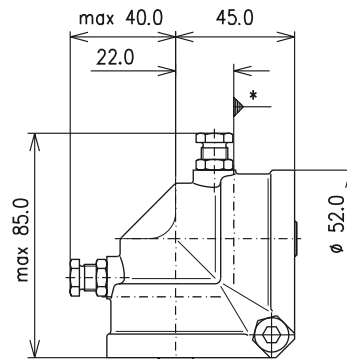

90° Winkel mit Abgleichschrauben
90° Elbow with adjustment screws
BN 53 27 02



Mittelstütze
Inner support
BN 85 99 06



Rohrleitungsverbinder
Rigid line splice
BN 53 27 04

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
1.4 m ≤ L ≤ 2.8 m	1
2.8 m < L ≤ 4.0 m	2

* Bezugsebene
Reference plane


ROHRLEITUNGSKOMPONENTEN 1 5/8" SMS-2
RIGID LINE COMPONENTS 1 5/8" SMS-2

- Außenleitersystem ohne Kontakttring, in Kupfer / Kupferlegierung
- einfache und schnelle Montage
- keine Spezialwerkzeuge erforderlich
- PTFE-Isolation
- für Innenraummontage


- outer conductor system without contact ring, in copper / copper alloy
- quick and simple assembly
- no special tools required
- PTFE insulation
- for indoor application

		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m L = 4 m	0.90 kg 1.80 kg	BN A0 24 06 BN K1 96 40
Außenleiterrohr (Kupfer) Outer conductor tube (copper)	L = 2 m L = 4 m	2.80 kg 5.60 kg	BN A0 24 07 BN K1 96 08
Mittelstütze Inner support		0.04 kg	BN 85 99 06
Übergang SMS-2 Schelle auf 1 5/8" EIA Adaptor SMS-2 clamp to 1 5/8" EIA		0.21 kg	BN B1 34 87 C1000
Kupplungselement für 1 5/8" EIA inkl. Schraubensatz Coupling element for 1 5/8" EIA incl. screw set		0.16 kg	BN 91 83 11
Rohrleitungsverbinder Rigid line splice		0.46 kg	BN 54 27 49
90° Winkel 90° Elbow		0.66 kg	BN 54 27 42
Wellenwiderstand Impedance		50 Ω	
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		3.2 GHz	
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		7.0 kV	
Frequenzbereich Frequency range		0 ≤ f ≤ 2.7 GHz	
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz 230 MHz 860 MHz	≤ 20.0 kW ≤ 13.5 kW ≤ 7.0 kW	
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz 230 MHz 860 MHz	0.63 0.95 1.83	
Montageanleitung Installation instruction		M 36129	


ROHRLEITUNGSKOMPONENTEN 1 5/8" SMS-2
RIGID LINE COMPONENTS 1 5/8" SMS-2




Innenleiterrohr
Inner conductor tube
BN A0 24 06; BN K1 96 40




Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 07; BN K1 96 08




Übergang SMS-2 Schelle auf 1 5/8" EIA
Adaptor SMS-2 clamp to 1 5/8" EIA
BN B1 34 87 C1000

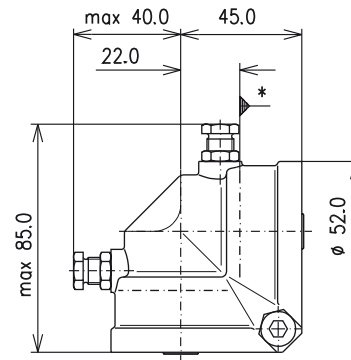

90° Winkel mit Abgleichschrauben
90° Elbow with adjustment screws
BN 54 27 42



Mittelstütze
Inner support
BN 85 99 06

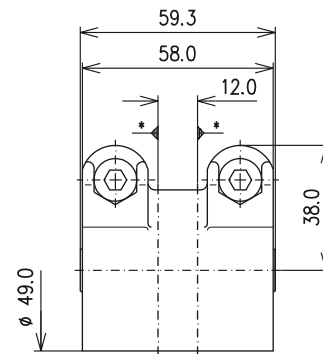

Rohrleitungsverbinder
Rigid line splice
BN 54 27 49

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
1.4 m ≤ L ≤ 2.8 m	1
2.8 m < L ≤ 4.0 m	2

* Bezugsebene
Reference plane

Rohrleitungen & Kabelstecker
Rigid Lines & Cable Connectors


ROHRLEITUNGSKOMPONENTEN 3 1/8" SMS
RIGID LINE COMPONENTS 3 1/8" SMS

- Außenleitersystem Aluminium / Aluminiumlegierung
- einfache und schnelle Montage
- keine Spezialwerkzeuge erforderlich
- PTFE-Isolation
- für Innenraummontage


- outer conductor system aluminium / aluminium alloy
- quick and simple assembly
- no special tools required
- PTFE insulation
- for indoor application

		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m	1.90 kg	BN A0 24 15
	L = 4 m	3.80 kg	BN K2 27 70
Außenleiterrohr (Aluminium) Outer conductor tube (aluminium)	L = 2 m	1.70 kg	BN A0 24 17
	L = 4 m	3.40 kg	BN K2 02 02
Mittelstütze Inner support		0.27 kg	BN 87 00 03
Übergang SMS Schelle auf 3 1/8" EIA Adaptor SMS clamp to 3 1/8" EIA		0.40 kg	BN B1 08 65 C1000
Kupplungelement für 3 1/8" EIA inkl. Schraubensatz Coupling element for 3 1/8" EIA incl. screw set		0.58 kg	BN 91 87 10
Rohrleitungsverbinder Rigid line splice		0.64 kg	BN 53 27 21
90° Winkel 90° Elbow		1.32 kg	BN 53 27 23
Wellenwiderstand Impedance		50 Ω	
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		1.6 GHz	
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		14.0 kV	
Frequenzbereich Frequency range		0 ≤ f ≤ 1.3 GHz	
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz	≤ 63.0 kW	
	230 MHz	≤ 42.0 kW	
	860 MHz	≤ 22.0 kW	
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz	0.37	
	230 MHz	0.56	
	860 MHz	1.08	
Montageanleitung Installation instruction		M 36125	


ROHRLEITUNGSKOMPONENTEN 3 1/8" SMS
RIGID LINE COMPONENTS 3 1/8" SMS




Innenleiterrohr
Inner conductor tube
BN A0 24 15; BN K2 27 70




Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 17; BN K2 02 02

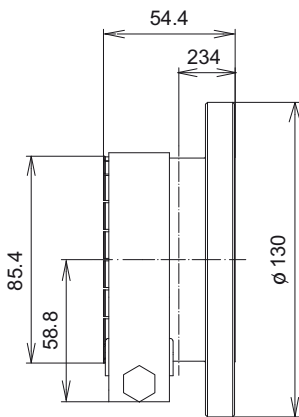


Übergang SMS Schelle auf 3 1/8" EIA
Adaptor SMS clamp to 3 1/8" EIA
BN B1 08 65 C1000

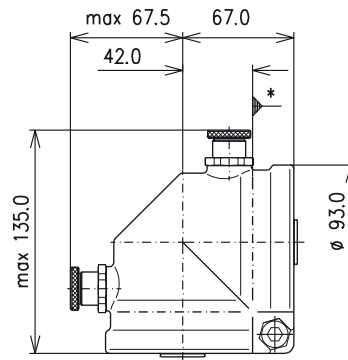

90° Winkel mit Abgleichschrauben
90° Elbow with adjustment screws
BN 53 27 23



Mittelstütze
Inner support
BN 87 00 03

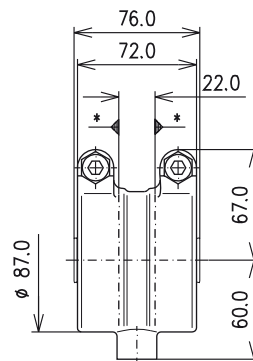

Rohrleitungsverbinder
Rigid line splice
BN 53 27 21

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
2.0 m ≤ L ≤ 4.0 m	1

* Bezugsebene
Reference plane

ROHRLEITUNGSKOMPONENTEN 4 1/2" SMS
RIGID LINE COMPONENTS 4 1/2" SMS


- Außenleitersystem Aluminium / Aluminiumlegierung
- einfache und schnelle Montage
- keine Spezialwerkzeuge erforderlich
- PTFE-Isolation
- für Innenraummontage

- outer conductor system aluminium / aluminium alloy
- quick and simple assembly
- no special tools required
- PTFE insulation
- for indoor application


		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m	2.50 kg	BN A0 24 21
	L = 4 m	5.00 kg	BN K2 62 91
Außenleiterrohr (Aluminium) Outer conductor tube (aluminium)	L = 2 m	2.70 kg	BN A0 24 23
	L = 4 m	5.40 kg	BN K2 02 03
Mittelstütze Inner support		0.60 kg	BN 64 86 02
Übergang SMS Schelle auf 4 1/2" EIA (339 IEC 50-105) Adaptor SMS clamp to 4 1/2" EIA (339 IEC 50-105)		0.93 kg	BN 53 27 66
Kupplungselement für 4 1/2" EIA inkl. Schraubensatz (339 IEC 50-105) Coupling element for 4 1/2" EIA incl. screw set (339 IEC 50-105)		1.07 kg	BN 82 28 10
Rohrleitungsverbinder Rigid line splice		2.02 kg	BN 53 27 63
90° Winkel 90° Elbow		3.72 kg	BN 53 27 61

Wellenwiderstand Impedance		50 Ω
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		1.2 GHz
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		19.0 kV
Frequenzbereich Frequency range		0 ≤ f ≤ 1.0 GHz
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz	≤ 106.0 kW
	230 MHz	≤ 70.0 kW
	860 MHz	≤ 37.0 kW
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz	0.28
	230 MHz	0.42
	860 MHz	0.82
Montageanleitung Installation instruction		M 36126


ROHRLEITUNGSKOMPONENTEN 4 1/2" SMS
RIGID LINE COMPONENTS 4 1/2" SMS




Innenleiterrohr
Inner conductor tube
BN A0 24 21; BN K2 62 91

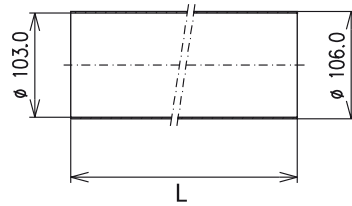


Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 23; BN K2 02 03




Übergang SMS Schelle auf 4 1/2" EIA ¹⁾
Adaptor SMS clamp to 4 1/2" EIA ¹⁾
BN 53 27 66

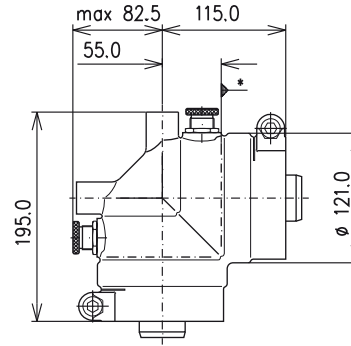

90° Winkel mit Abgleichschrauben
90° Elbow with adjustment screws
BN 53 27 61



Mittelstütze
Inner support
BN 64 86 02



Rohrleitungsverbinder
Rigid line splice
BN 53 27 63

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
$2.5 \text{ m} \leq L \leq 4.0 \text{ m}$	1

¹⁾ 339 IEC 50-105
* Bezugs Ebene
Reference plane

ROHRLEITUNGSKOMPONENTEN 52-120 SMS
RIGID LINE COMPONENTS 52-120 SMS


- Außenleitersystem Aluminium / Aluminiumlegierung
- einfache und schnelle Montage
- keine Spezialwerkzeuge erforderlich
- PTFE-Isolation
- für Innenraummontage

- outer conductor system aluminium / aluminium alloy
- quick and simple assembly
- no special tools required
- PTFE insulation
- for indoor application


		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m	2.90 kg	BN A0 24 24
	L = 4 m	5.80 kg	BN K2 40 58
Außenleiterrohr (Aluminium) Outer conductor tube (aluminium)	L = 2 m	3.20 kg	BN A0 24 26
	L = 4 m	6.40 kg	BN K2 02 06
Mittelstütze Inner support		1.78 kg	BN 54 27 05
Übergang SMS Schelle auf 4 1/2" EIA (339 IEC 50-105) Adaptor SMS clamp to 4 1/2" EIA (339 IEC 50-105)		6.94 kg	BN 54 27 20
Kupplungselement für 4 1/2" EIA inkl. Schraubenset (339 IEC 50-105) Coupling element for 4 1/2" EIA incl. screw set (339 IEC 50-105)		1.07 kg	BN 82 28 10
Übergang SMS Schelle auf 6 1/8" EIA Adaptor SMS clamp to 6 1/8" EIA		9.50 kg	BN 54 27 01
Kupplungselement für 6 1/8" EIA inkl. Schraubenset Coupling element for 6 1/8" EIA incl. screw set		2.12 kg	BN 91 93 10
Übergang SMS Schelle auf 52-120 BT Adaptor SMS clamp to 52-120 BT		0.90 kg	BN 54 27 26
Kupplungselement 52-120 BT inkl. Schraubenset Coupling element 52-120 BT incl. screw set		1.31 kg	BN 52 81 01
Rohrleitungsverbinder Rigid line splice		3.34 kg	BN 54 27 04
90° Winkel 90° Elbow		5.22 kg	BN 54 27 02
Wellenwiderstand Impedance		50 Ω	
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		1.0 GHz	
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		22.0 kV	
Frequenzbereich Frequency range		0 ≤ f ≤ 890 MHz	
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz 230 MHz 860 MHz	≤ 140.0 kW ≤ 92.0 kW ≤ 47.0 kW (≤ 57.0 kW) ¹⁾	
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz 230 MHz 860 MHz	0.24 0.36 0.69	
Montageanleitung Installation instruction		M 36127	

¹⁾ Hierfür muss die Rohrleitung mit einem schwarzen, hitzebeständigen Lack versehen werden
 In this case it is necessary to paint the rigid line with a black, heat resistant varnish


ROHRLEITUNGSKOMPONENTEN 52-120 SMS
RIGID LINE COMPONENTS 52-120 SMS




Innenleiterrohr
Inner conductor tube
BN A0 24 24; BN K2 40 58




Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 26; BN K2 02 06




Kupplungselement 52-120 BT inkl. Schraubenset
Coupling element 52-120 BT incl. screw set
BN 52 81 01




Übergang SMS Schelle auf 6 1/8" EIA
Adaptor SMS clamp to 6 1/8" EIA
BN 54 27 01




Übergang SMS Schelle auf 4 1/2" EIA¹⁾
Adaptor SMS clamp to 4 1/2" EIA¹⁾
BN 54 27 20




Übergang SMS Schelle auf 52-120 BT
Adaptor SMS clamp to 52-120 BT
BN 54 27 26



Mittelstütze
Inner support
BN 54 27 05

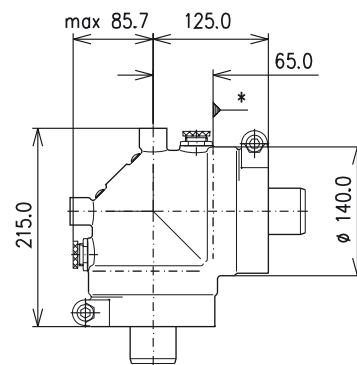

90° Winkel mit Abgleichschrauben
90° Elbow with adjustment screws
BN 54 27 02

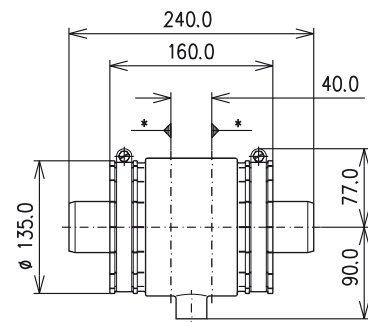

Rohrleitungsverbinder
Rigid line splice
BN 54 27 04

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
3.0 m ≤ L ≤ 4.0 m	1

¹⁾ 339 IEC 50-105
* Bezugs Ebene
Reference plane

Rohrleitungen & Kabelstecker
Rigid Lines & Cable Connectors

ROHRLEITUNGSKOMPONENTEN 52-120 BT
RIGID LINE COMPONENTS 52-120 BT

- Außenleitersystem Kupfer / Kupferlegierung
- einfache Montage
- hierzu SPINNER Bördelgerät BN 51 14 00 mit Einsatz BN 51 14 45
- PTFE-Isolation
- für Innenraummontage


- outer conductor system copper / copper alloy
- easy assembly
- SPINNER flaring tool BN 51 14 00 with Insert BN 51 14 45 available
- PTFE insulation
- for indoor application

		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m L = 4 m	2.90 kg 5.80 kg	BN A0 24 24 BN K2 40 58
Außenleiterrohr (Kupfer) Outer conductor tube (copper)	L = 2 m L = 4 m	10.21 kg 20.42 kg	BN A0 24 25 BN K3 32 21
Mittelstütze Inner support		1.78 kg	BN 54 27 05
Flansch Flange		1.72 kg	BN 04 99 17 S012
Kupplungselement 52-120 BT inkl. Schraubensatz Coupling element 52-120 BT including screw set		1.31 kg	BN 52 81 01
90° Winkel 90° Elbow		8.52 kg	BN 52 81 65
Übergang 52-120 BT (ohne Kupplungselement) auf 4 1/2" EIA (339 IEC 50-105) Adaptor 52-120 BT (without coupling element) to 4 1/2" EIA (339 IEC 50-105)		4.06 kg	BN 52 81 18
Kupplungselement für 4 1/2" EIA inkl. Schraubenset (339 IEC 50-105) Coupling element for 4 1/2" incl. screw set (339 IEC 50-105)		1.07 kg	BN 82 28 10
Übergang 52-120 BT (ohne Kupplungselement) auf 6 1/8" EIA Adaptor 52-120 BT (without coupling element) to 6 1/8" EIA		5.30 kg	BN 52 81 17
Kupplungselement für 6 1/8" EIA inkl. Schraubenset Coupling element for 6 1/8" EIA incl. screw set		2.12 kg	BN 91 93 10


Wellenwiderstand Impedance		50 Ω
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		1.0 GHz
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		22.0 kV
Frequenzbereich Frequency range		0 ≤ f ≤ 860 MHz
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz 230 MHz 860 MHz	≤ 142.0 kW ≤ 93.0 kW ≤ 48.0 kW (≤ 60.0 kW) ¹⁾
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz 230 MHz 860 MHz	0.22 0.33 0.63

¹⁾ Hierfür muss die Rohrleitung mit einem schwarzen, hitzebeständigen Lack versehen werden
 In this case it is necessary to paint the rigid line with a black, heat resistant varnish


ROHRLEITUNGSKOMPONENTEN 52-120 BT
RIGID LINE COMPONENTS 52-120 BT




Innenleiterrohr
Inner conductor tube
BN A0 24 24; BN K2 40 58

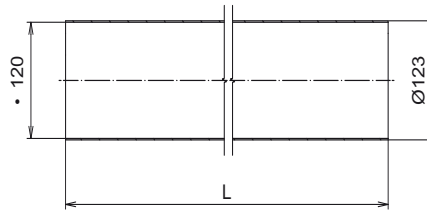


Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 25; BN K3 32 21




Übergang 52-120 BT auf 4 1/2" EIA ¹⁾
Adaptor 52-120 BT to 4 1/2" EIA ¹⁾
BN 52 81 18




Übergang 52-120 BT auf 6 1/8" EIA
Adaptor 52-120 BT to 6 1/8" EIA
BN 52 81 17

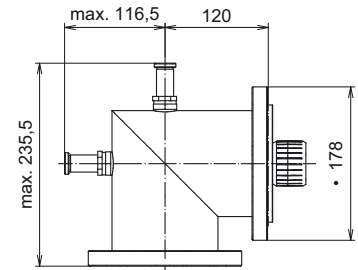


90° Winkel mit Abgleichschrauben
90° Elbow with adjustment screws
BN 52 81 65



Mittelstütze
Inner support
BN 54 27 05



Kupplungselement, inkl. Schraubensatz
Coupling element, including screw set
BN 52 81 01

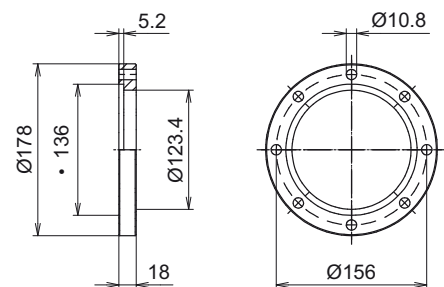

Flansch, vernickelt
Flange, Nickel plated
BN 04 99 17 S012

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
3.0 m ≤ L ≤ 4.0 m	1

¹⁾ 339 IEC 50-105


ROHRLEITUNGSKOMPONENTEN 6 1/8" SMS
RIGID LINE COMPONENTS 6 1/8" SMS

- Außenleitersystem Aluminium / Aluminiumlegierung
- einfache und schnelle Montage
- keine Spezialwerkzeuge erforderlich
- PTFE-Isolation
- für Innenraummontage


- outer conductor system aluminium / aluminium alloy
- quick and simple assembly
- no special tools required
- PTFE insulation
- for indoor application

		Gewicht Weight	Bestellnummer Part number
Innenleiterrohr (Kupfer) Inner conductor tube (copper)	L = 2 m L = 4 m	3.50 kg 7.00 kg	BN A0 24 27 BN K2 33 34
Außenleiterrohr (Aluminium) Outer conductor tube (aluminium)	L = 2 m L = 4 m	5.50 kg 11.00 kg	BN A0 24 29 BN K2 02 04
Mittelstütze Inner support		2.45 kg	BN 53 27 84
Übergang SMS Schelle auf 6 1/8" EIA Adaptor SMS clamp to 6 1/8" EIA		1.28 kg	BN 53 27 89
Kupplungselement für 6 1/8" EIA inkl. Schraubenset Coupling element for 6 1/8" EIA incl. screw set		2.12 kg	BN 91 93 10
Rohrleitungsverbinder Rigid line splice		3.44 kg	BN 53 27 83
90° Winkel 90° Elbow		3.70 kg	BN 53 27 81
Wellenwiderstand Impedance		50 Ω	
Grenzfrequenz für H11-Mode Cut off frequency for H11-Mode		0.83 GHz	
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)		28.0 kV	
Frequenzbereich Frequency range		0 ≤ f ≤ 800 MHz	
Effektive Leistung bei +40 °C Umgebungstemperatur Average power at +40 °C ambient temperature	100 MHz 230 MHz 800 MHz	≤ 213.0 kW ≤ 140.0 kW ≤ 72.0 kW	
Dämpfung bei +20 °C Umgebungstemperatur (dB/100m) Attenuation at +20 °C ambient temperature (dB/100m)	100 MHz 230 MHz 800 MHz	0.19 0.28 0.54	
Montageanleitung Installation instruction		M 36128	


ROHRLEITUNGSKOMPONENTEN 6 1/8" SMS
RIGID LINE COMPONENTS 6 1/8" SMS




Innenleiterrohr
Inner conductor tube
BN A0 24 27; BN K2 33 34

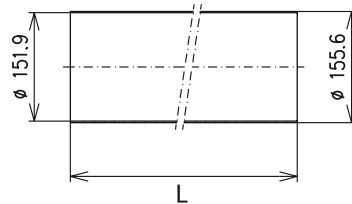


Außenleiterrohr (unlackiert)
Outer conductor tube (not painted)
BN A0 24 29; BN K2 02 04




Übergang SMS Schelle auf 6 1/8" EIA
Adaptor SMS clamp to 6 1/8" EIA
BN 53 27 89

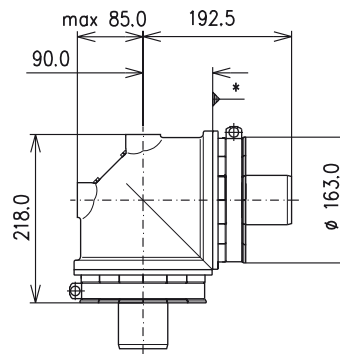

90° Winkel mit Abgleichschraube
90° Elbow with adjustment screw
BN 53 27 81



Mittelstütze
Inner support
BN 53 27 84

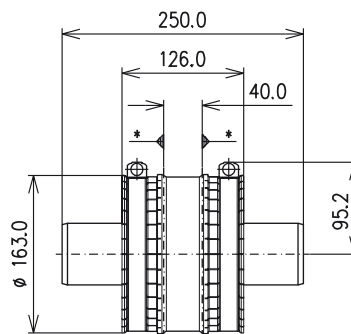


Rohrleitungsverbinder
Rigid line splice
BN 53 27 83

Rohrleitungslänge L Length of rigid line L	Benötigte Anzahl der Mittelstützen Number inner supports required
3.0 m ≤ L ≤ 4.0 m	1

* Bezugsebene
Reference plane

KABELSTECKVERBINDER
CABLE CONNECTORS

Maximale Anschlussleistung
Maximum Power rating

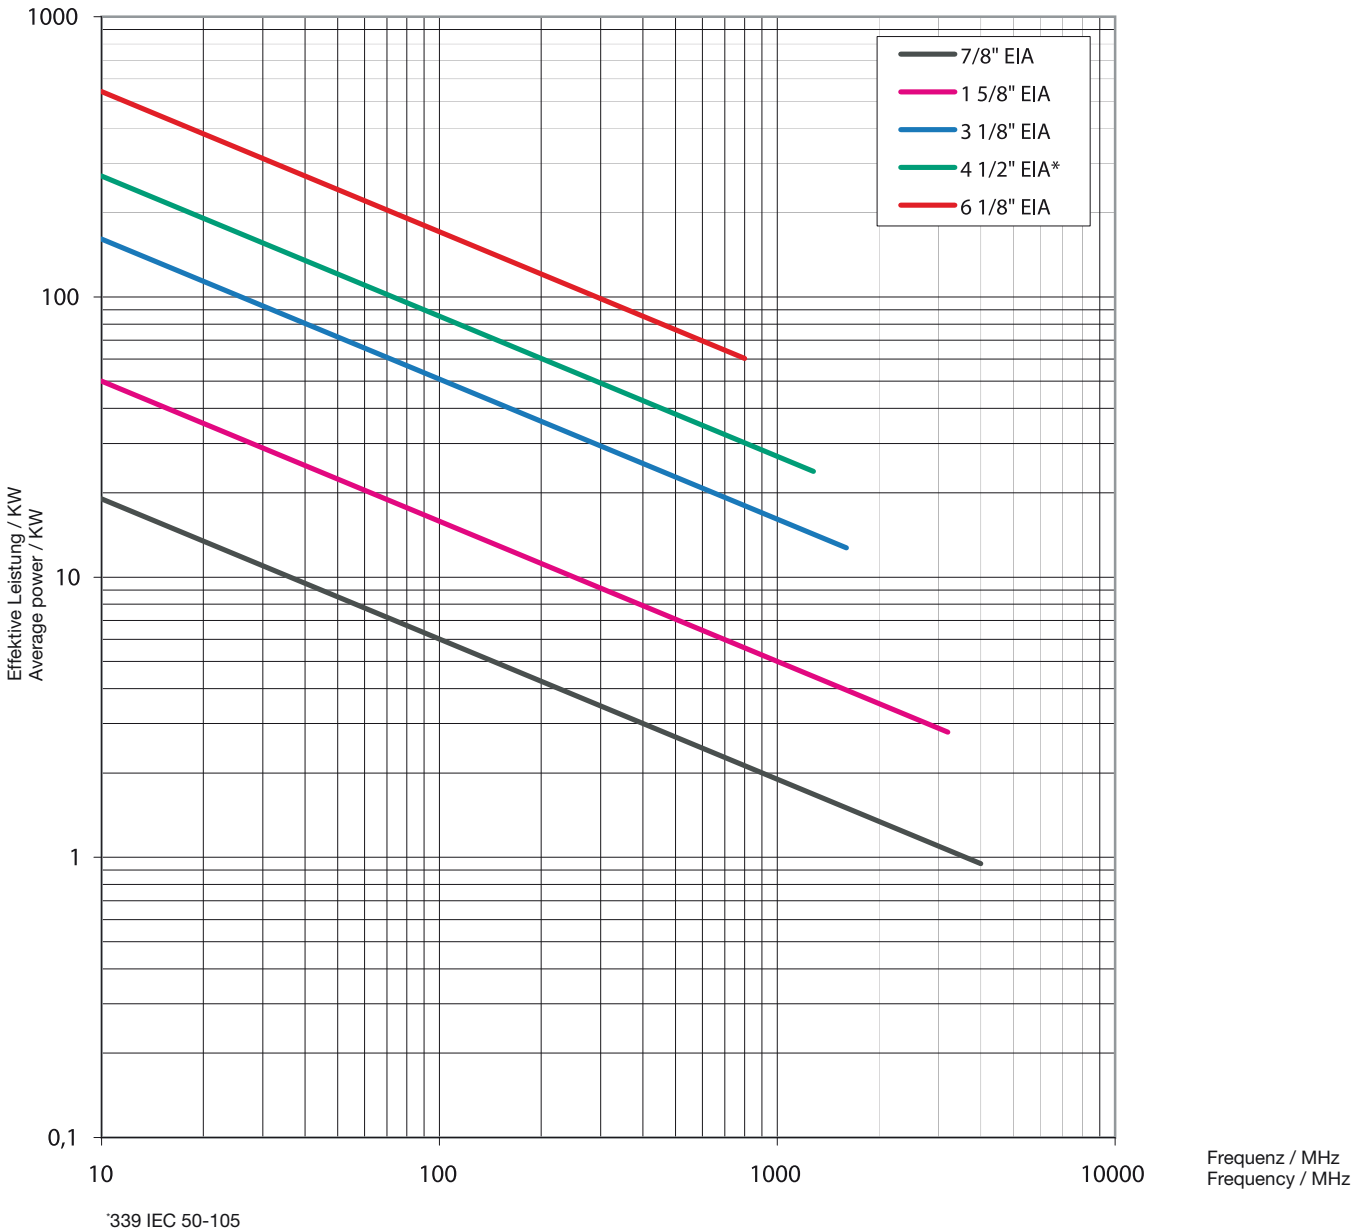

Alle Leistungsangaben beziehen sich auf das angegebene Stecksystem bei +40 °C Umgebungstemperatur und einer Innenleitertemperatur von +120 °C.

Achtung:
Die Höhe der übertragbaren Leistung kann durch das am Steckverbinder montierte Kabel reduziert werden.

All power ratings apply to the according connector system at +40 °C ambient temperature with an inner conductor temperature of +120 °C.

Note:
The power rating may be reduced by the cable attached to the connector.

KABELSTECKVERBINDER CABLE CONNECTORS

- genormt nach EIA STD RS-225, IEC 60339, MIL-F 24044 bzw. nach IEC 60169-4/-5
- schnelle und einfache Montage
- Abdichtung der Kabelabfangung: Plast 2000®
- Cut And Fit (CAF®) oder Premium Version
- Steckverbinder für HCA-Kabel längs- und querdicht

- EIA STD RS-225, IEC 60339, MIL-F 24044 certified resp. IEC 60169-4/-5
- quick and easy assembly
- cable clamp sealing: Plast 2000®
- Cut And Fit (CAF®) or Premium type design
- Barrier and mating face sealed connectors for HCA cables

Kabelsteckverbinder für CELLFLEX-Kabel Cable Connectors for CELLFLEX Cables

Kabeltyp Cable type	Steckverbindergröße Connector size		Ausführ. Type
	7/8" EIA	1 5/8" EIA	
SCF/UCF 12-50 ¹⁾	BN 71 55 80	–	CAF®
LCF12-50	BN 71 55 68	–	CAF®
UCF/LCF 78-50 A	BN 71 55 58	BN 72 34 58	CAF®
UCF/LCFS 114-50 A	BN 71 55 87	BN 72 34 84	CAF®
LCF 158-50 A	BN 71 55 88	BN 72 34 86	CAF®
LCF 214-50 A	–	BN 72 34 73	CAF®

Steckverbinder 7-16 und N für Kabel mit Kupferwellrohr-Außenleiter und Schaum-Dielektrikum (LF- bzw. SF) finden Sie in unserem PRODUCTFINDER auf unserer Webseite www.SPINNER-group.com.

Cable Connectors 7-16 and N for cables with copper corrugated outer conductor and foam dielectric (LF/SF) you will find on our website www.SPINNER-group.com PRODUCTFINDER.



¹⁾ Abdichtung der Kabelabfangung mit Profildichtung
Cable clamp sealed with profile gasket

Kabelsteckverbinder für HELIFLEX-Kabel Cable Connectors for HELIFLEX Cables

Kabeltyp Cable type	Steckverbindergröße Connector size							Ausführung Type
	7-16 m	13-30 m	7/8" EIA	1 5/8" EIA	3 1/8" EIA	4 1/2" EIA 339 IEC 50-105	6 1/8" EIA	
HCA 38-50	BN 97 06 28	–	BN 97 13 05¹⁾	–	–	–	–	CAF®
HCA 58-50	BN 92 55 25	–	BN 97 87 18	–	–	–	–	CAF®
HCA 78-50	BN 49 18 18	BN 39 87 18	BN 97 91 28	BN 97 89 18	–	–	–	CAF®
HCA 118-50	–	BN 71 19 08	–	BN 85 82 10	–	–	–	Premium
HCA 158-50	–	–	BN 83 91 10	BN 93 65 10	–	–	–	Premium
HCA 295-50	–	–	–	–	BN 93 00 50	–	–	Premium
HCA 400-50 (HCA 318-50)	–	–	–	–	BN 93 00 10	–	–	Premium
HCA 495-50 (HCA 418-50)	–	–	–	–	–	BN 83 86 03	–	Premium
HCA 550-50 (HCA 500-50)	–	–	–	–	–	BN 65 82 03	BN 65 67 02	Premium
HCA 618-50	–	–	–	–	–	–	BN 87 11 09	Premium

¹⁾ Stecker-Innenleiter mit Kabel-Innenleiter verschraubt
Contact attachment: inner conductor threaded


KUPPLUNGSELEMENTE
COUPLING ELEMENTS

Kupplungselemente werden komplett wie folgt geliefert:

- Innenleiter mit PTFE-Isolierstütze
- Schrauben mit Muttern und Zubehör aus nicht rostendem Stahl
- O-Ring aus EPDM bzw. Silikonkautschuk

Coupling elements will be delivered as follows:

- inner conductor with PTFE-insulator
- screws with nuts and accessories made of stainless steel
- O-ring made of EPDM or silicone rubber



Bestellnummer Part number	BN 91 17 15	BN 91 83 11	BN 91 87 10	BN 82 28 10	BN 91 93 10
Steckverbindergröße Connector size	7/8" EIA	1 5/8" EIA	3 1/8" EIA	4 1/2" EIA 339 IEC 50-105	6 1/8" EIA
Abmessungen Dimensions (mm)	A				
	B				
	C				
	D				
	23.8	29.80	45.1	45.0	63.0
	49.1	59.80	101.1	76.5	108.0
	4.7	6.35	9.5	9.8	11.0
	20.6	41.50	81.3 ¹⁾	104.75	153.7

¹⁾ Abweichend von 339 IEC 50-80 (etwas vergrößerter Durchmesser gewährleistet optimale Zentrierung des Innenleiters)
Difference to 339 IEC 50-80 (slightly increased diameter effects optimal centering of the inner conductor)

PLAST 2000

PLAST 2000

- garantiert eine absolut einwandfreie Abdichtung zwischen Steckverbinder und Kabel
- optimaler Korrosionsschutz der Außenleiterkontaktstelle zwischen Kabel und Steckverbinder
- die 20 cm³ Tube kann direkt in die Kabelabfangung eingeschraubt werden
- bei Verwendung der 70 cm³ Tube ist die Einspritzpresse BN 07 05 51 erforderlich

- ensures absolutely flawless seal between connector and cable
- optimum corrosion protection of the outer conductor contact between cable and connector
- the 20 cm³ tube can be screwed directly into the cable clamp
- when using the 70 cm³ tube the injection gun BN 07 05 51 is required



Bauteil Part	Bestellnummer Part number
20 cm ³ Tube	BN 15 16 71
70 cm ³ Tube	BN 15 05 97
Einspritzpresse mit Gewinde M9 Injection gun with thread M9	BN 07 05 51

Siehe auch Sicherheits-Datenblatt gemäß ISO/DIS 11014
See also Material Safety Data Sheet acc. ISO/DIS 11014

Kabeltyp Cable type	Füllmenge Filling quantity
LCF 12-50	4 cm ³
LCF 58-50	6 cm ³
LCF 78-50	7 cm ³
UCF / LCFS 114-50	15 cm ³
LCF 158-50	20 cm ³
LCF 214-50	28 cm ³
HCA 58-50	5 cm ³
HCA 78-50	5 cm ³
HCA 118-50	10 cm ³
HCA 158-50	20 cm ³
HCA 295-50	50 cm ³
HCA 400-50 (HCA 318-50)	70 cm ³
HCA 495-50 (HCA 418-50)	120 cm ³
HCA 550-50 (HCA 500-50)	250 cm ³
HCA 618-50	300 cm ³

BÖRDELGERÄTE UND EINSÄTZE FLARING TOOLS AND INSERTS

- für lufttraumisierte Kupfer-Wellrohrkabel und Rohrleitung 52-120 BT
- gewährleistet bestmöglichen HF-Kontakt
- Basisgerät verwendbar für mehrere Kabeltypen durch zusätzliche Einsätze
- Standard Bördelgerät mit Einsatz für die Rohrleitung 52-120 BT

- for air dielectric copper corrugated cables and rigid line 52-120 BT
- assures optimal RF contact
- basic tool usable for different cables with additional inserts
- standard flaring tool with insert for the rigid line 52-120 BT

Kabeltyp Cable type	Bördelgerät / Flaring Tool Bestellnummer / Part number	Einsatz / Insert Bestellnummer / Part number
HCA 118-50	BN 51 14 11	BN 51 14 47
HCA 158-50	BN 51 14 11	BN 51 14 57
HCA 295-50	BN 51 14 11	BN 51 14 81
HCA 400-50 (HCA 318-50)	BN 51 14 11 BN 51 14 00	Not necessary BN 51 14 42
HCA 495-50 (HCA 418-50)	BN 51 14 00	BN 51 14 43
HCA 550-50 (HCA 500-50)	BN 51 14 00	BN 51 14 44
HCA 618-50	BN 51 14 00	Not necessary
Rohrleitung/Rigid line 52-120 BT	BN 51 14 00	BN 51 14 45



ABSETZWERKZEUGE TRIMMING TOOLS

- für Kupfer-Wellrohrkabel
- Reduzierung der Montagezeiten um über 60 %
- erhebliche Senkung der Montagekosten
- gleichbleibende Montagequalität

- for copper corrugated cables
- assembly time cut by more than 60 %
- considerable reduction of the assembly costs
- constant assembly quality

Kabeltyp Cable type	Bestellnummer Part number
SCF / UCF 12-50	BN 54 13 34
LCF 12-50	BN 54 13 17
LCF 78-50 A	BN 54 13 18
UCF / LCFS 114-50 A LCF 158-50 A	BN 54 13 46 ¹⁾
UCF 114-50 A LCF 158-50 A LCF 214-50 A	BN 54 13 43 ²⁾
HCA 58-50	BN 54 13 41
HCA 78-50	BN 54 13 42




¹⁾ Schwere Ausführung mit Kurbel
Heavy duty type with crank

²⁾ Einfache Ausführung mit Kurbel
Economy type with crank

GASANSCHLÜSSE GAS INLETS

- geeignet für alle Steckverbinder der Premium-Ausführung für HELIFLEX-Kabel
- zur Belüftung von Kabeln, um das Eindringen oder die Bildung von Feuchtigkeit zu vermeiden
- suitable for all connectors in premium version for HELIFLEX-cables
- used to pressurise the cable to avoid penetration or build up of moisture

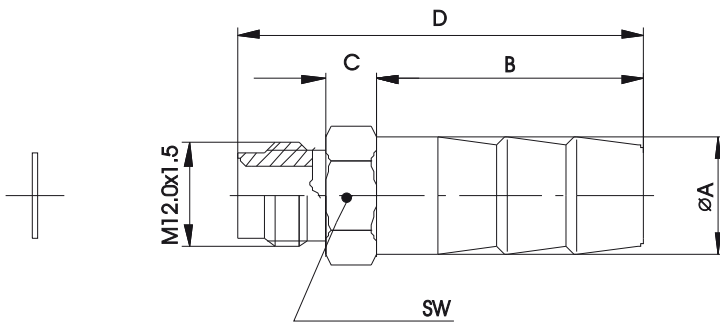

Gasanschlüsse für HELIFLEX-Kabel Gas inlets for HELIFLEX cables

Kabeltyp Cable type	Gewinde Thread	Schlauchinnen- durchmesser Inner hose diameter	Dimension A	Dimension B	Dimension C	Dimension D	SW	Bestellnummer Part number	
HCA 118-50	M12 x 1.5	6 mm	Ø 7.0 mm	24.5 mm	6.0 mm	40.5 mm	12.0 mm	BN 00 47 71 BN 00 47 70 BN 00 47 81	
HCA 158-50			Ø 11.0 mm	31.0 mm	6.0 mm	47.0 mm	12.0 mm		
HCA 295-50			Ø 13.5 mm	31.0 mm	6.0 mm	47.0 mm	14.0 mm		
HCA 400-50									
(HCA 318-50)									
HCA 495-50									
(HCA 418-50)									
HCA 550-50									
(HCA 500-50)									
HCA 618-50									

Alle Steckverbinder für die Kabelgrößen HCA 118-50 bis HCA 618-50 besitzen einen Adapter von Gewinde M12 x 1.5 auf Gewinde G 1/8" zur Verwendung eines handelsüblichen Gasanschlusses mit Außengewinde G 1/8".


All connectors for the cable sizes HCA 118-50 to HCA 618-50 include an adaptor for the screw thread M12 x 1.5 to G 1/8", enabling the use of a common gas inlet which has an outer thread of G 1/8".

SW = Schlüsselweite / Wrench size

TRIMMLEITUNGEN
TRIMMING LINES

- zur Verbesserung des VSWR
- mit 5 Trimmschrauben
- für Innenraummontage

- used to improve the VSWR
- with 5 trimming screws
- for indoor application

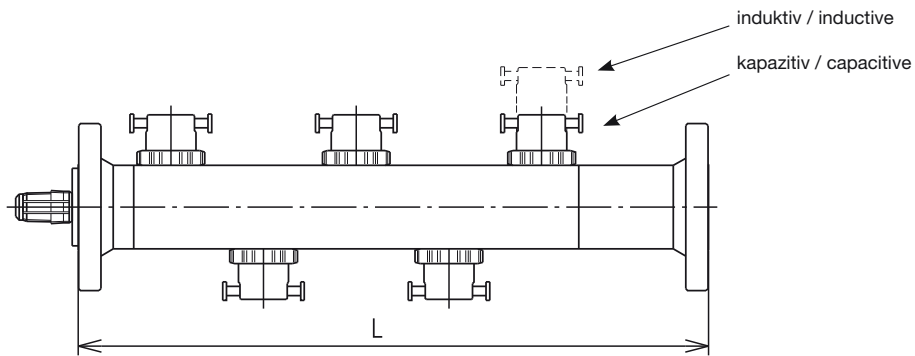

Bestellnummer Part number	BN B0 04 73	BN 52 56 23	BN 52 92 50	BN B1 05 78	BN 53 85 40	BN 53 85 29
Frequenzbereich Frequency range	470 - 860 MHz	470 - 860 MHz	470 - 860 MHz	470 - 860 MHz	470 - 860 MHz	470 - 800 MHz
Prüfspannung Proof voltage	≤ 2.0 kV	≤ 2.7 kV	≤ 5.0 kV	≤ 12.0 kV	≤ 15.0 kV	≤ 25.0 kV
Effektive Leistung (860 MHz) bei +40 °C Umgebungstemperatur Average power (860 MHz) at +40 °C ambient temperature	≤ 2.0 kW	≤ 2.6 kW	≤ 7.0 kW	≤ 23.0 kW	≤ 38.0 kW	≤ 78.0 kW (800 MHz)
Anschluss 1 Connector 1	7-16 Kuppler 7-16 female	7/8" EIA ¹⁾	1 5/8" EIA ¹⁾	3 1/8" EIA ¹⁾	4 1/2" EIA ¹⁾ 339 IEC 50-105	6 1/8" EIA ¹⁾
Anzahl Trimmschrauben Number of trimming screws	5	5	5	5	5	5
Länge Length	195 mm	auf Anfrage on request	340 mm	400 mm	450 mm	450 mm
Gewicht Weight	1.38 kg	auf Anfrage on request	2.90 kg	5.10 kg	10.80 kg	14.10 kg

¹⁾ Eine Seite mit fest eingebautem Kupplungselement
One side with solid built-in coupling element

Die Prüfspannung bezieht sich auf 860 MHz (800 MHz) und maximaler kapazitiver Belastung (Trimmschrauben ganz eingeschraubt). Trimmleitungen können in Serie geschaltet werden, um den Einstellbereich für niedrigere Frequenzen zu erhöhen.

The proof voltage value refers to 860 MHz (800 MHz) and maximal capacitive loading (trimming screws entirely screwed in). Trimming lines can be connected in series to increase the tuning range for lower frequencies.

ÜBERGANGSVERBINDER & MESSZUBEHÖR ADAPTORS & MEASUREMENT ACCESSORIES

SPINNER führt ein umfangreiches Programm an Zubehör zur Erleichterung von Mess- und Wartungsarbeiten. Beispielsweise liefern wir Übergangsverbinder auf die gängigsten internationalen Stecksysteme und Richtkoppler zur Messung der Vor- und Rücklaufleistung. Messtrennstücke ermöglichen einen Antennentest bzw. Antennenabgleich ohne Zerlegen der Anschlussleitung.

SPINNER ist zudem ein weltweit renommierter Lieferant hochpräziser Komponenten für Messungen und Kalibrierungen bis 67 GHz, die ausführlich in unserem Katalog für Mess- & Kalibrierkomponenten beschrieben werden. Natürlich werden typische terrestrische Rundfunk-Anwendungen in weitaus niedrigeren Frequenzen betrieben, daher haben wir eine Auswahl an Komponenten zusammengestellt, die für Messungen im Rundfunkbereich benötigt werden, beispielsweise Kalibrierkits, Präzisionsadapter und Kabel etc.

SPINNER offers a comprehensive range of accessories to facilitate measuring and maintenance work.

We deliver, for example, adapters for almost all common international connector systems, directional couplers for measuring the forward and reflected power and direct access units that allow antenna tests or adjustments without disassembling the connected lines.

SPINNER is also a world class supplier of high precision components for measurement and calibration up to 67 GHz, which are covered in detail in our Measurement & Calibration Equipment Catalogue. Of course typical terrestrial broadcasting application operate at far lower frequencies, therefore we have put together an excerpt of components that come in handy for the most common measurements required with broadcasting equipment, such as calibration kits, precision adapters and cables etc.

Adaptors for high power and measurement

- Standard adaptors
- Short adaptors

Direct access units

Monitoring couplers

- Standard double monitoring couplers
- Standard multi monitoring couplers
- Frequency response compensated multi monitoring couplers

Measurement accessories

- Calibration kits
- Precision adaptors
- Measurement cables
- Precision loads
- Attenuators


ÜBERGANGSVERBINDER ADAPTORS

- hervorragende elektrische Eigenschaften
(Bsp. VSWR ≤ 1,02 / Rückflussdämpfung ≥ 40 dB bis 1 GHz - Ausnahme: 6 1/8" Adapter bis 800 MHz)
- für Außenmontage
- Übergangsverbinder auch in Kurzbauweise

- excellent electrical performance
(e.g. VSWR ≤ 1.02 / return loss ≥ 40 dB up to 1 GHz - exception: 6 1/8" adaptor up to 800 MHz)
- for outdoor application
- also short length adaptors available

Übergänge Adaptors

Anschluss 1 Connector 1		Anschluss 2 Connector 2		Länge L Length L	Gewicht Weight	Bestellnummer Part number
N	Kuppler / female	SMA	Stecker / male	20.7 mm	0.028 kg	BN 64 06 82
N	Kuppler / female	N	Kuppler / female	36.2 mm	0.040 kg	BN 29 37 50
7-16	Stecker / male	N	Stecker / male	30.7 mm	0.083 kg	BN 29 38 00
7-16	Stecker / male	N	Kuppler / female	15.3 mm	0.073 kg	BN 19 44 00
7-16	Kuppler / female	N	Stecker / male	34.9 mm	0.074 kg	BN 29 39 00
7-16	Kuppler / female	N	Kuppler / female	24.5 mm	0.078 kg	BN 29 40 00
7-16	Kuppler / female	7-16	Kuppler / female	29.0 mm	0.088 kg	BN 19 64 00
7/8"	EIA	N	Kuppler / female	59.1 mm	0.25 kg	BN 90 25 00
7/8"	EIA	7-16	Kuppler / female	58.2 mm	0.24 kg	BN 80 56 00
7/8"	EIA	7-16	Stecker / male	47.2 mm	0.24 kg	BN 81 80 00
13-30	Stecker / male	7-16	Kuppler / female	61.7 mm	0.45 kg	BN 90 83 00
1 5/8"	EIA	N	Kuppler / female	84.7 mm	0.81 kg	BN 90 36 00
1 5/8"	EIA	7-16	Kuppler / female	82.4 mm	0.86 kg	BN 90 92 00
1 5/8"	EIA	7/8"	EIA	108.5 mm	1.13 kg	BN 91 21 00
1 5/8"	EIA	13-30	Kuppler / female	115.9 mm	1.21 kg	BN 91 43 00
1 5/8"	EIA	13-30	Stecker / male	105.5 mm	1.19 kg	BN 91 42 00
3 1/8"	EIA	N	Kuppler / female	113.0 mm	2.28 kg	BN 94 57 00
3 1/8"	EIA	7-16	Kuppler / female	119.7 mm	2.40 kg	BN 90 93 08
3 1/8"	EIA	1 5/8"	EIA	152.0 mm	3.49 kg	BN 91 75 00
4 1/2"	EIA ¹⁾	7-16	Kuppler / female	180.0 mm	4.66 kg	BN 72 89 00
4 1/2"	EIA ¹⁾	3 1/8"	EIA	177.0 mm	5.69 kg	BN 71 50 00
6 1/8"	EIA	3 1/8"	EIA	194.0 mm	8.15 kg	BN 91 89 00




Typische Zeichnung
Typical drawing

Übergänge in Kurzbauweise, mit eingebautem Kupplungselement Adaptors in short length version, with built-in coupling element

Anschluss 1 Connector 1		Anschluss 2 Connector 2		Länge L Length L	Gewicht Weight	Bestellnummer Part number
1 5/8"	EIA	7-16	Kuppler / female	34.9 mm	0.61 kg	BN 10 74 10
1 5/8"	EIA	7/8"	EIA	24.00 mm	0.83 kg	BN 91 21 10
3 1/8"	EIA	1 5/8"	EIA	15.00 mm	2.01 kg	BN 91 75 10
4 1/2"	EIA ¹⁾	3 1/8"	EIA	21.75 mm	3.50 kg	BN 71 50 10
6 1/8"	EIA	7-16	Kuppler / female	109.9 mm	6.51 kg	BN 90 94 04
6 1/8"	EIA	3 1/8"	EIA	35.75 mm	5.73 kg	BN 91 89 10
6 1/8"	EIA	4 1/2"	EIA ¹⁾	39.95 mm	6.28 kg	BN 71 49 10

¹⁾ 339 IEC 50-105

SMS- und BT-Übergangsverbinder sind bei den jeweiligen Rohrleitungsgrößen aufgeführt
SMS- and BT-adaptors are listed at the corresponding rigid line sizes



Typische Zeichnung
Typical drawing

MESSTRENNSTÜCKE
DIRECT ACCESS UNITS

- schneller und direkter Zugang zu den Koaxial-Anschlüssen
 - präzise Messungen von VSWR und elektrischer Länge über galvanische Kontakte
 - Antennentest und Antennenabgleich ohne Zerlegen der Anschlussleitungen
 - für Außenmontage
 - für alle Rundfunk- und Fernsehstandards geeignet
- quick and direct access to coaxial line ports
 - accurate measurements of VSWR and electrical length via galvanic contacts
 - antenna testing and tuning without dismantling the connected feeders
 - for outdoor application
 - suitable for all broadcast standards



Bestellnummer Part number	BN 39 09 06	BN 84 77 12	BN 84 77 10	BN 87 66 10	BN 87 67 06	
Frequenzbereich Frequency range	0 - 860 MHz	0 - 860 MHz	0 - 860 MHz	0 - 860 MHz	0 - 860 MHz	
Prüfspannung ¹⁾ Proof voltage ¹⁾	7.0 kV	12.0 kV	14.0 kV	18.0 kV	22.0 kV	
Effektive Leistung ²⁾ Average power ²⁾	100 MHz 230 MHz 860 MHz	≤ 20.0 kW ≤ 13.5 kW ≤ 7.0 kW	≤ 51.0 kW ≤ 34.0 kW ≤ 17.5 kW	≤ 67.0 kW ≤ 44.0 kW ≤ 23.0 kW	≤ 98.0 kW ≤ 64.0 kW ≤ 35.0 kW	≤ 140.0 kW ≤ 92.0 kW ≤ 47.0 kW
VSWR	≤ 1.02					
Anschlüsse Connectors	1 5/8" EIA	3 1/8" EIA	3 1/8" EIA	4 1/2" EIA 339 IEC 50-105	6 1/8" EIA	
Länge Length	240.0 mm	350.6 mm	358.0 mm	360.0 mm	520.0 mm	
Gewicht Weight	3.67 kg	6.80 kg	6.50 kg	13.00 kg	20.50 kg	
Passender Messeinsatz Corresponding measurement insert	BN 49 59 51	BN 29 09 03	BN 59 03 02	BN 59 03 02	BN 31 54 01	
Messanschlüsse Measuring connectors	7-16 Kuppler 7-16 female					
Gewicht Weight	1.97 kg	2.79 kg	5.22 kg	5.22 kg	7.23. kg	


¹⁾ Auf Meereshöhe, 86 - 106 kPa
At sea level, 86 - 106 kPa
²⁾ Bei +40 °C Umgebungstemperatur
At +40 °C ambient temperature

Übergangstecker & Meßzubehör
Adaptors & Measurement Accessories


DOPPEL-MESSRICHTKOPPLER DIRECTIONAL COUPLERS WITH TWO PROBES

- kompakte Bauform
- verwendbar in einem weiten Frequenzbereich
- variable Koppeldämpfung
- niedriges VSWR
- hohe Directivity
- für Innenraummontage

- compact design
- suitable in a wide frequency range
- variable coupling
- low VSWR
- high directivity
- for indoor application

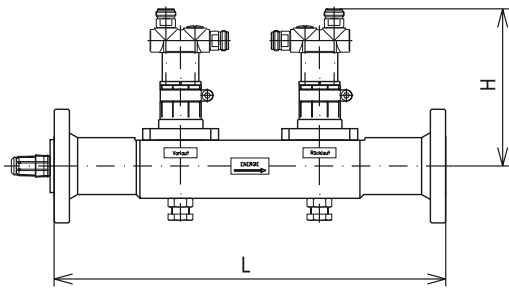

BN 80 08 29

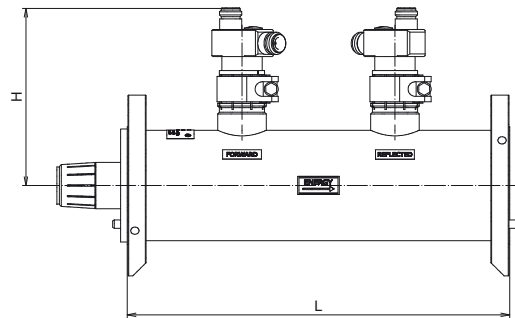

BN 80 02 64

Bestellnummer Part number	BN 80 08 29	BN 80 02 64	BN 80 03 64	BN 51 67 58	BN 51 67 64	
Frequenzbereich Frequency range	40 - 860 MHz	40 - 860 MHz	40 - 860 MHz	40 - 860 MHz	40 - 800 MHz	
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)	≤ 7 kV	≤ 14 kV	≤ 19 kV	≤ 22 kV	≤ 28 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 860 MHz	≤ 20.0 kW ≤ 13.5 kW ≤ 7.0 kW	≤ 67 kW ≤ 44 kW ≤ 23 kW	≤ 112 kW ≤ 74 kW ≤ 38 kW	≤ 170 kW ≤ 116 kW ≤ 60 kW	≤ 224 kW ≤ 148 kW ≤ 78 kW (800 MHz)
Kopplungsbereich Coupling range	100 MHz 230 MHz 860 MHz	38 - 72 dB 31 - 64 dB 25 - 53 dB	42 - 74 dB 35 - 67 dB 29 - 57 dB	46 - 78 dB 38 - 71 dB 32 - 60 dB	48 - 82 dB 42 - 75 dB 34 - 64 dB	49.5 - 81 dB 43.0 - 74 dB 31 - 63 dB (800 MHz)
VSWR Hauptleitung VSWR main line	≤ 1.04					
Directivity	34 - 40 dB					
Durchgangsdämpfung Insertion loss	≤ 0.05 dB					
Anschlüsse Hauptleitung Connectors main line	1 5/8" EIA male/female	3 1/8" EIA ²⁾ male/female	4 1/2" EIA ²⁾ male/female 339 IEC 50-105	52 - 120 BT male/female	6 1/8" EIA male/female	
Anschlüsse gekoppelte Leitung Connectors coupled line	2 x N Kuppler 2 x N female					
Abschlusswiderstand (separate Bestellung) Termination load (separate ordering)	Die Koppeldämpfung ist so zu wählen, dass an keinem Anschluss der gekoppelten Leitung mehr als 1 W ausgekoppelt wird. Please take care that with the chosen coupling not more than 1 W appears at a port of the coupled line.					
Abmessungen (L x H) mm Dimensions (L x H) mm	310 x 125	275 x 160	275 x 166	330 x 172	400 x 213	
Gewicht Weight	3.55 kg	4.3 kg	5.4 kg	7.0 kg	12.8 kg	


¹⁾ Bei +40 °C Umgebungstemperatur
At +40 °C ambient temperature

²⁾ Kupplungselement kann entfernt werden
Coupling element can be removed


MESSRICHTKOPPLER (1...5 MESS-STELLEN)
DIRECTIONAL COUPLERS (1...5 PROBES)

- extrem kompakte Bauform
- verwendbar in einem weiten Frequenzbereich
- variable Koppeldämpfung
- niedriges VSWR
- hohe Directivity
- für Innenraummontage

- extremely compact design
- suitable in a wide frequency range
- variable coupling
- low VSWR
- high directivity
- for indoor application

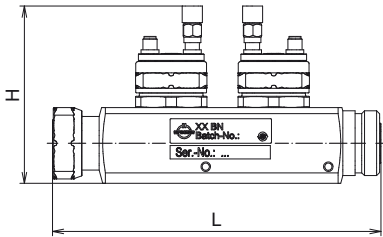

BN 80 04 68

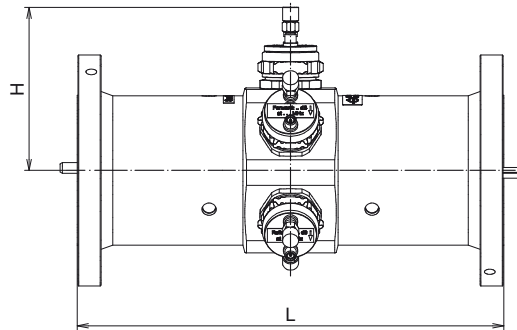

BN 80 02 65 C0005

Bestellnummer Part number	1-fach / -way 2-fach / -way 3-fach / -way 4-fach / -way 5-fach / -way	— BN 80 04 68 — — —	BN 80 08 65 C0001 BN 80 08 65 C0002 BN 80 08 65 C0003 — —	— BN 80 02 65 C0002 BN 80 02 65 C0003 BN 80 02 65 C0004 BN 80 02 65 C0005	— BN 80 03 65 C0002 BN 80 03 65 C0003 BN 80 03 65 C0004 BN 80 03 65 C0005
Frequenzbereich Frequency range	40 - 860 MHz				
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)	≤ 3 kV	≤ 7 kV	≤ 14 kV	≤ 19 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	100 MHz 230 MHz 860 MHz	≤ 5.3 kW ≤ 3.8 kW ≤ 2.0 kW	≤ 20.0 kW ≤ 13.5 kW ≤ 7.0 kW	≤ 67 kW ≤ 44 kW ≤ 23 kW	≤ 112 kW ≤ 74 kW ≤ 38 kW
Kopplungsbereich Coupling range	100 MHz 230 MHz 860 MHz	51 - 75 dB 45 - 69 dB 36 - 57 dB	58 - 86 dB 52 - 80 dB 43 - 68 dB	61 - 91 dB 56 - 85 dB 47 - 73 dB	65 - 96 dB 60 - 90 dB 51 - 78 dB
VSWR Hauptleitung VSWR main line	≤ 1.04				
Directivity	34 - 40 dB				
Durchgangsdämpfung Insertion loss	≤ 0.05 dB				
Anschlüsse Hauptleitung Connectors main line	7-16 Stecker/Kuppler 7-16 male/female	1 5/8" EIA female/female	3 1/8" EIA female/female	4 1/2" EIA female/female 339 IEC 50-105	
Anschlüsse gekoppelte Leitung Connectors coupled line	SMA Kuppler SMA female				
Abschlusswiderstand 1W incl. Termination load 1 W incl.	Die Koppeldämpfung ist so zu wählen, dass an keinem Anschluss der gekoppelten Leitung mehr als 1 W ausgekoppelt wird. Please take care that with the chosen coupling not more than 1 W appears at a port of the coupled line.				
Abmessungen (L x H) mm Dimensions (L x H) mm	148 x 98.5	150 x 92	240 x 110.5	300 x 122.5	
Gewicht Weight	0.6 kg	1.1 kg	3.5 kg	5.3 kg	


¹⁾ Bei +40 °C Umgebungstemperatur
At +40 °C ambient temperature

Übergangstecker & Meßzubehör
Adaptors & Measurement Accessories


MESSRICHTKOPPLER, FREQUENZGANGKOMPENSIERT (1...5 MESS-STELLEN)
DIRECTIONAL COUPLERS, FREQUENCY RESPONSE COMPENSATED (1...5 PROBES)

- extrem kompakte Bauform
- verwendbar in einem weiten Frequenzbereich
- variable Koppeldämpfung
- niedriges VSWR
- Messstellensignal frequenzunabhängig
- hohe Directivity
- für Innenraummontage

- extremely compact design
- suitable in a wide frequency range
- variable coupling
- low VSWR
- probe signal frequency independent
- high directivity
- for indoor application

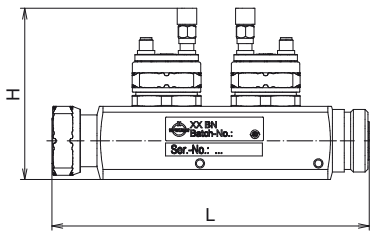

BN 80 04 68 C2002

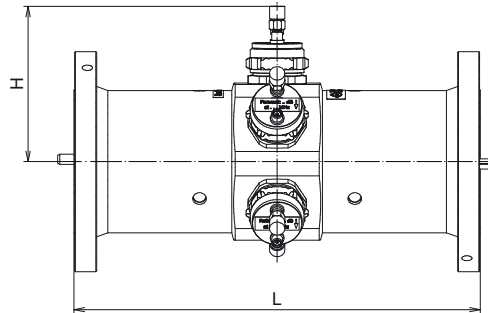

BN 80 02 65 C2005


Bestellnummer Part number	1-fach / -way 2-fach / -way 3-fach / -way 4-fach / -way 5-fach / -way	— BN 80 04 68 C2002	BN 80 08 65 C2001 BN 80 08 65 C2002 BN 80 08 65 C2003	— BN 80 02 65 C2002 BN 80 02 65 C2003 BN 80 02 65 C2004 BN 80 02 65 C2005	— BN 80 03 65 C2002 BN 80 03 65 C2003 BN 80 03 65 C2004 BN 80 03 65 C2005
Frequenzbereich Frequency range	470 - 860 MHz				
Prüfspannung auf Meereshöhe (NN) Proof voltage at sea level (NN)	≤ 3 kV	≤ 7 kV	≤ 14 kV	≤ 19 kV	
Effektive Leistung ¹⁾ Average power ¹⁾	≤ 2 kW	≤ 7 kW	≤ 23 kW	≤ 38 kW	
Kopplungsbereich Coupling range	40 - 68 dB	50 - 78 dB	54 - 80 dB	56 - 80 dB	
Variation der Koppeldämpfung Coupling variation	± 0.15 dB (bei einem VSWR < 1.02 am Anschluss der Messstelle / at VSWR < 1.02 at the probe port)				
VSWR Hauptleitung VSWR main line	≤ 1.04				
Directivity	34 - 40 dB				
Durchgangsdämpfung Insertion loss	≤ 0.05 dB				
Anschlüsse Hauptleitung Connectors main line	7-16 Stecker/Kuppler 7-16 male/female	1 5/8" EIA female/female	3 1/8" EIA female/female	4 1/2" EIA female/female 339 IEC 50-105	
Anschlüsse gekoppelte Leitung Connectors coupled line	SMA Kuppler SMA female				
Abschlusswiderstand 1W incl. Termination load 1 W incl.	Die Koppeldämpfung ist so zu wählen, dass an keinem Anschluss der gekoppelten Leitung mehr als 1 W ausgekoppelt wird. Please take care that with the chosen coupling not more than 1 W appears at a port of the coupled line.				
Abmessungen (L x H) mm Dimensions (L x H) mm	148 x 98.5	150 x 92	240 x 110.5	300 x 122.5	
Gewicht Weight	0.6 kg	1.1 kg	3.5 kg	5.3 kg	

¹⁾ Bei +40 °C Umgebungstemperatur
At +40 °C ambient temperature

MESSMITTEL ZUBEHÖR
MEASUREMENT ACCESSORIES

- Kalibrier Kits erhöhen die Genauigkeit von Messungen (Directivity, Rückflusdämpfung, Einfügedämpfung)
- Präzisions-Übergänge haben verbesserte Oberflächen für viele Steckvorgänge
- Präzisions-Übergänge haben keine O-Ringe und sind besser handhabbar
- Offene Eingänge sollten mit Präzisions-Widerständen abgeschlossen werden, um Messfehler durch Reflexionen zu vermeiden
- Calibration kits increase the accuracy of measurements (directivity, return loss, insertion loss)
- Precision adaptors have improved surfaces for many mating cycles
- Precision adaptors have no O-rings for quicker handling
- Open ports should be terminated by precision loads to avoid measurement errors by reflections

Product	Description	Part number
4-1 OSLT calibration kit 50 Ω 7-16 female 0 ≤ f ≤ 6 GHz incl. test report	For calibrating directly on 7-16 male connectors. Includes all required standards for multiport calibration (open, short, load & thru) in one compact unit.	BN 53 38 45
4-1 OSLT calibration kit 50 Ω N female 0 ≤ f ≤ 6 GHz incl. test report	For calibrating directly on N-male connectors. Includes all required standards for multiport calibration (open, short, load & thru) in one compact unit.	BN 53 38 43
Precision measurement adapter 7-16 male / N female 0 ≤ f ≤ 7.5 GHz incl. test report	Hard wearing center conductor, gold plated, for highest durability. For measurement use with improved surfaces for many cycles. return loss 0 - 3.0 GHz > 40 dB 0 - 7.5 GHz > 36 dB	BN 19 44 03
Measurement cable SUCOTEST 3.0 m N male / N male 0 ≤ f ≤ 18 GHz	For harsh environments and many mating cycles. return loss 0 - 2 GHz > 30 dB 0 - 18 GHz > 19 dB	BN A7 36 22
Measurement cable SF3/8" 4.5 m 7-16 male / 7-16 male 0 ≤ f ≤ 2.2 GHz	For intermodulation measurements IM3 ≤ -160 dBc with 2 x 20 W return loss 0 - 0.9 GHz > 32 dB 0 - 2.2 GHz > 28 dB	BN J5 00 04
Precision load 1 W 7-16 male 0 ≤ f ≤ 5 GHz	For termination of open 7-16 female ports. return loss 0 - 1 GHz > 40 dB 0 - 5 GHz > 26 dB	BN 19 36 90
Precision load 1 W N male 0 ≤ f ≤ 5 GHz	For termination of open N female ports. return loss 0 - 1 GHz > 40 dB 0 - 5 GHz > 26 dB	BN 39 24 90
Attenuator 5 W / 10 dB N male / N female 0 ≤ f ≤ 12 GHz	To protect test equipment from unknown high power signals. Recommended for measurements on high power transmitter sites. return loss 0 - 4 GHz > 23 dB 0 - 12 GHz > 15 dB	BN 52 86 26
Attenuator 5 W / 20 dB N male / N female 0 ≤ f ≤ 12 GHz	To protect test equipment from unknown high power signals. Recommended for measurements on high power transmitter sites. return loss 0 - 4 GHz > 23 dB 0 - 12 GHz > 15 dB	BN 52 86 27



Übergangsstecker & Meßzubehör
Adaptors & Measurement Accessories



ABSCHLUSSWIDERSTÄNDE LOADS

Abschlusswiderstände werden in vielen Rundfunkbereichen benötigt und typischerweise als Brückenabsorber für 3 dB Koppler oder als Kunstantennen für Testzwecke verwendet. Bis zu einer effektiven Leistung von 2,5 kW reicht zur Kühlung die natürliche Luftkonvektion (Ausnahme: Widerstände ohne Kühlkörper müssen geeignet gekühlt werden). Abschlusswiderstände für 2,5 kW und 5 kW sind mit Lüftern ausgerüstet, für die ein 1-phasiger 230V ± 10 %, 50/60 Hz Netzanschluss benötigt wird. Die 10 kW, 20 kW und 30 kW Modelle sind mit einem Flüssigkeits-Kühlsystem mit integriertem Flüssigkeits-Luft-Wärmetauscher inklusive Gebläse ausgestattet. Die Stromversorgung erfolgt über einen 3-phasigen 400V ± 5 %, 50/60Hz Netzanschluss. Alle Abschlusswiderstände mit Netzanschluss verfügen über Sensoren für eine Interlockschleife.

Alle Abschlusswiderstände sind für Innenraummontage vorgesehen (IP40).

Unsere Abschlusswiderstände sind mindestens bis zu einer Umgebungstemperatur von +40 °C mit der angegebenen effektiven Leistung belastbar, wo es sinnvoll ist, haben wir für höhere Umgebungstemperaturen Derating-Kurven abgebildet.

- Rote Kurve: zeigt die zulässige maximale Belastung sowie Richtwerte für die Oberflächentemperatur in Abhängigkeit von der Umgebungstemperatur. Der Temperaturverlauf zwischen den angegebenen Oberflächentemperaturen ist monoton. Die Oberflächentemperatur kann je nach Leistungsklasse an den heißesten Stellen bis zu +180 °C erreichen.
- Blaue Kurve: zeigt Richtwerte für die zulässige maximale Belastung in Abhängigkeit von der Umgebungstemperatur bei einer Oberflächentemperatur von circa +80 °C.
- Grüne Kurve: zeigt Richtwerte für die zulässige maximale Belastung in Abhängigkeit von der Umgebungstemperatur bei einer Oberflächentemperatur von circa +60 °C.

Alle Angaben gelten für einen Normaldruck von circa 1.000 hPa und einer relativen Luftfeuchtigkeit von 50 % auf Meereshöhe.

Loads are needed in many Broadcast applications and are typically used as balancing loads for the isolated port of directional couplers or as dummy loads for testing purposes. The loads with a power handling of up to 2.5 kW (average) are designed for normal convection cooling (exception: loads without heat sink must be cooled appropriately).

The 2.5 kW and 5 kW loads have an integrated blower for forced air cooling and operate with a single phase 230V ± 10 %, 50/60 Hz mains connection. Our 10 kW, 20 kW and 30 kW loads have an integrated liquid coolant system with a liquid-air heat exchanger including a blower.

The power is provided by a 3 phase 400V ± 5 %, 50/60 Hz connection. SPINNER loads with a mains connection are equipped with sensors for an interlock-loop.

All loads are designed for indoor application (IP40).

Our loads are specified for full power at ambient temperatures of at least +40 °C, for higher ambient temperatures power derating curves are supplied, when prudent.

- Red curve: shows the maximal permissible power handling and reference values for the surface temperature over ambient temperature. The temperature behaviour between given surface temperatures is monotonic. Depending on the power range, the surface temperature can reach up to +180 °C at the hottest spots.
- Blue curve: shows reference values for power handling over ambient temperature with a surface temperature of approximately +80 °C.
- Green curve: shows reference values for power handling over ambient temperature with a surface temperature of approximately +60 °C.

The given data is valid for a normal air pressure of approx. 1,000 hPa and a relative air humidity of 50 % at sea level.

KOAXIALE ABSCHLUSSWIDERSTÄNDE

COAXIAL LOADS

KONVEKTIONSGEKÜHLT

CONVECTION COOLED

Frequenzbereich Frequency range	Effektive Leistung Average power
0 - 5 GHz	≤ 1 W
0 - 7 GHz	≤ 5 W
0 - 7 GHz	≤ 10 W
0 - 7 GHz	≤ 25 W
0 - 860 MHz	≤ 50 W
0 - 860 MHz	≤ 100 W
0 - 860 MHz	≤ 200 W
0 - 860 MHz	≤ 400 W
0 - 860 MHz	≤ 600 W
0 - 860 MHz	≤ 1.0 kW
0 - 4476 MHz	≤ 1.6 kW
0 - 860 MHz	≤ 2.0 kW
0 - 860 MHz	≤ 2.5 kW

KONVEKTIONSGEKÜHLT, OHNE KÜHLKÖRPER

CONVECTION COOLED, WITHOUT HEAT SINK

Frequenzbereich Frequency range	Effektive Leistung Average power
0 - 860 MHz	≤ 625 W
0 - 860 MHz	≤ 1.25 kW
0 - 860 MHz	≤ 2.5 kW

ZWANGSLUFTKÜHLUNG

FORCED AIR COOLING

Frequenzbereich Frequency range	Effektive Leistung Average power
0 - 860 MHz	≤ 2.5 kW
0 - 860 MHz	≤ 5.0 kW

FLÜSSIGKEITS-ZWANGSLUFTGEKÜHLT

LIQUID-FORCED AIR COOLING

Frequenzbereich Frequency range	Effektive Leistung Average power
0 - 860 MHz	≤ 10 kW
0 - 860 MHz	≤ 20 kW
0 - 860 MHz	≤ 30 kW

FLÜSSIGKEITSGEKÜHLT, OHNE WÄRMETAUSCHER


LIQUID COOLED, WITHOUT HEAT EXCHANGER

Frequenzbereich Frequency range	Effektive Leistung Average power
0 - 860 MHz	≤ 38 kW
0 - 860 MHz	≤ 45 kW

1 W ABSCHLUSSWIDERSTÄNDE
1 W LOADS

- konvektionsgekühlt
- bleifrei
- BeO-frei
- kompakt
- für Innenraummontage

- convection-cooled
- lead-free
- BeO-free
- compact
- for indoor application

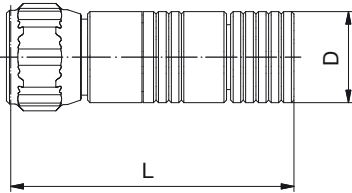


Bestellnummer Part number	BN 39 24 90	BN 19 36 90
Frequenzbereich Frequency range	$0 \leq f \leq 5 \text{ GHz}$	
VSWR	$0 \leq f \leq 1 \text{ GHz}$ $1 \leq f \leq 3 \text{ GHz}$ $3 \leq f \leq 5 \text{ GHz}$	≤ 1.02 ≤ 1.06 ≤ 1.10
Effektive Leistung Average power	$\leq 1 \text{ W}$	
Prüfspannung Proof voltage	$\leq 50 \text{ V}$	
Anschlüsse Connectors	N Stecker N male	7-16 Stecker 7-16 male
Umgebungstemperatur Ambient temperature	$-40 \text{ °C} \leq \vartheta \leq +60 \text{ °C}$	
Abmessungen (L x D) mm Dimensions (L x D) mm	56 x 18	44 x 18
Gewicht Weight	ca. 80 g	ca. 120g
Einbaulage Operation position	beliebig any	

5 W, 10 W ABSCHLUSSWIDERSTÄNDE
5 W, 10 W LOADS

- konvektionsgekühlt
- bleifrei
- kompakt
- für Innenraummontage



- convection-cooled
- lead-free
- compact
- for indoor application



Bestellnummer Part number	BN 53 17 27	BN 53 17 12	BN 53 12 21	BN 53 12 25
Frequenzbereich Frequency range	0 ≤ f ≤ 7 GHz			
VSWR	0 ≤ f ≤ 1 GHz 1 ≤ f ≤ 2 GHz 2 ≤ f ≤ 5 GHz 5 ≤ f ≤ 7 GHz		≤ 1.06 ≤ 1.11 ≤ 1.17 ≤ 1.22	
Effektive Leistung Average power	≤ 5 W ^{2.1)}		≤ 10 W ^{2.2)}	
Prüfspannung Proof voltage	≤ 1000 V			
Anschlüsse Connectors	N Stecker N male	7-16 Stecker 7-16 male	N Stecker N male	7-16 Stecker 7-16 male
Umgebungstemperatur Ambient temperature	-40 °C ≤ θ ≤ +40 °C ^{2.1/2.2)}			
Abmessungen (L x D) mm Dimensions (L x D) mm	35.5 x 24	26.3 x 24	44.5 x 40	35.3 x 40
Gewicht Weight	ca. 40 g	ca. 100 g	ca. 80 g	ca. 130 g
Einbaulage Operation position	beliebig any			

¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
Measuring point for surface temperature, see drawing


²⁾ Die Anschlussleistung reduziert sich bei steigender Umgebungstemperatur wie folgt
The maximum power handling is reduced with rising ambient temperatures as follows

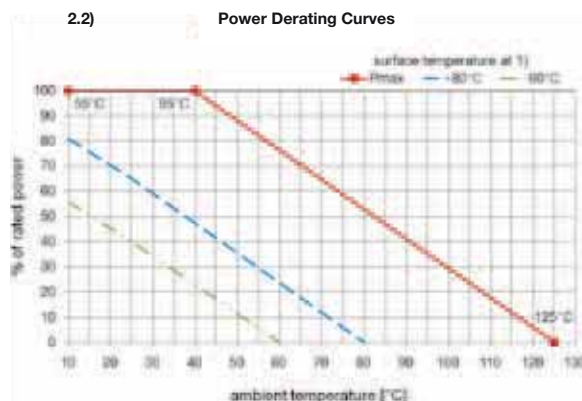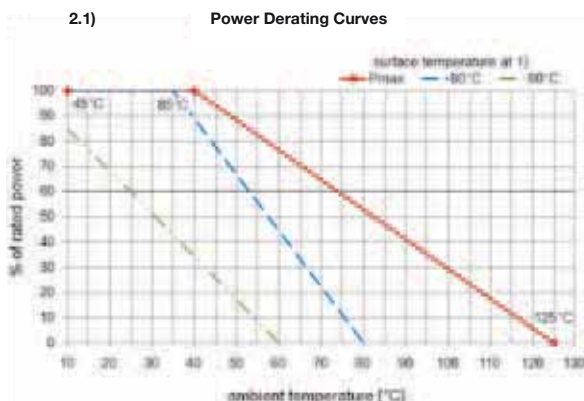

25 W ABSCHLUSSWIDERSTÄNDE
25 W LOADS


- konvektionsgekühlt
- bleifrei
- kompakt
- für Innenraummontage

- convection-cooled
- lead-free
- compact
- for indoor application



Bestellnummer Part number	BN 52 77 57			
Frequenzbereich Frequency range	$0 \leq f \leq 1$ GHz	$1 < f \leq 2$ GHz	$2 < f \leq 5$ GHz	$5 < f \leq 7$ GHz
VSWR	≤ 1.06	≤ 1.11	≤ 1.17	≤ 1.22
Effektive Leistung Average power	≤ 25 W ²⁾			
Prüfspannung Proof voltage	≤ 1000 V			
Anschlüsse Connectors	7-16 Stecker 7-16 male			
Umgebungstemperatur Ambient temperature	-40 °C $\leq \vartheta \leq +40$ °C ²⁾			
Abmessungen (L x D) mm Dimensions (L x D) mm	63.3 x 40			
Gewicht Weight	ca. 200 g			
Einbaulage Operation position	beliebig any			


¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
Measuring point for surface temperature, see drawing
²⁾ Die Anschlussleistung reduziert sich bei steigender Umgebungstemperatur wie folgt
The maximum power handling is reduced with rising ambient temperatures as follows

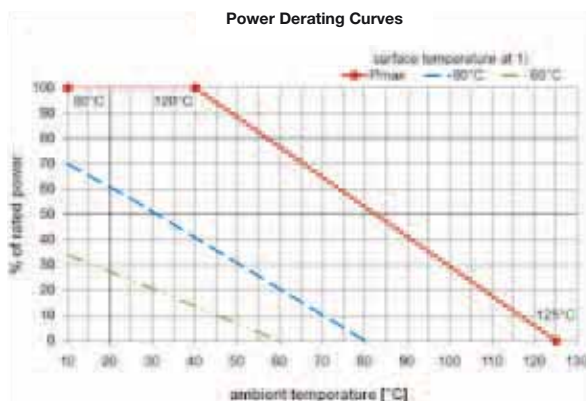

50 W ABSCHLUSSWIDERSTÄNDE
50 W LOADS


- konvektionsgekühlt
- bleifrei
- kompakt
- für Innenraummontage

- convection-cooled
- lead-free
- compact
- for indoor application

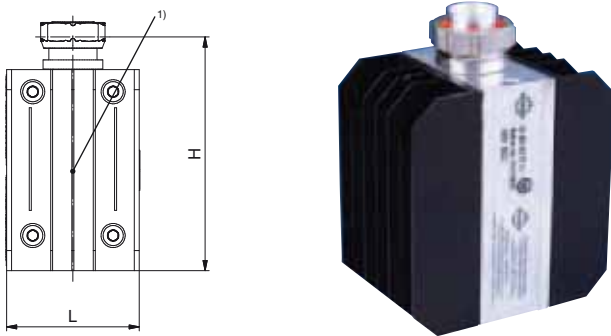

Bestellnummer Part number	BN 53 77 11
Frequenzbereich Frequency range	$0 \leq f \leq 860 \text{ MHz}$
VSWR	≤ 1.06
Effektive Leistung Average power	$\leq 50 \text{ W}^{2)}$
Prüfspannung Proof voltage	$\leq 1200 \text{ V}$
Anschlüsse Connectors	7-16 Stecker 7-16 male
Umgebungstemperatur Ambient temperature	$-40 \text{ °C} \leq \vartheta \leq +40 \text{ °C}^{2)}$
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm	66 x 93 x 116
Gewicht Weight	ca. 1.0 kg
Einbaulage Operation position	Kühlrippen senkrecht Cooling fins vertically


¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
Measuring point for surface temperature, see drawing
²⁾ Die Anschlussleistung reduziert sich bei steigender Umgebungstemperatur wie folgt
The maximum power handling is reduced with rising ambient temperatures as follows

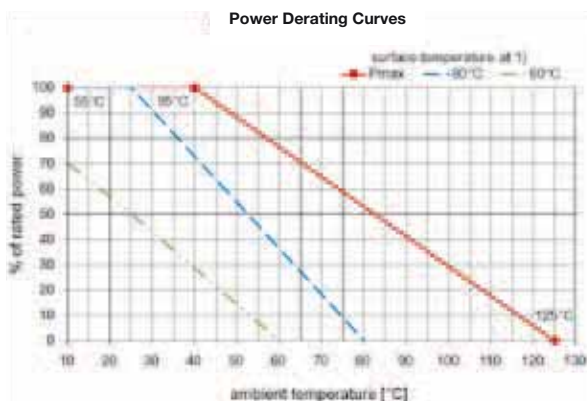

100 W ABSCHLUSSWIDERSTÄNDE
100 W LOADS


- konvektionsgekühlt
- bleifrei
- kompakt
- für Innenraummontage

- convection-cooled
- lead-free
- compact
- for indoor application



Bestellnummer Part number	BN 53 77 21	BN 53 77 20
Frequenzbereich Frequency range	0 ≤ f ≤ 860 MHz	
VSWR	≤ 1.06	
Effektive Leistung Average power	≤ 100 W ²⁾	
Prüfspannung Proof voltage	≤ 1200 V	
Anschlüsse Connectors	7-16 Stecker 7-16 male	7-16 Kuppler 7-16 female
Umgebungstemperatur Ambient temperature	-40 °C ≤ θ ≤ +40 °C ²⁾	
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm	66 x 113 x 123.9	66 x 113 x 119.8
Gewicht Weight	ca. 1.2 kg	
Einbaulage Operation position	Kühlrippen senkrecht Cooling fins vertically	


¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
Measuring point for surface temperature, see drawing
²⁾ Die Anschlussleistung reduziert sich bei steigender Umgebungstemperatur wie folgt
The maximum power handling is reduced with rising ambient temperatures as follows

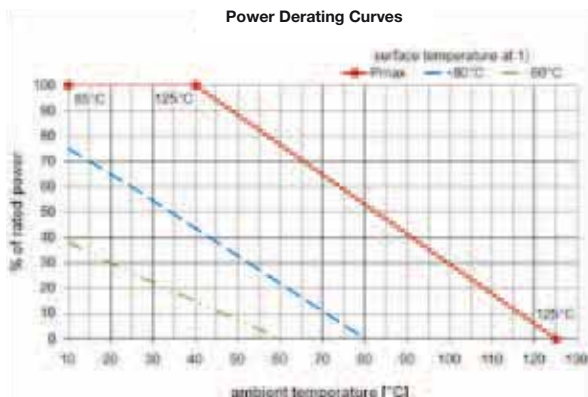

200 W ABSCHLUSSWIDERSTÄNDE
200 W LOADS

- konvektionsgekühlt
- bleifrei
- kompakt
- für Innenraummontage


- convection-cooled
- lead-free
- compact
- for indoor application

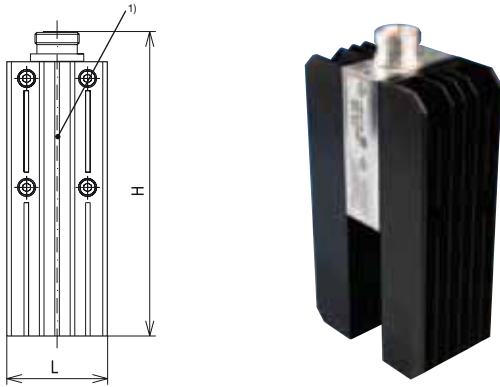

Bestellnummer Part number	BN 53 77 30
Frequenzbereich Frequency range	$0 \leq f \leq 860 \text{ MHz}$
VSWR	≤ 1.06
Effektive Eingangsleistung Average input	$\leq 200 \text{ W}^{2)}$
Prüfspannung Proof voltage	$\leq 1200 \text{ V}$
Anschlüsse Connectors	7-16 Kuppler 7-16 female
Umgebungstemperatur Ambient temperature	$-40 \text{ °C} \leq \vartheta \leq +40 \text{ °C}^{2)}$
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm	66 x 113 x 219.9
Gewicht Weight	ca. 2 kg
Einbaulage Operation position	Kühlrippen senkrecht Cooling fins vertically

¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
Measuring point for surface temperature, see drawing


²⁾ Die Anschlussleistung reduziert sich bei steigender Umgebungstemperatur wie folgt
The maximum power handling is reduced with rising ambient temperatures as follows

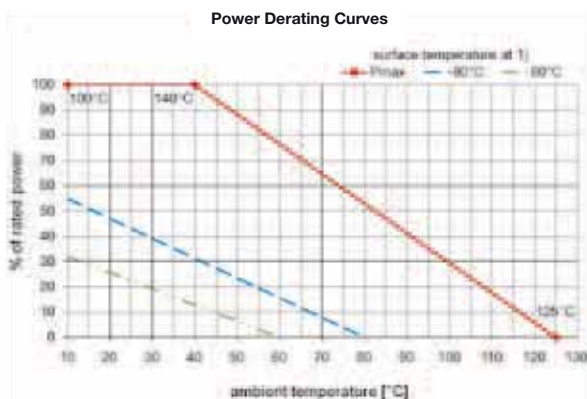

400 W, 600 W, 1 kW, 2 kW ABSCHLUSSWIDERSTÄNDE
 400 W, 600 W, 1 kW, 2 kW LOADS


- konvektionsgekühlt
- bleifrei
- kompakt
- für Innenraummontage

- convection-cooled
- lead-free
- compact
- for indoor application

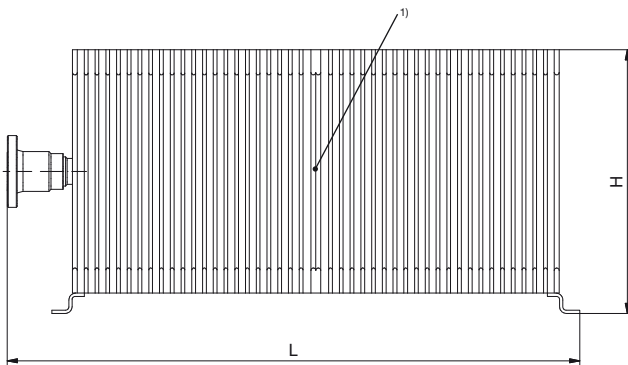


Bestellnummer Part number	BN 53 77 40	BN 53 77 50	BN 53 77 61	BN 53 77 70
Frequenzbereich Frequency range	0 ≤ f ≤ 860 MHz			
VSWR	≤ 1.06			
Effektive Leistung Average power	≤ 400 W ²⁾	≤ 600 W ²⁾	≤ 1 kW ²⁾	≤ 2 kW ²⁾
Prüfspannung Proof voltage	≤ 1.2 kV	≤ 2 kV		≤ 2 kV
Anschlüsse Connectors	7-16 Kuppler 7-16 female			1 5/8" EIA
Umgebungstemperatur Ambient temperature	-40 °C ≤ θ ≤ +40 °C ²⁾			
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm	269 x 113 x 275	289 x 113 x 325	340 x 199 x 325	706 x 210 x 325
Gewicht Weight	ca. 5 kg	ca. 6 kg	ca. 14 kg	ca. 32 kg
Einbaulage Operation position	Kühlrippen senkrecht Cooling fins vertically			

¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
 Measuring point for surface temperature, see drawing
²⁾ Die Anschlussleistung reduziert sich bei steigender Umgebungstemperatur wie folgt
 The maximum power handling is reduced with rising ambient temperatures as follows

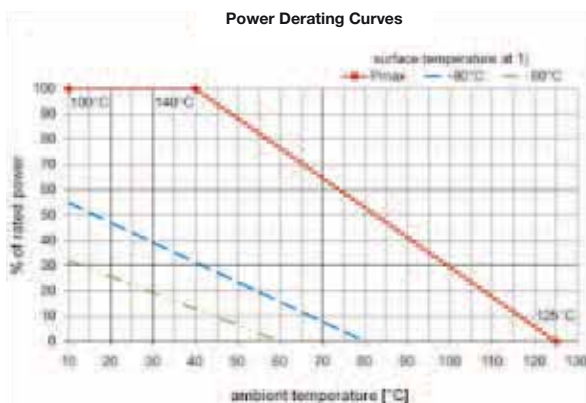

2,5 kW ABSCHLUSSWIDERSTÄNDE
2.5 kW LOADS


- konvektionsgekühlt
- bleifrei
- kompakt
- für Innenraummontage
- convection-cooled
- lead-free
- compact
- for indoor application

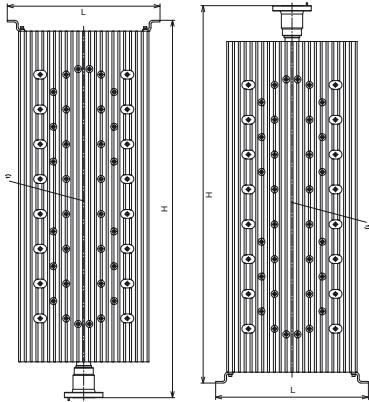

Bestellnummer Part number	BN 53 77 94
Frequenzbereich Frequency range	$0 \leq f \leq 860 \text{ MHz}$
VSWR	≤ 1.10
Effektive Leistung Average power	$\leq 2.5 \text{ kW}^{2)}$
Prüfspannung Proof voltage	$\leq 2.5 \text{ kV}$
Anschlüsse Connectors	1 5/8"EIA
Umgebungstemperatur Ambient temperature	$-40 \text{ }^\circ\text{C} \leq \vartheta \leq +40 \text{ }^\circ\text{C}^{2)}$
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm	300 x 215 x 843
Gewicht Weight	ca. 32 kg
Einbaulage Operation position	Kühlrippen senkrecht Cooling fins vertically

¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
Measuring point for surface temperature, see drawing
²⁾ Die Anschlussleistung reduziert sich bei steigender Umgebungstemperatur wie folgt
The maximum power handling is reduced with rising ambient temperatures as follows

Power Derating Curves

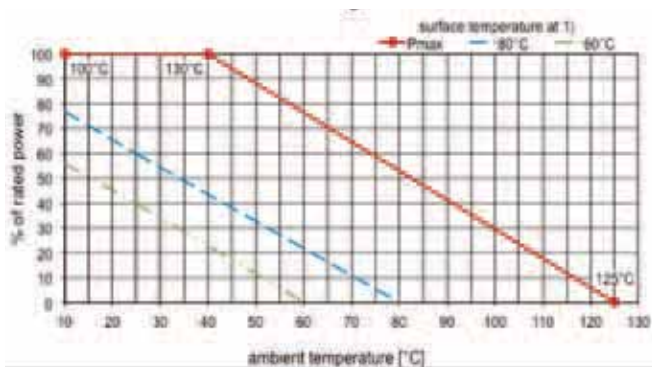


1,6 kW ABSCHLUSSWIDERSTÄNDE

1.6 kW LOADS


- für Oberwellenmessung
- konvektionsgekühlt
- bleifrei
- kompakt
- für Innenraummontage

- for harmonic measurement
- convection-cooled
- lead-free
- compact
- for indoor application

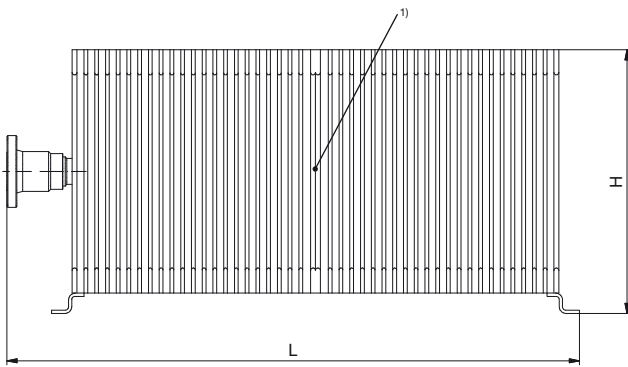

Bestellnummer Part number	BN 53 77 79			
Frequenzbereich Frequency range	$0 \leq f \leq 860 \text{ MHz}$	$1452 \leq f \leq 1492 \text{ MHz}$	$2904 \leq f \leq 2984 \text{ MHz}$	$4356 \leq f \leq 4476 \text{ MHz}$
VSWR	≤ 1.15	≤ 1.10	≤ 1.90	≤ 1.90
Effektive Eingangsleistung Average input	$\leq 1.6 \text{ kW}^2$			
Prüfspannung Proof voltage	$\leq 1.5 \text{ kV}$			
Anschlüsse Connectors	1 5/8" EIA			
Umgebungstemperatur Ambient temperature	$-40 \text{ °C} \leq \vartheta \leq +40 \text{ °C}^2$			
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm	706 x 210 x 325			
Gewicht Weight	ca. 32 kg			
Einbaulage Operation position	Kühlrippen senkrecht Cooling fins vertically			

¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
Measuring point for surface temperature, see drawing
²⁾ Die Anschlussleistung reduziert sich bei steigender Umgebungstemperatur wie folgt
The maximum power handling is reduced with rising ambient temperatures as follows


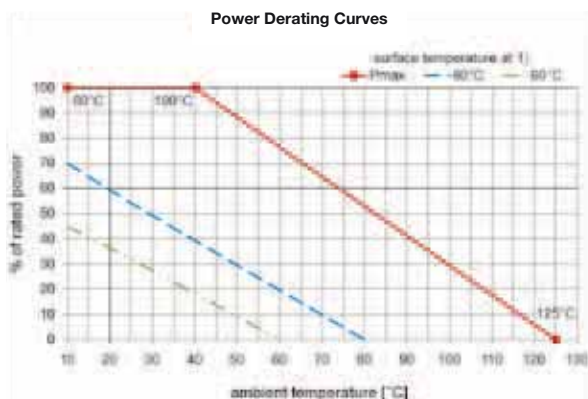


625 W, 1,25 kW, 2,5 kW ABSCHLUSSWIDERSTÄNDE

625 W, 1.25 kW, 2.5 kW LOADS

- ohne Kühlkörper
- zur Montage auf Kühlsysteme
- bleifrei
- kompakt
- für Innenraummontage

- without heat sink
- for installation on cooling systems
- lead-free
- compact
- for indoor application

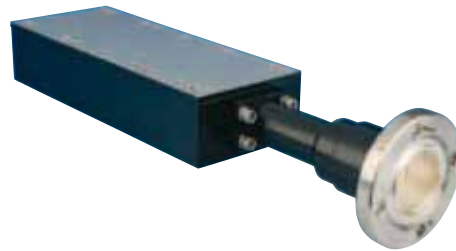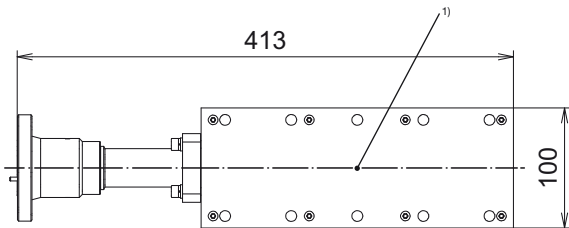



Bestellnummer Part number	BN 53 77 01	BN 53 77 02	BN 15 53 61
Frequenzbereich Frequency range	0 ≤ f ≤ 860 MHz		
VSWR	≤ 1.06		≤ 1.10
Effektive Leistung Average power	≤ 625 W	≤ 1.25 kW	≤ 2.5 kW
Prüfspannung Proof voltage	≤ 2 kV		
Anschlüsse Connectors	7-16 Kuppler 7-16 female		1 5/8" EIA
Deckeltemperatur Temperature of cover	≤ 110 °C ¹⁾		
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm	202 x 33 x 66	232 x 33 x 80	413 x 54 x 100
Gewicht Weight	ca. 1 kg	ca. 1.2 kg	ca. 4.3 kg
Einbaulage Operation position	beliebig any		

¹⁾ Messpunkt für Oberflächentemperatur, siehe Zeichnung
Measuring point for surface temperature, see drawing

¹⁾ Auf geeignetes Kühlsystem montieren, die Deckeltemperatur an Messpunkt 1) darf 110 °C nicht übersteigen
Mount on appropriate cooling, system, the surface temperature at measuring point 1) may not exceed 110 °C

2,5 kW, 5 kW ABSCHLUSSWIDERSTÄNDE - AKTIV GEKÜHLT
 2.5 kW, 5 kW LOADS - ACTIVE COOLED

- Zwangsluftkühlung
 - bleifrei
 - kompakt
 - für Innenraummontage
 - mit einem potentialfreien Interlock-Kontakt
- Forced air cooling
 - lead-free
 - compact
 - for indoor application
 - with an potential-free interlock contact





Bestellnummer Part number	BN 53 42 87	BN 53 42 64	BN 53 42 65
Frequenzbereich Frequency range	0 ≤ f ≤ 860 MHz		
VSWR	≤ 1.11		
Effektive Leistung Average power	≤ 2.5 kW	≤ 5 kW	
Prüfspannung Proof voltage	≤ 2.5 kV		
Anschlüsse Connectors	1 5/8" EIA		
Umgebungstemperatur Ambient temperature	-15 °C ≤ θ ≤ +45 °C		
Lagertemperatur Storage temperature	-30 °C ≤ θ ≤ +85 °C		
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm	502 x 270 x 465	964 x 270 x 465	
Gewicht Weight	ca. 43 kg	ca. 60 kg	
Einbaulage Operation position	stehend (wie dargestellt) upright (as shown)		
Stromversorgung Power requirements	230V ± 10 %, 50/60Hz L,N,PE		
Leistungsaufnahme Power consumption	ca. 140 W	ca. 270 W	
Potentialfreier Interlock-Kontakt Potential-free interlock-contact	SELV acc. DIN EN 60950-1 max. 42.4 V ACpk / 60 V DC		
Schalldruckpegel Noise level	ca. 70 dB(A)		
Eingehaltene Normen Standards	EN 12100-1, EN 12100-2 EN 60950-1		
Zwangsluftkühlung Forced air cooling	permanent		Temperaturgesteuert temperature-controlled

10 kW, 20 kW, 30 kW ABSCHLUSSWIDERSTÄNDE
 10 kW, 20 kW, 30 kW LOADS

- Flüssigkeits-Zwangsluft gekühlt
- bleifrei
- kompakt
- für Innenraummontage
- mit einem potentialfreien Interlock-Kontakt

- Liquid-Forced air cooling
- lead-free
- compact
- for indoor application
- with an potential free interlock contact

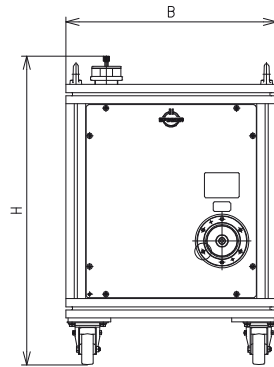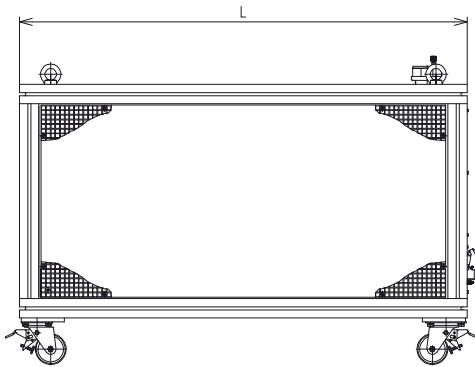

Bestellnummer Part number	50 Hz mains 60 Hz mains	BN 54 64 50 BN 54 64 50 C0001	BN 54 64 60 -	BN 54 64 70 BN 54 64 70 C0001
Frequenzbereich Frequency range	0 ≤ f ≤ 860 MHz			
VSWR	0 ≤ f ≤ 108 MHz 108 < f ≤ 470 MHz 470 < f ≤ 860 MHz 0 ≤ f ≤ 860 MHz		≤ 1.04 ≤ 1.04 ≤ 1.04 ≤ 1.08	
Effektive Eingangsleistung Average input		≤ 10 kW	≤ 20 kW	≤ 30 kW ¹⁾
Prüfspannung Proof voltage		≤ 14 kV		
Anschlüsse Connectors		3 1/8" EIA ²⁾		
Umgebungstemperatur Ambient temperature		-15 °C ≤ θ ≤ +45 °C		
Lagertemperatur Storage temperature		-35 °C ≤ θ ≤ +85 °C		
Abmessungen (L x B x H) mm Dimensions (L x B x H) mm		760 x 540 x 789	1150 x 540 x 789	1150 x 660 x 789
Gewicht Weight		ca. 100 kg	ca. 110 kg	ca. 115 kg
Stromversorgung Power requirements		3~ +PE 400V ± 5 %, 50 Hz or 60 Hz depending on model		
Leistungsaufnahme Power consumption		ca. 1.2 kW	ca. 1.4 kW	ca. 1.4 kW
Potentialfreier Interlock-Kontakt Potential-free interlock-contact		SELV acc. DIN EN 60950-1 max. 42.4 V ACpk / 60 V DC		
Schalldruckpegel Noise level		ca. 74 dB (A)		
Kühlmedium Coolant		SPINNER Kühlflüssigkeit SPINNER cooling liquid	Bestellung unter BN 15 45 67 (25 l Kanister) Order with BN 15 45 67 (25 l canister)	



¹⁾ Für ≥ 23 kW @ 470 - 860 MHz muss ein Übergang auf 4 1/2" EIA (339 IEC 50-105) verwendet werden. Hierzu bitte Übergang **BN 71 50 00** und Kupplungselement **BN 91 87 10** separat bestellen
 For ≥ 23 kW @ 470 - 860 MHz an adapter to 4 1/2" EIA (339 IEC 50-105) must be used. Please order separately adapter **BN 71 50 00** and coupling element **BN 91 87 10**

²⁾ Bitte beachten: 3 1/8" Flansch hat Gewinde M10 (keine Bohrung Ø 10,6 mm), Kurzübergänge mit Stehbolzen können nicht verwendet werden
 Please note: 3 1/8" flange with thread M10 (no drill hole Ø 10.6 mm), short adaptors with stay bolts cannot be used

38 kW ABSCHLUSSWIDERSTÄNDE
38 kW LOADS

- Flüssigkeitsgekühlt
- bleifrei
- kompakt
- für Innenraummontage
- BeO frei

- Liquid cooling
- lead-free
- compact
- for indoor application
- BeO free

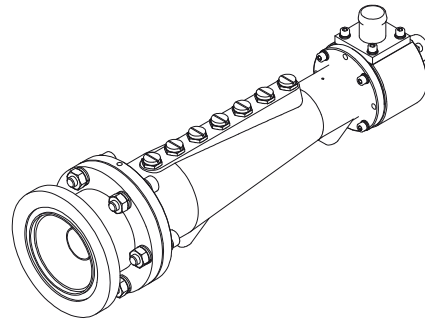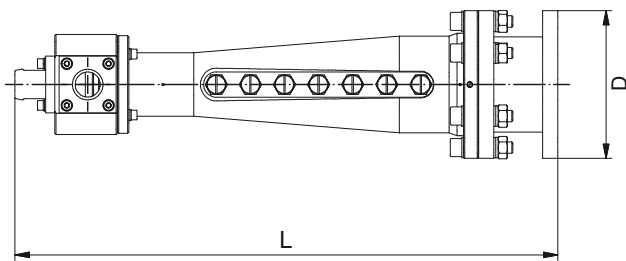



Bestellnummer Part number		BN 10 73 25	BN 54 64 00
Frequenzbereich Frequency range		0 ≤ f ≤ 860 MHz	
VSWR	0 ≤ f ≤ 108 MHz	≤ 1.04	
	108 ≤ f ≤ 470 MHz	≤ 1.04	
	470 ≤ f ≤ 860 MHz	≤ 1.04	
	0 ≤ f ≤ 860 MHz	≤ 1.08	
Effektive Eingangsleistung Average input		≤ 38 kW ¹⁾	≤ 45 kW
Prüfspannung Proof voltage		≤ 14 kV	≤ 20 kV
Anschlüsse Connectors		3 1/8" EIA (max. 23 kW @ 860 MHz)	6 1/8" EIA
Eintrittstemperatur Input temperature of coolant		max. 45 °C	
Kühlmedium Coolant		SPINNER Kühlflüssigkeit SPINNER cooling liquid	Bestellung unter BN 15 45 67 (25 l Kanister) Order with BN 15 45 67 (25 l canister)
Kühlflüssigkeitsdurchfluss Coolant flow rate		≥ 55 l/min	≥ 60 l/min
Kühlflüssigkeitsanschlüsse Coolant connections		Stutzen für Schlauch 1" lichte Weite Hoze nozzle for hose with 1" inner diameter	
Abmessungen (L x D) mm Dimensions (L x D) mm		3 1/8" EIA 477.8 x 130	6 1/8" EIA 543.5 x 206.5
Gewicht Weight		3 1/8" EIA ca. 7.5 kg	ca. 11.5 kg

¹⁾ für ≥ 23 kW @ 470 - 860 MHz muss ein Übergang auf 4 1/2" EIA (339 IEC 50-105) verwendet werden, bitte **BN 71 50 10** separat bestellen
for ≥ 23 kW @ 470 - 860 MHz an adapter to 4 1/2" EIA (339 IEC 50-105) must be used, please order separately **BN 71 50 10**



ENVIRONMENTAL CONDITIONS FOR BROADCAST PRODUCTS

The environmental conditions for broadcast products are applicable if not stated otherwise at the individual product page.

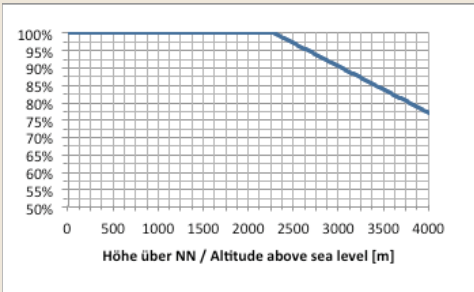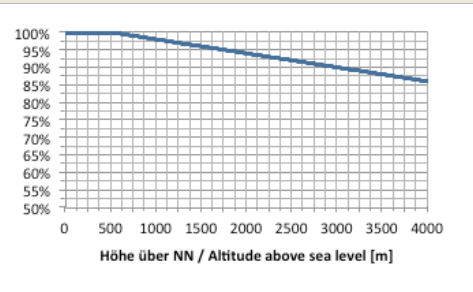Products	Combiners, Filters	Patch Panels, Switches, Coaxial Rigid Lines Components
Operational conditions	ETSI EN 300 019-1-3 V2.3.2 (2009-1) class 3.1 N	
Ambient temperature	-10 °C ≤ θ ≤ +45 °C	
Condensation	not allowed	
Relative humidity	≤ 95%	
Derating of input power with increasing altitude	 <p>The maximum input power can be applied up to 2286 m or 7500 ft above sea level unless noted otherwise in the data sheet. Above this height the maximum input power must be reduced as shown in the diagram.</p>	 <p>The maximum input power can be applied up to 500 m or 1600 ft above sea level unless noted otherwise in the data sheet. Above this height the maximum input power must be reduced as shown in the diagram.</p>
	Derating of voltage with increasing altitude	included in the derating of input power
Transport conditions	ETSI EN 300 019-1-2 V2.1.4 (2003-04) class 2.2	
Ambient temperature	-25 °C ≤ θ ≤ +70 °C	
Rain, condensation, icing	not allowed	
Storage conditions	ETSI EN 300 019-1-1 V2.1.4 (2003-04) class 1.2	
Ambient temperature	-10 °C ≤ θ ≤ +45 °C	
Rain, condensation, icing	not allowed	
Safety	EN 60215 (1994) / IEC 215 (1993)	

INDEX

Bestell-Nr.	Seite	Bestell-Nr.	Seite	Bestell-Nr.	Seite
Part number	Page	Part number	Page	Part number	Page
00 47 70.....	191	53 27 04.....	172	54 13 41.....	190
00 47 71.....	191	53 27 21.....	176	54 13 42.....	190
00 47 81.....	191	53 27 23.....	176	54 13 43.....	190
00 49 42.....	164	53 27 61.....	178	54 13 46.....	190
00 61 11.....	162	53 27 63.....	178	54 27 01.....	180
00 61 21.....	160	53 27 66.....	178	54 27 02.....	180
00 85 50.....	168	53 27 81.....	184	54 27 04.....	180
04 99 17 S012	182	53 27 83.....	184	54 27 05.....	180
07 05 51.....	189	53 27 84.....	168	54 27 20.....	180
10 73 25.....	215	53 27 89.....	184	54 27 26.....	180
15 05 97.....	189	53 42 64.....	213	54 27 42.....	174
15 16 71.....	189	53 42 65.....	213	54 27 49.....	174
15 45 67.....	119	53 42 87.....	213	54 27 62.....	170
15 53 61.....	212	53 42 92.....	139	54 27 67.....	170
15 57 29.....	119	53 65 74.....	138	54 27 68.....	160
19 36 90.....	203	53 65 80 A0300	133	54 27 69.....	170
19 64 00.....	194	53 65 81 A0300	133	54 27 79.....	170
29 37 50.....	194	53 65 82 A0300	134	54 64 00.....	215
39 09 06.....	195	53 65 83 A0300	134	54 64 50.....	214
39 24 90.....	203	53 65 84 A0300	134	54 64 50 C0001	214
39 87 18.....	187	53 65 85 A0300	135	54 64 60.....	214
49 18 18.....	187	53 65 86 A0300	135	54 64 70.....	214
51 14 00.....	190	53 77 01.....	212	54 64 70 C0001	214
51 14 11.....	190	53 77 02.....	212	54 71 71.....	122
51 14 42.....	190	53 77 11.....	206	54 71 71 C0101	122
51 14 43.....	190	53 77 20.....	207	54 71 74.....	123
51 14 44.....	190	53 77 21.....	207	54 71 74 C0102	123
51 14 45.....	190	53 77 30.....	208	55 30 31.....	130
51 14 47.....	190	53 77 40.....	209	55 30 32.....	130
51 14 57.....	190	53 77 50.....	209	55 30 48.....	130
51 14 81.....	190	53 77 61.....	209	55 30 64.....	153
51 26 63.....	156	53 77 70.....	209	55 30 65.....	153
51 26 65.....	156	53 77 79.....	211	55 31 82.....	122
51 26 90.....	147	53 77 94.....	210	55 31 82 C0101	122
51 26 97.....	148	53 85 29.....	192	55 32 26.....	123
51 26 98.....	148	53 85 40.....	192	55 32 26 C0101	123
51 67 58.....	196	53 96 13.....	130	55 32 29 C0001	125
51 67 64.....	196	53 96 27.....	130	55 32 82.....	128
52 56 23.....	192	53 96 33.....	130	55 32 83 A0200	126
52 77 57.....	205	53 96 47.....	130	55 32 84.....	127
52 81 01.....	180	53 96 48.....	130	55 32 85.....	128
52 81 17.....	182	54 01 21.....	130	55 33 31.....	130
52 81 18.....	182	54 06 42 A0200	129	55 33 32.....	130
52 81 65.....	182	54 06 43 A0200	129	55 33 48.....	130
52 92 50.....	192	54 06 52 A0200	129	55 33 64.....	154
53 12 21.....	204	54 06 52 C0001	129	55 33 65.....	154
53 12 25.....	204	54 06 58 A0200	126	55 34 31.....	122
53 17 12.....	204	54 13 17.....	190	55 34 31 C0101	122
53 17 27.....	204	54 13 18.....	190	55 34 72 A0200	126
53 27 02.....	172	54 13 34.....	190	55 35 14.....	124

INDEX

Bestell-Nr.	Seite	Bestell-Nr.	Seite	Bestell-Nr.	Seite
Part number	Page	Part number	Page	Part number	Page
55 35 14 C0101	124	57 46 43 C0002	56	57 49 28 A0010	71
55 35 67.....	125	57 46 48.....	31	57 49 29.....	25
55 35 76.....	128	57 46 55 C0002	37	57 49 31.....	36
55 35 78.....	127	57 46 62 A0000	61	57 49 32 A0010	60
55 35 79.....	128	57 46 68.....	33	57 49 33 A0010	60
55 36 11.....	130	57 46 69.....	32	57 49 34 A0000	62
55 36 12.....	130	57 46 70 A0010	69	57 49 34 A0010	62
55 36 48.....	130	57 46 71 A0010	69	57 49 35 A0000	62
55 36 64.....	155	57 46 72 A0010	61	57 49 35 A0010	62
55 36 65.....	155	57 46 73 C0002	53	57 49 36.....	34
55 38 02.....	124	57 46 75 C0002	55	57 49 37 A0010	73
55 38 02 C0101	124	57 46 76 C0002	55	57 49 38.....	34
55 38 72.....	125	57 46 77 C0002	57	57 49 39 A0010	73
55 38 81 A0200	129	57 46 78 C0002	57	57 49 40 A0010	73
55 38 81 C0001	129	57 46 80.....	24	57 49 42 C0001	54
55 38 88 A0200	126	57 46 81.....	22	57 49 42 C0002	54
57 42 26 A0010	66	57 46 84.....	23	57 49 44 C0001	56
57 42 29 A0010	66	57 46 85.....	23	57 49 44 C0002	56
57 42 30 A0010	66	57 46 86.....	35	57 49 45.....	23
57 42 81 A0010	67	57 46 87.....	35	57 49 46.....	23
57 42 83 A0010	67	57 46 90.....	30	57 49 47 A0000	62
57 42 86 A0020	67	57 46 91.....	30	57 49 47 A0010	62
57 45 82.....	40	57 46 93 A0010	70	57 49 48.....	50
57 45 83.....	40	57 46 94 A0010	70	57 49 48 C0002	50
57 45 84.....	40	57 46 95 A0010	70	57 49 49.....	50
57 45 86.....	41	57 46 96 A0020	70	57 49 49 C0002	50
57 45 87.....	41	57 46 97.....	31	57 49 50.....	51
57 45 88.....	41	57 46 98 A0010	72	57 49 50 C0002	51
57 45 89.....	41	57 49 00 A0020	71	57 49 51.....	51
57 46 03 C0001	52	57 49 01 C0001	52	57 49 51 C0002	51
57 46 03 C0002	52	57 49 01 C0002	52	57 49 61 A0000	63
57 46 04.....	24	57 49 02 A0000	60	57 49 61 A0010	63
57 46 05.....	46	57 49 04.....	24	57 49 62 A0000	63
57 46 05 C0001	46	57 49 06.....	47	57 49 62 A0010	63
57 46 05 C0002	46	57 49 06 C0001	47	57 49 63 A0000	63
57 46 06.....	47	57 49 06 C0002	47	57 49 63 A0010	63
57 46 06 C0001	47	57 49 07.....	31	57 49 64 A0010	75
57 46 06 C0002	47	57 49 11 C0003	44	57 49 65 A0010	74
57 46 10.....	38	57 49 12 C0003	44	57 49 66 A0010	74
57 46 11.....	38	57 49 13 C0003	44	57 49 67 A0010	71
57 46 12.....	39	57 49 14 C0003	44	57 49 69.....	25
57 46 13.....	39	57 49 16.....	27	57 49 70 A0010	69
57 46 17.....	24	57 49 18.....	29	57 49 71 A0010	72
57 46 34.....	36	57 49 19.....	29	57 49 73 A0010	68
57 46 35.....	36	57 49 21 C0003	45	57 49 74 A0020	72
57 46 36.....	36	57 49 22 C0003	45	57 49 74 C0002	53
57 46 37.....	36	57 49 23 C0003	45	57 49 75 A0010	68
57 46 41 C0001	54	57 49 24 C0003	45	57 49 76 A0010	68
57 46 41 C0002	54	57 49 25.....	28	57 49 79 A0020	75
57 46 43 C0001	56	57 49 27.....	25	57 49 85 A0020	68

INDEX

Bestell-Nr.	Seite	Bestell-Nr.	Seite	Bestell-Nr.	Seite
Part number	Page	Part number	Page	Part number	Page
57 49 88 A0020	73	57 55 65	42	61 66 66 C1033	109
57 49 89 A0010	75	57 55 66	43	61 66 66 C2041	109
57 49 90	29	57 55 67	43	61 66 66 C2043	109
57 49 91 A0020	74	57 55 68	43	61 66 69 C1041	114
57 49 92	30	61 63 64	84	61 66 69 C1043	114
57 49 94	26	61 63 65	84	61 66 69 C2041	114
57 49 96	26	61 63 95	118	61 66 69 C2043	114
57 55 11 A0070	58	61 64 02	100	61 66 70 C1041	115
57 55 12 A0030	58	61 64 03	101	61 66 70 C1043	115
57 55 12 A0040	58	61 64 04	104	61 66 70 C2041	115
57 55 13 A0030	58	61 64 09	110	61 66 70 C2043	115
57 55 13 A0040	58	61 64 09 C0002	110	61 71 08	89
57 55 15 A0070	59	61 64 09 C0020	110	61 71 09	89
57 55 16 A0030	59	61 64 09 C0022	110	61 71 10	88
57 55 16 A0040	59	61 64 52 C0011	118	61 71 11	88
57 55 17 A0030	59	61 65 01	95	61 71 12	90
57 55 17 A0040	59	61 65 01 C0004	95	61 71 13	90
57 55 20 A0010	64	61 65 07	94	61 71 15 C1015	85
57 55 20 A0060	64	61 65 11	116	61 71 16 C1025	85
57 55 21 A0010	64	61 65 12	116	61 71 26	92
57 55 21 A0060	64	61 65 13	116	61 71 26 C0010	92
57 55 22 A0010	64	61 65 14	116	61 71 44	86
57 55 22 A0060	64	61 65 16	117	61 71 45	86
57 55 23 A0020	64	61 65 18 C0010	106	61 71 71	86
57 55 25 A0010	65	61 65 40 C0010	112	61 71 83	87
57 55 25 A0060	65	61 65 42 C0010	107	61 71 90 C0010	91
57 55 26 A0010	65	61 65 42 C0011	107	61 71 91	93
57 55 26 A0060	65	61 65 44 C0010	113	61 71 93	93
57 55 27 A0010	65	61 65 50 C0020	112	64 00 81	149
57 55 27 A0060	65	61 65 50 C0021	112	64 00 82	149
57 55 28 A0020	65	61 65 50 C0022	112	64 06 82	194
57 55 30 A0080	76	61 65 54 C0020	113	64 86 01	166
57 55 31 A0080	76	61 65 54 C0021	113	64 86 02	166
57 55 32 A0080	76	61 65 54 C0022	113	65 67 02	187
57 55 33 A0080	76	61 65 66 C1025	98	65 82 03	187
57 55 35 A0080	78	61 65 68 C1025	99	70 40 01	166
57 55 36 A0080	78	61 65 70	111	71 19 08	187
57 55 37 A0080	78	61 65 71	111	71 50 00	194
57 55 38 A0080	78	61 65 72	105	71 55 58	187
57 55 40 A0080	77	61 66 60 C1025	96	71 55 68	187
57 55 41 A0080	77	61 66 61 C1025	97	71 55 80	187
57 55 42 A0080	77	61 66 63 C1031	102	71 55 87	187
57 55 43 A0080	77	61 66 63 C1033	102	71 55 88	187
57 55 45 A0080	79	61 66 64 C1031	103	72 34 58	187
57 55 46 A0080	79	61 66 64 C1033	103	72 34 73	187
57 55 47 A0080	79	61 66 65 C1031	108	72 34 84	187
57 55 48 A0080	79	61 66 65 C1033	108	72 34 86	187
57 55 62	42	61 66 65 C2041	108	72 89 00	194
57 55 63	42	61 66 65 C2043	108	75 40 30	146
57 55 64	42	61 66 66 C1031	109	75 40 66	146

INDEX

Bestell-Nr.	Seite	Bestell-Nr.	Seite	Bestell-Nr.	Seite
Part number	Page	Part number	Page	Part number	Page
75 40 67.....	145	91 42 00.....	194	A7 43 19.....	119
75 40 98.....	146	91 43 00.....	194	A7 43 20.....	119
80 02 64.....	196	91 75 00.....	194	B	
80 02 65 C0002.....	197	91 83 11.....	188	B0 04 73.....	192
80 02 65 C0003.....	197	91 87 10.....	188	B1 05 78.....	192
80 02 65 C0004.....	197	91 89 00.....	194	B1 08 65 C1000.....	176
80 02 65 C0005.....	197	91 93 10.....	188	B1 34 87 C1000.....	172
80 02 65 C2002.....	198	92 19 20.....	164	B1 81 00.....	119
80 02 65 C2003.....	198	92 55 25.....	187	K	
80 02 65 C2004.....	198	93 00 10.....	187	K1 96 08.....	162
80 02 65 C2005.....	198	93 00 50.....	187	K1 96 40.....	162
80 03 64.....	196	93 65 10.....	187	K2 02 01.....	172
80 03 65 C0002.....	197	93 85 20.....	162	K2 02 02.....	176
80 03 65 C0003.....	197	94 19 17.....	150	K2 02 03.....	178
80 03 65 C0004.....	197	94 19 18.....	150	K2 02 04.....	184
80 03 65 C0005.....	197	94 19 44.....	151	K2 02 06.....	180
80 03 65 C2002.....	198	94 19 89.....	152	K2 02 65.....	160
80 03 65 C2003.....	198	94 57 00.....	194	K2 08 52.....	166
80 03 65 C2004.....	198	97 06 28.....	187	K2 17 51.....	160
80 03 65 C2005.....	198	97 13 05.....	187	K2 27 70.....	164
80 04 68.....	197	97 87 18.....	187	K2 33 34.....	168
80 04 68 C2002.....	198	97 89 18.....	187	K2 40 58.....	180
80 08 29.....	196	97 91 28.....	187	K2 62 91.....	166
80 08 65 C0001.....	197	A		K2 65 68.....	168
80 08 65 C0002.....	197	A0 24 02.....	160	K2 65 69.....	164
80 08 65 C0003.....	197	A0 24 03.....	160	K3 32 21.....	182
80 08 65 C2001.....	198	A0 24 06.....	162		
80 08 65 C2002.....	198	A0 24 07.....	162		
80 08 65 C2003.....	198	A0 24 09.....	172		
80 56 00.....	194	A0 24 15.....	164		
81 80 00.....	194	A0 24 16.....	164		
82 28 10.....	188	A0 24 17.....	176		
83 71 05.....	160	A0 24 21.....	166		
83 86 03.....	187	A0 24 22.....	166		
83 91 10.....	187	A0 24 23.....	178		
84 77 10.....	195	A0 24 24.....	180		
84 77 12.....	195	A0 24 25.....	182		
85 82 10.....	187	A0 24 26.....	180		
85 99 06.....	162	A0 24 27.....	168		
87 00 03.....	164	A0 24 28.....	168		
87 11 09.....	187	A0 24 29.....	184		
87 32 08.....	168	A7 29 55.....	119		
87 66 10.....	195	A7 42 60.....	119		
87 67 06.....	195	A7 42 61.....	119		
90 25 00.....	194	A7 42 62.....	119		
90 36 00.....	194	A7 42 63.....	119		
90 83 00.....	194	A7 43 17.....	119		
90 92 00.....	194	A7 43 18.....	119		
91 17 15.....	188				
91 21 00.....	194				



NOTES

Lined area for notes, consisting of multiple horizontal lines.

SPINNER ICT, Inc.

5126 S. Royal Atlanta Drive
Tucker, GA 30084-3052

USA

tel.: +1 770 2636 326

fax: +1 770 9343 384

info-atlanta@spinner-group.com

SPINNER Austria GmbH

Triester Str. 190
1230 Wien

AUSTRIA

tel.: +43 1 66277 51

fax: +43 1 66277 5115

info-austria@spinner-group.com

**SPINNER Telecommunication
Devices Co., Ltd.**

351 Lian Yang Road
Songjiang Industrial Zone
Shanghai

201613 P.R. **CHINA**

tel.: +86 21 577 45377

fax: +86 21 577 40962

info-china@spinner-group.com

SPINNER France S.A.R.L.

1, Place du Village
Parc des Barbanniers
92632 Gennevilliers Cedex

FRANCE

tel.: +33 1 41479 600

fax: +33 1 41479 606

info-france@spinner-group.com

SPINNER Elektrotechnik OOO

Kozhevnikeskaja str. 1, bld. 1
Office 420
115114 Moscow

RUSSIA

tel.: + 7 495 6385 321

fax: + 7 495 2353 358

info-russia@spinner-group.com

SPINNER Electrotécnica S.L.

c/ Perú, 4 – Local nº 15
28230 Las Rozas (MADRID)

SPAIN

tel.: +34 91 6305 842

fax: +34 91 6305 838

info-iberia@spinner-group.com

SPINNER Nordic AB

Kråketorpsgatan 20
43153 Mölndal

SWEDEN

tel.: +46 31 7061670

fax: +46 31 7061679

info-nordic@spinner-group.com

SPINNER Middle East FZE

Jafza View 18, office 1203
Jebel Ali Free Zone
Dubai

UNITED ARAB EMIRATES

tel.: +971 4 885 7574

fax: +971 4 885 7596

info-me@spinner-group.com

SPINNER UK Ltd.

Suite 8 Phoenix House
Golborne Enterprise Park,
High Street
Golborne, Warrington
WA3 3DP

UNITED KINGDOM

tel.: +44 1942 275222

fax: +44 1942 275221

info-uk@spinner-group.com