
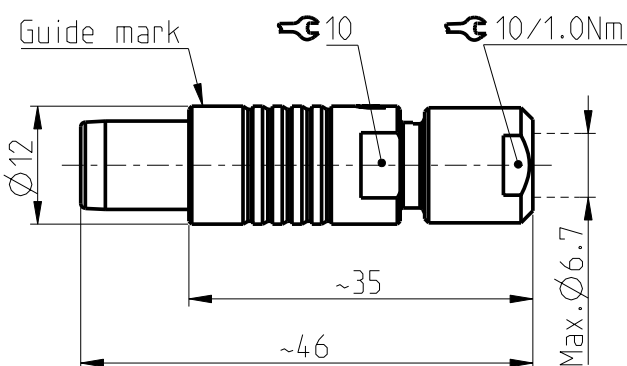


S/SC/SOV 103 Multipole Plugs

All dimensions see note 1)




S/SC

SOV

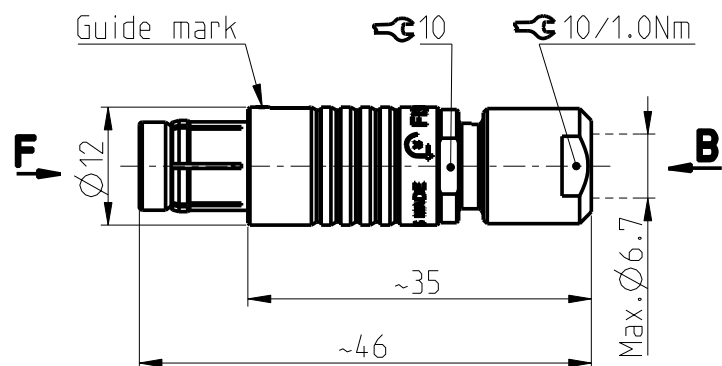

Contact polarity A

Contact polarity Z

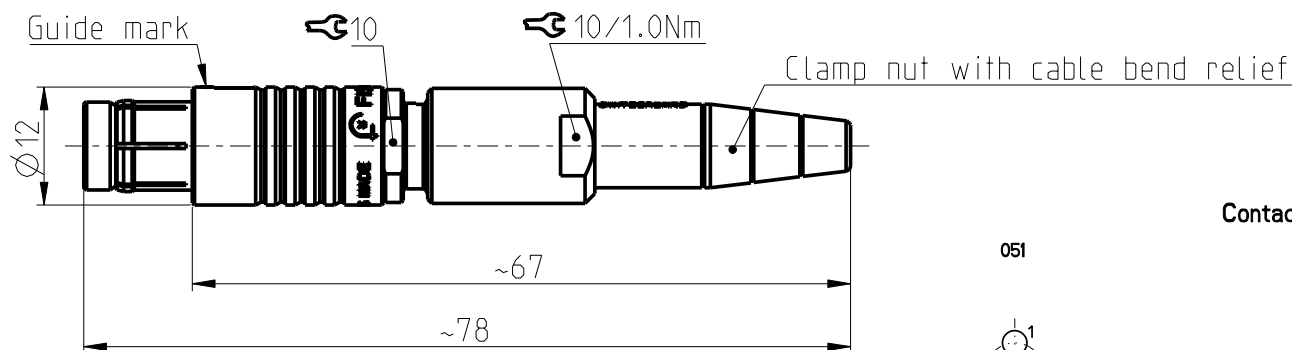




CONTACT CONFIGURATION	Contacts	Solder cup Ø		Crimp cup (2) Ø
103 A Z 051	2	1.18		1.18
103 A Z 052	3	1.18		-
103 A Z 053	4	0.79		-
103 A Z 054	5	0.79		0.80

Keying codes (View from F)

Code 1
(-1xx)


Code 2
(-2xx)

Code 3
(-3xx)




Contact configuration for polarity A (View from B)


051




052







053



054



Contact configuration for polarity Z (View from B)



All dimensions in mm

600023

Rev.

1

Pages

1/2

Notes :

1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$

2) For optimum crimping refer to available crimping manual.

Part number example : S 103 A062-130

fischer

www.fischerconnectors.com



Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

S/SC/SOV 103 Multipole Plugs

All dimensions see note 1)



S/SC

SOV

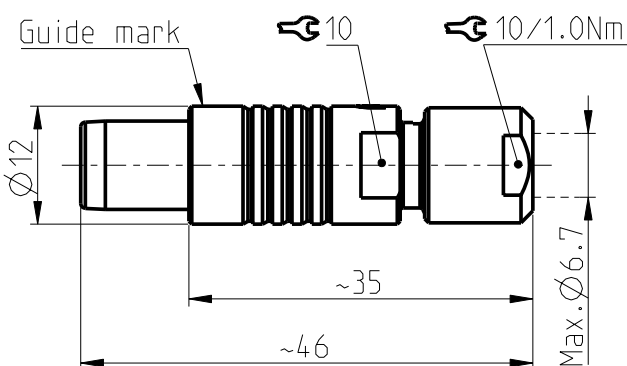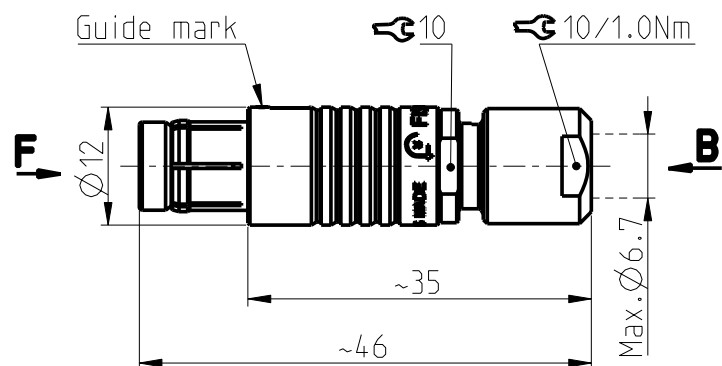


Contact polarity A

Contact polarity Z




CONTACT CONFIGURATION	Contacts	Solder cup Ø		Crimp cup ⁽²⁾ Ø
103 A Z 056	6	0.79		0.60
103 A Z 057	7	0.79		0.60
103 A Z 058	8	0.79		0.60
103 A Z 062	12	0.43		-

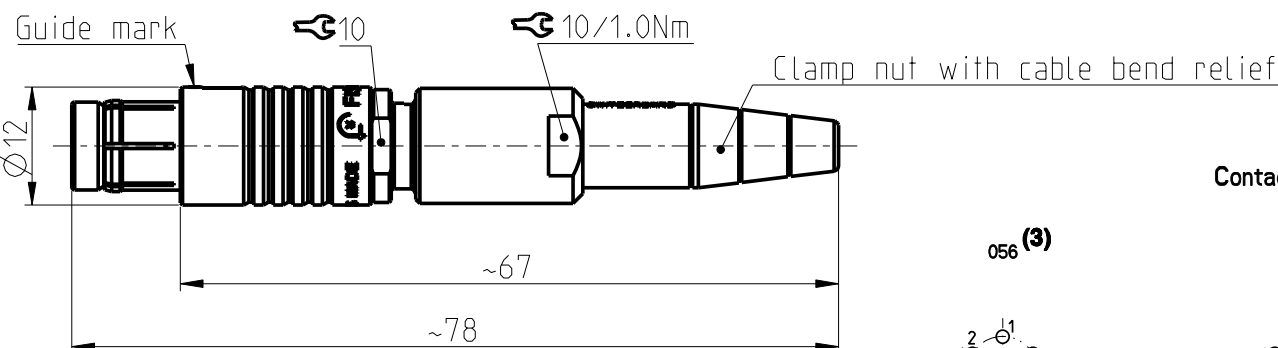


Contact configuration for polarity A (View from B)


056 (3)



057 (3)



058



062






Keying codes (View from F)

Code 1 (-1xx)


Code 2 (-2xx)

Code 3 (-3xx)






Contact configuration for polarity Z (View from B)

(3)



(3)



All dimensions in mm

Rev.

Pages

Notes :

600023

1

2/2

1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$
 2) For optimum crimping refer to available crimping manual.
 3) Only valid for Code 1. For other codes please contact us.
 Part number example : S 103 A062-130

fischer

www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.