
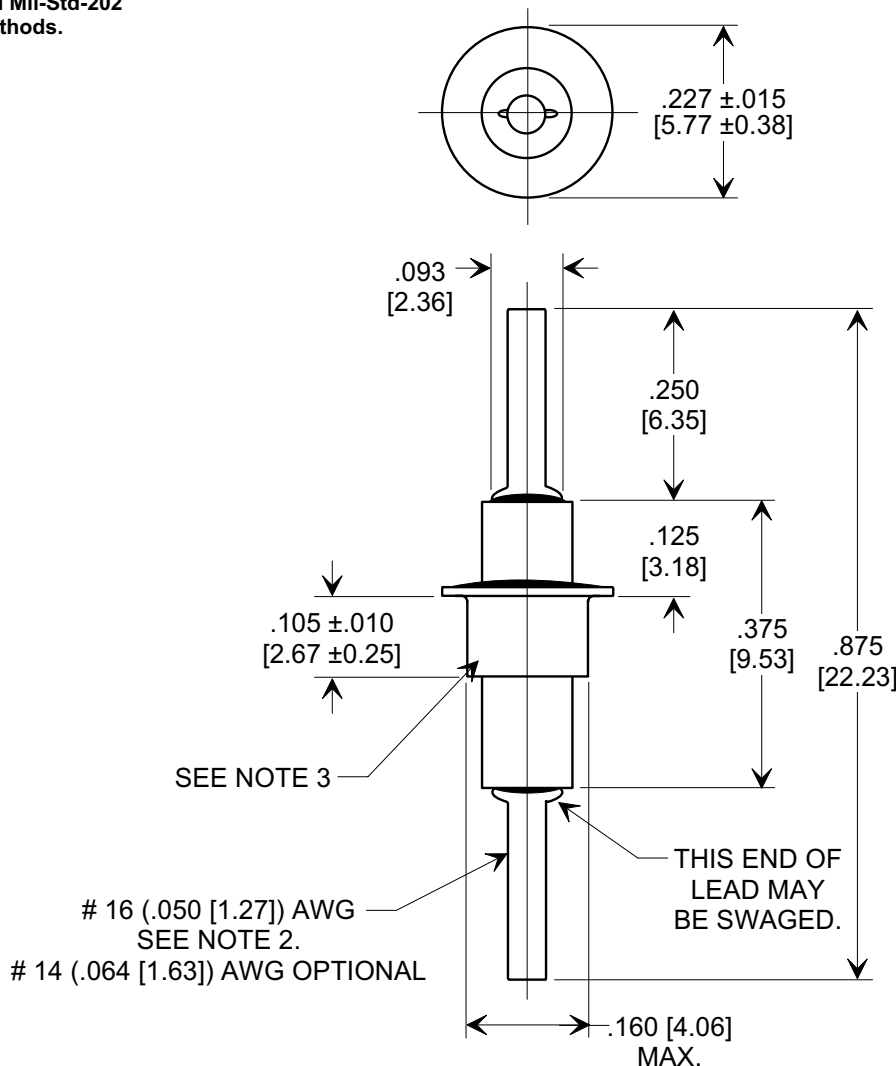



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



SEE NOTE 3

16 (.050 [1.27]) AWG
SEE NOTE 2.
14 (.064 [1.63]) AWG OPTIONAL

NOTES:

1. TUSONIX STANDARD PART NUMBER: 2404-000-X5U0-102P.
TUSONIX RoHS COMPLIANT PART NUMBER:
2404-000-X5U0-102P LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART
NUMBER WHEN ORDERING.
2. LEAD FINISH: STANDARD PART #: 60/40 SOLDER PLATED.
RoHS PART #: SILVER PLATED.
3. EYELET FINISH: STANDARD PART #: 60/40 SOLDER PLATED.
RoHS PART #: SILVER PLATED.
4. STANDARD VARIATIONS HAVE BOTTOM SWAGE.
LF VARIATIONS HAVE NO BOTTOM SWAGE.
5. PART MARKING: STANDARD PART: NO MARKING.
RoHS PART: GREEN DOT IDENTIFIER.

SPECIFICATIONS

Capacitance:	1000 pF
Cap. Tolerance:	+100, -0%
Temp. Coef.:	X5U
Operating Temp.:	-55°C TO +85°C
Voltage Rating:	500 VDC

REVISION RECORD Original Release C.O. 20000113-2-01 ADDED NOTES: S.M. 08-24-05 20050808-1-02			--TOLERANCES-- Unless Otherwise Specified	Title FEED - THRU CAPACITOR
			DECIMAL $\pm$.015 [0.38]	Drawn S.M. 01-14-00 Scale 4 X
			ANGLES $\pm$ 	Approved H.R. 01-14-00
			TUSONIX TUCSON, ARIZONA	A 2404-000-X5U0-102P