


The SW82 type of contactors has been designed for direct current loads, including motors as used on electric vehicles such as industrial trucks. Developed for both interrupted and uninterrupted loads, the SW82 is suitable for switching Resistive, Capacitive and Inductive loads.

Application	Interrupted	Uninterrupted
Thermal Current Rating ( $I_{th}$ )	100A	
Intermittent Current Rating:		
30% Duty	185A	
40% Duty	160A	
50% Duty	140A	
60% Duty	130A	
70% Duty	120A	
Rated Fault Current Breaking Capacity ( $I_{cn}$ ) 5ms Time Constant: (in accordance with UL583*)		
SW82	800A at 80V	
Rated Fault Current Breaking Capacity ( $I_{cn}$ ) Resistive Load: (in accordance with UL588*)		
SW82	150A at 96V D.C.	
Maximum Recommended Contact Voltages ( $U_e$ ):		
SW82	96V D.C.	
Typical Voltage Drop per pole across New Contacts at 100A	50mV	
Mechanical M.T.B.F	>5 x 10 <sup>6</sup>	
Coil Voltage Available ( $U_s$ ) (Rectifier board required for A.C.)	From 6 to 240V D.C.	
Coil Power Dissipation:		
Highly Intermittent Rated Types	20 - 30 Watts	
Intermittently Rated types	15 - 20 Watts	
Prolonged Rated Types	13 - 15 Watts	
Continuously Rated Types	7 - 13 Watts	
Maximum Pull-In Voltage (Coil at 20° C) Guideline:		
Highly Intermittent Rated types (Max 25% Duty Cycle)	60% $U_s$	
Intermittently Rated types (Max 70% Duty Cycle)	60% $U_s$	
Prolonged Operation (Max 90% Duty Cycle)	60% $U_s$	
Continuously Rated Types (100% Duty Cycle)	66% $U_s$	
Drop-Out Voltage Range	10 - 25% $U_s$	
Typical Pull-In Time	20ms	
Typical Drop-Out Time (N/O Contacts to Open):		
Without Suppression	5ms	
With Diode Suppression	50ms	
With Diode and Resistor (Subject to resistance value)	8 - 20ms	
Typical Contact Bounce Period	3ms	
Operating Ambient Temperature	- 40°C to + 60°C	
Guideline Contactor Weight:		
SW82	430 gms	



Advised Connection Sizes for Maximum Continuous Current		
Copper busbar	65mm <sup>2</sup> [0.1inch <sup>2</sup> ]	
Cable	Rated suitable for Application	
Key: <span style="color: red;">▴</span> = Interrupted <span style="color: blue;">▴</span> = Uninterrupted		
Note: Where applicable values shown are at 20° C		
* Please check our web site for product UL status		

- Interrupted** current - opening and closing on load with frequent switching (results in increased contact resistance).
- Uninterrupted** current - no or infrequent load switching requirements (maintains a lower contact resistance).

The SW82 features double pole double breaking main contacts with silver alloy tips, which are weld resistant, hard wearing and have excellent conductivity. The contactors are compact in size and are fully serviceable with a full range of spare parts available. The SW82 has M8 stud main terminals and 6.3mm spade coil connections. It can be mounted via M4 tapped holes or mounting brackets – either supplied fitted, or as separate items. Mounting can be horizontal or vertical, when vertical the M8 contact studs should point upwards. If the requirement is for downwards orientation we can adjust the contactor to compensate for this.

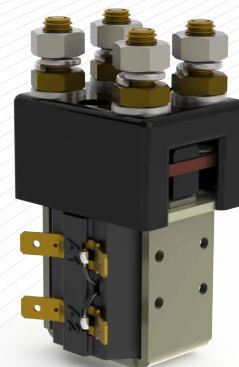


SW82

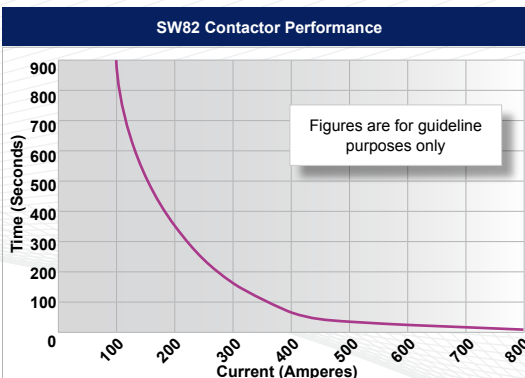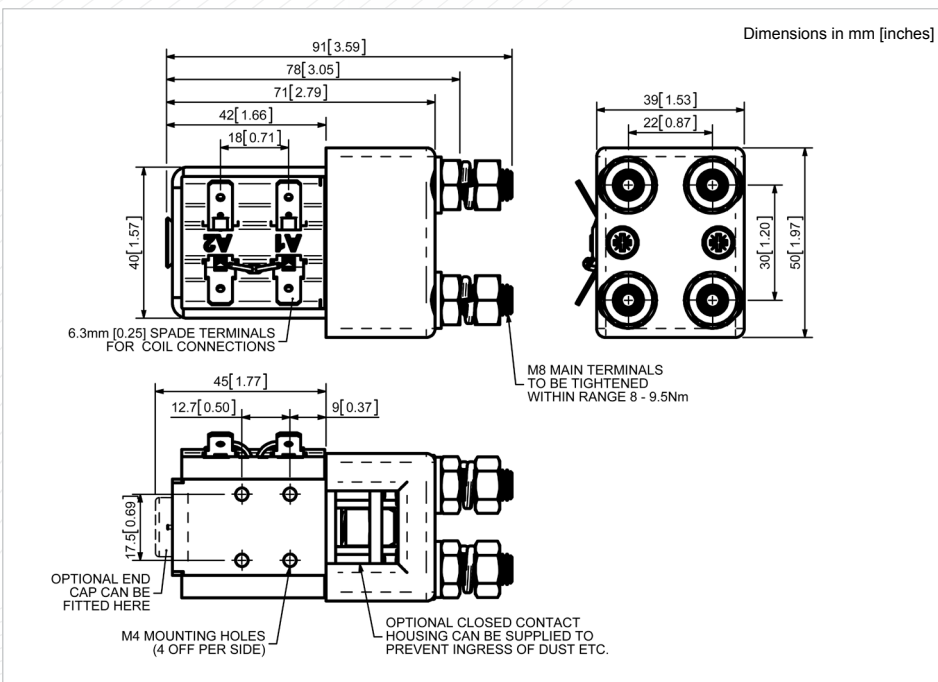

Contact Performance Key:

— Interrupted and Uninterrupted Current

Connection Diagram



SW82 Available Options

General	Suffix
Auxiliary Contacts	X
Auxiliary Contacts - V3	X
Magnetic Blowouts†	X
Magnetic Blowouts - High Powered†	X
Armature Cap	o
Mounting Brackets (See Stud Series Catalogue)	o
Magnetic Latching† (Not fail safe)	o M
Closed Contact Housing†	o
Environmentally Protected IP66 (see SW82P Catalogue sheet)	o P
EE Type (Steel Shroud)	X
Contacts	
Large Tips	o L
Textured Tips	o T
Silver Plating	X
Coil	
AC Rectifier Board (Fitted)	o
Coil Suppression†	o
Flying Leads	o F
Manual Override Operation	o
M4 Stud Terminals	X
M5 Terminal Board	o
Vacuum Impregnation	o
Key: Optional o Standard • Not Available X	
† Connections become polarity sensitive	
‡ Open Housing Available	

- Performance data provided should be used as a guide only. Some de-rating or variation from figures may be necessary according to application.
- Thermal current ratings stated are dependant upon the size of conductor being used
- For further technical advice email: [technical@albrightinternational.com](mailto:technical@albrightinternational.com)
- Albright reserve the right to change data without prior notice