
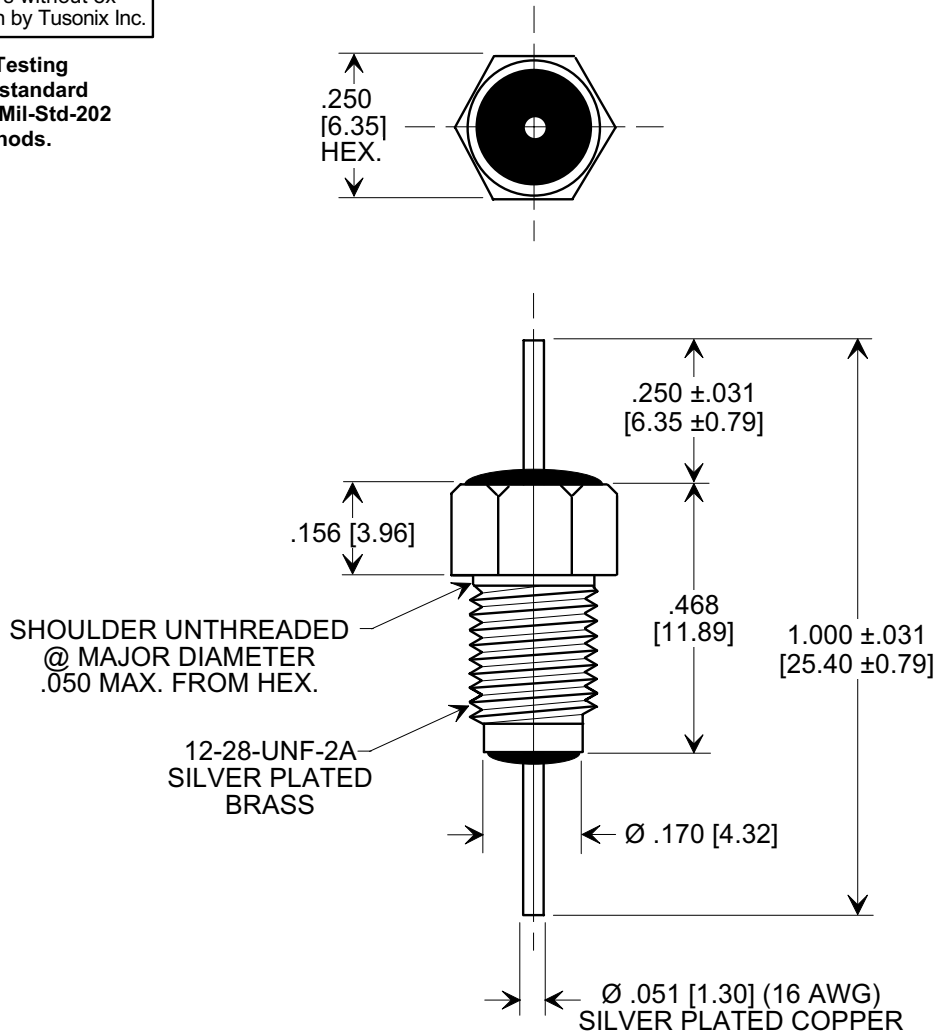


This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - []

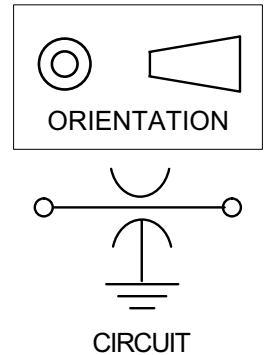

SPECIFICATION

TUSONIX STYLE:	2499-003
CAPACITANCE VALUE:	150 pF
CAPACITANCE TOL.:	± 10%
TEMP. CHARACTERISTIC:	S3H
RATING	500 WVDC @ 85°C
CURRENT (A)	20
OPERATING RANGE	-55° TO +85°C
I.R. MIN. @ 100 (VDC)	10 G Ω
DWV	1500 VDC

NOTES:

- SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
- TUSONIX STANDARD PART
NUMBER: 2499-003-S3H0-151K.
TUSONIX R.o.H.S. COMPLIANT PART
NUMBER: 2499-003-S3H0-151K LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- PART MARKING: TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON BUSHING HEX FLATS:
STANDARD PART: BLACK MARKING.
RoHS COMPLIANT PART: GREEN MARKING.

X-2015 Rev-0

REVISION RECORD			
Original Release	0		
C.O. 20030428-1-01			
ADDED NOTES, DWV & I.R.			
S.M. 07-24-06			
20060712-1-07	1		
REDRAWN BUSHING WITH SHOULDER; S.M. 08-09-06			
20060728-2-02	2		

--TOLERANCES--
Unless Otherwise Specified

DECIMAL ± .015 [0.38]

ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title **BUSHING TYPE
FEED-THRU
CAPACITOR**

Drawn S.M. 04-28-03 Scale 3 X

Approved B.Mc. 04-28-03

A **2499-003-S3H0-151K**