


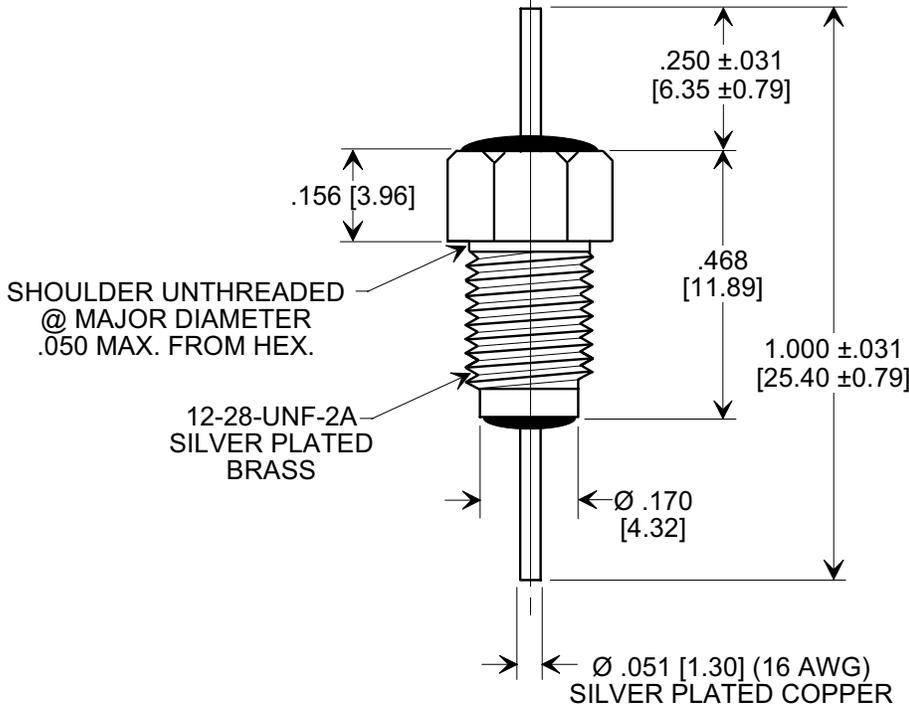


**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.



**Electrical Testing**  
**per Tusonix standard**  
**test plans and Mil-Std-202**  
**Test Methods.**

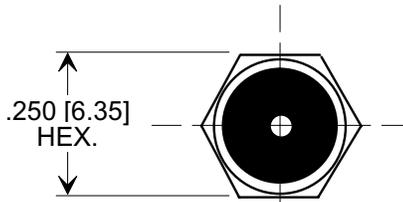

SPECIFICATION	
TUSONIX STYLE:	2499-003
CAPACITANCE VALUE:	100 pF
CAPACITANCE TOL.:	± 10%
TEMP. CHARACTERISTIC:	U2M
RATING:	500 WVDC @ 85°C
OPERATING RANGE:	-55° TO +125°C
CURRENT (A):	20
I.R. MIN. @ 100 (VDC):	10 G Ω
DWV (VDC):	1500

- NOTES:
- SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
  - TUSONIX STANDARD PART NUMBER: 2499-003-U2M0-101K. TUSONIX RoHS COMPLIANT PART NUMBER: 2499-003-U2M0-101K LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
  - PART MARKING: TRADEMARK, CAPACITANCE CODE & TOLERANCE CODE STAMPED ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.

X-2015 Rev-0	REVISION RECORD			--TOLERANCES-- Unless Otherwise Specified	Title <b>BUSHING TYPE FEED-THRU CAPACITOR</b>	
	Original Release C.O. <b>20000508-5-01</b>	ADDED & REVISED NOTES. ADDED METRIC, CURRENT, IR & DWV. S.M. 03-23-06	<b>0</b>		DECIMAL ± .015 [0.38]	Drawn L.E. 05-09-00
	20060323-1-01	CAP., TOL. & TEMP. REVISED NAME. S.M. 07-24-06	<b>1</b>	ANGLES ±	Approved T.C. 05-09-00	
	20060712-1-08	REDRAWN BUSHING WITH SHOULDER. S.M. 08-09-06	<b>2</b>	<b>TUSONIX</b> TUCSON, ARIZONA	<b>A</b>	<b>2499-003-U2M0-101K</b>
	20060728-2-03					