



17" RackMount Console

H/W Version: 1

An Ideal Solution for Complete KVM Management

LevelOne announces the release of KVM-0115 and KVM-0117 KVM RackMount Console that incorporates a display with keyboard and trackball to manage the remote servers.

Multiple Input Interfaces

The LevelOne KVM-0115 and KVM-0117 provides the most economical and convenient server management-solutions available in today's competitive network management markets.

Equipped with an integrated PS/2 and USB interface to control workstations through its integrated keyboard, touchpad and TFT display the KVM management switches provide full management access to server farms and other systems connected.



KVM-0117

Bright Active Matrix TFT Display


The KVM-0115 and KVM-0117 KVM RackMount Console are available with either a 15 inch or 17 inch bright active matrix TFT display. With high resolutions display of up to 1024x768 on the 15 inch KVM-0115 and 1280x1024 on the 17 inch KVM-0117 LCD Drawers, system and server status can easily be monitored and managed from the TFT display.

Quick and Easy Installation

The LevelOne KVM-0115 and KVM-0117 also feature a unique 1U rack-mountable dual-rail design for easy installation and quick access in server control rooms or in a remotely controlled location.



1. DVI PC Port
2. VGA PC Port
3. USB PC Port
4. PS/2 PC Port
5. Power

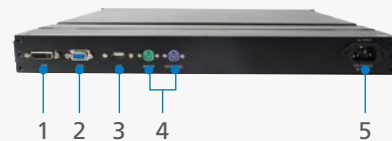

Key Features

- Bright Active Matrix TFT Display
- OSD function for LCD display
- Panel Protected by Tempered Glass
- 15 pins high density connector
- 15 Language keyboard and easy glide touchpad
- Durable keyboards (touchpad or trackball)
- Support PS/2 and USB Console Interface
- Support DVI Interface

Works Well With



KVM-1611
16-Port PS/2 KVM Switch



KVM-0831
8-Port combo KVM Switch w/
Expansion Slot

Technical Specification

Display Size

17"

Number of Port

1

Panel Type

Active Matrix TFT LCD

PC Interface

PS/2 x 2, USB x1, DVI x1

Resolution

1280x1024 (SXGA)

Pixel Pitch

0.297mm x0.297mm

Viewing Angle (CR > 10)

Right-Left view 60°~70° (Typ) Up-Down View 45°~60°

Contrast Ratio

400:1

Brightness

White 250cd/m2 (Center 1 point Typ)

Back Light

Four Lamps for Back Light

Colors Supported

16.2M Colors (6-bit with FRC)

Response Time

Rising Time 2ms, Decay Time 14ms

Operating System

Dos, Windows (3.1,9x, 2000, NT4, ME, XP, 2003 Server)

Linux, Novell 3.12-6, HP UX,SUN

Multi Platform

PS/2, SUN and USB

System cables

VGA, PS/2, DVI, USB

Keyboard Mouse

106 key PS/2 keyboard with touch pad

Sync

45-80KHZ

Power Source

100-240 VAC input

Dimension (mm)

447.5 x 482 x44mm

Weight

11.8Kg/ 26.0Lb

Power Consumption

25W, 19.05W for Panel

Operation Temp.

0~50 C


Storage Temp.

-20 ~ 60C

Humidity

10%~90%RH

Product Diagram

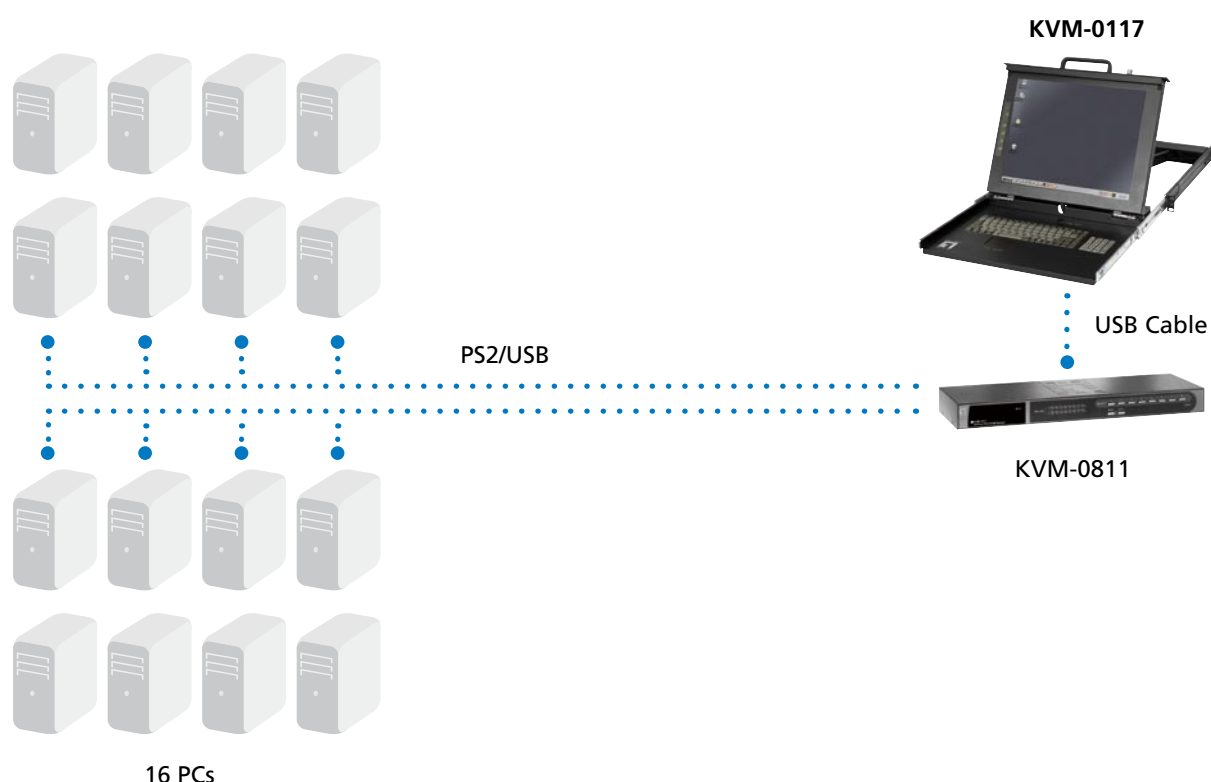

Order Information

KVM-0117: 17" RackMount Console

Package Contents

KVM-0117 x1, Rail with front and rear bracket x 1, Long brackets. (Needed for rack depth 828~1000mm) x 2, 1.8M cable (PS/2 mouse, PS/2 keyboard, DB15 VGA) x 1, USB x 1, DVI cable x1, Power cord x 1, CD with user manual x 1, QIG x 1, Keys x 2, Screws