

LEGEND

Digital TV Receiver

standard definition



The Legend LSD2 receives instant Digital TV reception with crystal clear pictures and incredible sound on any television set. Enjoy widescreen transmission (16:9 large viewing area) and free extra channels as per commercial network program guides.



What does the LSD2 offer you?


- Digital television reception
- Wide screen transmission (16:9 large viewing area)
- Electronic Program Guide (EPG)
- Subtitle selection
- Powerful editing abilities
- Teletext
- Timer Function
- Automatic channel scan
- RCA and RF Video outputs
- Variable aspect ratio (Widescreen & Letterbox)
- Additional channels

FEATURES

Tuner	
Input Frequency	UHF 470 MHz ~ 862 MHz VHF 174 MHz ~ 230 MHz
RF Input Level	-78dBm ~ 20dBm (75W)
RF Input connector	IEC Type Female
RF Output connector	IEC Type Male
Nominal input impedance	75 ohm
Channel Selection System	Electronic tuning, PLL synthesizer
Step frequency	166.67kHz
Channel Decode	
Demodulation	COFDM
Video	
Profile Level	MPEG-II MP@ML
Output System	NTSC / PAL
Output Terminal	RCA, TV scart, VCR scart
Output Level	1Vp-p (75W) (RCA)
Audio	
Audio Decoding	MPEG-II layer I & II
Freq response	20Hz ~ 20kHz
Output Level	Adjustable (600W unbalance)
Working Condition	
Power supply voltage	AC: 90~240V 50/60 Hz
Power Consumption	About 15W
Temperature	0 ~ 40 C
Humidity	10% ~ 90%
Size	300 x 210 x 64mm(L/W/H)
Weight	Approx. 2.4Kg



Rear of unit

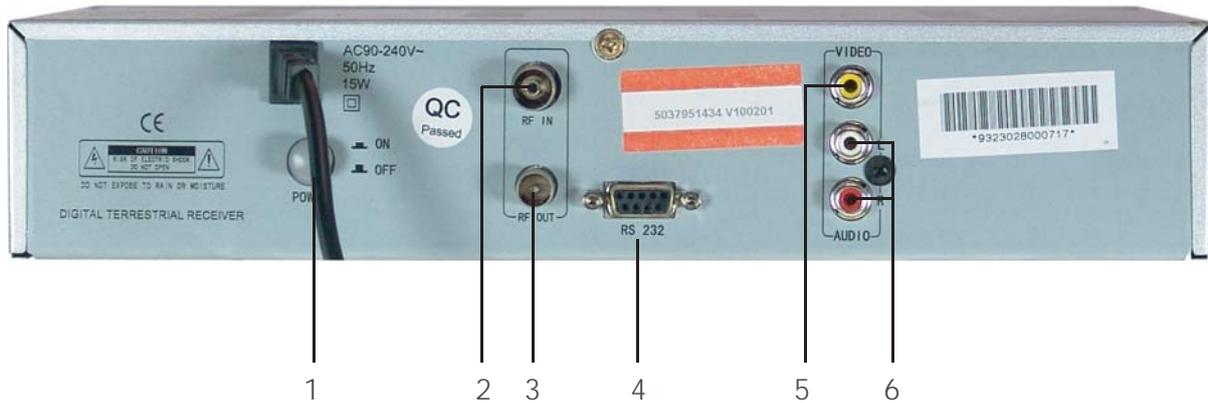

1. Power Switch
2. Loop output terminal
3. Antenna signal input terminal
4. Serial data interface - only use for software upgrades
5. Video signal output terminal
6. Audio signal output terminal

Box Contents

Unit
manual
remote
batteries x2
AV cables