


Stepping Motor – Uni-Polar

Type: 103-705-4



<http://www.casa.co.nz>

Edition: 11/08/2011

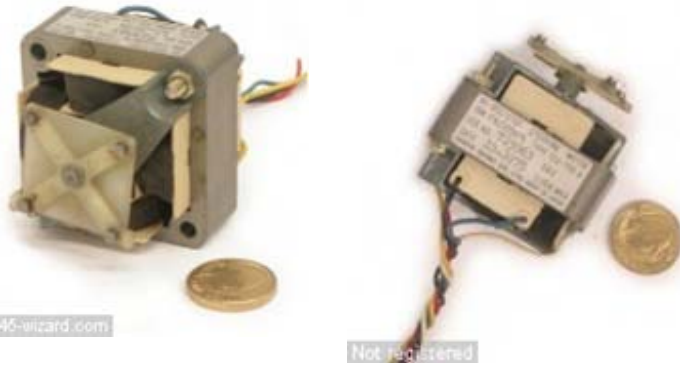

General Data

Brand: Sanyo Denki (Japan)

Type: 103-705-4

OEM #: 2305679 (IBM)

Frame: 2 Hole mount

Steps: 4/rev (90 Degrees per full-step or finer with micro-stepping)

Current: 0.25 Amp Max

Volts: 24 Vdc

Torque: ____ Nm @ ____ A (18 oz.in.)

Resistance: 116 Ohms / phase (nominal)

Inductance: 600~730mH / phase (nominal)

Connector: none

Wires: 5 wire (up to 90 mm nominal)

Shaft: ~4mm dia x 10mm long

Shaft-Detail: Taper pin cross-hole.

Size: 54 x 54 x 55mm (nominal)


Supply-Max: 24~80Vdc (recommended max = $V \times 25$)

Weight: 0.44kg

Condition: Used (refurbished)

Comments: 5 wire uni-polar motor will not work with bi-polar controllers like the Gecko or Wantai stepper controllers.

Notes:

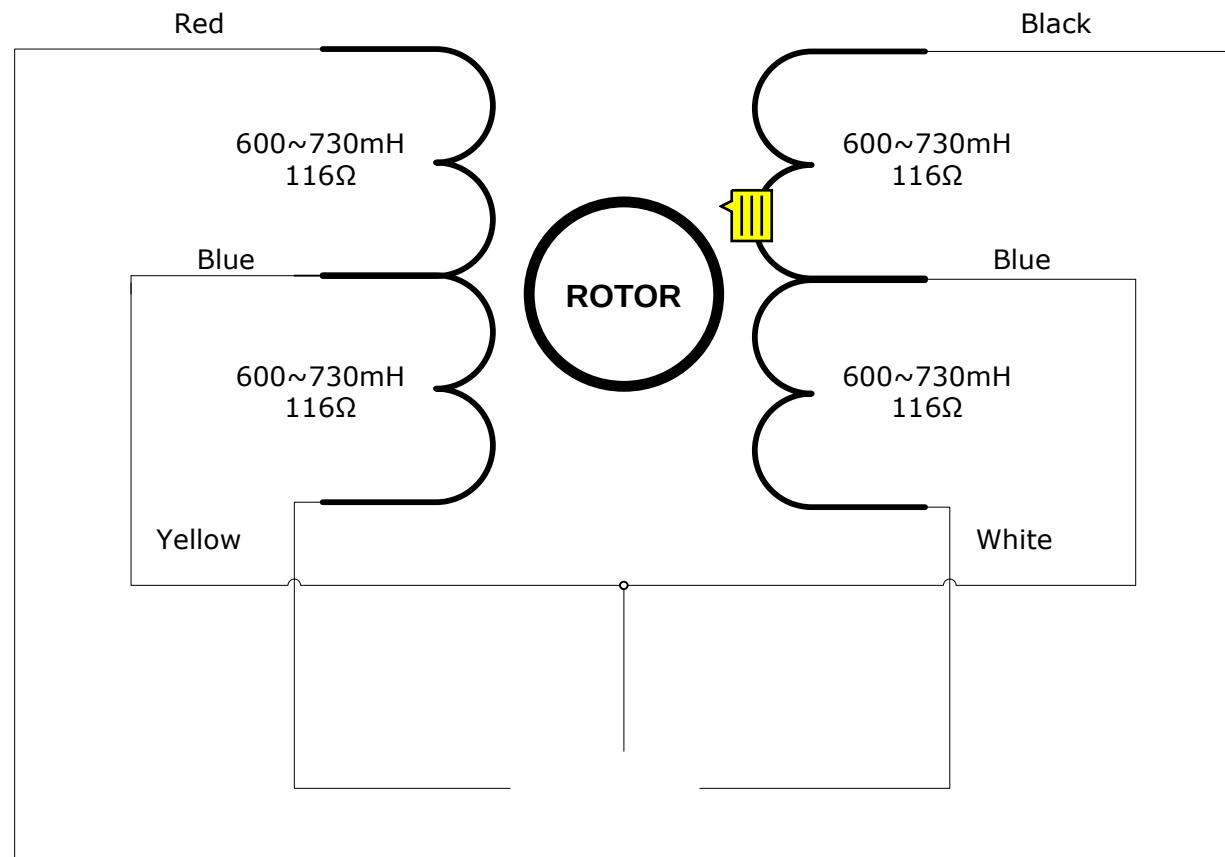

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.