



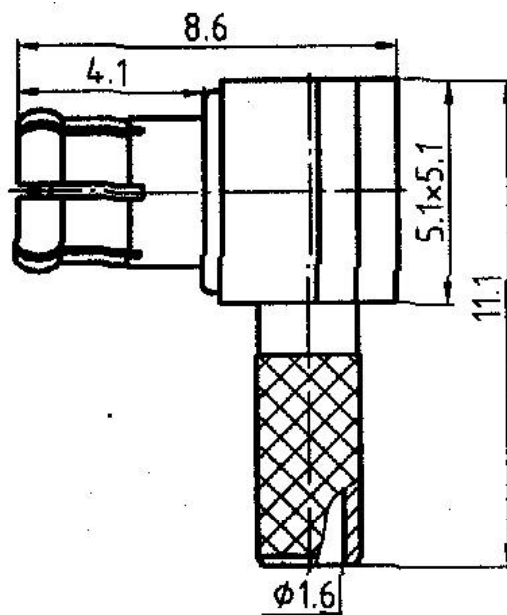

CRIMP FERRULES

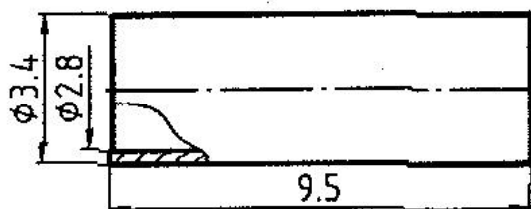

CABLE: SFF-50-1.5-1 OR RG316/U

MATERIALS AND PLATING:

1. Body: Brass, gold plated;
2. Spring contacts: Beryllium copper, gold plated;
3. Center contacts: Brass, gold plated;
4. Insulators: PTFE;
5. Crimp ferrules: Copper alloy, nickel plated.

ENVIRONMENTAL AND ELECTRICAL

Temperature range	-65 ~ +155℃
Characteristic impedance	50Ω
Frequency range	0 ~ 6HGz
Dielectric Withstanding voltage	750V
Contact resistance	
Center conductor:	≤5mΩ
Outer conductor:	≤2.5mΩ
Insulation resistance	>1000MΩ
VSWR	<1.2

Designed by X12200519	Checked by Tangshun0519	Approved by - date	Filename	Date 2004.03.22	Scale 4:1
Xian Connector Tech			MCX2112005/W/0002		
			MCX-(E)JW2.5	Edition	Sheet 2