

Stepping Motor

Type: 103-820-2



General Data

Brand: Step-Syn (Sanyo-Denki Japan)
Type: 103-802-2
OEM #: 2526734 (IBM)


Frame: NEMA 34 _____
Steps: 180 / rev (2 degrees per step or finer with micro-stepping)
Current: 1.4 Amp
Volts: 4.5 Vdc
Torque: _____ Nm @ _____ A (_____ oz.in.)
Resistance: 3.1 Ohms / phase (nominal)
Inductance: 7 mH / phase (nominal)
Connector: 6 way (if fitted - see diag.)
Wires: 6 wire (up to 150 mm nominal)

Shaft: 9.52 mm dia x 28 mm long
Shaft-Detail: Plain (+ cross-hole)
Size: 86 x 86 x 64 mm (nominal)
Weight: 1.29 kg

Supply-Max: 24~80 Vdc (recommended max = V x 25)

Condition: Used (refurbished)

Comments: an OPTIONAL timing pulley may be available.

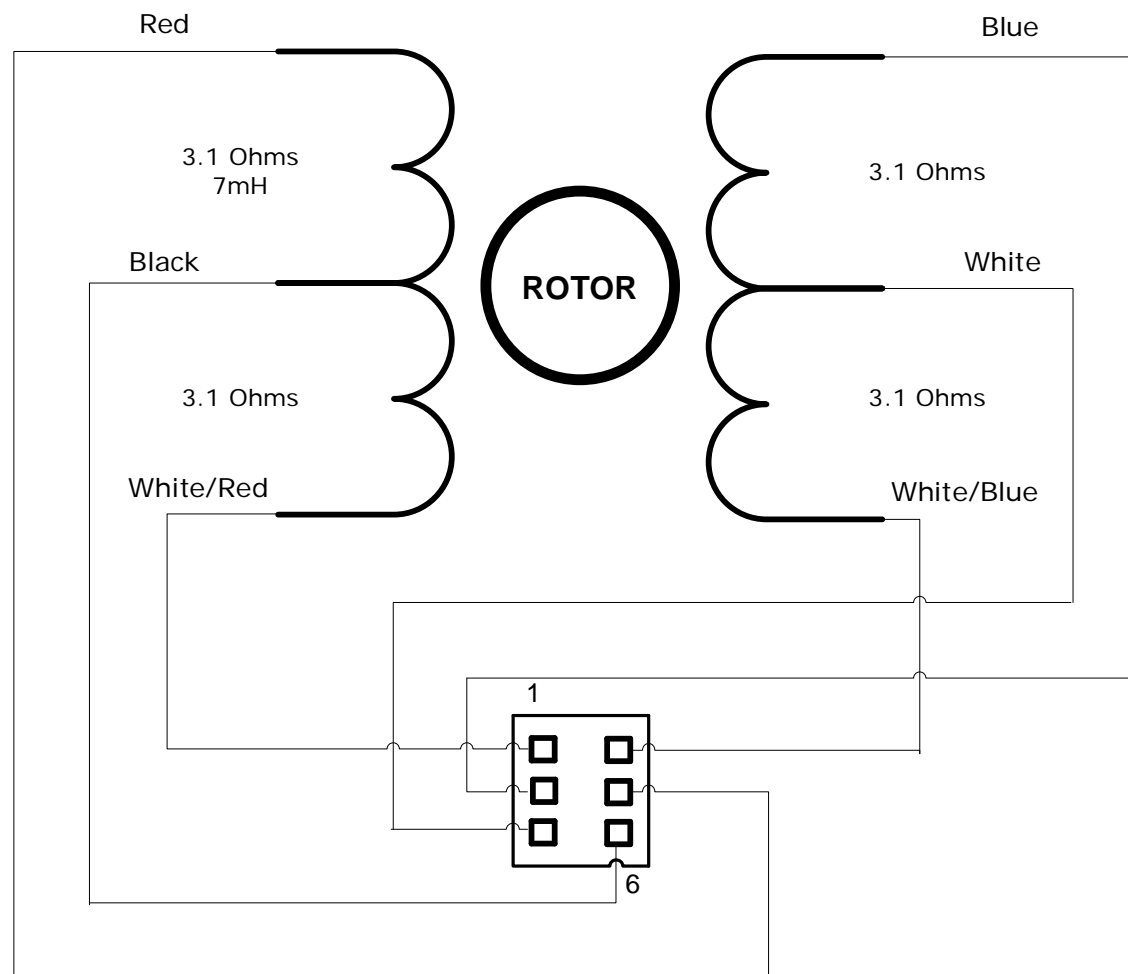

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.