

Stepping Motor



<http://www.casa.co.nz>

Edition: 11/08/2011

Type: 103-823-1



12345-wizard.com

General Data

Brand: Step-Syn (Sanyo-Denki Japan)

Type: 103-823-1

OEM #: 1812316 (IBM)

Frame: NEMA 34 _____

Steps: 180 / rev (2 degrees per step or finer with micro-stepping)

Current: 2.8 Amp

Volts: x Vdc

Torque: _____ Nm @ _____ A (_____ oz.in.)

Resistance: 1.35 Ohms / phase (nominal)

Inductance: 6.9 mH / phase (nominal)

Connector: 6 wire x (see diag.)

Wires: 6 wire (150 mm nominal)

Shaft: 9.52 mm dia x 28 mm long

Shaft-Detail: Flatted (+small flat)


Size: 86 x 86 x 92 mm (nominal)

Weight: 2.26 kg

Supply-Max: 24~80 Vdc (recommended max = V x 25)

Condition: Used (refurbished)

Comments: an OPTIONAL 23mm o.d. timing pulley may be available.

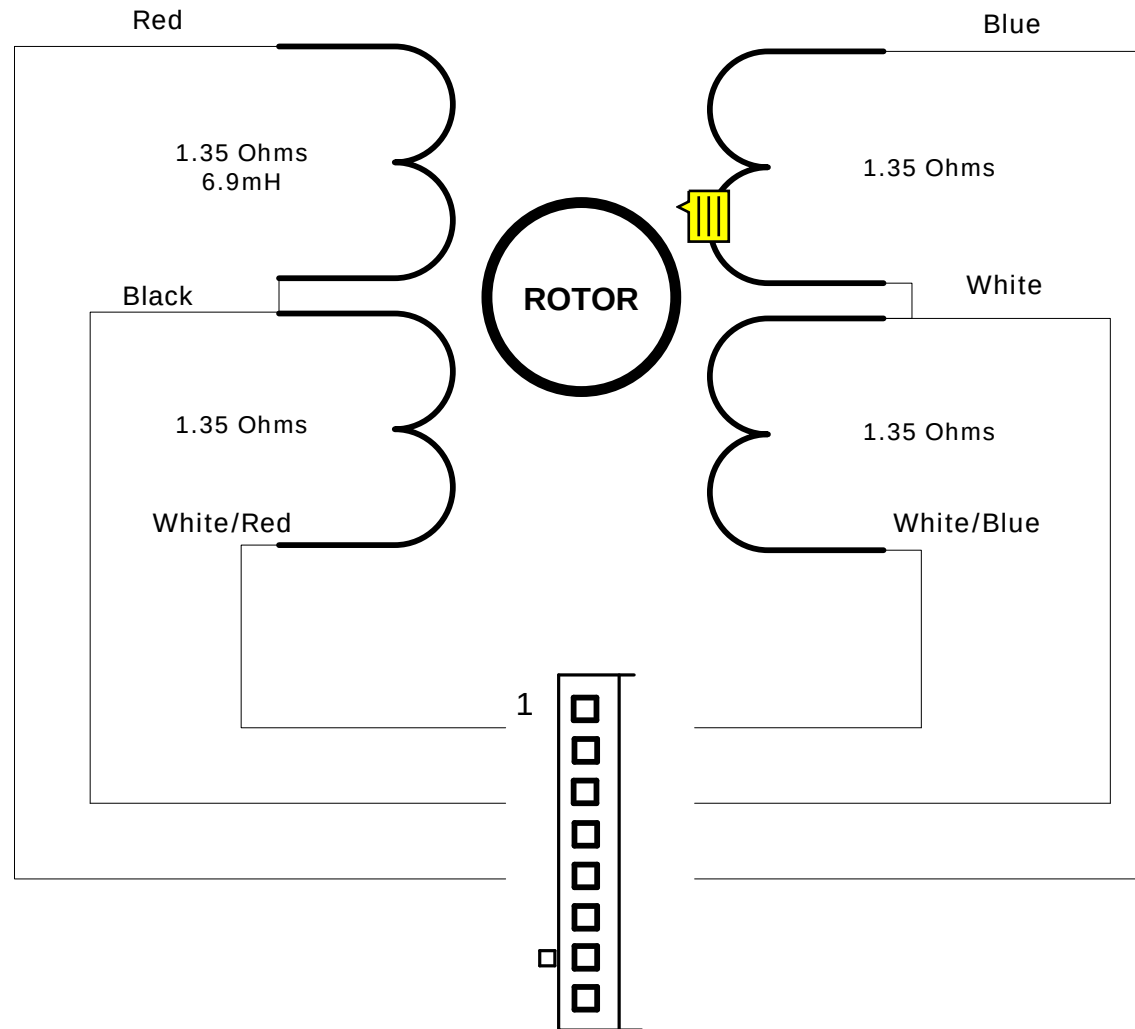

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.