

Mains Matching *AUTO* Transformer



<https://www.casa.co.nz>

Edition: 12/09/2022



Type: 240V~100V-250VA-Auto-CASA

Stock #: TBA

General Data

Brand: CASA (*Schott encased transformer*)

Type: 240V~100V-250VA-Auto-Schott

Model: TBA (*designated according to specific configuration*)

OEM: CASA

Input: 240~100Vac 50~60Hz (*multi-tapped as per schematic*)

Signal: Panel-lamp is lit when supply is active

Connection: IEC 3 pin chassis plug (*others upon request*)

Circuit Protection: Circuit-breaker in input (*or fuse upon request*)

Output: 100+120+220+240V etc Other voltages possible according to deployed configurations (*per schematic*)

Connection: 3 pole NZ chassis socket (*other connector options upon request*)

Power: 250VA (*estimated continuous rating*)

Circuit Protection: Optional (*fuse or circuit-breaker in output circuit upon request*)


Size: 210x153x132.5mm (*plus feet/standoffs & carry-handle*)

Weight: 4.88kg

Fixing: NA (*Available by customisation*)

Condition: As represented in picture (*new or re-furbished stock*).

Comments: Other input/output voltages can be achieved by selection of alternatives (*as annotated on the schematic*) or customised production using other available transformers etc.

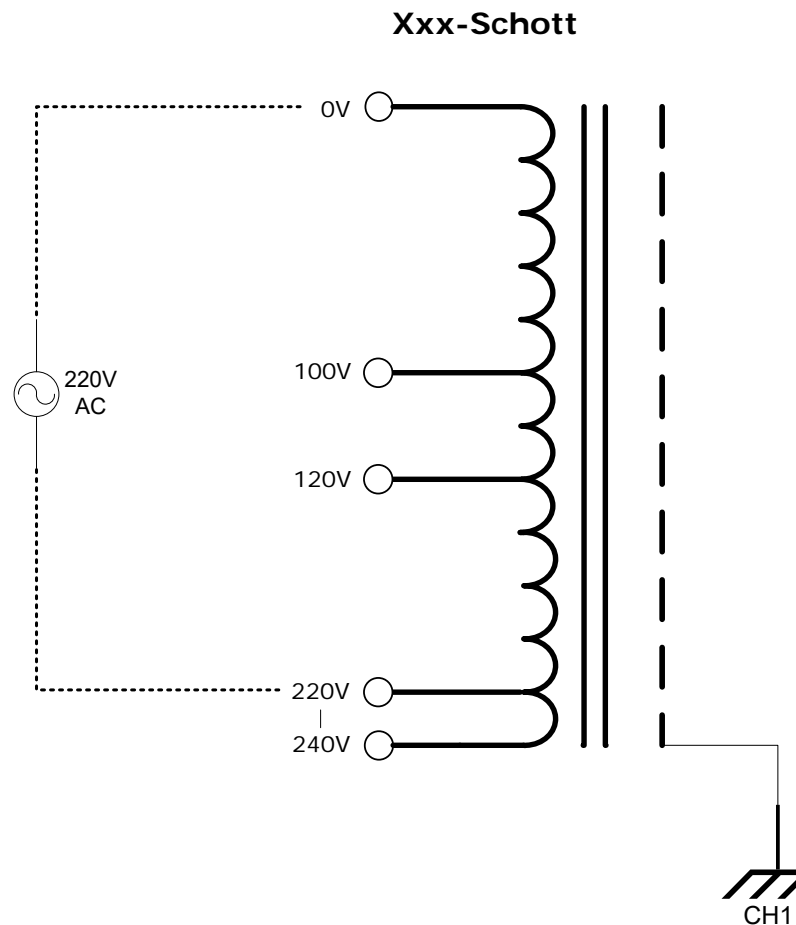

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.