


D
1767840

PART NO
1767840
LOGIC PG NO
YF035

A C DISTRIBUTION AND 48V SUPPLY
50HZ
FOR POWER SUPPLY PART NUMBERS 1767833, 1767835

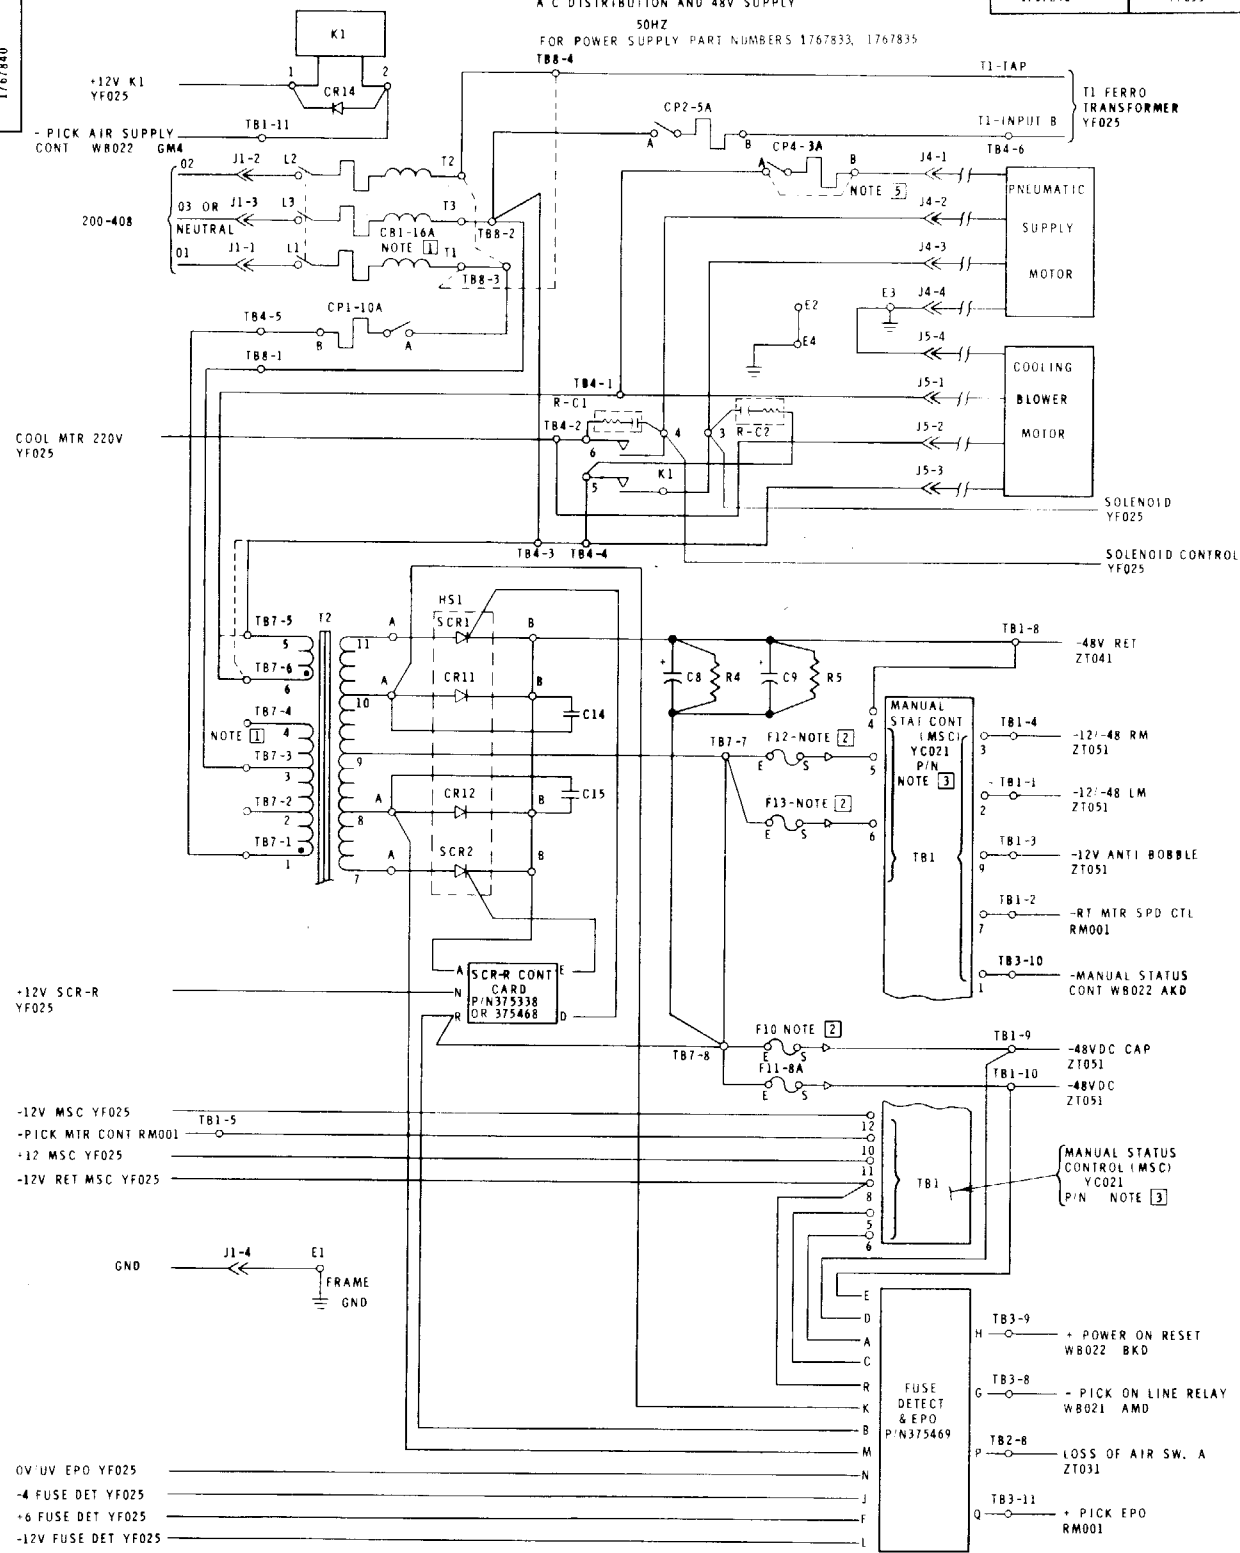

- NOTES
- SEE TABLE FOR NECESSARY CONNECTIONS FOR DIFFERENT LINE VOLTAGE-LOGIC SHOWS CONNECTION FOR 220 VOLT CONNECTION FOR 380 AND 408 VOLT OPERATION LEADS 5 AND 6 ON CABLE 2504156 ARE TO BE INTERCHANGED AND LEADS 14 AND 22 ON CABLE 2504157 ARE TO BE INTERCHANGED AS SHOWN IN TABLE

SUPPLY	FUSE		
	F10	F12	F13
1767833	8A	10A	10A
1767835	12A	15A	15A

POWER SUPPLY P/N	MSC CARD P/N
1767833	2524604
1767835	2523105

THIS DOCUMENT IS THE PROPERTY OF IBM. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION OR FOR THE PERFORMANCE OF WORK FOR IBM. ALL QUESTIONS MUST BE REFERRED TO THE IBM PURCHASING DEPARTMENT.


- SIMILAR TO PART NUMBER 2523064
- CP4 REPLACED WITH JUMPER BETWEEN LEADS 5 AND 28 OF CABLE P/N 2504156 FOR MOD 8 (50HZ)

NAME		DATE	CHANGE NO	DATE	CHANGE NO
DRIVE A C AND -48V 50HZ		19MAY72	734305A	25SEP73	734487
		12SEP72	734305C	10FEB77	449067
DESIGN	ECH		8JAN73		
DETAIL	RMF	19MAY72		22MAY80	846320
CHECK	VLG	20MAY72	21MAR73		
APPRO					

VOLTAGE	FROM LEAD 25	TO	FROM	TO	FROM	TO	FROM	TO	FROM	TO
0-0	TB8	T2-TB7	TB4-	T2-TB7	TB4-	T2-TB7	CB1	TB8	CB1	TB8
200	1	2	1	6	3	5	T1	3	T2	4
220	1	3	1	6	3	5	T1	3	T2	4
235	1	4	1	6	3	5	T1	3	T2	4
380	1	3	1	5	3	6	T1	4	T2	3
408	1	4	1	5	3	6	T1	4	T2	3

1767840

D

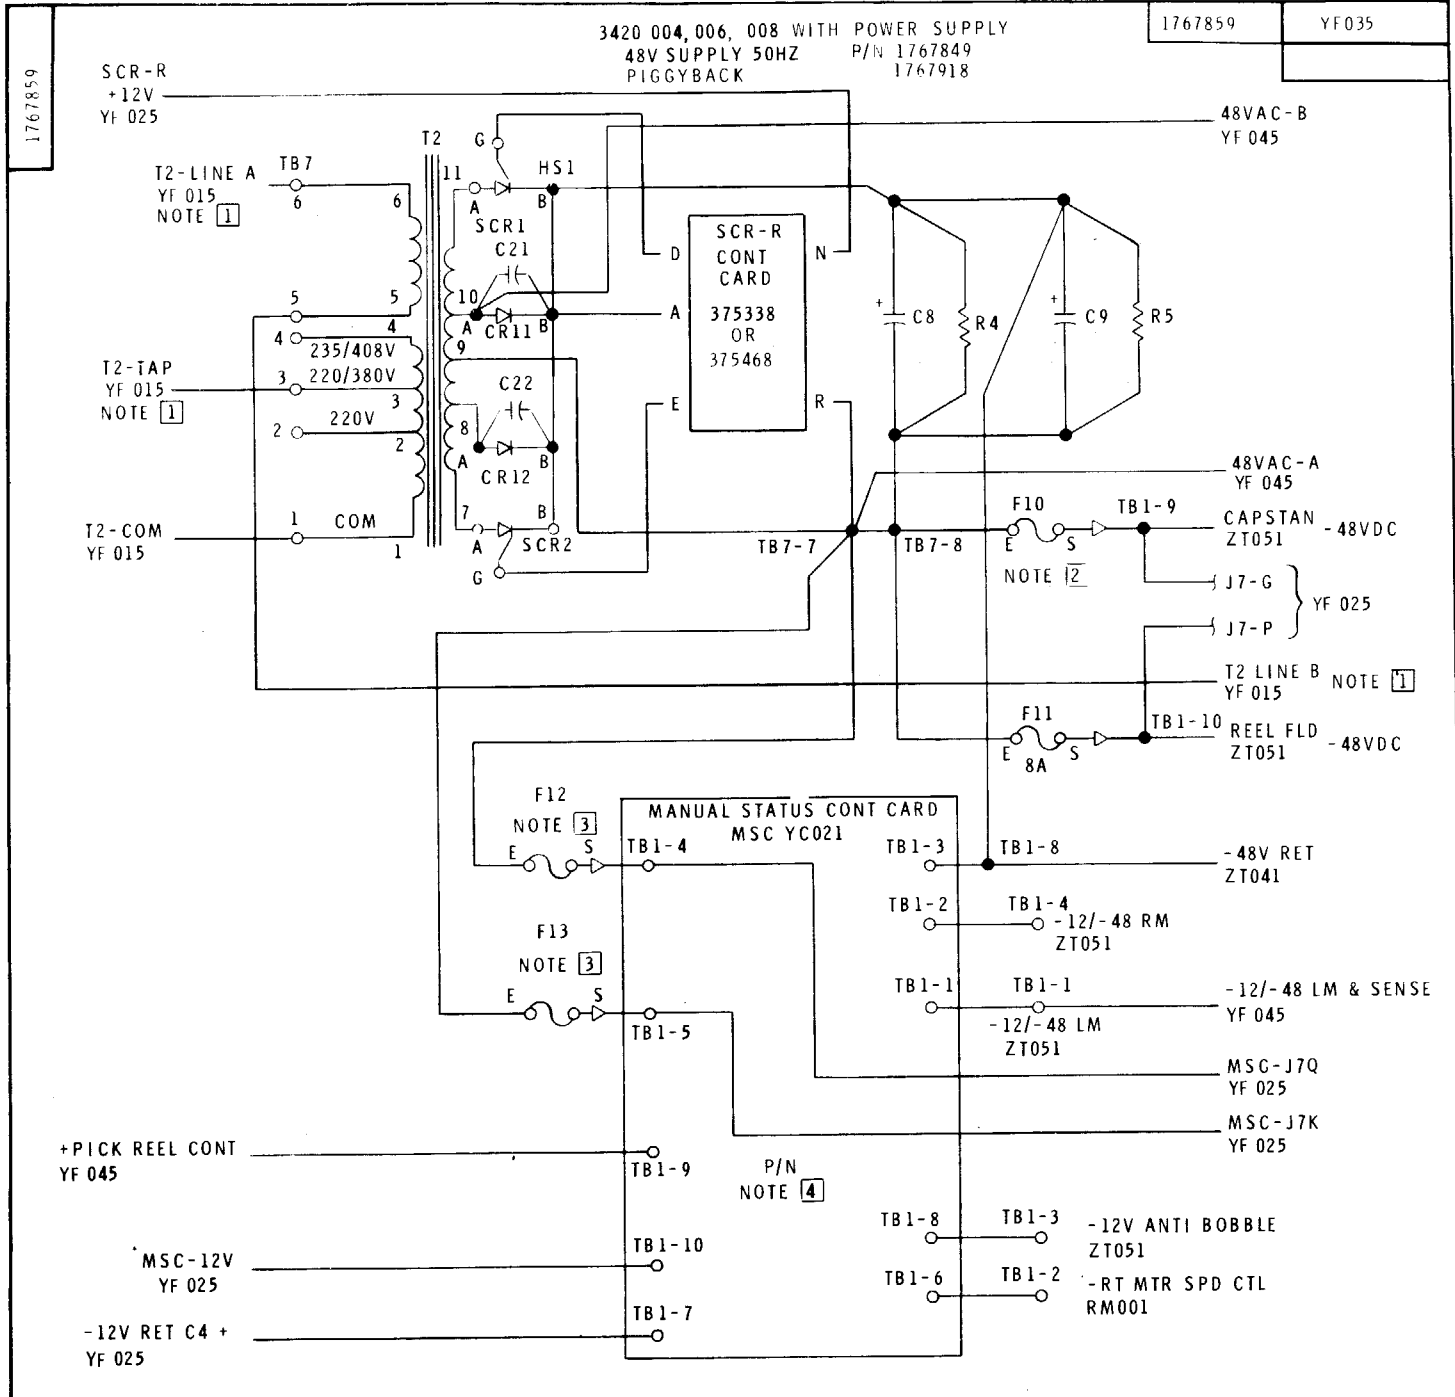

- NOTES**
- 1 LOGIC SHOWS CONNECTION FOR 220 VAC OPERATION. SEE TABLE FOR CONNECTION FOR ALL OTHER VOLTAGES
 - 2 8A FOR SUPPLY NO. 1767849, 12A FOR SUPPLY NO. 1767918
 - 3 10A FOR SUPPLY NO. 1767849, 15A FOR SUPPLY NO. 1767918

POWER SUPPLY P/N	MSC CARD P/N
1767849	373071
1767918	373074

INPUT VOLTAGE CHART

INPUT VOLTAGE	T2-LINE A		T2-LINE B		FROM TB4	TO T2-TB7
	FROM TB4	TO T2-TB7	FROM T2-TB7	TO TB6		
200V	6	6	5	1	5	2
220V	6	6	5	1	5	3
235V	6	6	5	1	5	4
380V	6	5	6	1	5	3
408V	6	5	6	1	5	4

"This document is the property of IBM. Its use is authorized only for responding to a request for quotation or for the performance of work for IBM. All questions must be referred to the IBM Purchasing Department."

IBM				DATE	CHANGE NO.	DATE	CHANGE NO.	NOTE X PRINT TO ENG. SPEC. NO.	DEVELOPMENT NO.
NAME SYSTEM DIAGRAM				22JUN72	734305B				
48VDC 50HZ				4MAY73	734499				
DESIGN	ECH	4MAY72	STANDARDS CODE	18OCT73	734488				
DETAIL	JWS	22JUN72		10FEB77	449067				
CHECK	PS			22MAY80	846320				
APPRO	N-ER	BALG72							