


LTR	DESCRIPTION	DATE	BY
A	Released	6/20/99	JCL

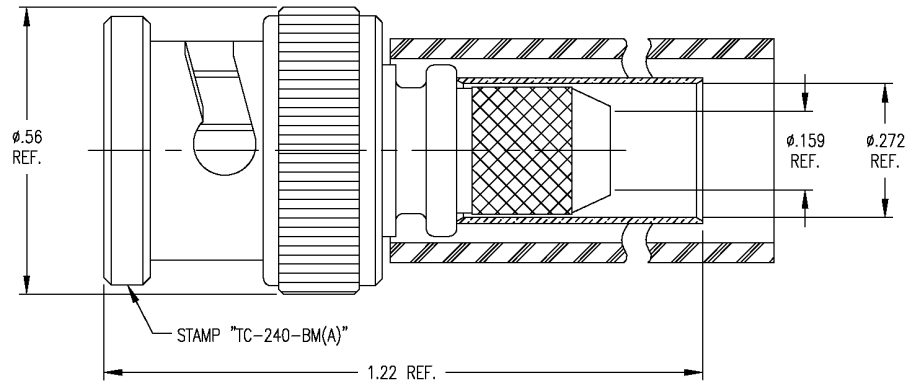

### I. MATERIALS & FINISHES

center contact: Gold Plated Brass  
 outer contact: Alballoy Plated Brass  
 coupling nut: Alballoy Plated Brass  
 body: Alballoy Plated Brass  
 crimp sleeve: Alballoy Plated Copper  
 dielectric: Teflon® PTFE  
 gasket: Silicone Rubber  
 shrink sleeve: Adhesive Lined Polyolefin  
 attachment: braid crimp (.255"hex)

### II. ELECTRICAL PROPERTIES

impedance: 50 ohms  
 working voltage: 500 vrms (max)  
 vswr: 1.25:1 (max) up to 3 GHz  
 insertion loss:  $0.10 \times \sqrt{F_{\text{ghz}}}$

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

### Approvals

Drawn	JP	6/20/99



### TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492  
 (203) 949-8400; (203) 949-8423.Fax  
 www.timesmicrowave.com

### TC-240-BM (A)

Type-BNC male (plug) – Solder Pin  
 for LMR-240 Cable

Size A	CAGE CODE <b>68999</b>	Drawing No.: <b>3190-867</b>
-----------	---------------------------	---------------------------------

Scale: NA

Rev. (-)

Sheet: 1 of 1