

# Low-Cost E Series Multifunction DAQ

## 12 or 16-Bit, 200 kS/s, 16 Analog Inputs

### E Series – Low-Cost

- 16 analog inputs at up to 200 kS/s, 12 or 16-bit resolution
- Up to 2 analog outputs at 10 kS/s, 12 or 16-bit resolution
- 8 digital I/O lines (TTL/CMOS); two 24-bit counter/timers
- Digital triggering
- 4 analog input signal ranges
- NI-DAQ driver simplifies configuration and measurements

#### Families

- NI 6036E
- NI 6034E
- NI 6025E
- NI 6024E
- NI 6023E

#### Operating Systems

- Windows 2000/NT/XP
- Real-time performance with LabVIEW (page 134)
- Others such as Linux and Mac OS X (page 187)

#### Recommended Software

- LabVIEW
- LabWindows/CVI
- Measurement Studio
- VI Logger

#### Other Compatible Software

- Visual Basic, C/C++, and C#

#### Driver Software (included)

- NI-DAQ 7

#### Calibration Certificate Included

See page 21.



| Family   | Bus         | Analog Inputs | Input Resolution | Max Sampling Rate | Input Range    | Analog Outputs | Output Resolution | Output Rate          | Output Range | Digital I/O | Counter/Timers | Triggers |
|----------|-------------|---------------|------------------|-------------------|----------------|----------------|-------------------|----------------------|--------------|-------------|----------------|----------|
| NI 6036E | PCI, PCMCIA | 16 SE/8 DI    | 16 bits          | 200 kS/s          | ±0.05 to ±10 V | 2              | 16 bits           | 10 kS/s <sup>1</sup> | ±10 V        | 8           | 2, 24-bit      | Digital  |
| NI 6034E | PCI         | 16 SE/8 DI    | 16 bits          | 200 kS/s          | ±0.05 to ±10 V | 0              | -                 | -                    | -            | 8           | 2, 24-bit      | Digital  |
| NI 6025E | PCI, PXI    | 16 SE/8 DI    | 12 bits          | 200 kS/s          | ±0.05 to ±10 V | 2              | 12 bits           | 10 kS/s <sup>1</sup> | ±10 V        | 32          | 2, 24-bit      | Digital  |
| NI 6024E | PCI, PCMCIA | 16 SE/8 DI    | 12 bits          | 200 kS/s          | ±0.05 to ±10 V | 2              | 12 bits           | 10 kS/s <sup>1</sup> | ±10 V        | 8           | 2, 24-bit      | Digital  |
| NI 6023E | PCI         | 16 SE/8 DI    | 12 bits          | 200 kS/s          | ±0.05 to ±10 V | 0              | -                 | -                    | -            | 8           | 2, 24-bit      | Digital  |

<sup>1</sup>10 kS/s typical when using the single DMA channel for analog out put. 1kS/s maximum when using the single DMA channel for either analog input or counter/timer operations. 1 kS/s maximum for PCMCIA DAQCards in all cases.

Table 1. NI Low-Cost E Series Model Guide (See page 228 for detailed specifications.)

## Overview and Applications

NI low-cost E Series multifunction data acquisition devices provide full functionality at a price to meet the needs of the budget-conscious user. They are ideal for applications ranging from continuous high-speed data logging to control applications to high-voltage signal or sensor measurements when used with NI signal conditioning. Synchronize the operations of multiple devices using the RTSI bus or PXI trigger bus to easily integrate other hardware such as motion control and machine vision to create an entire measurement and control system.

### Highly Accurate Hardware Design

NI Low-Cost E Series DAQ devices include the following features and technologies:

**Temperature Drift Protection Circuitry** – Designed with components that minimize the effect of temperature changes on measurements to less than 0.0010% of reading per °C.

**Resolution-Improvement Technologies** – Carefully designed noise floor maximizes the resolution.

**Onboard Self-Calibration** – Precise voltage reference included for calibration and measurement accuracy. Self-calibration is completely software controlled, with no potentiometers to adjust.

**NI DAQ-STC** – Timing and control ASIC designed to provide more flexibility, lower power consumption, and a higher immunity to noise and jitter than off-the-shelf counter/timer chips.

**NI MITE** – ASIC designed to optimize data transfer for multiple simultaneous operations using bus mastering with one DMA channel, interrupts, or programmed I/O.

**NI PGIA** – Measurement and instrument class amplifier that guarantees settling times at all gains. Typical commercial off-the-shelf amplifier components do not meet the settling time requirements for high-gain measurement applications.

**PFI Lines** – Eight programmable function input (PFI) lines that can be used for software-controlled routing of interboard and intraboard digital and timing signals.

# Low-Cost E Series Multifunction DAQ

## 12 or 16-Bit, 200 kS/s, 16 Analog Inputs

|                               |             | Full-Featured E Series                    |          |                    |          | Low-Cost E Series  |                                 | Basic              |
|-------------------------------|-------------|-------------------------------------------|----------|--------------------|----------|--------------------|---------------------------------|--------------------|
| Models                        |             | NI 6030E, NI 6031E,<br>NI 6032E, NI 6033E | NI 6052E | NI 6070E, NI 6071E | NI 6040E | NI 6034E, NI 6036E | NI 6023E, NI 6024E,<br>NI 6025E | PCI-6013, PCI-6014 |
| Measurement Sensitivity* (mV) |             | 0.0023                                    | 0.0025   | 0.009              | 0.008    | 0.0036             | 0.008                           | 0.004              |
| Nominal Range (V)             |             | Absolute Accuracy (mV)                    |          |                    |          |                    |                                 |                    |
| Positive FS                   | Negative FS |                                           |          |                    |          |                    |                                 |                    |
| 10                            | -10         | 1.147                                     | 4.747    | 14.369             | 15.373   | 7.560              | 16.504                          | 8.984              |
| 5                             | -5          | 2.077                                     | 0.876    | 5.193              | 5.697    | 1.790              | 5.263                           | 2.003              |
| 2.5                           | -2.5        | —                                         | 1.190    | 3.605              | 3.859    | —                  | —                               | —                  |
| 2                             | -2          | 0.836                                     | —        | —                  | —        | —                  | —                               | —                  |
| 1                             | -1          | 0.422                                     | 0.479    | 1.452              | 1.556    | —                  | —                               | —                  |
| 0.5                           | -0.5        | 0.215                                     | 0.243    | 0.735              | 0.789    | 0.399              | 0.846                           | 0.471              |
| 0.25                          | -0.25       | —                                         | 0.137    | 0.379              | 0.405    | —                  | —                               | —                  |
| 0.2                           | -0.2        | 0.102                                     | —        | —                  | —        | —                  | —                               | —                  |
| 0.1                           | -0.1        | 0.061                                     | 0.064    | 0.163              | 0.176    | —                  | —                               | —                  |
| 0.05                          | -0.05       | —                                         | 0.035    | 0.091              | 0.100    | 0.0611             | 0.106                           | 0.069              |
| 10                            | 0           | 0.976                                     | 1.232    | 6.765              | 7.269    | —                  | —                               | —                  |
| 5                             | 0           | 1.992                                     | 2.119    | 5.391              | 5.645    | —                  | —                               | —                  |
| 2                             | 0           | 0.802                                     | 0.850    | 2.167              | 2.271    | —                  | —                               | —                  |
| 1                             | 0           | 0.405                                     | 0.428    | 1.092              | 1.146    | —                  | —                               | —                  |
| 0.5                           | 0           | 0.207                                     | 0.242    | 0.558              | 0.583    | —                  | —                               | —                  |
| 0.2                           | 0           | 0.098                                     | 0.111    | 0.235              | 0.247    | —                  | —                               | —                  |
| 0.1                           | 0           | 0.059                                     | 0.059    | 0.127              | 0.135    | —                  | —                               | —                  |

Note: Accuracies are valid for measurements following an internal calibration. Measurement accuracies are listed for operational temperatures within  $\pm 1^\circ\text{C}$  of internal calibration temperature and  $\pm 10^\circ\text{C}$  of external or factory-calibration temperature. One-year calibration interval recommended. The Absolute Accuracy at Full Scale calculations were performed for a maximum range input voltage (for example, 10 V for the  $\pm 10$  V range) after one year, assuming 100 pt averaging of data.\*Smallest detectable voltage change in the input signal at the smallest input range.

Table 2. Low-Cost E Series Analog Input Absolute Accuracy Specifications

|                   |             | Full-Featured E Series                    |          |                    |          | Low-Cost E Series |                      | Basic            |
|-------------------|-------------|-------------------------------------------|----------|--------------------|----------|-------------------|----------------------|------------------|
| Models            |             | NI 6030E, NI 6031E,<br>NI 6032E, NI 6033E | NI 6052E | NI 6070E, NI 6071E | NI 6040E | PCI-6036E         | PCI-6024E, NI 6025E, | NI 6013, NI 6014 |
| Nominal Range (V) |             | Absolute Accuracy (mV)                    |          |                    |          |                   |                      |                  |
| Positive FS       | Negative FS |                                           |          |                    |          |                   |                      |                  |
| 10                | -10         | 1.43                                      | 1.405    | 8.127              | 8.127    | 2.417             | 8.127                | 3.835            |
| 10                | 0           | 1.201                                     | 1.176    | 5.685              | 5.685    | —                 | —                    | —                |

Table 3. Low-Cost E Series Analog Output Absolute Accuracy Specifications

**RTSI or PXI Trigger Bus** – Used to share timing and control signals between multiple devices to synchronize operations.

**RSE Mode** – In addition to differential and nonreferenced single-ended modes, NI low-cost E Series devices offer referenced single-ended (RSE) mode for use with floating signal sources in applications with channel counts higher than eight.

**Onboard Temperature Sensor** – Included for monitoring the operating temperature of the device to ensure that it is operating within the specified range.

### High-Performance, Easy-to-Use Driver Software

NI-DAQ is the robust driver software that makes it easy to access the functionality of your data acquisition hardware, whether you are a beginning or advanced user. Helpful features include:

**Automatic Code Generation** – The DAQ Assistant is an interactive guide that steps you through configuring, testing, and programming measurement tasks and generates the necessary code automatically for LabVIEW, LabWindows/CVI, or Measurement Studio.

**Cleaner Code Development** – Basic and advanced software functions have been combined into one easy-to-use yet powerful set to help

you build cleaner code and move from basic to advanced applications without replacing functions.

**High-Performance Driver Engine** – Software-timed single-point input (typically used in control loops) with NI-DAQ achieves rates of up to 50 kHz. NI-DAQ also delivers maximum I/O system throughput with a multithreaded driver.

**Test Panels** – With NI-DAQ, you can test all of your device functionality before you begin development.

**Scaled Channels** – Easily scale your voltage data into the proper engineering units using the NI-DAQ Measurement Ready virtual channels by choosing from a list of common sensors and signals or creating your own custom scale.

**LabVIEW Integration** – All NI-DAQ functions create the waveform data type, which carries acquired data and timing information directly into more than 400 LabVIEW built-in analysis routines for display of results in engineering units on a graph.

**For information on device support in NI-DAQ 7,**  
visit [ni.com/dataacquisition](http://ni.com/dataacquisition)

Visit [ni.com/oem](http://ni.com/oem) for quantity discount information.

# Low-Cost E Series Multifunction DAQ

## 12 or 16-Bit, 200 kS/s, 16 Analog Inputs

### Worldwide Support and Services

NI provides you with a wealth of resources to help you get your application up and running more quickly, including:

**Technical Support** – Purchase of NI hardware or software gives you access to application engineers all over the world as well as Web resources with more than 3,000 measurement examples and more than 9,000 KnowledgeBase entries. – [ni.com/support](http://ni.com/support)

**NI Factory Installation Services (FIS)** – Software and hardware installed in PXI and PXI/SCXI systems, tested and ready to use – [ni.com/advisor](http://ni.com/advisor)

**Calibration** – Includes NIST-traceable basic calibration certificates, services for ANSI/NCSL-Z540 and periodic calibration – [ni.com/calibration](http://ni.com/calibration)

**Extended Warranty** – Meet project life-cycle requirements and maintain optimal performance in a cost-effective way – [ni.com/services](http://ni.com/services)

**Data Acquisition Training** – Instructor-led courses – [ni.com/training](http://ni.com/training)

**Professional Services** – Feasibility, consulting, and integration through our Alliance Partners – [ni.com/alliance](http://ni.com/alliance)

*For more information on NI services and support, please visit [ni.com/services](http://ni.com/services)*

### Recommended Accessories

Signal conditioning is required for sensor measurements or voltage inputs greater than 10 V. National Instruments SCXI is a versatile, high performance signal conditioning platform, intended for high-channel-count applications. NI SCC products provide portable, flexible signal conditioning options on a per-channel basis. Both signal conditioning platforms are designed to increase the performance and reliability of your DAQ System, and are up to 10X more accurate than terminal blocks (please visit [ni.com/sigcon](http://ni.com/sigcon) for more details). Refer to the table below for more information:

| Sensor/Signals (>10 V) |             |                                     |                     |      |
|------------------------|-------------|-------------------------------------|---------------------|------|
| System                 | Description | DAQ Device                          | Signal Conditioning | Page |
| High performance       |             | PCI-60xxE, PXI-60xxE, DAQCard-60xxE | SCXI                | 270  |
| Low-cost, portable     |             | PCI-60xxE, PXI-60xxE, DAQCard-60xxE | SCC                 | 251  |

| Signals (<10 V) <sup>1</sup> |             |                     |                |            |      |
|------------------------------|-------------|---------------------|----------------|------------|------|
| System                       | Description | DAQ Device          | Terminal Block | Cable      | Page |
| Shielded                     |             | PCI-60xxE           | SCB-68         | SH6868-EP  | 214  |
| Shielded                     |             | PXI-60xxE           | TB-2705        | SH6868-EP  | 214  |
| Shielded                     |             | DAQCard-60xxE       | SCB-68         | SHC6868-EP | 214  |
| Low-cost                     |             | PCI-6025E/PXI-6025E | Two TBX-68s    | SH1006868  | 214  |
| Low-cost                     |             | PCI-60xxE/PXI-60xxE | CB-68LP        | R6868      | 214  |
| Low-Cost                     |             | DAQCard-60xxE       | CB-68LP        | RC6868     | 214  |

<sup>1</sup>Terminal Blocks do not provide signal conditioning (ie. filtering, amplification, isolation, etc.), which may be necessary to increase the accuracy of your measurements.

Table 4. Recommended Accessories

### Ordering Information

|                       |           |
|-----------------------|-----------|
| NI PCI-6036E .....    | 778465-01 |
| NI DAQCard-6036E..... | 778561-01 |
| NI PCI-6034E .....    | 778075-01 |
| NI PXI-6025E .....    | 777798-01 |
| NI PCI-6025E .....    | 777744-01 |
| NI DAQCard-6024E..... | 778269-01 |
| NI PCI-6024E .....    | 777743-01 |
| NI PCI-6023E .....    | 777742-01 |

Includes NI-DAQ driver software and calibration certificate.

For more information on warranty and value-added services, see page 20.

### BUY ONLINE!

Visit [ni.com/dataacquisition](http://ni.com/dataacquisition)

# Multifunction DAQ Overview

Multifunction DAQ Overview

Data Acquisition and  
Signal Conditioning

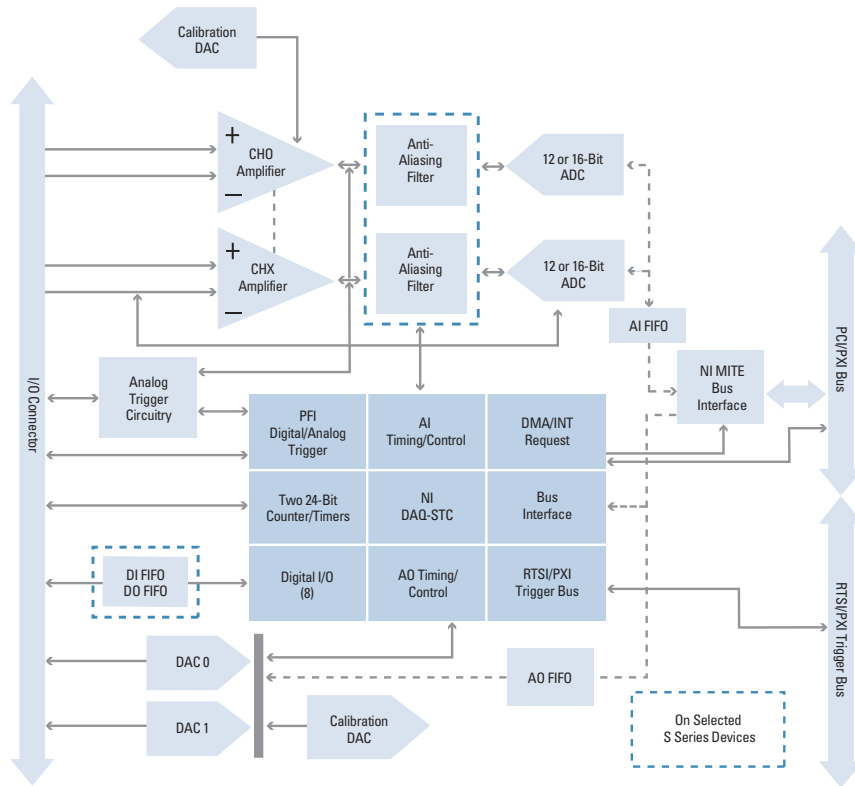


Figure 1. S Series Hardware Block Diagram

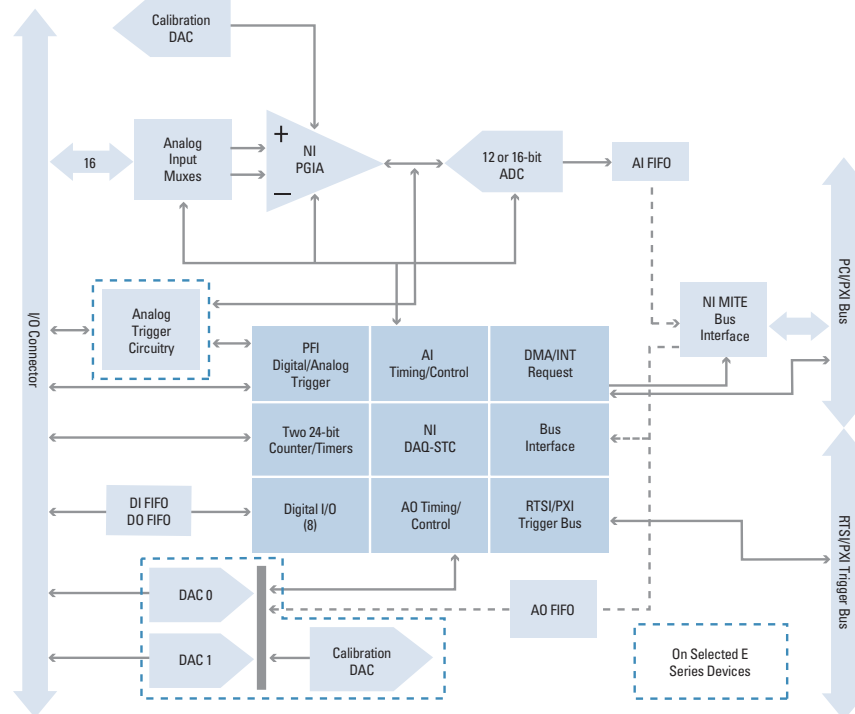


Figure 2. E Series Hardware Block Diagram

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 6062E, NI 6040E, NI 602xE

These specifications are typical for 25 °C unless otherwise noted.

### Analog Input

Accuracy specifications ..... See page 228.

### Input Characteristics

| Number of Channels |                                                                         |
|--------------------|-------------------------------------------------------------------------|
| 6070E              | 16 single-ended or 8 differential<br>(software selectable per channel)  |
| 6062E              |                                                                         |
| 6040E              |                                                                         |
| 602xE              |                                                                         |
| 6071E              | 64 single-ended or 32 differential<br>(software selectable per channel) |

Resolution ..... 12 bits, 1 in 4,096

| Maximum Sampling Rate |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| 607xE                 | 1.25 MS/s                                                          |
| 6062E                 | 500 kS/s                                                           |
| 6040E                 | 500 kS/s single-channel scanning<br>250 kS/s multichannel scanning |
| 6023E                 | 200 kS/s                                                           |
| 6024E                 |                                                                    |
| 6025E                 |                                                                    |
| 6020E                 | 100 kS/s                                                           |

| Input Signal Ranges |                             |                     |                      |
|---------------------|-----------------------------|---------------------|----------------------|
| Device              | Range (Software Selectable) | Bipolar Input Range | Unipolar Input Range |
| 607xE               | 20 V                        | ±10 V               | —                    |
| 6062E               | 10 V                        | ±5 V                | 0 to 10 V            |
| 6040E               | 5 V                         | ±2.5 V              | 0 to 5 V             |
| 6020E               | 2 V                         | ±1 V                | 0 to 2 V             |
|                     | 1 V                         | ±500 mV             | 0 to 1 V             |
|                     | 500 mV                      | ±250 mV             | 0 to 500 mV          |
|                     | 200 mV                      | ±100 mV             | 0 to 200 mV          |
|                     | 100 mV                      | ±50 mV              | 0 to 100 mV          |
| 6023E               | 20 V                        | ±10 V               | —                    |
| 6024E               | 10 V                        | ±5 V                | —                    |
| 6025E               | 1 V                         | ±500 mV             | —                    |
|                     | 100 mV                      | ±50 mV              | —                    |

Input coupling ..... DC

Maximum working voltage  
(signal + common mode) ..... Input should remain within ±11 V of ground

| Overvoltage Protection |            |             |
|------------------------|------------|-------------|
| Device                 | Powered On | Powered Off |
| 607xE                  | ±25 V      | ±15 V       |
| 6062E                  |            |             |
| 6040E                  |            |             |
| 6023E                  | ±40 V      | ±25 V       |
| 6024E                  |            |             |
| 6025E                  |            |             |
| 6020E                  | ±35 V      | ±25 V       |

| Inputs Protected |                                |
|------------------|--------------------------------|
| 6070E            | AI <0.15>, AI SENSE            |
| 6062E, 6040E     |                                |
| 602xE            |                                |
| 6071E            |                                |
| 6071E            | AI <0.63>, AI SENSE, AI SENSE2 |

| FIFO Buffer Size               |               |
|--------------------------------|---------------|
| DAQCard-6062E                  | 8,192 samples |
| DAQPad-6020E                   | 4,096 samples |
| DAQPad-6070E                   | 2,048 samples |
| DAQCard-6024E                  | 512 samples   |
| PCI/PXI-6070E                  |               |
| 6071E, 6040E                   |               |
| PCI-6023E, NI 6025E, PCI-6024E |               |

Data transfers

PCI, PXI, DAQPad for FireWire ..... DMA, interrupts, programmed I/O

DAQCard, DAQPad for USB ..... Interrupts, programmed I/O

DMA modes

PCI, PXI, DAQPad for FireWire ..... Scatter-gather (single-transfer, demand transfer)

Configuration memory size ..... 512 words

### Transfer Characteristics

| Relative Accuracy |                  |                    |
|-------------------|------------------|--------------------|
| Device            | Typical Dithered | Maximum Undithered |
| 607xE             | ±0.5 LSB         | ±1.5 LSB           |
| 6062E             |                  |                    |
| 6040E             |                  |                    |
| 6023E             |                  |                    |
| 6024E             | ±0.2 LSB         | ±1.5 LSB           |
| 6025E             |                  |                    |
| 6020E             |                  |                    |

| DNL           |           |                |
|---------------|-----------|----------------|
| Device        | Typical   | Maximum        |
| 607xE         | ±0.5 LSB  | ±1.0 LSB       |
| 6040E         |           |                |
| 6023E         |           |                |
| PCI-6024E     |           |                |
| 6025E         | ±0.2 LSB  | ±1.0 LSB       |
| 6020E         |           |                |
| 6062E         |           |                |
| DAQCard-6024E | ±0.75 LSB | -0.9, +1.5 LSB |

No missing codes ..... 12 bits, guaranteed

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

### Amplifier Characteristics

| Input Impedance                                   |                                           |                |                |
|---------------------------------------------------|-------------------------------------------|----------------|----------------|
| Device                                            | Normal Powered On                         | Powered Off    | Overload       |
| 6070E<br>6062E<br>6040E<br>PCI-6071E<br>PXI-6071E | 100 G $\Omega$ in parallel<br>with 100 pF | 820 $\Omega$   | 820 $\Omega$   |
| 6023E, 6024E,<br>6025E                            | 100 G $\Omega$ in parallel with 100 pF    | 4.7 k $\Omega$ | 4.7 k $\Omega$ |
| 6020E                                             | 100 G $\Omega$ in parallel with 50 pF     | 3 k $\Omega$   | 3 k $\Omega$   |

Input bias current .....  $\pm 200$  pA

Input offset current .....  $\pm 100$  pA

| CMRR, DC to 60 Hz |                |           |
|-------------------|----------------|-----------|
| Device            | Range          | CMRR (dB) |
| 607xE             | 20 V           | 95        |
|                   | 10 V           | 100       |
|                   | 100 mV to 5 V  | 106       |
| 6040E             | 10 to 20 V     | 85        |
| 6062E             | 5 V            | 95        |
|                   | 100 mV to 2 V  | 100       |
| 6023E             | 10 to 20 V     | 85        |
| 6024E             | 100 mV to 1 V  | 90        |
| 6025E             |                |           |
| 6020E             | 100 mV to 20 V | 90        |

### Dynamic Characteristics

| Bandwidth          |                      |                       |
|--------------------|----------------------|-----------------------|
| Device             | Small Signal (-3 dB) | Large Signal (1% THD) |
| 607xE              | 1.6 MHz              | 1 MHz                 |
| 6062E              | 1.3 MHz              | 250 kHz               |
| 6040E              | 600 kHz              | 350 kHz               |
| 6023E              | 500 kHz              | 225 kHz               |
| PCI-6024E<br>6025E |                      |                       |
| DAQCard-6024E      | 500 kHz              | 265 kHz               |
| DAQPad-6020E       | 150 kHz              | 200 kHz               |

### Settling Time to Full-Scale Step

|        |               | Accuracy                                 |                                            |                                            |
|--------|---------------|------------------------------------------|--------------------------------------------|--------------------------------------------|
| Device | Range         | $\pm 0.012\%$<br>( $\pm 0.5$ LSB)        | $\pm 0.024\%$<br>( $\pm 1$ LSB)            | $\pm 0.098\%$<br>( $\pm 4$ LSB)            |
| 6070E  | 20 V          | 2 $\mu$ s typical<br>3 $\mu$ s maximum   | 1.5 $\mu$ s typical<br>2 $\mu$ s maximum   | 1.5 $\mu$ s typical<br>2 $\mu$ s maximum   |
|        | 10 V          | 2 $\mu$ s typical<br>3 $\mu$ s maximum   | 1.5 $\mu$ s typical<br>2 $\mu$ s maximum   | 1.3 $\mu$ s typical<br>1.5 $\mu$ s maximum |
|        | 200 mV to 5 V | 2 $\mu$ s typical<br>3 $\mu$ s maximum   | 1.5 $\mu$ s typical<br>2 $\mu$ s maximum   | 0.9 $\mu$ s typical<br>1 $\mu$ s maximum   |
|        | 100 mV        | 2 $\mu$ s typical<br>3 $\mu$ s maximum   | 1.5 $\mu$ s typical<br>2 $\mu$ s maximum   | 1 $\mu$ s typical<br>1.5 $\mu$ s maximum   |
|        | 20 V          | 3 $\mu$ s typical<br>5 $\mu$ s max       | 1.9 $\mu$ s typical<br>2.5 $\mu$ s maximum | 1.9 $\mu$ s typical<br>2 $\mu$ s maximum   |
|        | 10 V          | 3 $\mu$ s typical<br>5 $\mu$ s maximum   | 1.9 $\mu$ s typical<br>2.5 $\mu$ s maximum | 1.2 $\mu$ s typical<br>1.5 $\mu$ s maximum |
| 6071E  | 200 mV to 5 V | 3 $\mu$ s typical<br>5 $\mu$ s maximum   | 1.9 $\mu$ s typical<br>2.5 $\mu$ s maximum | 1.2 $\mu$ s typical<br>1.3 $\mu$ s maximum |
|        | 100 mV        | 3 $\mu$ s typical<br>5 $\mu$ s maximum   | 1.9 $\mu$ s typical<br>2.5 $\mu$ s maximum | 1.2 $\mu$ s typical<br>1.5 $\mu$ s maximum |
|        | All           | 2.5 $\mu$ s typical<br>4 $\mu$ s maximum | 2.5 $\mu$ s typical<br>3 $\mu$ s maximum   | 2 $\mu$ s typical<br>2.5 $\mu$ s maximum   |
|        | All           | 4 $\mu$ s typical<br>8 $\mu$ s maximum   | 4 $\mu$ s maximum                          | 4 $\mu$ s maximum                          |
|        | All           | 5 $\mu$ s typical                        | 5 $\mu$ s maximum                          | 5 $\mu$ s maximum                          |
|        | All           | 10 $\mu$ s maximum                       | 10 $\mu$ s maximum                         | 10 $\mu$ s maximum                         |

| System Noise (LSB <sub>rms</sub> , Not Including Quantization) |            |            |           |
|----------------------------------------------------------------|------------|------------|-----------|
| Device                                                         | Range      | Dither Off | Dither On |
| 6070E                                                          | 1 to 20 V  | 0.25       | 0.5       |
| 6071E                                                          | 500 mV     | 0.4        | 0.6       |
|                                                                | 200 mV     | 0.5        | 0.7       |
|                                                                | 100 mV     | 0.8        | 0.9       |
|                                                                | 100 mV     | 0.8        | 0.9       |
| 6062E                                                          | 1 to 20 V  | 0.25       | 0.6       |
|                                                                | 500 mV     | 0.4        | 0.75      |
|                                                                | 200 mV     | 0.5        | 0.8       |
|                                                                | 100 mV     | 0.8        | 1.0       |
| 6040E                                                          | 1 to 20 V  | 0.2        | 0.5       |
|                                                                | 500 mV     | 0.25       | 0.5       |
|                                                                | 200 mV     | 0.5        | 0.7       |
|                                                                | 100 mV     | 0.9        | 1.0       |
| 6023E                                                          | 1 to 20 V  | 0.1        | 0.6       |
| PCI-6024E, 6025E                                               | 100 mV     | 0.7        | 0.8       |
| DAQCard-6024E                                                  | 10 to 20 V | 0.1        | 0.65      |
|                                                                | 1 V        | 0.45       | 0.65      |
|                                                                | 100 mV     | 0.70       | 0.90      |
| 6020E                                                          | 1 to 20 V  | 0.07       | 0.5       |
|                                                                | 500 mV     | 0.12       | 0.5       |
|                                                                | 200 mV     | 0.25       | 0.6       |
|                                                                | 100 mV     | 0.5        | 0.7       |

| Crosstalk, DC to 100 KHz |                   |                    |
|--------------------------|-------------------|--------------------|
| Device                   | Adjacent Channels | All Other Channels |
| 607xE, 6062E, 6040E      | -75 dB            | -90 dB             |
| 602xE                    | -60 dB            | -80 dB             |

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

### Analog Output

#### Output Characteristics

| Number of Channels |                   |
|--------------------|-------------------|
| 607xE              | 2 voltage outputs |
| 6062E              |                   |
| 6040E              |                   |
| 6020E              |                   |
| 6024E              |                   |
| 6025E              |                   |
| 6023E              | None              |

Resolution ..... 12 bits, 1 in 4,096

Maximum update rate

#### Waveform Generation

| Device        | FIFO Mode        |                  | Non-FIFO Mode          |                        |
|---------------|------------------|------------------|------------------------|------------------------|
|               | Internally Timed | Externally Timed | 1 Channel              | 2 Channels             |
| 607xE         | 1 MS/s           | 950 kS/s         | 800 kS/s,              | 400 kS/s,              |
| 6040E         |                  |                  | system dependent       | system dependent       |
| 6062E         | 850 kS/s         | 850 kS/s         | 800 kS/s,              | 400 kS/s,              |
|               |                  |                  | system dependent       | system dependent       |
| 6023E         | N/A              | N/A              | 10 kS/s with DMA       | 10 kS/s with DMA       |
| PCI-6024E     |                  |                  | 1 kS/s with interrupts | 1 kS/s with interrupts |
| 6025E         |                  |                  | system dependent       | system dependent       |
| DAQCard-6024E | N/A              | N/A              | 1 kS/s with interrupts | 1 kS/s with interrupts |
|               |                  |                  | system dependent       | system dependent       |
| DAQPad-6020E  | N/A              | N/A              | 20 S/s,                | 20 S/s,                |
|               |                  |                  | system dependent       | system dependent       |

#### FIFO Buffer Size

|              |               |
|--------------|---------------|
| 607xE, 6062E | 2,048 samples |
| 6040E        | 512 samples   |
| 602xE        | None          |

#### Data transfers

PCI, PXI, DAQPad for IEEE 1394 ..... DMA, interrupts, programmed I/O  
DAQCard, DAQPad for USB ..... Interrupts, programmed I/O

#### DMA modes

PCI, PXI, DAQPad ..... Scatter-gather (single transfer, demand transfer)

### Transfer Characteristics

#### Relative accuracy

After calibration  
6062E, DAQCard-6024E .....  $\pm 0.5$  LSB typical,  $\pm 1.0$  LSB maximum  
All others .....  $\pm 0.3$  LSB typical,  $\pm 0.5$  LSB maximum  
Before calibration .....  $\pm 4$  LSB maximum

#### DNL

After calibration  
6062E, DAQCard-6024E .....  $\pm 0.5$  LSB typical,  $\pm 1.0$  LSB maximum  
All others .....  $\pm 0.3$  LSB typical,  $\pm 1.0$  LSB maximum  
Before calibration .....  $\pm 3$  LSB maximum

Monotonicity ..... 12 bits, guaranteed after calibration

#### Gain error (relative to external reference)

6062E, 6020E .....  $\pm 0.5\%$  of output maximum, not adjustable  
607xE, 6040E ..... 0 to 0.67% of output maximum, not adjustable

### Voltage Output

Output coupling ..... DC  
Output impedance .....  $0.1 \Omega$  maximum

#### Ranges

|                        |                                                                            |
|------------------------|----------------------------------------------------------------------------|
| 607xE, 6040E,<br>6020E | $\pm 10$ V, 0 to 10 V, $\pm$ EXT REF, 0 to EXT REF;<br>software selectable |
| 6062E                  | $\pm 10$ V, $\pm$ EXT REF, software selectable                             |
| 6024E, 6025E           | $\pm 10$ V                                                                 |

Current drive .....  $\pm 5$  mA maximum

Protection ..... Short-circuit to ground

Power-on state ..... 0 V ( $\pm 200$  mV)

### External Reference Input

Range ..... 11 V  
Overvoltage protection  
607xE, 6062E, 6040E .....  $\pm 25$  V powered on,  $\pm 15$  V powered off  
6020E .....  $\pm 35$  V powered on,  $\pm 25$  V powered off  
Input impedance .....  $10 \text{ k}\Omega$   
Bandwidth ( $-3 \text{ dB}$ )  
607xE, 6040E ..... 1 MHz  
6062E ..... 50 kHz  
6020E ..... 300 kHz

### Dynamic Characteristics

| Device                  | Settling Time for Full-Scale Step          | Slew Rate                  |
|-------------------------|--------------------------------------------|----------------------------|
| 607xE<br>6062E<br>6040E | $3 \mu\text{s}$ to $\pm 0.5$ LSB accuracy  | $20 \text{ V}/\mu\text{s}$ |
| 602xE                   | $10 \mu\text{s}$ to $\pm 0.5$ LSB accuracy | $10 \text{ V}/\mu\text{s}$ |

| Device        | Reglitching Disabled | Reglitching Enabled |
|---------------|----------------------|---------------------|
| 607xE, 604xE  | $\pm 20$ mV          | $\pm 4$ mV          |
| PCI-6024E     | $\pm 42$ mV          | N/A                 |
| 6025E         |                      |                     |
| DAQCard-6024E | $\pm 13$ mV          | N/A                 |
| 6020E         | $\pm 100$ mV         | N/A                 |
| 6062E         | $\pm 80$ mV          | $\pm 30$ mV         |

#### Glitch Duration (At Mid-Scale Transition)

|       |                   |
|-------|-------------------|
| 607xE | 1.5 $\mu\text{s}$ |
| 6040E |                   |
| 6024E | 2 $\mu\text{s}$   |
| 6025E |                   |
| 6020E | 3 $\mu\text{s}$   |
| 6062E |                   |

Noise .....  $200 \mu\text{V}_{\text{rms}}$ , DC to 1 MHz

Glitch energy magnitude (at mid-scale transition)

### Stability

Gain temperature coefficient (except 6024E, 6025E)

External reference .....  $\pm 25 \text{ ppm}/^\circ\text{C}$

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

### Digital I/O

| Number of Channels |                 |
|--------------------|-----------------|
| 602xE              | 32 input/output |
| All others         | 8 input/output  |

Compatibility ..... 5 V TTL  
 Power-on state ..... Input; (high-impedance)  
 Digital logic levels  
   P0.<0..7>

| Level                                     | Minimum (V) | Maximum (V) |
|-------------------------------------------|-------------|-------------|
| Input low voltage                         | 0           | 0.8         |
| Input high voltage                        | 2.0         | 5.0         |
| Output low voltage ( $I_{out} = 24$ mA)   | —           | 0.4         |
| Output high voltage ( $I_{out} = -13$ mA) | 4.35        | —           |

P1.<0..7>, P2.<0..7>, P3.<0..7>

| Level                                      | Minimum (V) | Maximum (V) |
|--------------------------------------------|-------------|-------------|
| Input low voltage                          | 0           | 0.8         |
| Input high voltage                         | 2.2         | 5.0         |
| Output low voltage ( $I_{out} = 2.5$ mA)   | —           | 0.4         |
| Output high voltage ( $I_{out} = -2.5$ mA) | 3.7         | —           |

#### Data Transfers

|            |                            |
|------------|----------------------------|
| 602xE      | Interrupts, programmed I/O |
| All others | Programmed I/O             |

Transfer rate (1 word = 8 bits)  
 Maximum with NI-DAQ, system dependent

| Transfer Rate |             |
|---------------|-------------|
| DAQPad-6070E  | 5 kwords/s  |
| All others    | 50 kwords/s |

Constant sustainable rate ..... 1 to 10 kwords/s, system dependent

### Timing I/O

Number of channels  
   Up/down counter/timers ..... 2  
   Frequency scaler ..... 1  
 Resolution  
   Up/down counter/timers ..... 24 bits  
   Frequency scaler ..... 4 bits  
 Compatibility ..... 5 V/TTL  
 Base clocks available  
   Up/down counter/timers ..... 20 MHz and 100 kHz  
   Frequency scaler ..... 10 MHz and 100 kHz  
 Base clock accuracy .....  $\pm 0.01\%$   
 Maximum source frequency  
   Up/down counter/timers ..... 20 MHz  
 Minimum source pulse duration ..... 10 ns, edge-detect mode  
 Minimum gate pulse duration ..... 10 ns, edge-detect mode  
 Data transfers ..... DMA\*, interrupts, programmed I/O

\*Except DAQCard and USB DAQPad

### Triggers

#### Analog Triggers

| Number of Triggers |      |
|--------------------|------|
| 607xE              | 1    |
| 6062E              |      |
| 6040E              |      |
| 602xE              | None |

#### Purpose

Analog input ..... Start and stop trigger, gate, clock  
 Analog output ..... Start trigger, gate, clock  
 General-purpose counter/timers ..... Source, gate

Source ..... All analog input channels, PFI 0/AI START TRIG

#### Level

Internal source, AI<0..15/63> .....  $\pm$ Full-scale  
 External source, PFI 0/AI START TRIG .....  $\pm 10$  V

Slope ..... Positive or negative; software selectable

Resolution ..... 8 bits, 1 in 256

Bandwidth (-3 dB)

| Device | Internal Source | External Source |
|--------|-----------------|-----------------|
| 607xE  | 2 MHz           | 7 MHz           |
| 6062E  | 500 kHz         | 2.5 MHz         |
| 6040E  | 650 kHz         | 3 MHz           |

Hysteresis ..... Programmable

#### Digital Triggers (All Devices)

##### Purpose

Analog input ..... Start and stop trigger, gate, clock  
 Analog output ..... Start trigger, gate, clock  
 General-purpose counter/timers ..... Source, gate

Source ..... PFI <0..9>, RTSI <0..6>

Compatibility ..... 5 V/TTL

Response ..... Rising or falling edge

Pulse width ..... 10 ns minimum

#### External Input For Digital Or Analog Trigger (PFI0/TRIG1)

##### Impedance

6062E ..... 12 k $\Omega$   
 607xE, 6040E ..... 10 k $\Omega$

Coupling ..... DC

##### Protection

Digital trigger ..... -0.5 to  $V_{cc} + 0.5$  V

### Calibration

Recommended warm-up time ..... 15 minutes; 30 minutes for DAQCard and DAQPad

Calibration interval ..... 1 year

#### Onboard calibration reference

DC level ..... 5.000 V ( $\pm 3.5$  mV) over full operating temperature, actual value stored in EEPROM

Temperature coefficient .....  $\pm 5$  ppm/ $^{\circ}$ C maximum

Long-term stability .....  $\pm 15$  ppm/ $\sqrt{1000$  h

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

### RTSI Bus (PCI and FireWire only)

|                            |   |
|----------------------------|---|
| Trigger lines <sup>1</sup> |   |
| PCI .....                  | 7 |
| FireWire (DAQPad) .....    | 4 |

### PXI Trigger Bus (PXI only)

|                     |   |
|---------------------|---|
| Trigger lines ..... | 6 |
| Star trigger .....  | 1 |

### Bus Interface

|                                   |               |
|-----------------------------------|---------------|
| PCI, PXI, FireWire (DAQPad) ..... | Master, slave |
| USB (DAQPad) .....                | Slave         |
| PCMCIA (DAQCard) .....            | Slave         |

### Power Requirements<sup>2</sup>

| Device                     | +5 VDC (±5%)*                    | Power Available at I/O Connector |
|----------------------------|----------------------------------|----------------------------------|
| PCI-607xE, PXI-607xE       | 1.1 A                            | +4.65 to +5.25 VDC, 1 A          |
| 6040E                      | 1.0 A                            | +4.65 to +5.25 VDC, 1 A          |
| DAQCard-6062E              | 340 mA typical<br>750 mA maximum | +4.65 to +5.25 VDC, 250 mA       |
| DAQCard-6024E              | 270 mA typical<br>750 mA maximum | +4.65 to +5.25 VDC, 250 mA       |
| 6023E, 6025E,<br>PCI-6024E | 0.7 A                            | +4.65 to +5.25 VDC, 1 A          |

| Device       | Power*              | Power Available at I/O Connector |
|--------------|---------------------|----------------------------------|
| DAQPad-6020E | 15 W, +9 to +30 VDC | +4.65 to +5.25 VDC, 1 A          |
| DAQPad-6070E | 17 W, +9 to +25 VDC | +4.65 to +5.25 VDC, 1 A          |

\*Excludes power consumed through I/O connector

Discharge time with BP-1 battery pack

|                         |                    |
|-------------------------|--------------------|
| FireWire (DAQPad) ..... | 2.5 hours, typical |
| USB (DAQPad) .....      | 3 hours, typical   |

### Physical<sup>2</sup>

#### Dimensions (Not Including Connectors)

|           |                                  |
|-----------|----------------------------------|
| PCI ..... | 17.5 by 10.7 cm (6.9 by 4.2 in.) |
| PXI ..... | 16.0 by 10.0 cm (6.3 by 3.9 in.) |

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| DAQPad (30 cm enclosure) ..... | 25.4 by 30.7 by 4.3 cm<br>(10 by 12.1 by 1.7 in.) |
| DAQPad (15 cm enclosure) ..... | 14.6 by 21.3 by 3.8 cm<br>(5.8 by 8.4 by 1.5 in.) |
| DAQCard .....                  | Type II PC Card                                   |

| I/O Connector                                 |                             |
|-----------------------------------------------|-----------------------------|
| 6070E<br>6040E<br>6020E<br>6023E<br>PCI-6024E | 68-pin male 0.050 D-type    |
| DAQCard-6062E,<br>DAQCard-6024E               | 68-pin female VHDCI         |
| 6071E<br>6025E                                | 100-pin female 0.050 D-type |

### Environment

|                             |                                                                                                                                                                                                                        |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating temperature ..... | 0 to 55 °C<br>0 to 40 °C for DAQCard-6062E and DAQCard-6024E with<br>a maximum internal temperature of 70 °C as measured by<br>onboard temperature sensor; case temperature should not<br>exceed 55 °C for any DAQCard |
| Storage temperature .....   | -20 to 70 °C                                                                                                                                                                                                           |
| Relative humidity .....     | 10 to 90%, noncondensing                                                                                                                                                                                               |

### Certifications and Compliances

#### CE Mark Compliance

<sup>1</sup>Refer to RTSI specifications for available RTSI trigger lines. RTSI not available on DAQCards.

<sup>2</sup>See page 134 for RT Series devices, power requirements and physical parameters.

# Multifunction DAQ Cable and Accessory Selection Guides

## NI Cable Design Advantages

The SH68-68-EP cable is the most commonly used E Series and S Series cable. The cable is designed to work specifically with the NI Multifunction DAQ devices to preserve signal integrity through these technologies:

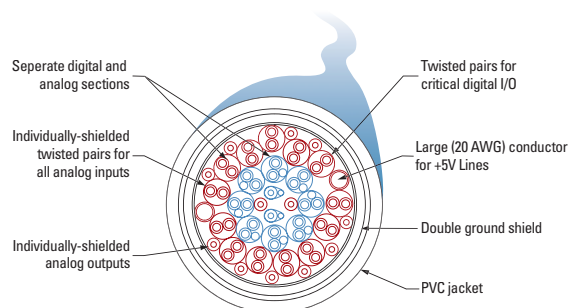


Figure 1. SH68-68-EP Cable

A variety of cabling and accessory options are available for your needs. Use the following tables to choose the most appropriate cables and accessories. To determine which Multifunction DAQ device best fits your needs, please see page 189.



Figure 2. NI offers a wide variety of cable and accessory options, such as the SH68-68-EP cable and the BNC-2110 terminal block.

| Platform                    | Shielding  | Connect to ...                               | Cable                                    | Adapter     | Accessory                                       |
|-----------------------------|------------|----------------------------------------------|------------------------------------------|-------------|-------------------------------------------------|
| <b>PCI/PXI/USB/FireWire</b> |            |                                              |                                          |             |                                                 |
|                             | Shielded   | SCC portable signal conditioning per channel | SH68-68-EP                               | —           | SC-2345 and modules, page 251                   |
|                             | Shielded   | SCXI high-performance signal conditioning    | SCXI-1349                                | —           | SCXI Chassis and Modules, page 270              |
|                             | Shielded   | Screw terminals <sup>1</sup>                 | SH68-68-EP or SH68-68R1-EP               | —           | SCB-68                                          |
|                             | Shielded   | BNC terminal block                           | SH68-68-EP                               | —           | BNC-2110, BNC-2120, BNC-2090                    |
|                             | Shielded   | 50-pin connector                             | SH6850                                   | —           | CB50, custom or 3rd party                       |
|                             | Shielded   | Configurable connectivity box                | SH68-68-EP                               | —           | CA-1000, page 351                               |
|                             | Unshielded | Screw terminals <sup>1</sup>                 | R6868                                    | —           | TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory |
|                             | Unshielded | 50-pin connector                             | R6850                                    | —           | CB50, custom or 3rd party                       |
| <b>PXI only</b>             |            |                                              |                                          |             |                                                 |
|                             | Shielded   | Front-mounted screw terminals                | N/A                                      | —           | TB-2705                                         |
| <b>PCMCIA</b>               |            |                                              |                                          |             |                                                 |
|                             | Shielded   | Screw terminals <sup>1</sup>                 | SHC68-68-EP or SHC68U-68-EP <sup>2</sup> | —           | SCB-68, CA-1000                                 |
|                             | Shielded   | 50-pin connector                             | SHC68-68-EP or SHC68U-68-EP <sup>2</sup> | 68M-50F MIO | CB50, custom or 3rd party                       |
|                             | Unshielded | Screw terminals <sup>1</sup>                 | RC68-68                                  | —           | TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory |
|                             | Unshielded | 50-pin connector                             | RC68-68                                  | 68M-50F MIO | CB50, custom or 3rd party                       |

<sup>1</sup>Unshielded cables can connect to shielded accessories and vice-versa. <sup>2</sup>In adjacent PCMCIA slots, both cables types are required because the same cable would cause mechanical hindrance.

Table 1. Cable Connection Specifications for 16-Channel E Series Devices and Basic Multifunction DAQ (except NI 6025E, which is on the next page)

# Multifunction DAQ Cable and Accessory Selection Guides

|                  |    |    |                 |
|------------------|----|----|-----------------|
| AI 0-            | 34 | 68 | AI 0+           |
| AI 1+            | 33 | 67 | AI 0 GND        |
| AI 1 GND         | 32 | 66 | AI 1-           |
| AI 2-            | 31 | 65 | AI 2+           |
| AI 3+            | 30 | 64 | AI 2 GND        |
| AI 3 GND         | 29 | 63 | AI 3-           |
| NC               | 28 | 62 | NC              |
| NC               | 27 | 61 | NC              |
| NC               | 26 | 60 | NC              |
| NC               | 25 | 59 | NC              |
| NC               | 24 | 58 | NC              |
| NC               | 23 | 57 | NC              |
| AO 0             | 22 | 56 | NC              |
| AO 0             | 21 | 55 | AO GND          |
| EXT REF          | 20 | 54 | AO GND          |
| P0.4             | 19 | 53 | D GND           |
| D GND            | 18 | 52 | P0.0            |
| P0.1             | 17 | 51 | P0.5            |
| P0.6             | 16 | 50 | D GND           |
| D GND            | 15 | 49 | P0.2            |
| +5 V             | 14 | 48 | P0.7            |
| D GND            | 13 | 47 | P0.3            |
| D GND            | 12 | 46 | AI HOLD         |
| PFI 0/AI START   | 11 | 45 | EXT STROBE      |
| PFI 1/REF TRIG   | 10 | 44 | D GND           |
| D GND            | 9  | 43 | PFI 2/AI CONV   |
| +5 V             | 8  | 42 | PFI 3/CTR 1 SRC |
| D GND            | 7  | 41 | PFI 4/CTR1 GATE |
| PFI 5/AO SAMP    | 6  | 40 | CTR 1 OUT       |
| PFI 6/AO START   | 5  | 39 | D GND           |
| D GND            | 4  | 38 | PFI 7/AI SAMP   |
| PFI 9/CTR 0 GATE | 3  | 37 | PFI 8/CTR 0 SRC |
| CTR 0 OUT        | 2  | 36 | D GND           |
| F OUT            | 1  | 35 | D GND           |

Figure 2. S Series Devices Connector

<sup>1</sup>No connects for boards that do not support AO or use an external reference with the SH1006868 cable.

|                      |    |    |                     |
|----------------------|----|----|---------------------|
| AI 8                 | 34 | 68 | AI 0                |
| AI 1                 | 33 | 67 | AI GND              |
| AI GND               | 32 | 66 | AI 9                |
| AI 10                | 31 | 65 | AI 2                |
| AI 3                 | 30 | 64 | AI GND              |
| AI GND               | 29 | 63 | AI 11               |
| AI 4                 | 28 | 62 | AI SENSE            |
| AI GND               | 27 | 61 | AI 12               |
| ACH13                | 26 | 60 | AI 5                |
| ACH6                 | 25 | 59 | AI GND              |
| AI GND               | 24 | 58 | AI 14               |
| ACH15                | 23 | 57 | AI 7                |
| AO 0 <sup>1</sup>    | 22 | 56 | AI GND              |
| AO 1 <sup>1</sup>    | 21 | 55 | AO GND              |
| EXT REF <sup>1</sup> | 20 | 54 | AO GND              |
| P0.4                 | 19 | 53 | D GND               |
| D GND                | 18 | 52 | P0.0                |
| P0.1                 | 17 | 51 | P0.5                |
| P0.6                 | 16 | 50 | D GND               |
| D GND                | 15 | 49 | P0.2                |
| +5 V                 | 14 | 48 | P0.7                |
| D GND                | 13 | 47 | P0.3                |
| D GND                | 12 | 46 | AI HOLD             |
| PFI 0/AI START       | 11 | 45 | EXT STROBE          |
| PFI 1/REF TRIG       | 10 | 44 | D GND               |
| D GND                | 9  | 43 | PFI 2/AI CONV       |
| +5 V                 | 8  | 42 | PFI 3/AI CTR 1 SRC  |
| D GND                | 7  | 41 | PFI 4/AI CTR 1 GATE |
| PFI 5/AO SAMP        | 6  | 40 | CTR 1 OUT           |
| PFI 6/AO START       | 5  | 39 | D GND               |
| D GND                | 4  | 38 | PFI 7/AI SAMP       |
| PFI 9/CTR 0 GATE     | 3  | 37 | PFI 8/CTR 0 SRC     |
| CTR 0 OUT            | 2  | 36 | D GND               |
| F OUT                | 1  | 35 | D GND               |

Figure 3. I/O Connector for 16-Channel E Series and Basic Multifunction DAQ Devices, except NI 6025E

|                  |    |     |            |
|------------------|----|-----|------------|
| AI GND           | 1  | 51  | AI 16      |
| AI GND           | 2  | 52  | AI 24      |
| AI 0             | 3  | 53  | AI 17      |
| AI 8             | 4  | 54  | AI 25      |
| AI 1             | 5  | 55  | AI 18      |
| AI 9             | 6  | 56  | AI 26      |
| AI 2             | 7  | 57  | AI 19      |
| AI 10            | 8  | 58  | AI 27      |
| AI 3             | 9  | 59  | AI 20      |
| AI 11            | 10 | 60  | AI 28      |
| AI 4             | 11 | 61  | AI 21      |
| AI 12            | 12 | 62  | AI 29      |
| AI 5             | 13 | 63  | AI 22      |
| AI 13            | 14 | 64  | AI 30      |
| AI 6             | 15 | 65  | AI 23      |
| AI 14            | 16 | 66  | AI 31      |
| AI 7             | 17 | 67  | AI 32      |
| AI 15            | 18 | 68  | AI 40      |
| AI SENSE         | 19 | 69  | AI 33      |
| AO 0             | 20 | 70  | AI 41      |
| AO 1             | 21 | 71  | AI 34      |
| EXT REF          | 22 | 72  | AI 42      |
| AO GND           | 23 | 73  | AI 35      |
| D GND            | 24 | 74  | AI 43      |
| P0.0             | 25 | 75  | AI SENSE 2 |
| P0.4             | 26 | 76  | AI GND     |
| P0.1             | 27 | 77  | AI 36      |
| P0.5             | 28 | 78  | AI 44      |
| P0.2             | 29 | 79  | AI 37      |
| P0.6             | 30 | 80  | AI 45      |
| P0.3             | 31 | 81  | AI 38      |
| P0.7             | 32 | 82  | AI 46      |
| D GND            | 33 | 83  | AI 39      |
| +5 V             | 34 | 84  | AI 47      |
| +5 V             | 35 | 85  | AI 48      |
| AI HOLD          | 36 | 86  | AI 56      |
| EXT STROBE       | 37 | 87  | AI 49      |
| PFI 0/AI START   | 38 | 88  | AI 57      |
| PFI 1/REF TRIG   | 39 | 89  | AI 50      |
| PFI 2/AI CONV    | 40 | 90  | AI 58      |
| PFI 3/CTR 1 SRC  | 41 | 91  | AI 51      |
| PFI 4/CTR 1 GATE | 42 | 92  | AI 59      |
| CTR 1 OUT        | 43 | 93  | AI 52      |
| PFI 5/AO SAMP    | 44 | 94  | AI 60      |
| PFI 6/AO START   | 45 | 95  | AI 53      |
| PFI 7/AI SAMP    | 46 | 96  | AI 61      |
| PFI 8/CTR 0 SRC  | 47 | 97  | AI 54      |
| PFI 9/CTR 0 GATE | 48 | 98  | AI 62      |
| CTR 0 OUT        | 49 | 99  | AI 55      |
| F OUT            | 50 | 100 | AI 63      |

Figure 4. I/O Connector for 64-Channel E Series Devices

|                  |    |     |      |
|------------------|----|-----|------|
| AI GND           | 1  | 51  | P2.7 |
| AI GND           | 2  | 52  | GND  |
| AI 0             | 3  | 53  | P2.6 |
| AI 8             | 4  | 54  | GND  |
| AI 1             | 5  | 55  | P2.5 |
| AI 9             | 6  | 56  | GND  |
| AI 2             | 7  | 57  | P2.4 |
| AI 10            | 8  | 58  | GND  |
| AI 3             | 9  | 59  | P2.3 |
| AI 11            | 10 | 60  | GND  |
| AI 4             | 11 | 61  | P2.2 |
| AI 12            | 12 | 62  | GND  |
| AI 5             | 13 | 63  | P2.1 |
| AI 13            | 14 | 64  | GND  |
| AI 6             | 15 | 65  | P2.0 |
| AI 14            | 16 | 66  | GND  |
| AI 7             | 17 | 67  | P1.7 |
| AI 15            | 18 | 68  | GND  |
| AI SENSE         | 19 | 69  | P1.6 |
| AO 0             | 20 | 70  | GND  |
| AO 1             | 21 | 71  | P1.5 |
| NC               | 22 | 72  | GND  |
| AO GND           | 23 | 73  | P1.4 |
| D GND            | 24 | 74  | GND  |
| P0.0             | 25 | 75  | P1.3 |
| P0.4             | 26 | 76  | GND  |
| P0.1             | 27 | 77  | P1.2 |
| P0.5             | 28 | 78  | GND  |
| P0.2             | 29 | 79  | P1.1 |
| P0.6             | 30 | 80  | GND  |
| P0.3             | 31 | 81  | P1.0 |
| P0.7             | 32 | 82  | GND  |
| D GND            | 33 | 83  | P0.7 |
| +5 V             | 34 | 84  | GND  |
| +5 V             | 35 | 85  | P0.6 |
| AI HOLD          | 36 | 86  | GND  |
| EXT STROBE       | 37 | 87  | P0.5 |
| PFI 0/AI START   | 38 | 88  | GND  |
| PFI 1/REF TRIG   | 39 | 89  | P0.4 |
| PFI 2/AI CONV    | 40 | 90  | GND  |
| PFI 3/CTR 1 SRC  | 41 | 91  | P0.3 |
| PFI 4/CTR 1 GATE | 42 | 92  | GND  |
| CTR 1 OUT        | 43 | 93  | P0.2 |
| PFI 5/AO SAMP    | 44 | 94  | GND  |
| PFI 6/AO START   | 45 | 95  | P0.1 |
| PFI 7/AI SAMP    | 46 | 96  | GND  |
| PFI 8/CTR 0 SRC  | 47 | 97  | P0.0 |
| PFI 9/CTR 0 GATE | 48 | 98  | GND  |
| CTR 0 OUT        | 49 | 99  | +5 V |
| F OUT            | 50 | 100 | GND  |

Figure 5. I/O Connector for the NI 6025E Device

## E Series Devices (NI 6031E, NI 6033E, NI 6071E, NI 6025E)

| Platform | Shielding  | Connect to ...               | Cable     | Cable Leg | Adapter          | Accessory                                       |
|----------|------------|------------------------------|-----------|-----------|------------------|-------------------------------------------------|
| PCI, PXI |            |                              |           |           |                  |                                                 |
|          | Shielded   | Screw terminals              | SH100100  | —         | —                | SCB-100                                         |
|          | Shielded   | Screw terminals              | SH1006868 | MIO:      | —                | SCB-68                                          |
|          | Shielded   |                              | SH1006868 | Extended: | —                | SCB-68                                          |
|          | Shielded   | Screw terminals <sup>1</sup> | SH1006868 | MIO:      | —                | TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory |
|          | Shielded   | Screw terminals <sup>1</sup> | SH1006868 | Extended: | —                | TBX-68, CB-68LP, CB-68LPR                       |
|          | Shielded   | BNC terminal block           | SH1006868 | MIO:      | —                | BNC-2110, BNC-2120, BNC-2090                    |
|          | Shielded   |                              | SH1006868 | Extended: | —                | BNC-2115                                        |
|          | Shielded   | 50-pin connectors            | SH1006868 | MIO:      | 68M-50F MIO      | Custom or 3rd party                             |
|          | Shielded   |                              | SH1006868 | Extended: | 68M-50F Extended | Custom or 3rd party                             |
|          | Unshielded | 50-pin connector             | R1005050  | MIO:      | —                | Custom or 3rd party                             |
|          | Unshielded |                              | R1005050  | Extended: | —                | Custom or 3rd party                             |

<sup>1</sup>Shielded cable with unshielded accessories

Table 2. Cable Connection Specifications for 64-Channel E Series Devices and the NI 6025E