
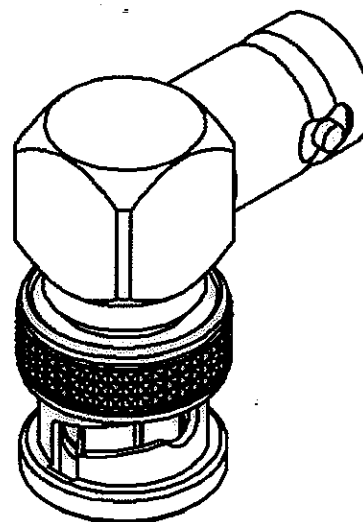
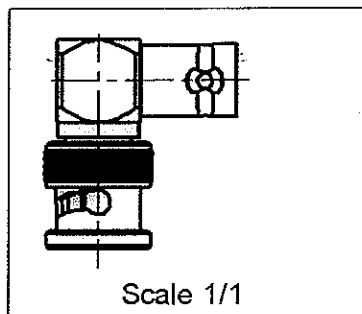


MALE-FEMALE RIGHT ANGLE ADAPTER

R142.770.000

Series : BNC 75

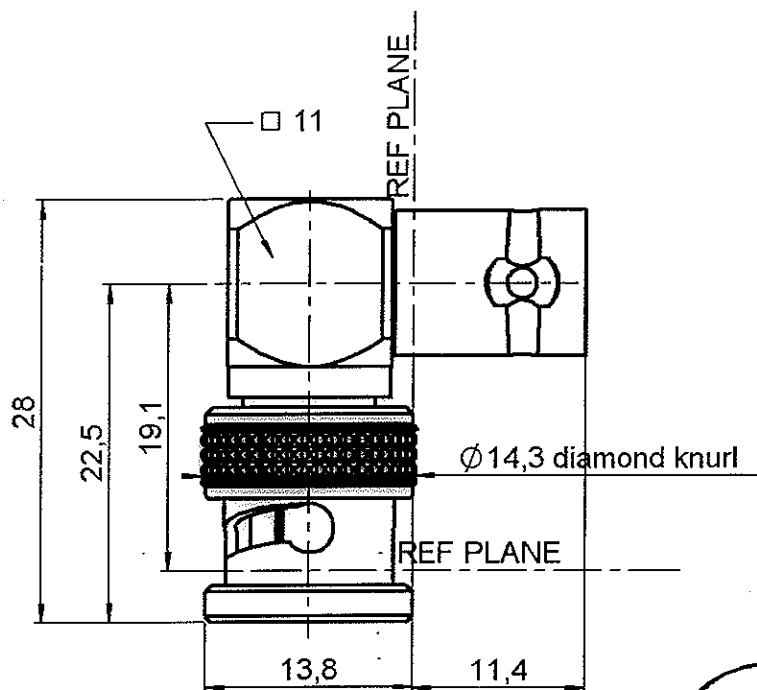

: All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING
BODY	BRASS	NICKEL 2 μm
CENTRE CONTACT	BERYLLIUM COPPER, BRASS	GOLD 0.5 OVER NICKEL 2 μm
OUTER CONTACT	-	- μm
INSULATOR	PTFE	
GASKET	-	
OTHERS PARTS	BRASS	NICKEL 2 μm
-	-	-
-	-	-



Edition : 9905 C

Design changes may be in order to improve the product.

MALE-FEMALE RIGHT ANGLE ADAPTER**R142.770.000**Series : **BNC 75****ELECTRICAL CHARACTERISTICS**

Impedance		75 Ω
Frequency		0-1.5 GHz
VSWR	1.35 +	0.000 x F(GHz) Maxi
Insertion loss		0.175 $\sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (	57 - F(GHz)) dB mini
Voltage rating		500 Veff Maxi
Dielectric withstanding voltage		1500 Veff mini
Insulation resistance		5000 M Ω mini

SPECIFICATION**ENVIRONMENTAL**

Operating temperature	-65/+165 °C
Hermetic seal	NA Atm.cm3/s
Leakage – pressurised only	NA Mpa

MECHANICAL CHARACTERISTICS

Centre contact retention	
Axial force – Mating end	18 N mini
Axial force – Opposite end	18 N mini
Torque	2.8 N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	0.000 g

OTHERS CHARACTERISTICS

Assembly instruction NA

Others :

**RADIALL®**

Edition : 9905 C

Design changes may be in order to improve the product.