




Dual Concentric Rotary Attenuator

Model	Frequency Range	Attenuation Range	Attenuation Accuracy	VSWR	Insertion Loss
50DR-096	DC-3000 MHz	0-30 dB in 1 dB steps	+/- .25 dB or 2 % DC-1000 MHz +/- .4 dB or 3% 1000-2000 MHz +/- .5 dB or 4% 2000-3000 MHz	1.4:1 to 1000 MHz 1.5:1 to 2000 MHz 1.7:1 to 3000 MHz	1 dB maximum

Impedance	RF Input Power	Operating Temperature	Standard Rotation	Indexing	RF Connectors
50 Ohms	2 Watts average 1000 Watts peak	-20° C to +85° C	Attenuation increases in clockwise direction	30 degrees with stops at minimum and maximum	SMA female

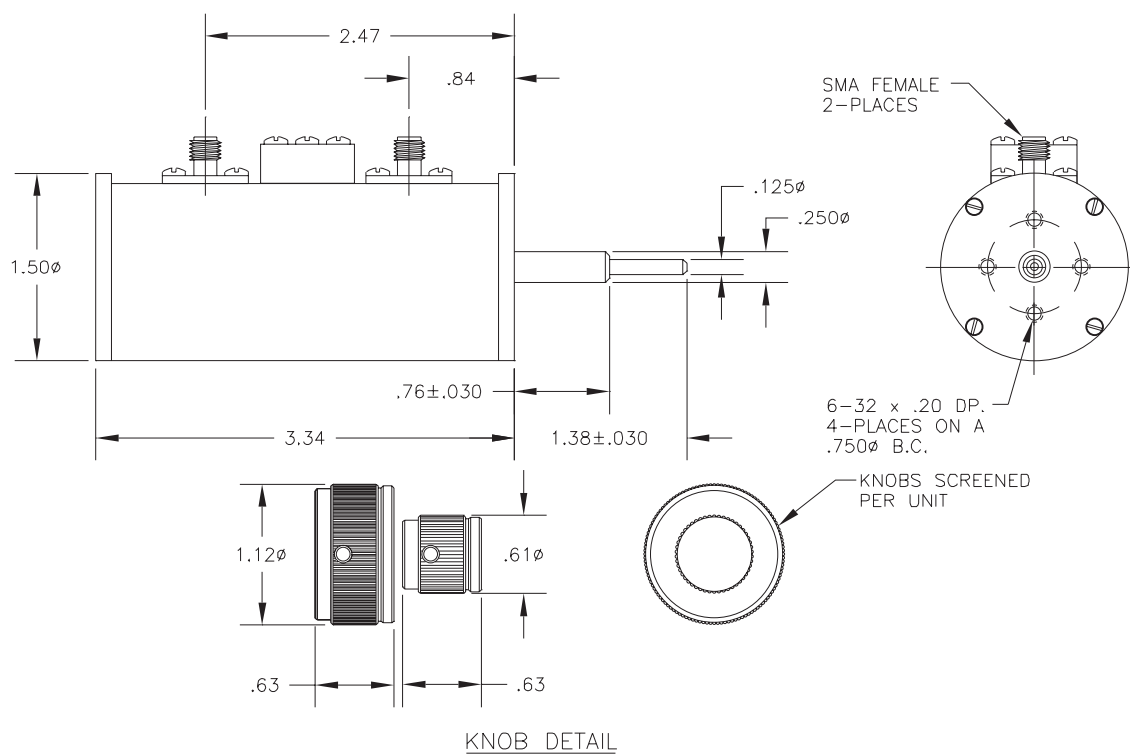

This catalog represents only 10% of our products. For YOUR application, please contact JFW at 1-877-887-4JFW