

Assembly instruction

Cable Feed-Through, crimped

AA 08.01.97
324/MDC

Series 71Z
No. 3081

Suitable cables e.g.

RG 213/U
RG 214/U

RG 59
RG 04233

RG 58
RG 223

Centre contact:

Crimp insert:


D

C


B

TYPES	X	CABLES	CRIMP INSERT
71Z 0-7-7	10	RG 213/U	D
71Z 0-7-8	10	RG 214/U	D
71Z 0-4-8	8	RG 59	C
71Z 0-4-9	8	G04233d	C
71Z 0-3-13	8	RG 58	B
71Z 0-3-14	8	RG 223	B


Length of Y + Z as required

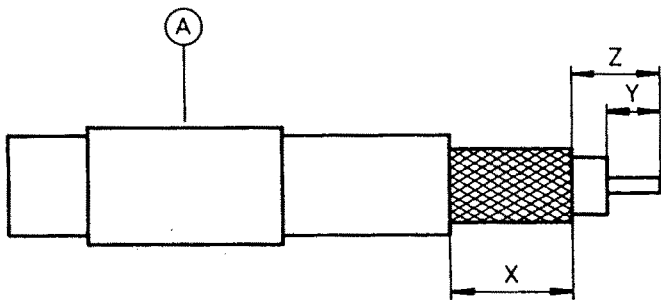

Ferrule A on cable. Prepare cable according to diagram. Length Y + Z as required. Do not damage inner conductor of cable, braid and dielectric.

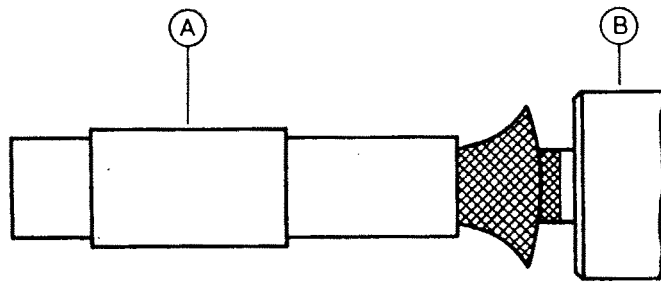

Splay out braid, and insert cable in connector body B. Ensure that braid lies above the crimp neck.

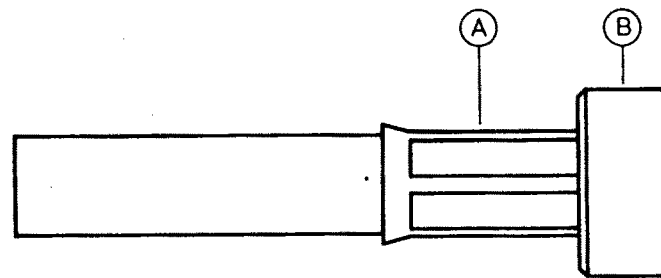

Slide ferrule A over braid and crimp as close to connector body B as possible. (Crimp insert: B, C or D).



HUBER + SUHNER Ltd. CH-9100 HERISAU
Switzerland