

Coaxial Connectors Series UHF

Crimp version

Impedance: not matched
 Inner conductor: Brass, silver-plated
 Crimp ferrule: Copper, nickel-plated
 Other metal parts: Brass, nickel-plated
 Gaskets: Silicone rubber

Plugs

(Inner and outer conductor crimped)

Suhner Code No.	Cable	Insulator	Crimp tool	Fig.
11 UHF-0-3-17c	RG 58 C/U	PP	2 B	1
11 UHF-0-3-18c	RG 223/U	PP	2 B	1
11 UHF-0-3-19c	RG 58 C/U	PTFE	2 B	1
11 UHF-0-3-20c	RG 223/U	PTFE	2 B	1
11 UHF-0-4-14c	RG 59 B/U	PP	2 C	1
11 UHF-0-4-15c	G 04233-d	PP	2 C	1
11 UHF-0-4-16c	RG 59 B/U	PTFE	2 C	1
11 UHF-0-4-17c	G 04233-d	PTFE	2 C	1
11 UHF-0-7-17c	RG 213/U	PP	3 D	2
11 UHF-0-7-18c	RG 214/U	PP	3 D	2
11 UHF-0-7-19c	RG 213/U	PTFE	3 D	2
11 UHF-0-7-20c	RG 214/U	PTFE	3 D	2

Assembly instruction

No. 3075

PP: Polypropylene

Angle Plug

(Inner conductor soldered)

Suhner Code No.	Cable	Insulator	Crimp tool	Fig.
16 UHF-0-3-4c	RG 58 C/U	PTFE	2 B	3
16 UHF-0-3-5c	RG 223/U	PTFE	2 B	3
16 UHF-0-4-5c	RG 59 B/U	PTFE	2 C	3
16 UHF-0-4-6c	G 04233-d	PTFE	2 C	3
16 UHF-0-7-4c	RG 213/U	PTFE	3 D	4
16 UHF-0-7-5c	RG 214/U	PTFE	3 D	4

Assembly instruction

No. 3075

Jack

(Inner and outer conductor crimped)

Suhner Code No.	Cable	Insulator	Crimp tool	Fig.
21 UHF-0-3-3c	RG 58 C/U	PTFE	2 B	5
21 UHF-0-3-4c	RG 223/U	PTFE	2 B	5
21 UHF-0-4-3c	RG 59 B/U	PTFE	2 C	5
21 UHF-0-4-4c	G 04233-d	PTFE	2 C	5
21 UHF-0-7-4c	RG 213/U	PTFE	3 D	6
21 UHF-0-7-5c	RG 214/U	PTFE	3 D	6

Assembly instruction

No. 3075

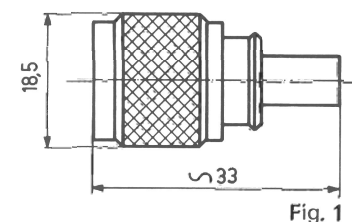


Fig. 1

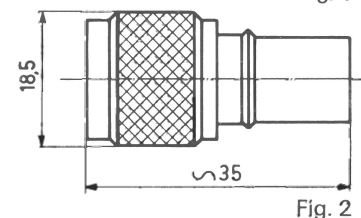


Fig. 2




Fig. 3

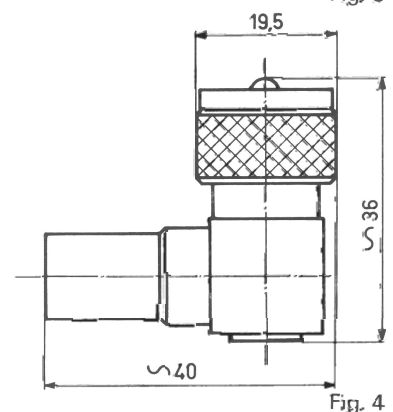


Fig. 4

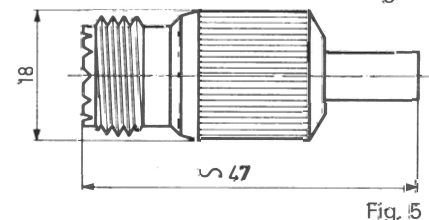


Fig. 5

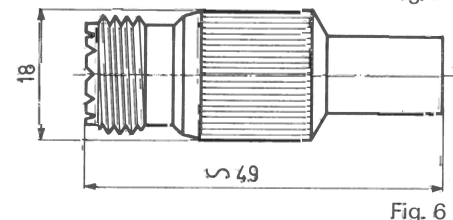


Fig. 6