

# CASA Type #: 11PAL-75-5-RG6-EF125-YB

Suitable cables include industry standard 75 Ohm  
solid centre conductor types with 5mm solid or foamed  
dielectric with braided screens (with or without foil-wraps)

RG-6/U

RG-6B/U

other RG-6 types subject to testing.


# DRAFT

Overall  
Ø 11.0mm

Max Cable  
Ø 8.5mm

XXmm HEX  
AF Size

Recommended Hex Crimp Dies  
X.X mm AF (nominally 8~10mm long)

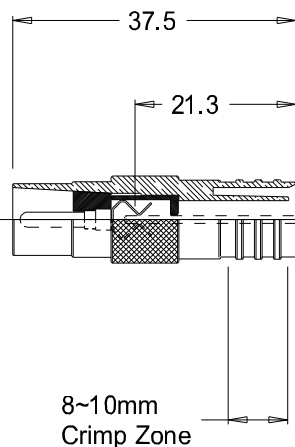

+ 15mm (cut-cable) add-on  
for fitted connector

Optional Heat-Shrink Sleeve  
13mm ID (coated or un-coated)  
nominally 30~50mm long

RG-6 Types 75 Ohm Cables 7~8mm (nominal) OD

Connector Outline

MATERIAL NA
ALLOY NA
EST. AREA NA mm
EST. WEIGHT NA kg/m
EST. PERIPHERY EXT: NA mm TOT: NA mm
TOLERANCE 0.00mm ±0.1mm 00.0mm ±0.25mm 0000mm ±0.5mm 0~600mm ±0.1mm > 600mm ±0.5mm
BS1474:1987 APPLIES UNLESS OTHERWISE SPECIFIED
JOB No. <b>XXXX</b>

Supplier: Yubright (Taiwan)  
OEM #: EF125RG6 (Yubright)  
Batch #: Txxxxx

<b>CASA</b> Modular Systems
Petone 5012, WELLINGTON, NEW ZEALAND TELEPHONE : (64-4) 9393 777 WWW Address: www.casa.co.nz

CUSTOMER : **CASA Modular Systems**

DESCRIPTION : Semi-Crimp PAL Plugs & Sockets from YuBright etc.

DRAWN : **AWD**

DATE : **29/05/19**

APPROVED : **?**

DWG. SCALE : **1:1**

SIZE <b>A4</b>	DRAWING Reference No. <b>11PAL-EF125RG6</b>	ISSUE <b>A</b>
© COPYRIGHT : CASA Modular Systems ALL RIGHTS RESERVED		