





Fixed coupler plugs and sockets (Square flange)

These plugs and sockets are supplied complete with panel mounting gasket, corner bushes, nuts, bolts and washers.

MOUNTED FROM REAR OF PANEL

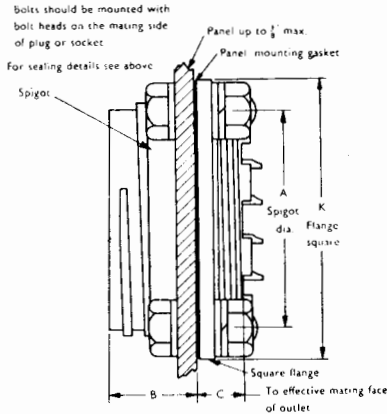


SEALING DETAILS




Bolts should be mounted with bolt heads on the mating side of plug or socket

MOUNTED FROM FRONT OF PANEL

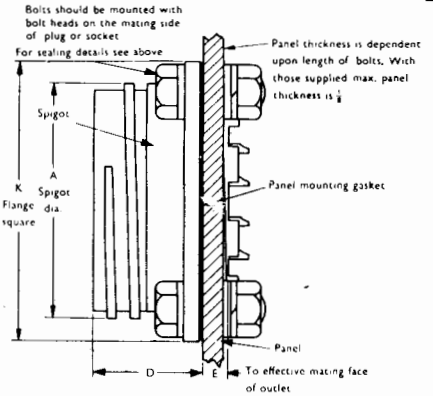

Panel thickness is dependent upon length of bolts. With those supplied max. panel thickness is 1/8"

Panel piercing details

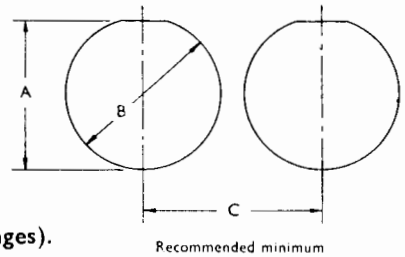


For fixed plugs or sockets (round flanges).

Shell Size	A	B dia.	C	Panel Mounting Washer* 508/2/
1	.811/.816	.848/.853	1.312	07810/005
2	1.033/1.038	1.067/1.072	1.562	07811/005
3	1.410/1.415	1.442/1.447	2.00	07812/005

Panel piercing details

For fixed coupler plugs and sockets (square flange).

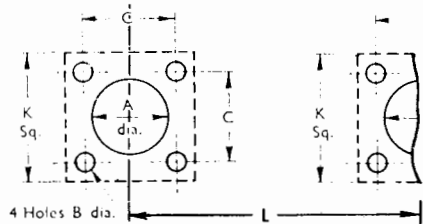

Shell Size	A dia.	B dia.	C	K sq.	L
1	.995	.147	1.000	1.33	1.45
	1.000	4BA			
2	1.215	.191	1.235	1.65	1.71
	1.220	2BA			
3	1.590	.191	1.515	1.92	2.19
	1.595	2BA			

Contact Arrangement	Weight(oz.)		Shell Size	A dia.	B	C	D	E	K sq.
	Plug	Skt							
2-19 amp. 250 V	2.6	2.7	1						
3-5 amp. 250 V	2.7	2.6		.995	.54	.38	.67	.26	1.33
4-5 amp. 250 V	2.7	2.7		1.000					
6-5 amp. 250 V	2.7	2.7							
2-35 amp. 250 V	4.1	4.0	2						
3-19 amp. 2 kV	4.0	4.0							
4-19 amp. 250 V	4.1	4.1		1.215	.55	.38	.68	.26	1.65
6-5 amp. 500 V	4.0	4.0		1.220					
6-5 amp. 2 kV	4.0	4.0							
12-5 amp. 250 V	4.1	4.1							
3-60 amp. } 250 V	6.2	5.9	3						
1-19 amp. }									
2-60 amp. } 250 V	6.1	6.2							
3-19 amp. }									
6-19 amp. 2.5 kV	5.9	5.9		1.590	.61	.40	.77	.25	1.92
9-19 amp. 250 V	6.0	6.1		1.595					
13-12 amp. 250 V	6.1	6.1							
18-5 amp. spec.	5.9	5.9							
25-5 amp. 250 V	6.0	5.9							