




Dimensions and weights Aluminium Mark 4 Plugs and sockets

Free plugs and sockets

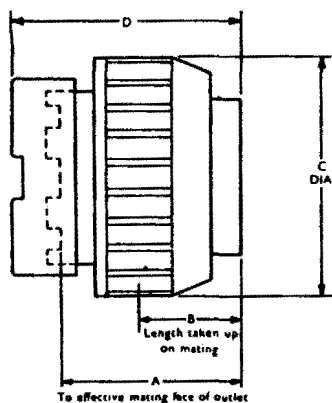


Free


Contact Arrangement	Weight (oz.)		Shell Size	A	B	C dia.	D
	Plug	Skt.					
2-19 amp. 250 V	-7	-7	1	.88	.34	1.140	1.03
3-5 amp. 250 V	-7	-7					
4-5 amp. 250 V	-7	-7					
6-5 amp. 250 V	-7	-8					
2-35 amp. 250 V	1-1	1-1	2	.865	.34	1.363	1.02
3-19 amp. 2 kV	1-1	1-1					
4-19 amp. 250 V	1-1	1-1					
6-5 amp. 500 V	1-1	1-1					
6-5 amp. 2 kV	1-3	1-4					
12-5 amp. 250 V	1-2	1-2					
3-60 amp. 250 V 1-19 amp.	2-3	2-1	3	1.03	.42	1.738	1.19
2-60 amp. 250 V 3-19 amp.	2-15	2-3					
6-19 amp. 2.5 kV	2-0	2-0					
9-19 amp. 250 V	2-1	2-2					
18-5 amp. spec.	1-9	1-8					
25-5 amp. 250 V	1-8	2-0					

Fixed plugs and sockets

MOUNTED FROM FRONT OF PANEL



MOUNTED FROM REAR OF PANEL

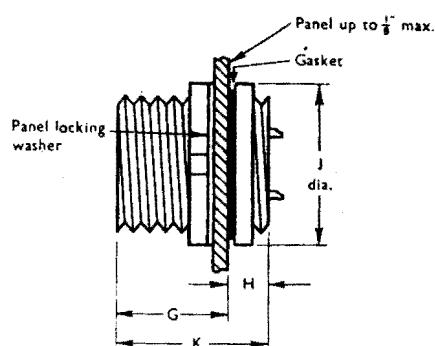


Fixed

Contact Arrangement	Weight (oz.)		Shell Size	G	H	J dia.	K
	Plug	Skt.					
2-19 amp. 250 V	-8	-8	1	.60	.302	1.125	.902
3-5 amp. 250 V	-8	-8					
4-5 amp. 250 V	-8	-8					
6-5 amp. 250 V	-9	-9					
2-35 amp. 250 V	1-3	1-2	2	.60	.302	1.343	.902
3-19 amp. 2 kV	1-2	1-2					
4-19 amp. 250 V	1-2	1-2					
6-5 amp. 500 V	1-5	1-6					
6-5 amp. 2 kV	1-4	1-5					
12-5 amp. 250 V	1-7	1-7					
3-60 amp. 250 V 1-19 amp.	2-5	2-3	3	.67	.349	1.718	1.019
2-60 amp. 250 V 3-19 amp.	2-4	2-5					
6-19 amp. 2.5 kV	2-3	2-2					
9-19 amp. 250 V	2-3	2-5					
18-5 amp. spec.	2-1	2-0					
25-5 amp. 250 V	2-3	2-5					

Panel piercing details

Shell Size	A	B dia.	C	Panel Mounting Washer* 508/2/
1	.811/.816	.848/.853	1.312	07810/005
2	1.033/1.038	1.067/1.072	1.562	07811/005
3	1.410/1.415	1.442/1.447	2.00	07812/005

The 'flat' is not essential for sealing and is provided for location only

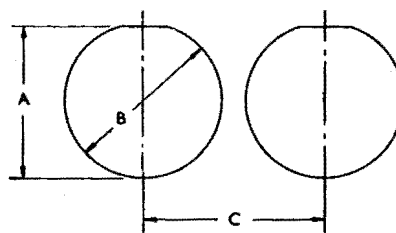

Recommended minimum

* Panel mounting washers are required where panel thickness is $\frac{1}{32}$ " or less.