
General Data

Metal parts nickel-plated.

Insulation: polythene.

Not impedance-matched.

Male and female types comply with standard banana contacts of .157" dia. (4 mm).

Outer conductor .472" dia. (12 mm).

Contact pins with a spring catch.

Application

Particularly suitable for high-frequency radio reception by wire, ph-measuring instruments and others.

Frequency Range: up to 50 Mc/s



Operating Voltage: 250 V_{eff}.

Temperature Limit: 70°C/160°F

Cable-Entry Size: approx. .275" dia. (7 mm)

Plug



male

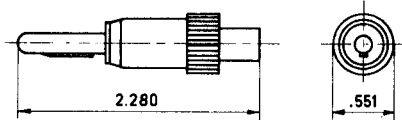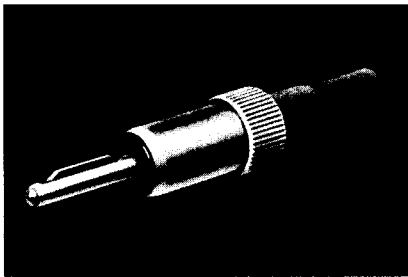

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
NA 0614					.216	.116	1	RG-58 C/U		with extension on nut to accomodate rubber tube for cable sheath
NA 0617					.216	.116	1	RG-58 C/U		NA 0614 with addition of Earthing Plug
NA 0621					.252	.146	1	RG-59 B/U		with extension on nut to accomodate rubber tube for cable sheath
NA 0622					.252	.146	1	RG-59 B/U		NA 0621 with addition of Earthing Plug

Plug



female

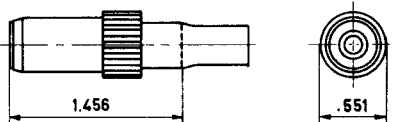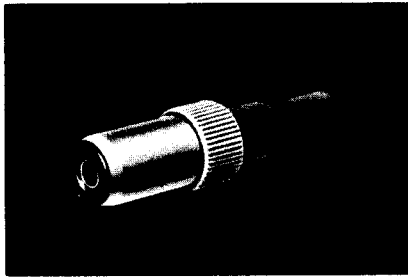

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
NA 0619					.216	.116	1	RG-58 C/U		with extension on nut to accomodate rubber tube for cable sheath
NA 0620					.216	.116	1	RG-58 C/U		NA 0619 with addition of Earthing Plug
NA 0623					.252	.146	1	RG-59 B/U		with extension on nut to accomodate rubber tube for cable sheath
NA 0615					.252	.146	1	RG-59 B/U		NA 0623 with addition of Earthing Plug

Receptacle



female

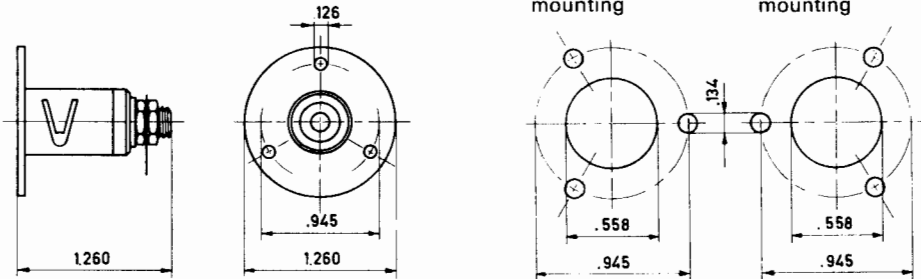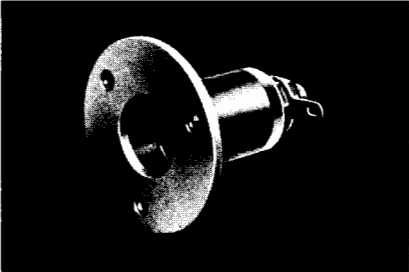

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
PA 0602										Panel Mounting type with Earthing Tag, mates with Male Plug

Receptacle



male

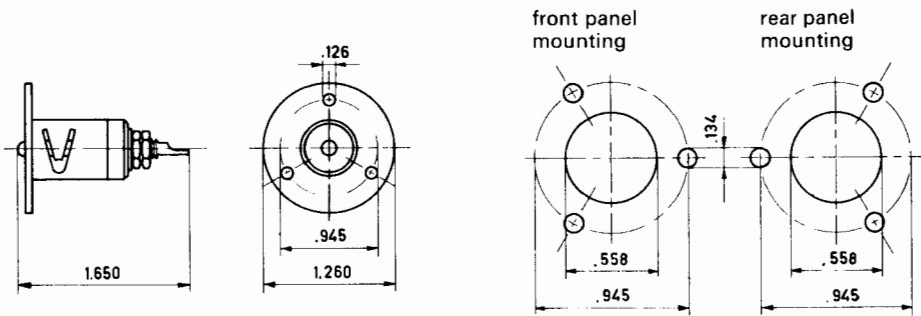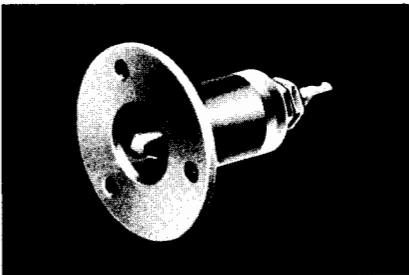

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
PA 0604										Panel Mounting type mates with Female Plug

Adapter



2 female contacts

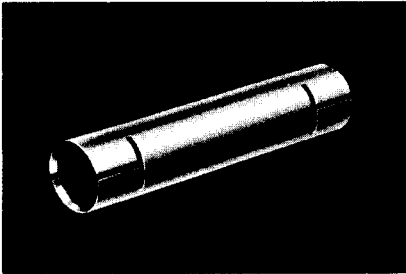

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
NA 0605										mates with Male Plug

T-Adapter

3 female contacts

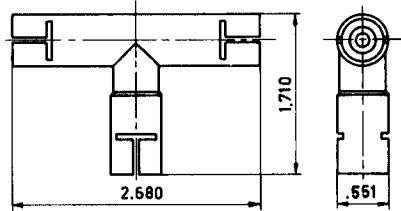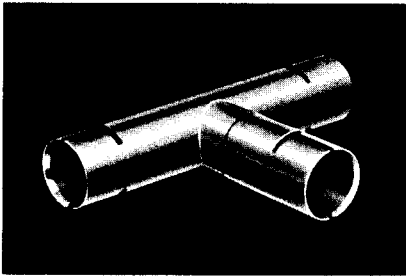

Suhner Type	US-MIL-Type	NATO Type equivalent	centre contact	pressur- ized	cable				assembly instruction number	notes
					dia. max. in	dielectric dia. in	screen	example		
NA 0606										mates with Male Plug