



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE461

Silicon N-Channel JFET Transistor


Dual, Matched Pair

DC Amp/Sampler/Chopper

TO71 Type Package

Features:

- High Input Impedance: $I_G \leq 50\text{pA}$
- Minimum System Error and Calibrations
- TO-71 Case Style



Absolute Maximum Ratings:

Gate Drain or Gate Source Voltage		-50V
Gate Current		30mA
Device Dissipation ($T_A = +25^\circ\text{C}$, Each Side)		250mW
Derate Above 25°C		1.67mW/ $^\circ\text{C}$
Total Device Dissipation ($T_A = +25^\circ\text{C}$)		400mW
Derate Above 25°C		2.67mW/ $^\circ\text{C}$
Storage Temperature Range		-65° to $+200^\circ\text{C}$
Lead Temperature (During Soldering, 1/16" from case for 30sec)		$+300^\circ\text{C}$

Electrical Characteristics: ($T_A = +25^\circ\text{C}$, unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Static Characteristics						
Gate-Source Breakdown Voltage	$V_{(BR)GSS}$	$I_G = -1\text{ A}$, $V_{DS} = 0$	-50	-	-	V
Gate Reverse Current	I_{GSS}	$V_{GS} = -30\text{V}$, $V_{DS} = 0$	-	-	-100	pA
Gate-Source Cutoff Voltage	$V_{GS(off)}$	$V_{DG} = 15\text{V}$, $I_D = 0.5\text{nA}$	-0.5	-	-4.5	V
Saturation Drain Current	I_{DSS}	$V_{DS} = 15\text{V}$, $V_{GS} = 0$	0.5	-	8.0	mA
Gate Operating Current	I_G	$V_{DG} = 15\text{V}$, $I_D = 200\text{ A}$	-	-	-50	pA
Dynamic Characteristics						
Forward Transconductance	g_{fs}	$g = 1\text{kHz}$	1500	-	6000	mhos
Input Capacitance	C_{iss}	$V_{DS} = 15\text{V}$, $V_{GS} = 0$	-	-	6	pF
Reverse Transfer Capacitance	C_{rss}	$V_{DS} = 15\text{V}$, $V_{GS} = 0$	-	-	2	pF

Electrical Characteristics (Cont'd): ($T_A = +25^{\circ}\text{C}$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Matching Characteristics						
Differential Gate Current	$I_{G1}-I_{G2}$	$V_{DG} = 15\text{V}$, $I_D = 200\text{ A}$, $T_A = +25^{\circ}\text{C}$	–	–	5	nA
Saturation Drain Current Ratio	I_{DSS1}/I_{DSS2}	$V_{DS} = 15\text{V}$, $V_{GS} = 0$, Note 1	0.95	–	1.0	
Differential Gate–Source Voltage	$V_{GS1}-V_{GS2}$	$V_{GD} = 15\text{V}$, $I_D = 50\text{ A}$	–	–	15	mV
		$I_D = 200\text{ A}$	–	–	15	mV
Gate–Source Voltage Differential Drift		$V_{DG} = 15\text{V}$, $I_D = 200\text{ A}$, Note 2	$T_A = +25^{\circ}\text{C}/T_B = +125^{\circ}\text{C}$	–	–	40 $\text{V}/^{\circ}\text{C}$
			$T_A = -55^{\circ}\text{C}/T_B = +25^{\circ}\text{C}$	–	–	40 $\text{V}/^{\circ}\text{C}$
Transconductance Ratio	g_{fs1}/g_{fs2}		0.95	–	1.0	
Differential Output Conductance	$g_{os1}-g_{os2}$		–	–	3	mhos

Note 1. Assumes smaller value in numerator.

Note 2. Measured at end points, T_A and T_B .

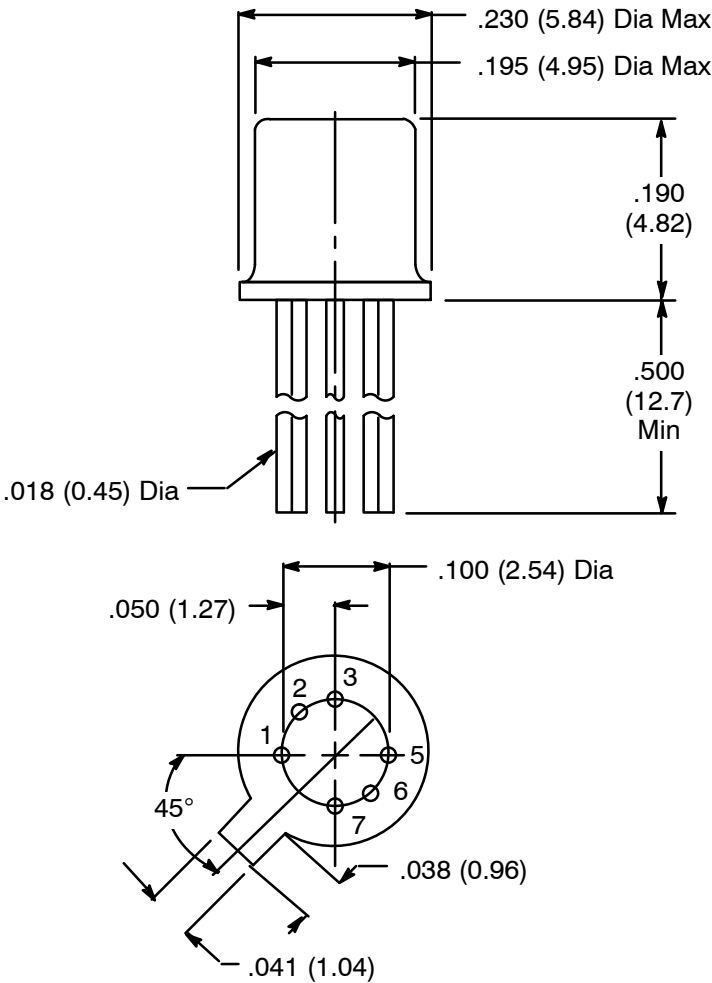

Pin4 and Pin8 are Omitted
All Leads are Isolated from Case

- Pin 1 S1
- Pin 2 D1
- Pin 3 G1
- Pin 5 S2
- Pin 6 D2
- Pin 7 G2