



SPARE PARTS LIST

PART No.	DESCRIPTION	No. PER INST.	FIN-ISH	PART No.	DESCRIPTION	No. PER INST.	FIN-ISH
INSTRUCTIONS							
96317	Instruction Card	1	00	See RV1	SW2 - ON/OFF Switch	-	-
96314	Cabinet Label	1	00	96057	Wire Switch - operating link for S.W.1	1	689
96360	Guarantee Card	1	00	96058	Washer on Switch - operating link for S.W.1	1	689
96098A	Serial No. Label	1	00	10048	Eyelet on Switch - operating link for S.W.1	1	00
CABINET AND FITTINGS							
96048A	Cabinet Body	1	00	VALVES, VALVEHOLDERS & TRANSISTORS			
96049A	Cabinet Back	1	00	DK96	V1 - Frequency Changer	1	00
96048B	Cabinet Body (Model 1410G only)	1	00	DF96	V2 - IF Amplifier	1	00
96049B	Cabinet Back	1	00	DAP96	V3 - Detector, AGC & IF Amplifier	1	00
96067A	Handle Model 1410B only	1	00	96065A	(TRA1 {Matched pair	1	00
96067B	Handle Model 1410G only	1	00	96065A	(TRA2 {Transistors	1	00
96068	Spring Clips on Handle	2	00	96051A	Valveholders for V1,2 & 3.	3	00
96069A	Wavechange Slider Knob	1	689	BATTERIES			
96070	Metal Slider Link	1	00	Ever Ready	BL39 67.5v HT Battery	1	00
92362	Spire Nut securing Knob to Slider Link	1	00	"	U11 1.5v LT Cells	3	00
93991	Rubber Band on Cabinet Back	1	00	BATTERY CONNECTORS, WIRING Etc.			
15159	Tags retaining Rubber Band	1	00	96064	LT + Battery Contact	1	454
96076	PK Screws securing Tags	2	104	96064A	LT - Battery Contact	1	00
95896	HMV Emblem	1	00	41232A	HT + Battery Connector Socket	1	00
CONTROL KNOBS				41229A	HT - Battery Connector Stud	1	00
See RV1	"Volume" Knob	1	00	143/404/	PVC covered connecting	-	-
Assy.	"Tune"	1	00	230 - 9	wire 1/024	-	-
96077A	"Wavechange" Knob	1	00	144/401/	Flexible PVC covered	-	-
96079	Pin (securing Tuning Spring)	1	689	040 - 9	connecting wire 14/.0048 (Battery Leads, etc.)	-	-
96080	Knob	1	00	NB. For colour required change last figure as per Standard Colour Code.			
92362	Spire Nut securing Wave-change Knob	1	00	143/051/	240 24 SWG Tinned Copper Wire	-	-
96229	Felt Washers on Tuning Spindle	2	00	141/401/	024 1 mm Yellow PVC Sleeving	-	-
LOUDSPEAKER				141/403/	508 4 mm Clear Sleeving	-	-
96072A	Loudspeaker complete - 2 1/2" Round	1	00	INDUCTORS			
96073	Spire Nuts securing loudspeaker	4	00	92780B	L1 - MW Aerial Coil	1	00
CHASSIS ASSEMBLIES				92770D	L2 - LW Aerial Coil	1	00
96050B	Radio Unit complete	1	00	92690B	L3) 1st. IF Transformer	1	00
96074	Clamp (securing Radio PK Screw) Unit in Cabinet	1	689				
96075		1	689				

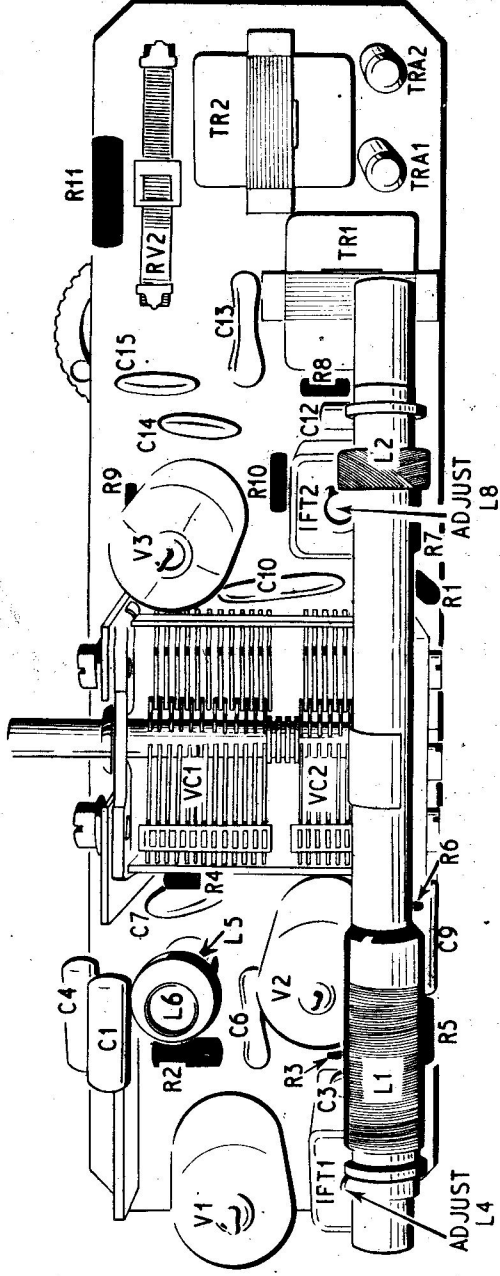

TOP VIEW OF CHASSIS

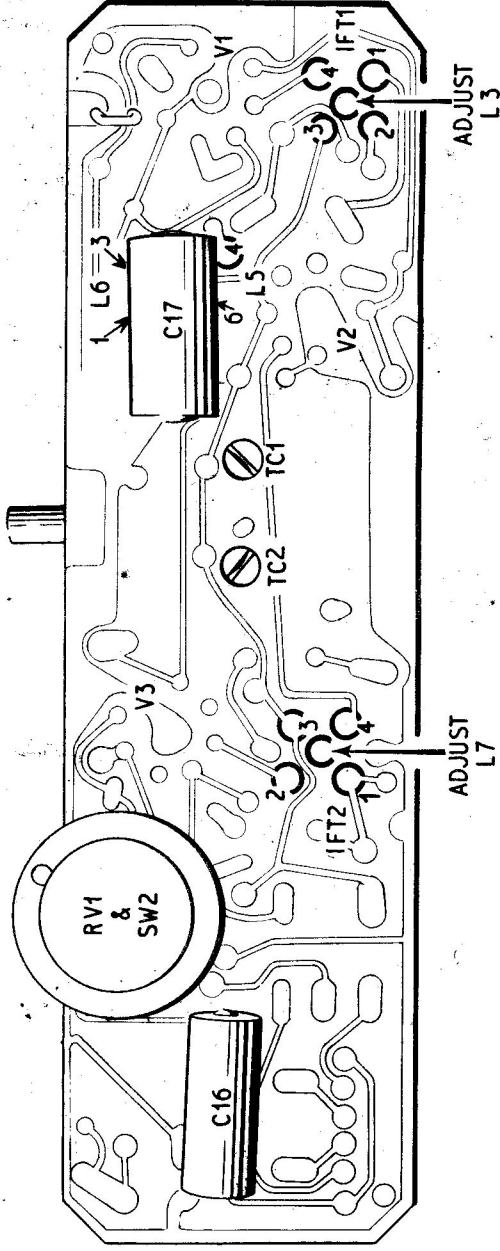

UNDERSIDE VIEW OF CHASSIS