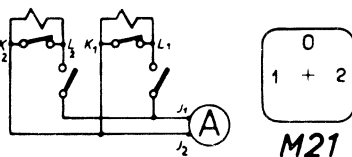
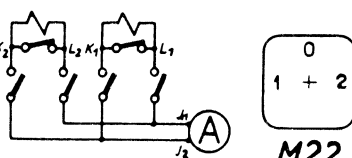
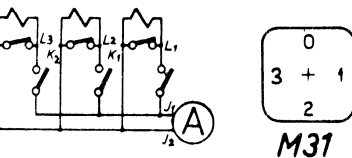
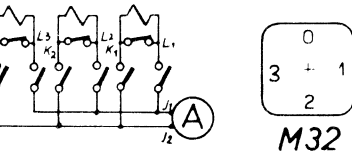
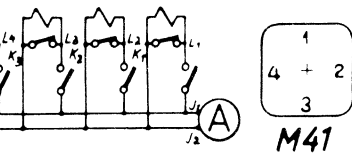
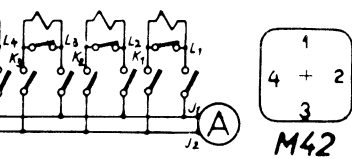
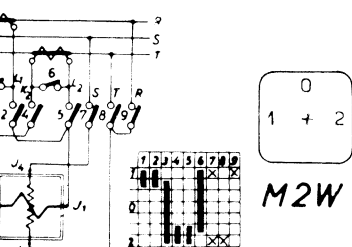


Telux-CAM SWITCHES

Description	Circuit diagram and switch programme	No. of cells	Angle of rotation PN	Switch size	Current rating A	Panel mounting E	Base mounting V	in plastic enclosure P	in plastic enclosure splashproof PF	Cast aluminium G	Cast aluminium splashproof GF
-------------	--------------------------------------	--------------	-------------------------	-------------	---------------------	---------------------	--------------------	---------------------------	--	---------------------	----------------------------------

Ammeter and Wattmeter Selector Switch

Two current transformer circuits, single pole 1-0-2		2	90° PN 64	M 10 M 16	10 16	E M 21	V M 21	P M 21	PF M 21	G M 21	GF M 21
				N 16 N 20	16 20						
				N 32	32						
			60° 55	T 310 T 316	10 16						
For two current transformer circuits, or direct current measurement in two phases, two pole 1-0-2		3	90° PN 64	M 10 M 16	10 16	E M 22	V M 22	P M 22	PF M 22	G M 22	GF M 22
				N 16 N 20	16 20						
				N 32 N 40 N 60	32 40 63						
			60° 55	N 100 N 200	100 200						
				T 310 T 316	10 16						
For three current transformer circuits, single pole 0-1-2-3		4	90° PN 62	M 10 M 16	10 16	E M 31	V M 31	P M 31	PF M 31	G M 31	GF M 31
				N 16 N 20	16 20						
				N 32	32						
			60° 54	T 310 T 316	10 16						
For three current transformer circuits or direct current measurement in three phases, two poles 0-1-2-3		6	90° PN 62	M 10 M 16	10 16	E M 32	V M 32	P M 32	PF M 32	G M 32	GF M 32
				N 16 N 20	16 20						
				N 32 N 40 N 60	32 40 63						
			60° 54	N 100 N 200	100 200						
				T 310 T 316	10 16						
For four current transformer circuits, single pole 1-2-3-4		4	90° PN 62	M 10 M 16	10 16	E M 41	V M 41	P M 41	PF M 41	G M 41	GF M 41
				N 16 N 20	16 20						
				N 32	32						
For four current transformer circuits or direct current measurement in four circuits two poles 1-2-3-4		6	90° PN 62	M 10 M 16	10 16	E M 42	V M 42	P M 42	PF M 42	G M 42	GF M 42
				N 16 N 20	16 20						
				N 32 N 40 N 60	32 40 63						
			60° 54	N 100 N 200	100 200						
				T 310 T 316	10 16						
For output measurement in three phase systems by the two watt meter method 1-0-2		5	90° PN 64	M 10 M 16	10 16	E M 2W	V M 2W	P M 2W	PF M 2W	G M 2W	GF M 2W
				N 16 N 20	16 20						
				N 32 N 40 N 60	32 40 63						
			60° 54	N 100 N 200	100 200						
				T 310 T 316	10 16						