

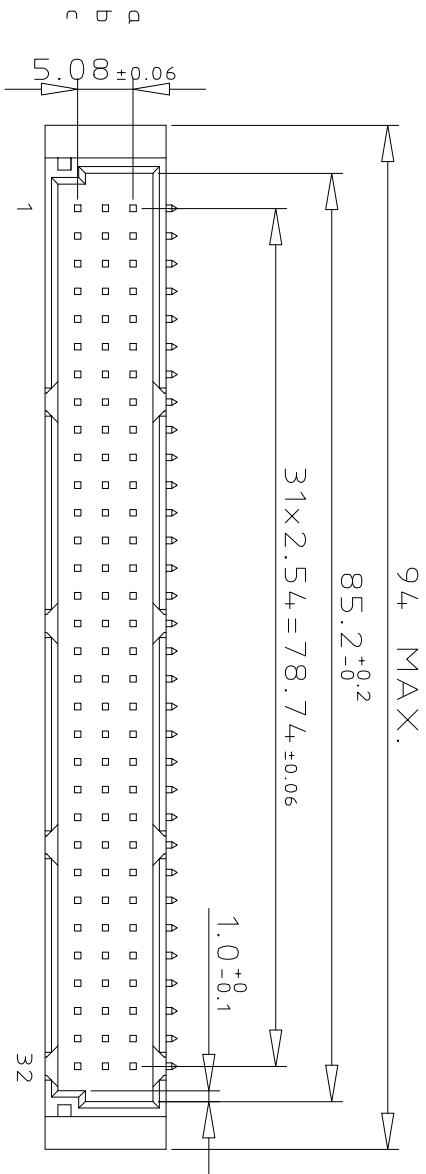
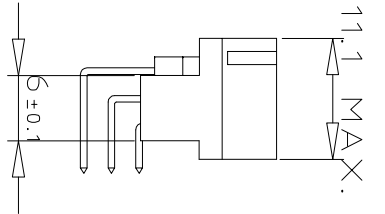



DIMENSIONS

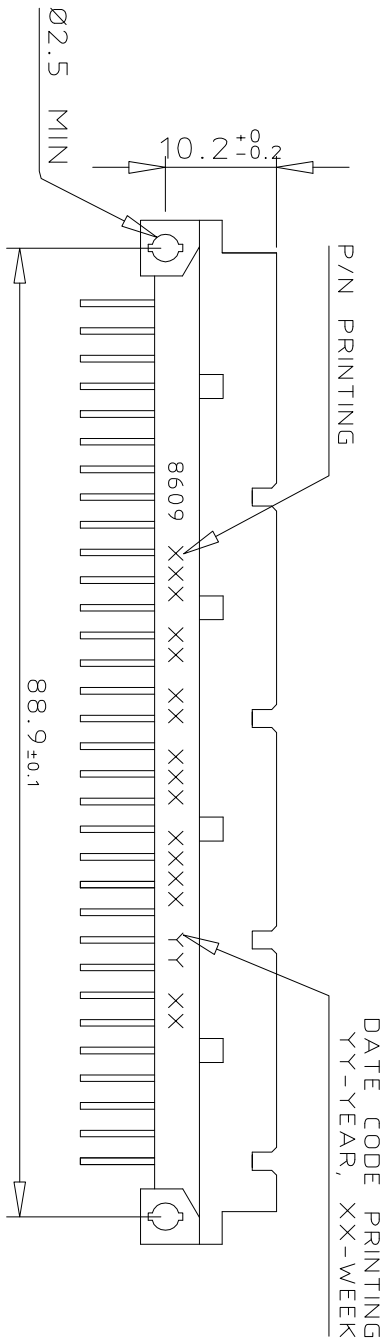

TERMINATION

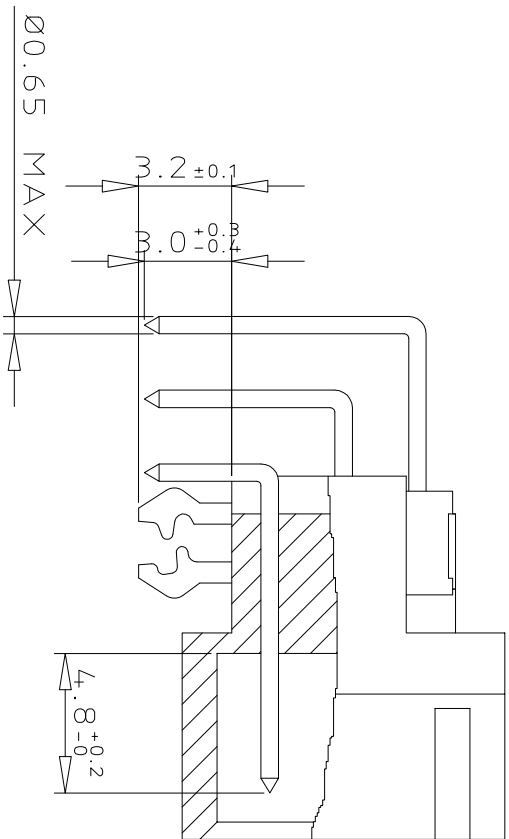

PCB LAYOUT

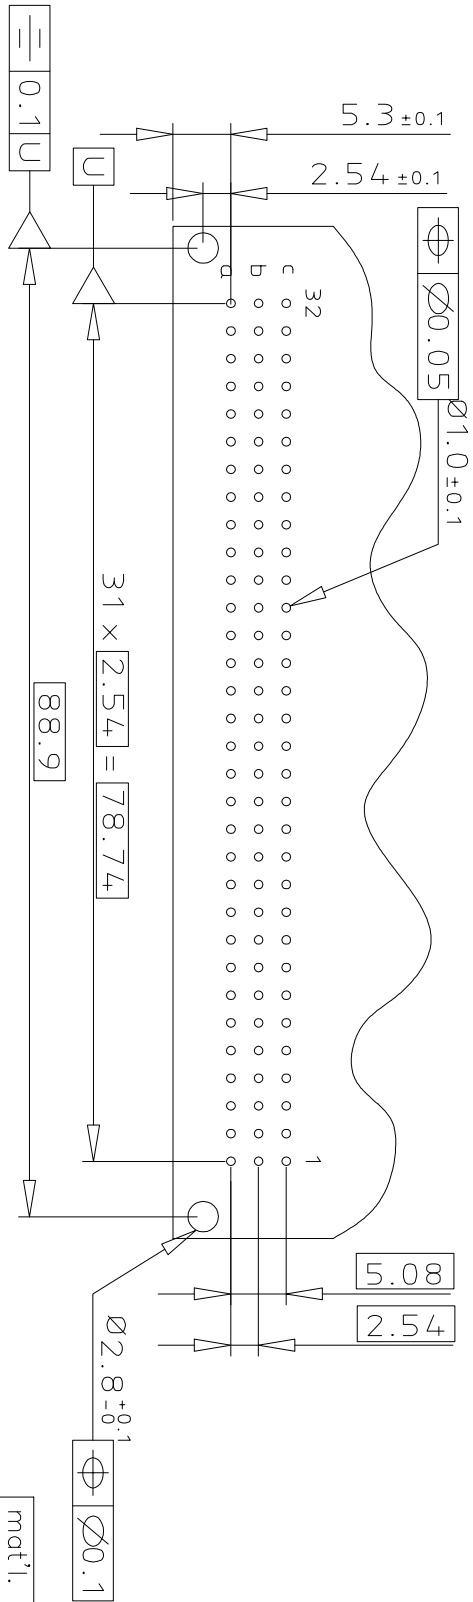

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	4	5	ELF							
ROWS FITTED WITH CONTACTS	ROW a	b	c	d	e	f	g	h	i	j							
ROW a - c	d	e	f	g	h	i	j	k	l	m							
NO. OF CONTACTS	TYPE OF INSULATOR	3 ROW MALE INSULATOR	METHOD OF MOUNTING	STANDARD MOUNTING - STYLE C	TERMINATION	ANGLED SPILL	OPTIONS	NO. OPTION WITH HARPOONS	PERFORMANCE CLASS	DIN 4,1612 CLASS 3	DIN 4,1612 CLASS 2	DIN 4,1612 CLASS 1	AS PER MIL C 55302 / JSS 50808	PITCH PER ROW	2.54 mm	LEAD FREE VERSION	ELF

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code				surface		tolerance		projection		product family	
SEE DRAWING C-8609-0000A				ISO 1302		ISO 406 ISO 1101				8609	
ltr	ecn	no	dr	date	tolerances unless otherwise specified				title		
A	104-0063	MINI	2004-09-16	angles	linear		0.X	±0.1	DIN STANDARD HEADER		
B	105-0042	MINI	2005-05-19				0.XX	±0.1	DIN 41612 STYLE C		
C	106-0061	MINI	2006-05-31	0°±2°	0.XXX		±0.1	scale 3:2			
D	107-0100	KR	2007-08-20	dr	MINI K V	2004-09-16					
E	108-0146	KR	2008-10-21	engr	RAKHEE G	2004-09-16					
				chr	KESAVAN R	2008-10-21					
					apdd	KESAVAN R	2008-10-21				
sheet index	revision	E									
	sheet	1									
dwg no				sheet 1 of 1		size					
C-8609-2001				A3							
type Product Customer Drawing											