


GX16-2/3/4/5/6/7/8 AVIATION PLUG MALE AND FEMALE PIN CONNECTOR CIRCULAR CONNECTORS SOCKET PLUG DIAMETER 16MM MINI METAL ROUND SHELL CONNECTOR

GX Aviation Connector was first applied to aerospace area for vibration and harsh environment. With technological innovation and costs continuing to fall, it has started to be used in civilian areas, such as CCTV security system, rear view camera, vision system, communications, etc.

DIMENSIONS

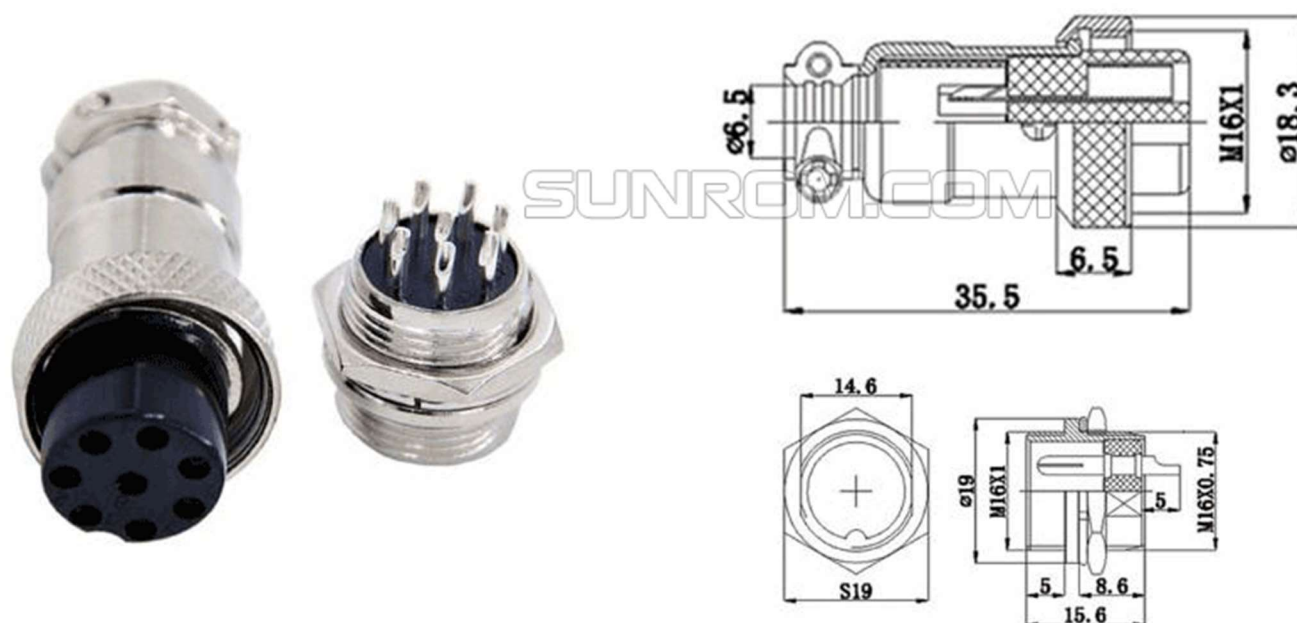

SPECIFICATIONS

Coupling	Threaded Coupling		Termination		Solder		
Shell Material	Zinc Alloy with Nickel plated		Mating Cycle		500 Times		
Insert Material	Bakelite		Temperature Range		-20°C ~ +85°C		
Contact Material	Copper		Cable Diameter		Φ7.5mm- ≤ Φ8.5mm		
			Protection Degree		IP55		
Core Number	2 Core	3 Core	4 Core	5 Core	6 Core	7 Core	8 Core
Contact Arrangement							
Contact The Diameter,Number	Φ2.5*2	Φ2.5*3	Φ2.5*4	Φ2.5*5	Φ2.5*6	Φ2.5*7	Φ2.5*8
Rated Current(A)	7	7	5	5	4	4	4
Working Voltage (AC,V,RMS)	250	250	250	250	250	250	250

ORDERING DETAILS

Sunrom Part#	Pins	Ordering Page
5594	2	http://www.sunrom.com/m/5594
5595	3	http://www.sunrom.com/m/5595
5596	4	http://www.sunrom.com/m/5596
5597	5	http://www.sunrom.com/m/5597
5598	6	http://www.sunrom.com/m/5598
5599	7	http://www.sunrom.com/m/5599
5600	8	http://www.sunrom.com/m/5600

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Olimex Ltd.:](#)

[CONNECTOR-GX16-4](#)