






THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7409: UPDATED PER NEW SUPPLIER SPEC	5/19/14	D. CASTRO



RECOMMENDED
PANEL OPENING

WIRING	
PIN 1	PIN 1
PIN 2	PIN 2
PIN 3	PIN 3
PIN 4	PIN 4
PIN 5	PIN 5
PIN 6	PIN 6
PIN 7	PIN 7
PIN 8	PIN 8
SHIELD	SHIELD

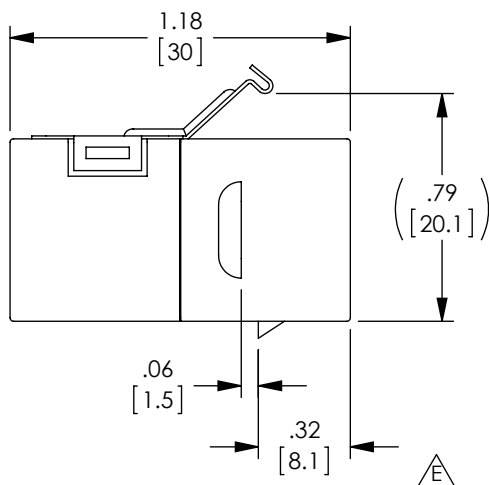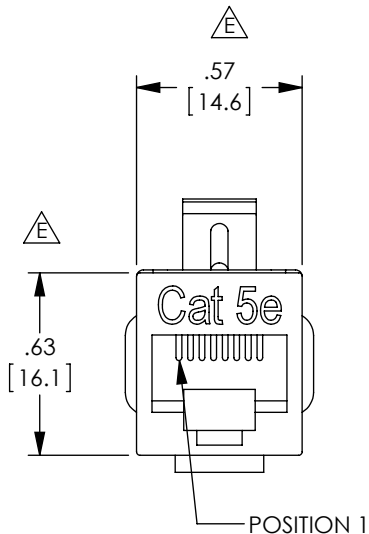

NOTES:

MATERIAL:

HOUSING: ABS, UL94V-0, COLOR: BLACK.
CONTACTS: PHOSPHOR BRONZE
CONTACT PLATING: GOLD, 50 μ INCHES OVER NICKEL PLATE.
SHIELD: BRASS WITH NICKEL PLATE.

ELECTRICAL:

DC CURRENT RATING: 1.5 AMP (MAX.)
VOLTAGE RATING: 150 VOLTS
INSULATION RESISTANCE: 500M Ω

MISCELLANEOUS:


RATING: CATEGORY 5E
OPERATING TEMPERATURE RANGE: -10°C TO +60°C.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3] PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D. PARHAM	4/8/2004				
	CHECKED BY T. CLARK	4/9/2004	CATEGORY	TELECOM/MODULAR		
	APPROVED BY C. McCORMICK	4/12/2004	PRODUCT DESCRIPTION			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CAT 5E SHLD RJ45 KEYSTONE CPLR			
COLOR VARIATIONS MAY OCCUR			SIZE A	FSCM NO. 43321	DWG. NO. TDG1026KS-C5E	REV. E
			SCALE: NONE		CAD FILE: TDG1026KS-C5E.SLDRW	SHEET 1 OF 1