

Copper Network System Products


KH-MAX™ High Humidity Jack

Product Code: CNSPKHMH



Features

- Low profile, with less than 36mm of depth (including bend radius of cable)
- Snaps in and out of all keystone faceplates, patch panels and accessories
- Universal label is colour coded for T568A and T568B wiring schemes
- Jack module allows minimal moisture entry in high humidity environments
- Gold-plated contacting area and tin plating in insulation displacement area
- One piece contacts (no internal transfer points)
- Compatible with Category 6 standard RJ45 plugs
- Fully mechanically and electrically backwards compatible with CAT.5e
- 360° Jacket coverage leading to a completely shielded module
- Fully integrated spring shutter

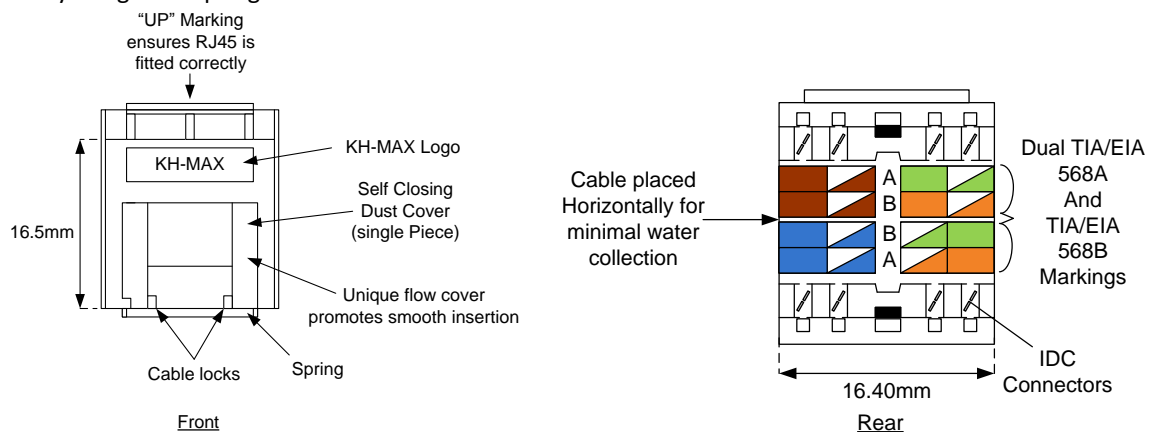

Specifications

Frequency	100 MHz	200 MHz	250MHz
Attenuation	< 0.2dB	< 0.2dB	< 0.3dB
Return loss	24 dB	18.5 dB	16 dB
Next Pair to Pair	58 dB	50 dB	47.5 dB
Operating Temperature Range	-10°C to +60°C	-10°C to +60°C	-10°C to +60°C
Operating humidity range	> 97% relative humidity	> 97% relative humidity	> 97% relative humidity

Minimum order quantity: 100 pieces (of any one type)



KH-MAX is a registered Trademark, and is used under license to KPower
For further Information please email sales@kpower.biz quoting product code above