

Series 62 Saddle Clamps

for Series 80 Mighty Mouse Connectors

620M*065 Saddle Clamp, General Purpose, Spin Coupling



Adapter Code **M**

This accessory fits Series 80 Mighty Mouse Connectors

MATERIAL/FINISH

Body, saddles, coupling nut: aluminum or SST/ finish per PN Build
Screws, washers: stainless steel/passivated

Full radius saddles. Straight, 45° or 90°. Spin coupling. Saddle clamp fits Series 80 Mighty Mouse connectors. Aluminum or stainless steel. Full radius saddles should be fully closed onto frame. Apply silicone tape or resilient bushing to wire bundle to build up diameter to fit the saddles.

PART NUMBER

620MS065


M

13

Base P/N
620MS065 Straight
620MA065 90°
620MB065 45°

Material/Finish
C Alum/Black Anodize
M Alum/Electroless Nickel
MT Alum/Nickel-PTFE
NF Alum/Olive Drab Cadmium
ZR Alum/Black Zinc-Nickel
TZ Alum/Tin-Zinc
ZI SST/Passivated

Size Code
05 06 07 08 09 10 11 12 13 14 16 17
See table below for size code

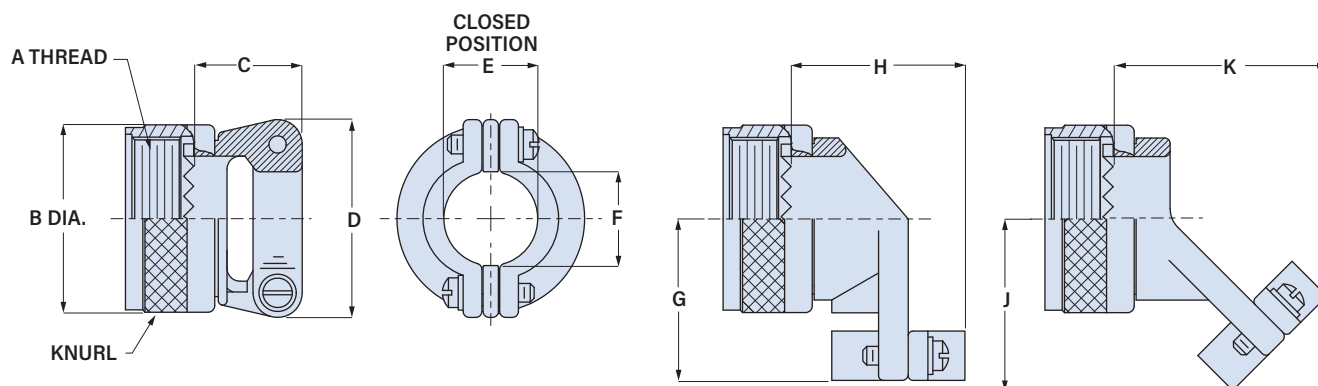

┌ Shell Size ┐																					
Size Code	Series	Series 805	A	øB Max.		C Max.		D		E Closed		F		G Max.		H Max.		J Max.		K Max.	
	800, 801, 803, 804		Thread UNEF-2B	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
05	5	N/A	0.250-32	.470	11.9	.688	17.5	.496	12.6	.11	2.8	.119	3.1	.551	14.0	.613	15.6	.511	13.0	.806	20.5
06	6	N/A	0.3125-32	.530	13.5	.688	17.5	.582	14.8	.17	4.3	.182	4.6	.582	14.8	.675	17.2	.542	13.8	.850	21.6
11	N/A	8	0.3750-32	.570	14.5	.688	17.5	.582	14.8	.17	4.3	.182	4.6	.602	15.3	.675	17.2	.562	14.3	.850	21.6
07	7	9	0.4375-28	.637	16.2	.688	17.5	.656	16.7	.23	5.8	.244	6.2	.632	16.1	.675	17.2	.592	15.0	.850	21.6
08	8	10	0.500-28	.700	17.8	.688	17.5	.726	18.4	.30	7.6	.307	7.8	.662	16.8	.743	18.9	.622	15.8	.887	22.5
09	9	11	0.5625-24	.758	19.3	.750	19.1	.726	18.4	.30	7.6	.307	7.8	.691	17.6	.743	18.9	.651	16.5	.887	22.5
10	10	12	0.625-24	.819	20.8	.750	19.1	.885	22.5	.36	9.1	.369	9.4	.846	21.5	.805	20.5	.770	19.6	1.018	25.9
12	11, 12, 13	13	0.6875-24	.896	22.8	.750	19.1	.952	24.2	.42	10.7	.432	11.0	.881	22.4	.868	22.1	.805	20.5	1.061	27.0
13	N/A	15	0.750-20	.930	23.6	.750	19.1	.952	24.2	.42	10.7	.432	11.0	.921	23.4	.868	22.1	.855	21.7	1.091	27.7
14	14, 15, 16, 17	18, 19	0.9375-20	1.137	28.9	.750	19.1	1.018	25.9	.48	12.2	.494	12.6	.998	25.4	.993	25.2	.922	23.4	1.146	29.1
15	14, 15, 16, 17	18, 19	0.9375-20	1.137	28.9	.750	19.1	1.148	29.2	.61	15.5	.619	15.7	1.060	26.9	1.055	26.8	.984	25.0	1.208	30.7
16	19	21	1.0625-18	1.230	31.2	.750	19.1	1.273	32.3	.73	18.5	.744	18.9	1.090	27.7	1.243	31.6	.950	24.1	1.325	33.7
17	21	23	1.1875-18	1.387	35.2	.750	19.1	1.400	35.6	.86	21.8	.869	22.1	1.151	29.2	1.312	33.3	1.042	26.5	1.495	38.0