


Straight Plug

MC3106 Class A

MS3106 Class A

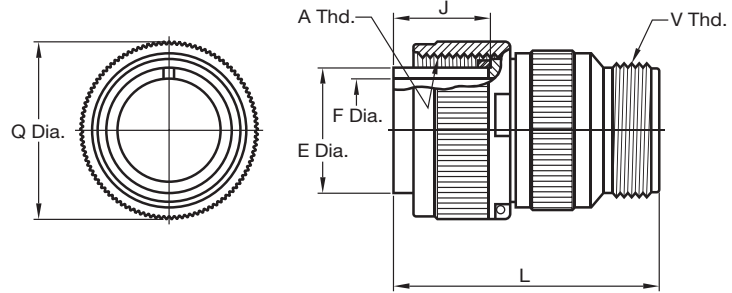

Units : mm

Shell Size	A Thread Class 2B	E Dia. +0.00 -0.38	F Dia. Min.	J ±0.12	L Max.	Q Dia. Max.	V Thread Class 2A
10SL	5/8-24UNEF	11.32	8.21	13.49	38.88	24.61	5/8-24UNEF
14S	7/8-20UNEF	17.14	13.37	13.49	42.87	29.36	3/4-20UNEF
16S	1-20UNEF	20.44	16.54	13.49	42.87	31.75	7/8-20UNEF
16	1-20UNEF	20.44	16.54	18.26	52.37	31.75	7/8-20UNEF
18	1 1/8-18UNEF	23.62	19.72	18.26	52.37	34.13	1-20UNEF
20	1 1/4-18UNEF	26.67	23.68	18.26	55.57	37.31	1 3/16-18UNEF
22	1 3/8-18UNEF	29.84	26.07	18.26	55.57	40.48	1 3/16-18UNEF
24	1 1/2-18UNEF	33.02	29.24	18.26	58.72	43.66	1 7/16-18UNEF
28	1 3/4-18UNEF	38.60	34.80	18.26	58.72	50.01	1 7/16-18UNEF
32	2-18UNS	44.95	41.15	18.26	61.92	56.36	1 3/4-18UNS
36	2 1/4-16UN	50.29	46.69	18.26	61.92	62.71	2 -18UNS