


MC3106 Class E

MS3106 Class E

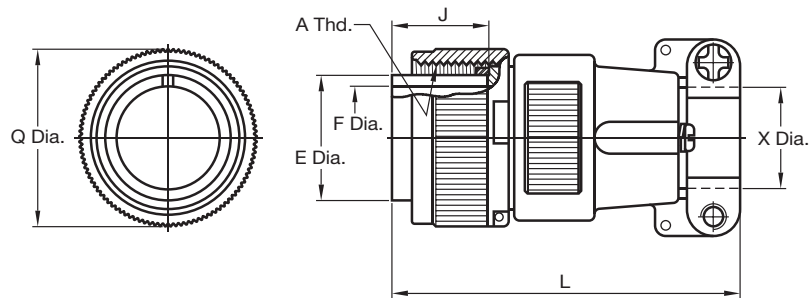

Units : mm

Shell Size	A Thread Class 2B	E Dia. +0.00 -0.38	F Dia. Min.	J ±0.12	L Max.	Q Dia. Max.	X Min. Cable Clearance
10SL	5/8-24UNEF	11.32	8.21	13.49	57.15	24.61	7.14
14S	7/8-20UNEF	17.14	13.37	13.49	57.15	29.36	10.32
16S	1-20UNEF	20.44	16.54	13.49	57.15	31.75	12.70
16	1-20UNEF	20.44	16.54	18.26	66.67	31.75	12.70
18	1 1/8-18UNEF	23.62	19.72	18.26	68.27	34.13	13.49
20	1 1/4-18UNEF	26.67	23.68	18.26	69.85	37.31	16.67
22	1 3/8-18UNEF	29.84	26.07	18.26	69.85	40.48	19.05
24	1 1/2-18UNEF	33.02	29.24	18.26	75.41	43.66	19.84
28	1 3/4-18UNEF	38.60	34.80	18.26	76.98	50.01	23.42
32	2-18UNS	44.95	41.15	18.26	76.98	56.36	29.37
36	2 1/4-16UN	50.29	46.69	18.26	83.33	62.71	31.75