


Wall Mounting Receptacle


MC3100 Class A
MS3100 Class A

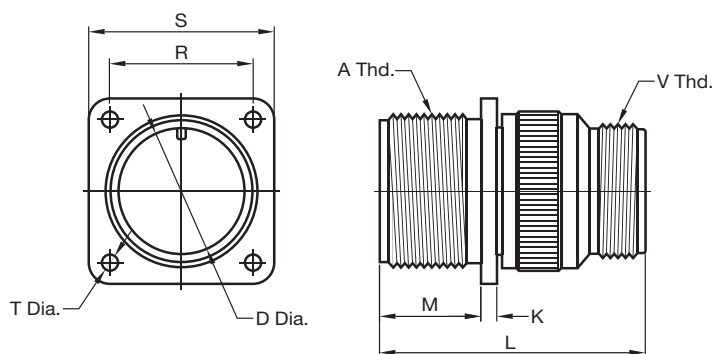

Units : mm

Shell Size	A Thread Class 2A	D Dia. +0.38 -0.00	K ±0.30	L Max.	M +0.78 -0.00	R ±0.12	S ±0.78	T Dia. +0.25 -0.12	V Thread Class 2A
10SL	5/8-24UNEF	11.38	2.30	38.88	14.28	18.26	25.40	3.05	5/8-24UNEF
14S	7/8-20UNEF	17.33	2.30	42.87	14.28	23.01	30.18	3.05	3/4-20UNEF
16S	1-20UNEF	20.50	2.50	42.87	14.28	23.01	32.54	3.05	7/8-20UNEF
16	1-20UNEF	20.50	2.50	52.37	19.05	24.61	32.54	3.05	7/8-20UNEF
18	1 1/8-18UNEF	23.68	3.00	52.37	19.05	26.97	34.93	3.05	1-20UNEF
20	1 1/4-18UNEF	26.88	3.00	55.57	19.05	29.36	38.10	3.05	1 3/16-18UNEF
22	1 3/8-18UNEF	30.03	3.20	55.57	19.05	31.75	41.28	3.05	1 3/16-18UNEF
24	1 1/2-18UNEF	33.20	3.20	58.72	20.63	34.93	44.45	3.73	1 7/16-18UNEF
28	1 3/4-18UNEF	38.77	3.60	58.72	20.63	39.67	50.80	3.73	1 7/16-18UNEF
32	2-18UNS	45.12	4.20	61.92	22.23	44.45	57.15	4.39	1 3/4-18UNS
36	2 1/4-16UN	50.68	4.20	61.92	22.23	49.23	63.50	4.39	2 -18UNS

MC3100 Class E
MS3100 Class E

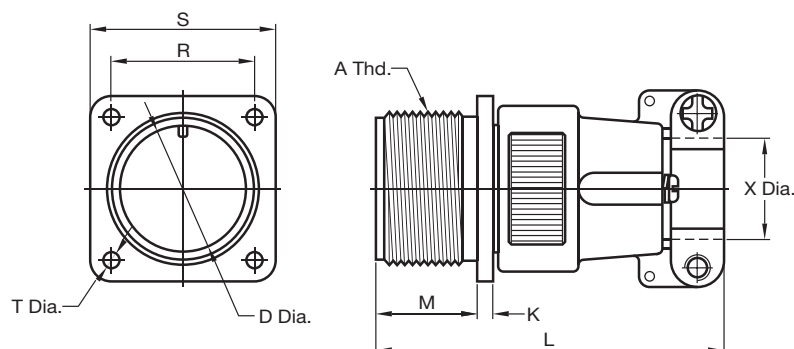

Units : mm

Shell Size	A Thread Class 2A	D Dia. +0.38 -0.00	K ±0.30	L Max.	M +0.78 -0.00	R ±0.12	S ±0.78	T Dia. +0.25 -0.12	X Min. Cable Clearance
10SL	5/8-24UNEF	11.38	2.30	57.15	14.28	18.26	25.40	3.05	7.14
14S	7/8-20UNEF	17.33	2.30	57.15	14.28	23.01	30.18	3.05	10.32
16S	1-20UNEF	20.50	2.50	57.15	14.28	23.01	32.54	3.05	12.70
16	1-20UNEF	20.50	2.50	66.67	19.05	24.61	32.54	3.05	12.70
18	1 1/8-18UNEF	23.68	3.00	68.27	19.05	26.97	34.93	3.05	13.49
20	1 1/4-18UNEF	26.88	3.00	69.85	19.05	29.36	38.10	3.05	16.67
22	1 3/8-18UNEF	30.03	3.20	69.85	19.05	31.75	41.28	3.05	19.05
24	1 1/2-18UNEF	33.20	3.20	75.41	20.63	34.93	44.45	3.73	19.84
28	1 3/4-18UNEF	38.77	3.60	76.98	20.63	39.67	50.80	3.73	23.42
32	2-18UNS	45.12	4.20	76.98	22.23	44.45	57.15	4.39	29.37
36	2 1/4-16UN	50.68	4.20	83.33	22.23	49.23	63.50	4.39	31.75